



LUND UNIVERSITY

The Sea Stratus Experiments, April 1976 (2 parts)

Källström, Claes

1976

Document Version:

Publisher's PDF, also known as Version of record

[Link to publication](#)

Citation for published version (APA):

Källström, C. (1976). *The Sea Stratus Experiments, April 1976 (2 parts)*. (Technical Reports TFRT-7110). Department of Automatic Control, Lund Institute of Technology (LTH).

Total number of authors:

1

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

THE SEA STRATUS EXPERIMENTS, APRIL 1976
PART I

CLAES KÄLLSTRÖM

Lund Institute of Technology
Department of Automatic Control
September 1976

Dokumentutgivare
Lund Institute of Technology
Handläggare Dept of Automatic Control
Örjan Källström
Författare
Örjan Källström

Dokumentnamn
REPORT
Utgivningsdatum
Sept 1976

Dokumentbeteckning
LUTFD2/(TFRT-7110)/1-587/(1976)
Ärendebeteckning
STU 73 41 87
STU 74 41 27

10T4

Dokumenttitel och undertitel

18T0
The Sea Stratus Experiments, April 1976

Referat (sammandrag)

36T0
Experiments of steady state course keeping and turning on a tanker in ballast condition are presented. An adaptive autopilot, consisting of a Kalman filter, a self-tuning regulator for straight course keeping and a turning regulator, was tested in different speed and weather conditions. Comparative experiments with a conventional autopilot based on a PID-regulator were also performed.

Referat skrivet av
Author

Förslag till ytterligare nyckelord

44T0
Ship control, Ship regulator, Ship manoeuvring

Klassifikationssystem och -klass(er)

50T0

Indexterminer (angå källa)

52T0
Ship manoeuvring (Thesaurus of Engineering and Scientific Terms, Engineers Joint Council, N Y, USA)

Omfång

56T0 pages

Övriga bibliografiska uppgifter

56T2

Språk

English

Sekretessuppgifter

60T0

ISSN

60T4

ISBN

60T6

Dokumentet kan erhållas från

62T0
Department of Automatic Control
Lund Institute of Technology
P O Box 725, S-220 07 Lund 7, Sweden

Mottagarens uppgifter

62T4

Pris

66T0

THE SEA STRATUS EXPERIMENTS, APRIL 1976

PART I

CLAES KÄLLSTRÖM

ABSTRACT

Experiments of steady state course keeping and turning on a tanker in ballast condition are presented. An adaptive autopilot, consisting of a Kalman filter, a self-tuning regulator for straight course keeping and a turning regulator, was tested in different speed and weather conditions. Comparative experiments with a conventional autopilot based on a PID-regulator were also performed.

TABLE OF CONTENTS

	Page
PART I	
1. INTRODUCTION	6
2. MEASUREMENT EQUIPMENT	8
3. AUTOPILOT	10
3.1 Kalman Filter	12
3.2 Self-tuning Regulator	17
3.3 PID-regulator	21
3.4 Yaw Regulator	22
4. DISCUSSION OF THE EXPERIMENTS	27
4.1 Kalman Filter Testing	28
4.2 Straight Course Keeping	32
4.3 Yawing	37
4.4 Experiments for Identification	38
5. CONCLUSIONS	40
6. ACKNOWLEDGEMENTS	42
7. REFERENCES	43
APPENDIX A - NOTATIONS	44
APPENDIX B - STANDARD PARAMETER VALUES	50
APPENDIX C - PROGRAM LISTINGS	56
APPENDIX D - EXPERIMENTS	67
A1	79
A2	89
A3	99
A4	109
A5	119
A6	129
A7	139

	Page
A8	149
A9	159
A10	169
A11	179
A12	189
A13	199
A14	209
A15	219
A16	229
A17	239
A18	249
A19	259
A20	269
A21	278
 PART II	
A22	288
A23	298
A24	308
A25	318
A26	328
A27	338
A28	348
A29	358
A30	368
A31	377
A32	386
A33	396

	Page
A34	406
A35	416
A36	425
B1	435
B2	441
B3	447
C1	453
C2	463
C3	473
C4	483
C5	493
C6	503
D1	513
D2	523
D3	533
E1	543
E2	552
E3	561
E4	571
F1	580
F2	581
F3	582
F4	583

1. INTRODUCTION

The purpose of the experiments was to test an adaptive autopilot, consisting of a Kalman filter, a self-tuning regulator and a yaw regulator, in different weather conditions and at different speeds. Comparative experiments performed with a PID-regulator were also recorded.

The ship, T/T Sea Stratus, is a 355 000 tdw oil tanker built for the Salén Shipping Co in Stockholm by Kockums in Malmö. The length between perpendiculars is 350 m and the beam is 60 m. The draught of the ship is 22.3 m in full load condition. The main engine power is 29.4 MW (40 000 shp), which implies that the speed obtained is 15.5 knots when the tanker is fully loaded. The adaptive autopilot was implemented by use of the programming language FORTRAN as a task of the Integrated Navigation System, Kockums Bridge System type 546, which is a standard software package designed for the process computer Kongsberg SM 406 S. A special paper tape punch was installed to record the experiments.

Extensive computer simulations had preceded the experiments. A mathematical model of a 255 000 tdw tanker was used in Aspernäs and Foisack (1975), Aspernäs and Källström (1975), and Källström (1976a). A model, which describes the steering dynamics of the actual tanker T/T Sea Stratus, was simulated in Källström (1976b) and (1976c). The latter report shows the performance of the same adaptive autopilot, which is used in the experiments described here, for different load and speed conditions.

Preliminary full scale experiments on 255 000 tdw tankers, T/T Sea Scout and T/T Sea Swift, are described in Källström (1974) and (1975), resp. Most of the Sea Swift experiments were performed in full load condition, while the Sea Scout was ballasted during the experiments.

The experiments on the Sea Stratus were performed during a voyage from Lisbon, Portugal, to Cape Town, South Africa, between 1976-04-18 and 1976-05-03. At the departure from Lisbon the ship had a ballast of 134 000 tdw, which implies a mean draught of 10.5 m. The ballast was changed to 160 000 tdw on 1976-04-26 and then the mean draught obtained was 11.9 m. The average speed of the ship varied between 12.1 knots and 15.9 knots. The largest wind velocity measured was 15 m/s, which means moderate gale, but complete calm was also prevailing during some of the experiments.

Thirty-six experiments, A1-A36, of straight course keeping were recorded. The PID-regulator was used during some of the experiments, but most of them were performed using the adaptive autopilot. Three experiments, B1-B3, were specially carried out to record the performance of the Kalman filter by punching data at a high sampling rate. Six turning experiments, C1-C6, and three normal operating experiments, D1-D3, were also recorded as well as four experiments, E1-E4, for off-line identification of the ship steering dynamics. Finally four straight course keeping experiments, F1-F4, were performed to compare the steering quality of the adaptive autopilot to that of the PID-regulator. Notice that no data were punched on paper tape during these experiments. The Kalman filter was running during all the experiments, but the estimates were not always used by the regulators. All the fifty-six experiments are described in Appendix D. The total experimental time was about 33 h, but the testing was going on during almost all the days and nights of the voyage, i.e. during about 2 weeks.

The notations used in this report are explained in Appendix A and the standard parameter values of the autopilot are summarized in Appendix B. The listings of the FORTRAN subroutines of the autopilot are given in Appendix C.

2. MEASUREMENT EQUIPMENT

Several measurement signals are usually available in the computer, and no special equipment, besides the paper tape punch, had to be installed to carry through the experiments. Following measurement signals were recorded:

- o Rudder servo position δ_s [deg], scan cycle 1 s.
- o Rudder angle δ [deg], scan cycle 1 s, accuracy about 0.2 deg.
- o Propeller effect P_s [MW] (mean value during 5 min), scan cycle 10 s.
- o Number of propeller revolutions n [rpm], scan cycle 2 s.
- o Forward velocity u [knots], scan cycle 1 s, measured by a doppler log, type Atlas, with an accuracy of 0.02 knots.
- o Transversal velocity of bow v_1 [knots], scan cycle 1 s, measured by the same device and with the same accuracy as the forward velocity.
- o Yaw angular velocity or yaw rate r [deg/s], scan cycle 1 s, measured with an accuracy of about 0.005 deg/s by a rate gyro manufactured by ATEW AB.
- o Heading angle ψ [deg], scan cycle 0.25 s, measured by a Sperry gyro compass, and transformed by a synchro-digital converter with an accuracy of about 0.02 deg.

During two experiments, Al and D1, the forward velocity u was measured by Sperrys log. Sometimes that signal had an incorrect value in the computer. No measurements of the transversal velocity of bow v_1 were recorded during these two experiments. The sign of v_1 was incorrect during experiment Cl and a defect rudder servo was used during experiment Al.

The relative wind direction and the relative wind velocity were manually recorded once at the beginning of each experiment. However, absolute values have been calculated and these are used in this report.

The distance from the origin, which is placed half-way between the perpendiculars, to the forward doppler log (ℓ_1) is 164.35 m. The centre of mass is situated 9.3 m in front of the origin in full load condition. The distance is 6.9 m when the ship is ballasted.

In this report the convention of the sign of the rudder angle is chosen in such a way that a positive rudder angle (starboard rudder) gives a positive yaw rate (starborad yaw).

3. AUTOPILOT

The structure of the autopilot is shown in Fig. 3.1. To obtain a good performance of all speeds, the autopilot performs a speed scaling using the speed v_s [m/s]. v_s is computed with sampling interval $T_k = 1$ s according to

$$v_s = u \cdot CKM \quad \text{if} \quad IVVC = 1 \quad (3.1)$$

or

$$v_s = v_c \quad \text{if} \quad IVVC = 3 \quad (3.2)$$

where $CKM = 0.514444$ denotes the conversion factor from knots to m/s and v_c [m/s] is a constant user-defined speed. The standard value of IVVC is equal to 1.

The Kalman filtering as well as the computation of the transversal velocity of the origin v [knots] according to

$$v = v_1 - \ell_1 \cdot r \cdot CGR/CKM \quad (3.3)$$

is performed with sampling interval T_k . The lever arm ℓ_1 is equal to 164.35 m and the conversion factor from degrees to radians CGR is equal to 0.0174533. Either the estimates from the Kalman filter \hat{v} [knots], \hat{r} [deg/s], and $\hat{\psi}$ [deg] or the measurements v , r , and ψ are used by the self-tuning regulator, the PID-regulator, and the yaw regulator. The standard configuration is the one when Kalman filter estimates are fed into the different regulators.

The rudder command δ_c [deg] is computed with sampling interval T_s , where T_s mostly is equal to 10 s. The PID-regulator for straight course keeping is only used for comparison. The reference course ψ_{ref} [deg] and the reference yaw rate r_{ref} [deg/s] for turning as well as the rudder limit δ_ℓ [deg] are also used by the autopilot. The complete autopilot is implemented by the FORTRAN subroutines AUTP3 and STUR listed in Appendix C.

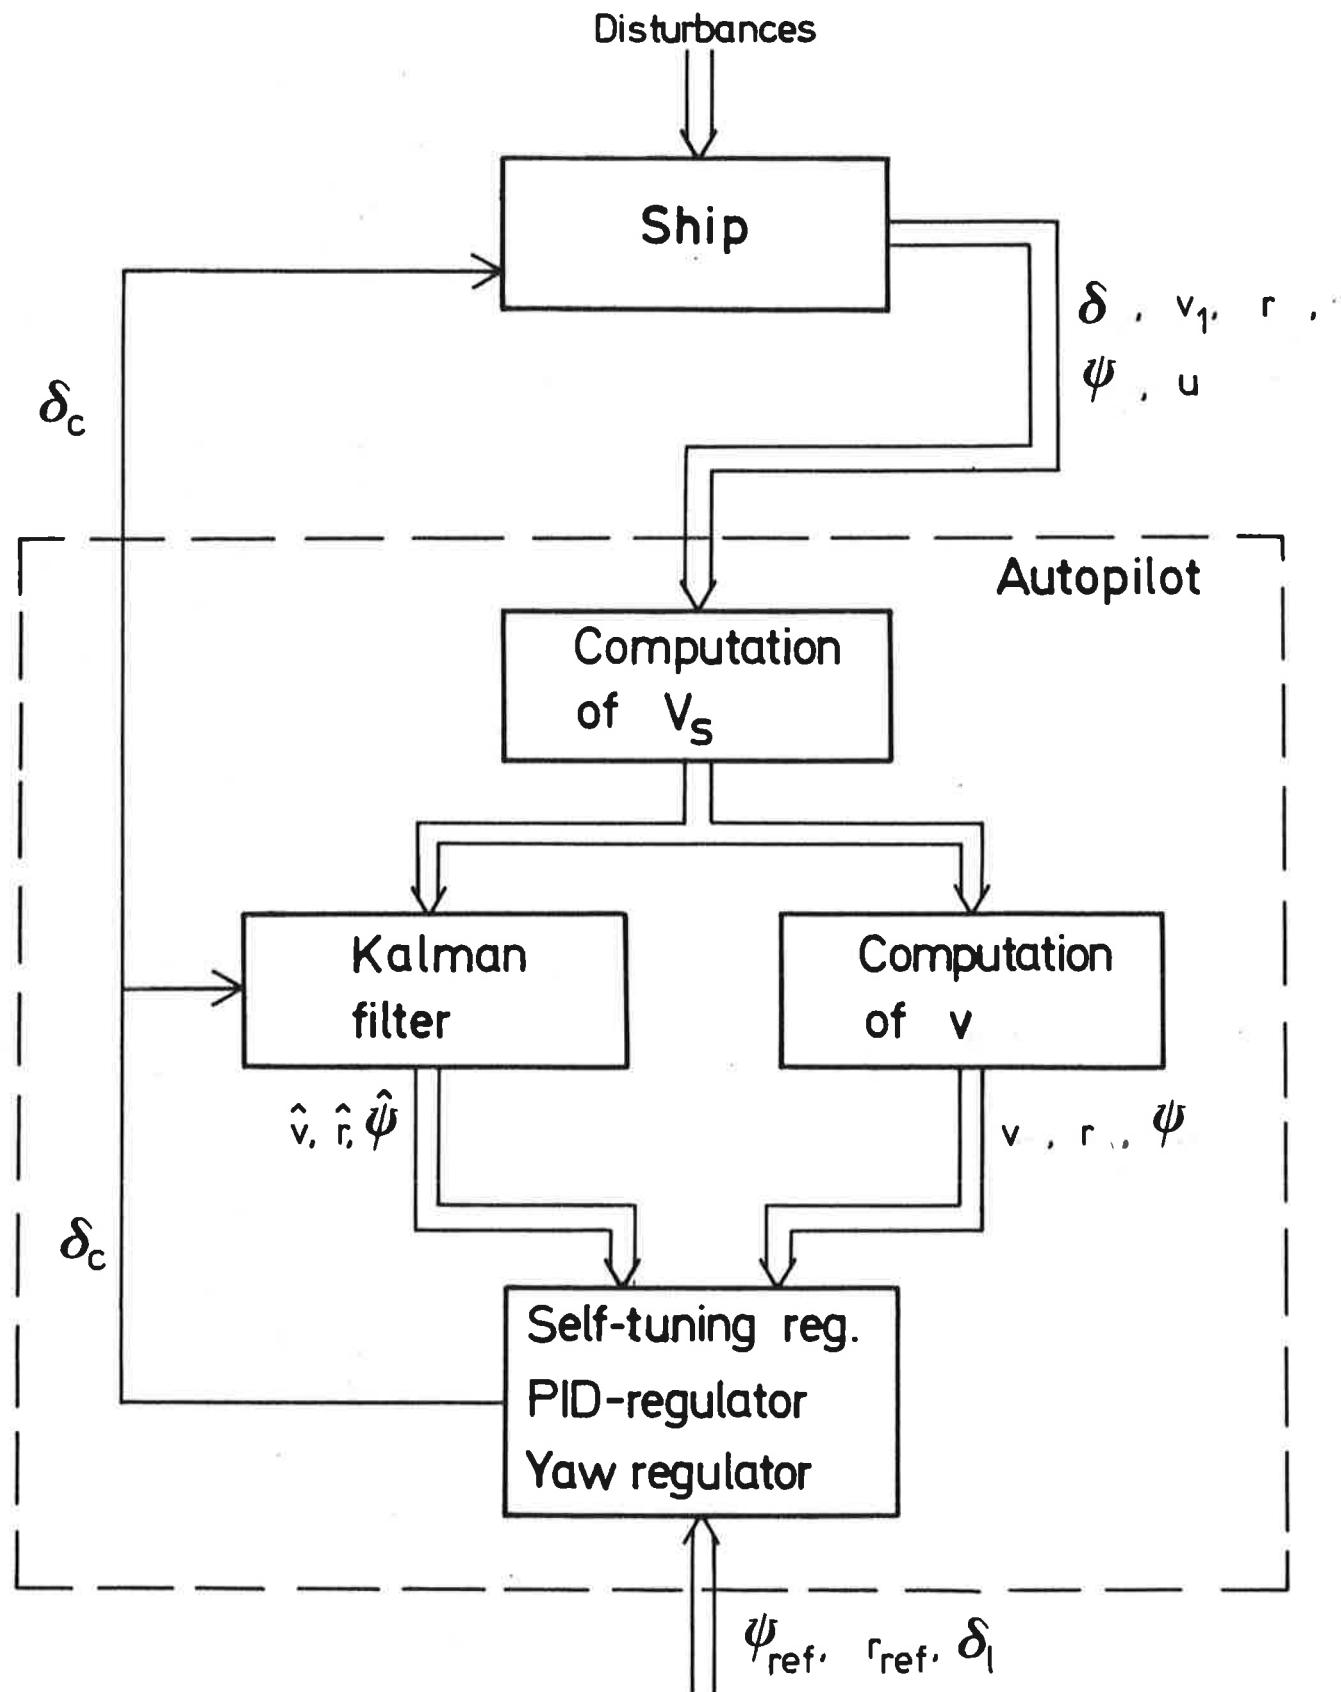


Fig. 3.1 - Structure of the autopilot.

3.1 Kalman Filter

The design of the Kalman filter follows in detail the description given in Källström (1976c). A model of a fully loaded tanker is used. Notice, however, that the covariance matrix R_1 for the process noise is changed somewhat:

$$\text{diag}(R_1) = \quad (3.4)$$

$$= \begin{pmatrix} 2.5 \cdot 10^{-5} & 5 \cdot 10^{-9} & 8 \cdot 10^{-8} & 8 \cdot 10^{-8} & 1.2 \cdot 10^{-8} & 4 \cdot 10^{-7} & 3 \cdot 10^{-12} & 8 \cdot 10^{-11} \end{pmatrix}$$

The following Kalman filter equations are obtained:

$$\begin{cases} \hat{x}'(t|t-1) = A \hat{x}'(t-1|t-1) + B u'(t-1) \\ \hat{x}'(t|t) = \hat{x}'(t|t-1) + K \varepsilon'(t) \\ y'(t) = C \hat{x}'(t|t-1) + \varepsilon'(t) \end{cases} \quad (3.5)$$

where all variables are normalized using the length of the ship L ($L = 350$ m) as unit of length and the time to cover the length L , i.e. L/V_s , as unit of time. The notation $x'(t|t-1)$ stands for the estimate of x' at the time t based on measurements up to and including time $t-1$. The vectors and matrices of (3.5) are explained by:

$$u' = \delta_C \cdot \text{CGR}$$

$$(\hat{x}')^T = \left[\begin{array}{cccccccc} \hat{v}' & \hat{r}' & \hat{\psi}' & \hat{\delta}_d' & \hat{\delta}_o' & \hat{d}_v' & \hat{d}_r' & \hat{d}_\delta' \end{array} \right]$$

$$(y')^T = \left[\begin{array}{cccc} \delta \cdot \text{CGR} & v_1 \cdot \text{CKM}/V_s & r \cdot \text{CGR} \cdot L/V_s & \psi \cdot \text{CGR} \end{array} \right]$$

$$(\varepsilon')^T = \left[\begin{array}{cccc} \varepsilon_\delta' & \varepsilon_v' & \varepsilon_r' & \varepsilon_\psi' \end{array} \right]$$

$$A = \begin{pmatrix} a_{11} & a_{12} & 0 & a_{14} & a_{15} & 0 & 0 & 0 \\ a_{21} & a_{22} & 0 & a_{24} & a_{25} & 0 & 0 & 0 \\ a_{31} & a_{32} & 1 & a_{34} & a_{35} & 0 & 0 & 0 \\ 0 & 0 & 0 & a_{44} & a_{45} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{pmatrix}$$

$$B^T = \begin{pmatrix} b_{11} & b_{21} & b_{31} & b_{41} & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$C = \begin{pmatrix} 0 & 0 & 0 & 1 & 1 & 0 & 0 & 1 \\ 1 & \ell_1/L & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$K = \begin{pmatrix} -9.27 \cdot 10^{-5} & 8.82 \cdot 10^{-2} & -2.40 \cdot 10^{-2} & -0.367 \\ 6.30 \cdot 10^{-4} & 0.481 & 9.65 \cdot 10^{-2} & 1.02 \\ 1.69 \cdot 10^{-5} & 7.86 \cdot 10^{-3} & 3.14 \cdot 10^{-3} & 0.326 \\ 1.66 \cdot 10^{-2} & -2.90 \cdot 10^{-3} & 5.65 \cdot 10^{-3} & 6.51 \cdot 10^{-2} \\ 1.03 \cdot 10^{-3} & 2.98 \cdot 10^{-3} & -5.63 \cdot 10^{-3} & -6.49 \cdot 10^{-2} \\ -1.26 \cdot 10^{-4} & 2.00 \cdot 10^{-2} & -6.69 \cdot 10^{-5} & -5.06 \cdot 10^{-3} \\ 1.63 \cdot 10^{-6} & -1.68 \cdot 10^{-3} & 3.02 \cdot 10^{-3} & -5.77 \cdot 10^{-2} \\ 2.54 \cdot 10^{-3} & 7.61 \cdot 10^{-6} & 1.24 \cdot 10^{-5} & 1.41 \cdot 10^{-4} \end{pmatrix}$$

where

$$\begin{array}{ll}
 a_{11} = 0.99163 & a_{32} = 0.0224515 \\
 a_{12} = -0.0100810 & a_{34} = 0.000195418 \\
 a_{14} = -0.00208207 & a_{35} = -0.0000132723 \\
 a_{15} = 0.000212358 & a_{44} = 0.81873 \\
 a_{21} = -0.0759537 & a_{45} = -0.18127 \\
 a_{22} = 0.96485 & b_{11} = -0.000212358 \\
 a_{24} = 0.0164706 & b_{21} = 0.00170991 \\
 a_{25} = -0.00170991 & b_{31} = 0.0000132723 \\
 a_{31} = -0.000874514 & b_{41} = 0.18127
 \end{array}$$

The elements of the state estimate vector \hat{x}' are normalized estimates of the following variables: transversal velocity of the origin (\hat{v}'), yaw rate (\hat{r}'), heading ($\hat{\psi}'$), rudder angle minus rudder bias ($\hat{\delta}_d' = \hat{\delta}' - \hat{\delta}_o'$), rudder bias ($\hat{\delta}_o'$), measurement biases of v_1 , r , δ , resp. (\hat{d}_v' , \hat{d}_r' , \hat{d}_δ'). The initial state estimate vector is equal to

$$(\hat{x}'(t_o))^T = \left[v \cdot CKM / V_s \quad r \cdot CGR \cdot L / V_s \quad \psi \cdot CGR \quad \delta \cdot CGR \quad 0 \quad 0 \quad 0 \quad 0 \right]$$

where v is obtained from (3.3) and all the measurements are from the time t_o .

If

$$|\varepsilon_\delta'| > t_\delta',$$

$$|\varepsilon_v'| > t_v',$$

$$|\varepsilon_r'| > t_r',$$

or

$$|\varepsilon_\psi'| > t_\psi',$$

where

$$\begin{aligned}
 t'_\delta &= 1 \\
 t'_v &= 0.06 \\
 t'_r &= 0.25 \\
 t'_\psi &= 0.015
 \end{aligned} \tag{3.6}$$

then the corresponding measurement or measurements are rejected, when the state estimate vector is updated. A measurement signal is definitively rejected when IMX ($\text{IMX} = 10$) consecutive measurements are rejected. However, during the first $\text{IKMX} = 900$ s after the Kalman filter is initialized, no measurements are rejected because the bias states of the Kalman filter must be fairly estimated to avoid incorrect rejectings. The rejecting of a measurement is performed by putting the corresponding column of K equal to zero. Notice that the values of (3.6) are chosen very large to avoid rejectings when the Kalman filter is tested.

The only measurement signal used by the Kalman filter in the experiments A26 and A27 is the heading angle. The first three columns of the filter gain K are cancelled in experiment A27, while the following filter gain, designed correctly for the case of heading measurements only, is used in experiment A26:

$$K^T = \begin{pmatrix} -0.481 & 2.40 & 0.390 & 0.0720 & -0.0716 & 0 & 0 & 0 \end{pmatrix} \tag{3.7}$$

The bias estimates $\hat{\delta}'_o$, \hat{d}'_v , \hat{d}'_r , and \hat{d}'_δ were not updated during the turning experiments C3 and C4.

The non-normalized state estimate vector is obtained as:

$$(\hat{x})^T = \left(\begin{array}{cccccccc} \hat{v} & \hat{r} & \hat{\psi} & \hat{\delta}_d & \hat{\delta}_o & \hat{d}_v & \hat{d}_r & \hat{d}_\delta \end{array} \right)$$

where

$$\begin{aligned}
 \hat{v} &= \hat{v}' \cdot v_s / \text{CKM} & [\text{knots}] \\
 \hat{r} &= \hat{r}' \cdot v_s / (\text{CGR} \cdot L) & [\text{deg/s}] \\
 \hat{\psi} &= \hat{\psi}' / \text{CGR} & [\text{deg}] \\
 \hat{\delta}_d &= \hat{\delta}_d' / \text{CGR} & [\text{deg}] \\
 \hat{\delta}_o &= \hat{\delta}_o' / \text{CGR} & [\text{deg}] \\
 \hat{d}_v &= \hat{d}_v' \cdot v_s / \text{CKM} & [\text{knots}] \\
 \hat{d}_r &= \hat{d}_r' \cdot v_s / (\text{CGR} \cdot L) & [\text{deg/s}] \\
 \hat{d}_\delta &= \hat{d}_\delta' / \text{CGR} & [\text{deg}]
 \end{aligned}$$

Notice the following expressions, too:

$$\begin{aligned}
 \hat{v}_l &= \hat{v} + \ell_l \cdot \hat{r} \cdot \text{CGR/CKM} & [\text{knots}] \\
 \hat{\delta} &= \hat{\delta}_d + \hat{\delta}_o & [\text{deg}]
 \end{aligned}$$

The non-normalized residual vector is obtained as:

$$\boldsymbol{\varepsilon}^T = \left(\begin{array}{cccc} \varepsilon_\delta & \varepsilon_v & \varepsilon_r & \varepsilon_\psi \end{array} \right)$$

where

$$\begin{aligned}
 \varepsilon_\delta &= \varepsilon_\delta' / \text{CGR} & [\text{deg}] \\
 \varepsilon_v &= \varepsilon_v' \cdot v_s / \text{CKM} & [\text{knots}] \\
 \varepsilon_r &= \varepsilon_r' \cdot v_s / (\text{CGR} \cdot L) & [\text{deg/s}] \\
 \varepsilon_\psi &= \varepsilon_\psi' / \text{CGR} & [\text{deg}]
 \end{aligned}$$

3.2 Self-tuning Regulator

A simple self-tuning regulator based on least squares identification and minimum variance control is used for straight course keeping. The basic self-tuning regulator is described in Wittenmark (1973).

The following model of the ship is used by the self-tuning regulator:

$$\begin{aligned}
 & (\hat{\psi}(t) - \psi_{ref}) + a_1 (\hat{\psi}(t-k-1) - \psi_{ref}) + \dots + \\
 & + a_{NA} (\hat{\psi}(t-k-NA) - \psi_{ref}) = \\
 & = (v_s(t-k-1)/v_o)^2 b_o \nabla \delta_c(t-k-1) + \\
 & + (v_s(t-k-2)/v_o)^2 b_o b_1 \nabla \delta_c(t-k-2) + \dots + \\
 & + (v_s(t-k-NB-1)/v_o)^2 b_o b_{NB} \nabla \delta_c(t-k-NB-1) + \\
 & + v_s(t-k-1) c_1 \nabla \hat{v}(t-k-1) + \\
 & + c_2 \nabla \hat{r}(t-k-1) + e(t)
 \end{aligned} \tag{3.8}$$

where the design speed is denoted v_o [m/s]. The minimum variance control is given by

$$\begin{aligned}
 \nabla \delta_c(t) = & \left(\frac{v_o}{v_s(t)} \right)^2 \frac{1}{b_o} \left[a_1 (\hat{\psi}(t) - \psi_{ref}) + \dots + \right. \\
 & + a_{NA} (\hat{\psi}(t-NA+1) - \psi_{ref}) - \\
 & - (v_s(t-1)/v_o)^2 b_o b_1 \nabla \delta_c(t-1) - \dots - \\
 & - (v_s(t-NB)/v_o)^2 b_o b_{NB} \nabla \delta_c(t-NB) - \\
 & \left. - v_s(t) c_1 \nabla \hat{v}(t) - c_2 \nabla \hat{r}(t) \right]
 \end{aligned} \tag{3.9}$$

where

$$\begin{aligned}\nabla \delta_c(t) &= \delta_c(t) - \delta_c(t-1) \\ \nabla \hat{v}(t) &= \hat{v}(t) - \hat{v}(t-1) \\ \nabla \hat{r}(t) &= \hat{r}(t) - \hat{r}(t-1)\end{aligned}$$

Notice that the speed scaling of (3.8) and (3.9) is introduced in such a way that the parameters a_1, \dots, a_{NA} , b_1, \dots, b_{NB} , c_1 and c_2 are approximately independent of the forward speed. This fact will, of course, simplify the mission of the self-tuning regulator.

The following standard values are used:

$$NA = 4$$

$$NB = 2$$

$$k = 7$$

$$T_s = 10 \text{ s}$$

$$\lambda_f = 0.99$$

$$b_o = 1$$

$$v_o = 6 \text{ m/s}$$

where T_s is the sampling interval and λ_f the exponential forgetting factor. Other values of k , T_s , and v_o are sometimes used. The following initial values of the parameters and of the covariance matrix P are used:

$$\begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{pmatrix} = \begin{pmatrix} -6.91 \\ 5.95 \\ 3.88 \\ -3.57 \\ 0.48 \\ 0.11 \\ -2.10 \\ 34.73 \end{pmatrix} \quad P = \begin{pmatrix} 1 & & & & & & & \\ & 1 & & & & & & \\ & & 1 & & & & & \\ & & & 1 & & & & \\ & & & & 0.01 & & & \\ & & & & & 0.01 & & \\ & & & & & & 1 & \\ & & & & & & & 100 \end{pmatrix} \quad (3.10)$$

Sometimes $c_1 = 0$ or $c_2 = 0$, which is indicated by assigning NCl resp NC2 the value zero. The corresponding diagonal element of P is then also equal to zero. The standard values are NCl = 1 and NC2 = 1.

By use of the minimum variance control (3.9) the following criterion is minimized:

$$J_1 = \sum_{n=0}^{\infty} (\hat{\psi}(n+k+1) - \psi_{ref})^2 \quad (3.11)$$

If the criterion

$$J_2 = \sum_{n=0}^{\infty} \left[(\hat{\psi}(n+k+1) - \psi_{ref})^2 + q_2 (\nabla \delta_c(n))^2 \right] \quad (3.12)$$

is minimized instead, a penalty on the rudder motions is introduced by the parameter q_2 . However, a proper solution of this problem requires the solving of a Riccati equation. A self-tuning regulator, which performs this, is used in Källström (1976a).

If the criterion (3.12) is modified to read

$$J_3(n) = (\hat{\psi}(n+k+1) - \psi_{ref})^2 + q_2 (\nabla \delta_c(n))^2 \quad (3.13)$$

$n = 0, 1, 2, \dots$

and if (3.13) is minimized at every sample event, then a simpler regulator is obtained. By inserting (3.8) into (3.13) and then performing the minimization, the following control is obtained:

$$\overline{\nabla \delta_c(t)} = \frac{(v_s(t)/v_o)^4 b_o^2}{(v_s(t)/v_o)^4 b_o^2 + q_2} \nabla \delta_c(t) \quad (3.14)$$

where $\nabla \delta_c(t)$ is the minimum variance control given by (3.9). If $q_2 = 0$, then minimization of (3.13) gives the same result as minimization of (3.11) and consequently the controls (3.14) and (3.9) are equivalent. Notice that (3.14) only is a very small modification of (3.19) and that the identification part of the self-tuning regulator is unchanged. However, the control (3.14) has the serious disadvantage that no guarantee of closed loop stability is obtained in the general case.

The minimum variance control (3.9) is approximately scaled by $(v_o/v_s(t))^2$ when the speed changes, i.e. (3.14) may be rewritten

$$\overline{\nabla \delta_c(t)} = \frac{b_o^2}{b_o^2 + \left(\frac{v_o}{v_s(t)}\right)^4 q_2} \left(\frac{v_o}{v_s(t)}\right)^2 [\nabla \delta_c(t)]_{v_o} \quad (3.15)$$

where $[\nabla \delta_c(t)]_{v_o}$ denotes the minimum variance control when $v_s = v_o$. By introducing $q = (v_o/v_s(t))^4 q_2$ we obtain

$$\begin{aligned} \overline{\nabla \delta_c(t)} &= \frac{b_o^2}{b_o^2 + q} \left(\frac{v_o}{v_s(t)}\right)^2 [\nabla \delta_c(t)]_{v_o} = \\ &= \frac{b_o^2}{b_o^2 + q} \nabla \delta_c(t) \end{aligned} \quad (3.16)$$

which is the actual control used in the autopilot. The standard value of q is equal to zero.

The estimates from the Kalman filter are used in all formulas of this section. Notice, however, that it is possible to use the non-filtered measurements instead.

3.3 PID-regulator

The following discrete PID-regulator for straight course keeping is also implemented for comparison:

$$\delta_C(nT_s) = - \left(\frac{v_o}{v_s(nT_s)} \right)^2 \left[k_p (\hat{\psi}(nT_s) - \psi_{ref}) + k_D \hat{r}(nT_s) + k_I T_s \sum_{i=0}^{n-1} (\hat{\psi}(iT_s) - \psi_{ref}) \right] \quad (3.17)$$

$$n = 0, 1, 2, \dots$$

The following standard values are used:

$$\begin{aligned} k_p &= 3 \\ k_D &= 75 \text{ s} \\ k_I &= 0.02 \text{ 1/s} \\ T_s &= 10 \text{ s} \\ v_o &= 6 \text{ m/s} \end{aligned} \quad (3.18)$$

Notice that it is possible to use the non-filtered measurements instead of the Kalman filter estimates in (3.17). The special speed scaling used in (3.17) will approximately give the same course keeping performance independent of the forward speed. The rudder deviations, however, are increased proportional to $(v_o/v_s)^2$ when the speed is decreased.

3.4 Yaw Regulator

A yaw performed by the yaw regulator consists of four different phases, viz. the initial phase (phase 1), the phase of constant yaw rate (phase 2), the checking rudder phase (phase 3), and the terminating phase (phase 4). However, if the requested heading change $\Delta\psi_{ref}$ is small, one or more of the phases may be skipped. The Kalman filter estimates used by the yaw regulator are the yaw rate \hat{r} and the heading $\hat{\psi}$, and the reference values used are the requested yaw rate r_{ref} and the new requested heading ψ_{ref} . The phase of straight course keeping is denoted phase 0.

Modified discrete, fixed gain PID-regulators are used in the different phases (note that $n = 0, 1, 2, \dots$):

Phase 1:

$$\delta_c(nT_s) = - \left(\frac{V_o}{V_s(nT_s)} \right)^2 k_4 (\hat{r}(nT_s) - r_o) + \bar{\delta}_c$$

$$| k_4 (\hat{r}(nT_s) - r_o) | \leq | \bar{c}_1 r_o |$$

Phase 2:

$$\delta_c(nT_s) = - \left(\frac{V_o}{V_s(nT_s)} \right)^2 \left[k_5 (\hat{r}(nT_s) - r_o) + \right.$$

$$\left. + k_6 T_s \sum_{i=0}^{n-1} (\hat{r}(iT_s) - r_o) \right] + \bar{\delta}_c$$

Phase 3:

$$\delta_c(nT_s) = - \left(\frac{V_o}{V_s(nT_s)} \right)^2 \left[k_7 (\hat{\psi}(nT_s) - \psi_{ref}) + k_8 \hat{r}(nT_s) \right]$$

$$| k_7 (\hat{\psi}(nT_s) - \psi_{ref}) + k_8 \hat{r}(nT_s) | \leq | \bar{c}_3 r_o |$$

Phase 4:

$$\delta_c(nT_s) = - \left(\frac{v_o}{v_s(nT_s)} \right)^2 \left[k_1 (\hat{\psi}(nT_s) - \psi_{ref}) + k_2 \hat{r}(nT_s) + k_3 T_s \sum_{i=0}^{n-1} (\hat{\psi}(iT_s) - \psi_{ref}) \right]$$

The moving average $\bar{\delta}_c$ of the rudder commands δ_c is only updated during phase 0 and phase 4:

$$\bar{\delta}_c((k+1)T_s) = \bar{\delta}_c(kT_s) + \left(\frac{1-\gamma}{k+1} + \gamma \right) (\delta_c(kT_s) - \bar{\delta}_c(kT_s))$$

$$k = 0, 1, 2, \dots$$

$$\bar{\delta}_c(0) = 0$$

The reference yaw rate r_o including sign is computed once, when the yaw is initiated, as

$$r_o = r_{ref} \text{ if } \hat{\psi} - \psi_{ref} \leq 0$$

or as

$$r_o = -r_{ref} \text{ if } \hat{\psi} - \psi_{ref} > 0$$

Notice that the value of r_{ref} always is positive.

The conditions to jump from one phase to another read:

Phase 0 → phase 4:

$$\psi_1 < \Delta\psi_{ref} \leq \psi_2$$

Phase 0 → phase 1:

$$\Delta\psi_{ref} > \psi_2$$

Phase 1 → phase 2:

$$r_o \geq 0 \quad \text{and} \quad \hat{r} - r_o > -\varepsilon_1$$

or

$$r_o < 0 \quad \text{and} \quad \hat{r} - r_o < \varepsilon_1$$

or

$$(\text{time in phase 1}) > T_1$$

Phase 1 or 2 → phase 3:

$$r_o \geq 0 \quad \text{and} \quad -\bar{c}_2 \hat{r} < \hat{\psi} - \psi_{\text{ref}}$$

or

$$r_o < 0 \quad \text{and} \quad -\bar{c}_2 \hat{r} > \hat{\psi} - \psi_{\text{ref}}$$

Phase 3 → phase 4:

$$|\hat{r}| < \varepsilon_2$$

or

$$r_o \geq 0 \quad \text{and} \quad \hat{\psi} - \psi_{\text{ref}} > -\varepsilon_3$$

or

$$r_o < 0 \quad \text{and} \quad \hat{\psi} - \psi_{\text{ref}} < \varepsilon_3$$

or

$$(\text{time in phase 3}) > T_3$$

Phase 4 → phase 0:

$$(\text{time in phase 4}) > T_4$$

The condition to remain in phase 0 is:

$$\Delta\psi_{\text{ref}} \leq \psi_1$$

If the reference yaw rate r_{ref} is changed during a yaw, the new value is immediately used, but no other changes. It is also possible to change the reference course ψ_{ref} during a yaw, and then a new yaw is initiated by entering phase 1, if

$$|\Delta\psi_{ref}| > \psi_3 \quad \text{and} \quad (3.19)$$

the actual phase is 3 or 4

or if

$$|\Delta\psi_{ref}| > \psi_3, \quad \text{the actual phase is 1 or 2, and one of the two conditions} \quad (3.20)$$

$$r_o > 0, \quad \hat{\psi} - \psi_{ref} > 0$$

and

$$r_o \leq 0, \quad \hat{\psi} - \psi_{ref} < 0$$

is satisfied.

If neither condition (3.19) nor condition (3.20) is fulfilled, the new value of ψ_{ref} is used, but no other changes.

The following parameter values of the yaw regulator are used:

$k_1 = 5$	$k_7 = 2$
$k_2 = 200 \text{ s}$	$k_8 = 200 \text{ s}$
$k_3 = 0.005 \text{ l/s}$	$\epsilon_1 = 0 \text{ deg/s}$
$k_4 = 200 \text{ s}$	$\epsilon_2 = 0.02 \text{ deg/s}$
$k_5 = 200 \text{ s}$	$\epsilon_3 = 1 \text{ deg}$
$k_6 = 8$	

$\bar{c}_1 = 60 \text{ s}$	$\psi_1 = 0.35 \text{ deg}$
$\bar{c}_2 = 50 \text{ s}$	$\psi_2 = 2.5 \text{ deg}$
$\bar{c}_3 = 60 \text{ s}$	$\psi_3 = 2.5 \text{ deg}$
$T_1 = 30 \text{ s}$	$v_o = 6 \text{ m/s}$
$T_3 = 100 \text{ s}$	$T_s = 10 \text{ s}$
$T_4 = 300 \text{ s}$	$\gamma = 0.05$

A special indicator M_y is used to describe the actual yaw phase, i.e. $M_y = 0, 1, 2, 3, 4$ corresponds to phase 0, 1, 2, 3, 4, resp. Notice that it is possible to use the non-filtered measurements instead of the Kalman filter estimates in the yaw regulator. The special speed scaling used in the yaw regulator will approximately give the same performance of the yaw rate and the heading independent of the forward speed. The rudder deviations, however, are increased proportional to $(v_o/v_s)^2$ when the speed is decreased.

4. DISCUSSION OF THE EXPERIMENTS

All the experiments are described in Appendix D, where also plots of the recorded variables are shown. A complete summary of the experiments is given in the Tables D.1 - D.6 at the beginning of Appendix D.

To make it possible to compare the steering quality of different autopilot structures, two loss functions are now introduced:

$$V_1 = \frac{1}{\tau} \int_0^{\tau} \left[(\psi(t) - \psi_{ref})^2 + \lambda (\delta_c(t) - m_{\delta_c})^2 \right] dt \quad (4.1)$$

and

$$V_2 = \frac{1}{\tau} \int_0^{\tau} \left[(\psi(t) - \psi_{ref})^2 + \lambda (\delta(t) - m_{\delta}(t))^2 \right] dt \quad (4.2)$$

where the mean values of δ_c and δ are denoted m_{δ_c} and m_{δ} , resp., and the weighting factor λ is equal to 1/12. The duration of the experiment is denoted τ . The loss functions are approximated by:

$$V_1 = \frac{1}{N_1} \sum_{n=0}^{N_1-1} \left[(\psi(nT_s) - \psi_{ref})^2 + \lambda (\delta_c(nT_s) - m_{\delta_c})^2 \right] \quad (4.3)$$

and

$$V_2 = \frac{1}{N_2} \sum_{n=0}^{N_2-1} \left[(\psi(nh) - \psi_{ref})^2 + \lambda (\delta(nh) - m_{\delta}(nh))^2 \right] \quad (4.4)$$

where $N_1 T_s = \tau$ and $N_2 h = \tau$, resp. Notice that T_s is the sampling interval of the regulator, usually equal to 10 s, while h always is equal to 1 s. The loss function V_1 is used to compare the experiments A1 - A36, while the loss function V_2 is computed during experiments F1 - F4.

4.1 Kalman Filter Testing

The Kalman filter was running during all the experiments. Discussions and comparisons of some of the experiments are given in this section.

Three experiments, B1 - B3, were performed to test the Kalman filter by recording some of the estimates at the same sampling rate as the filter was running at, i.e. with sampling interval 1 s. The wind velocity during the experiments was 6, 8, and 15 m/s, resp., and the forward speed was 13.7, 13.3, and 15.9 knots, resp. The experiments are summarized in Table D.2 of Appendix D. It can be concluded from the plots that the performance of the Kalman filter seems to be very good in the different wind and speed conditions. Notice, however, that the yaw rate measurements are filtered in a rather hard way, although the filtering is not at all unreasonable. Another yaw rate estimate \hat{r}_d is also computed every second:

$$\hat{r}_d(t) = \frac{\psi(t) - \psi(t-5)}{5} \quad (4.5)$$

It can be concluded that these estimates are not at all as smooth as the Kalman filter estimates, but that they are preferable compared to the measurements. By use of the measurement devices of the heading and the yaw rate, which are installed on the Sea Stratus, it thus can be concluded that a yaw rate estimate computed by the difference approximation formula (4.5) seems to be preferable in front of the noisy measurement signal r .

A summary of 8 experiments of straight course keeping by the self-tuning regulator using Kalman filter estimates, when the measurement signals used by the filter are varied, is given in Table 4.1. The Kalman filter estimates obtained when δ , v_1 or r is not used by the filter, experiments A22, A23, and A24, resp., are approximately of the same

Ex- peri- ment	Rel. wind direc- tion	Wind velo- city [m/s]	δ_c		$\psi - \psi_{ref}$		Mean value of u [knots]	v_1	Remarks
			Mean value [deg]	Std. dev. [deg]	Mean value [deg]	Std. dev. [deg]			
A 19	1	9	0.45	1.11	-0.005	0.176	13.0	0.134	
A 22	1	13	2.32	0.95	-0.006	0.204	12.8	0.117	δ not used by filter
A 23	1	13	1.71	0.94	0.015	0.217	12.6	0.121	v_1 not used by filter
A 24	1	14	1.34	1.25	0.130	0.317	12.5	0.248	r not used by filter
A 25	1	14	1.25	0.90	-0.034	0.240	12.5	0.126	After 9.5 min, ψ was not used by filter
A 26	1	6	0.24	0.89	0.030	0.230	13.4	0.120	v_1 , r and δ not used by filter. Correct K.
A 27	1	7	0.30	0.92	0.043	0.197	13.2	0.111	v_1 , r and δ not used by filter
A 28	1	4	0.16	0.95	0.006	0.239	13.5	0.132	

Table 4.1 – Experiments of straight course keeping by the self-tuning regulator using Kalman filter estimates, when the measurement signals used by the filter are varied. If nothing else is remarked, all measurement signals v_1 , r , ψ , and δ are used by the Kalman filter. An explanation of the relative wind direction is given in Appendix A. The tuning time before the experiment started was equal to 30 min. The following standard values are used:
 $T_s = 10$ s, $V_0 = 6$ m/s, IVVC = 1, NC1 = 1, NC2 = 1, $k = 7$, and $q = 0$.
The experiments were performed during a period of 3 days.

quality as the estimates obtained in experiments A19 and A28, where all the measurement signals are used. The steering performances obtained are also approximately of the same quality, with one exception; extraordinary disturbances seem to have affected experiment A24, where r is not used by the filter. Experiment A25 shows that it is possible to obtain an acceptable course keeping during at least 15 min after the heading measurement signal ψ is rejected by the filter.

The Kalman filter estimates obtained, when the only measurement signal used is the heading ψ , are quite acceptable, which can be concluded from experiments A26 and A27. It is also concluded that the difference between using a correctly designed filter gain K (cf. (3.7)) and cancelling the corresponding columns of the original filter gain is very insignificant. The steering performance obtained is approximately of the same quality, when the only measurement signal used by the Kalman filter is the heading ψ (experiments A26 and A27), compared to the performance obtained when all measurement signals are used (experiments A19 and A28). From the experiments of Table 4.1 it thus can be concluded that it is not necessary to use all the measurement signals to obtain a good performance of the Kalman filter. In fact, acceptable filter estimates are obtained when the only measurement signal used is the heading ψ .

By comparing experiment A14, where complete calm was prevailing, with experiment A22, where the wind velocity was 13 m/s, it can be concluded that the quality of the Kalman filter estimates is rather insensitive to wind changes. Experiments A34 and A35 show that the performance of the Kalman filter is approximately of the same quality at the forward speed 15.8 knots compared to the forward speed 12.1 knots.

Experiments A1, D2 and D3 show the initial performance of the Kalman filter. The bias estimates of the filter are approximately tuned after about 30 min.

The performance of the Kalman filter during turns is shown in experiments C1-C6 and D1. From experiments C1, C2, and D1 it is immediately concluded that it is very important to skip the updating of the bias estimates $\hat{\delta}_o'$, \hat{d}_v' , \hat{d}_r' , and \hat{d}_ψ' when turning, because otherwise the bias estimates are disturbed significantly. The updating is skipped during experiments C3 and C4. From experiments C3-C6 it is concluded that the performance of the Kalman filter is approximately of the same good quality during turning as during straight course keeping. Experiments E1-E4 also illustrate the good performance of the Kalman filter.

Considering all the experiments it is obvious that the test values (3.6) of the Kalman filter are chosen too large, at least when the speed of the ship is larger than about 10 knots. The following non-normalized values seem to be suitable when the speed is about 13 knots:

$$\begin{aligned} t_\delta &= 10 \text{ deg} \\ t_v &= 0.15 \text{ knots} \\ t_r &= 0.15 \text{ deg/s} \\ t_\psi &= 0.3 \text{ deg} \end{aligned} \tag{4.6}$$

Then the normalized test values are (cf. (3.6)):

$$\begin{aligned} t'_\delta &= 0.17 \\ t'_v &= 0.012 \\ t'_r &= 0.14 \\ t'_\psi &= 0.0052 \end{aligned} \tag{4.7}$$

The test values (4.7) seem to be reasonable when the speed is larger than about 10 knots, while the values (3.6), obtained from simulations in Källström (1976c), are suitable at lower speeds.

4.2 Straight Course Keeping

Experiments of straight course keeping by the self-tuning regulator using Kalman filter estimates, when the parameters T_s , V_o , NC1, NC2, k and q are varied, are summarized in Table 4.2.

The straight course keeping is mainly affected by the value of the design speed V_o during the initial phase, when the parameters of the self-tuning regulator not yet are tuned. However, from experiments A2, A5, A6, and A10 it can be concluded that $V_o = 7$ m/s is to prefer in front of $V_o = 6$ m/s. Since the parameter V_o also is used in the yaw regulator, the value 6 m/s is nevertheless used during most of the experiments by reasons explained in Section 4.3.

By comparing experiments A2-A9 it is concluded that $T_s = 10$ s, $k = 7$ (experiments A2, A5, A6) in average is the best choice. An acceptable alternative is $T_s = 15$ s, $k = 5$ (experiment A9). Experiments A10-A13 show clearly that the best steering performance is obtained when $q = 0$.

The importance of the feedforward signals is illustrated by experiments A15-A17. It is concluded that the quality of the steering performance is significantly decreased when both feedforward signals are omitted. The comparative experiment A14 was unfortunately disturbed by a temporarily reduction of the number of propeller revolutions immediately before the experiment started. No comparisons with experiment A14 are thus performed.

Ex- peri- ment	Rel. wind dir.	Wind velo- city	T_s	V_0 [m/s]	Structure of self- tuning regulator				δ_c	$\psi - \psi_{ref}$	Mean value of u [knots]	V_1	Remarks	
					NC1	NC2	k	q						
A 2	5	5	10	7	1	1	7	0	0.41	1.14	0.017	0.182	13.9	0.142 Tuning time: > 120 min.
A 3	5	10	10	7	1	5	0	0.74	1.20	0.009	0.239	14.2	0.177	
A 4	5	5	10	7	1	1	6	0	1.39	1.41	-0.009	0.246	14.0	0.226
A 5	5	4	10	7	1	1	7	0	0.66	1.17	0.014	0.219	14.0	0.162
A 6	4	4	10	7	1	1	7	0	-0.73	1.32	-0.051	0.290	13.5	0.232
A 7	3	4	10	7	1	1	8	0	-0.17	1.19	0.034	0.260	14.1	0.187
A 8	5	4	15	6	1	1	4	0	0.17	1.46	-0.027	0.309	13.9	0.274
A 9	5	4	15	6	1	1	5	0	0.05	1.24	-0.022	0.301	13.8	0.219
A 10	5	3	10	6	1	1	7	0	0.08	1.62	0.013	0.344	13.7	0.337
A 11	5	3	10	6	1	1	6	0.05	-0.06	1.79	-0.033	0.400	13.9	0.428
A 12	5	3	10	6	1	1	6	0.1	0.05	1.69	0.013	0.444	13.7	0.435
A 13	6	3	10	6	1	1	7	0	-0.61	1.66	-0.017	0.111	13.5	0.242 Tuning time: > 120 min.
A 14	-	0	10	6	1	0	7	0	-0.68	0.82	0.015	0.158	13.3	0.081
A 15	-	0	10	6	1	0	7	0	-0.43	0.62	-0.066	0.169	12.9	0.065
A 16	1	5	10	6	0	0	7	0	0.01	0.89	-0.188	0.247	12.9	0.162
A 17	1	5	10	6	0	0	7	0						

Table 4.2 - Experiments of straight course keeping by the self-tuning regulator using Kalman filter estimates, when the parameters T_s , V_0 , NC1, NC2, k and q are varied. All measurement signals v_1 , r , ψ and δ are used by the Kalman filter. An explanation of the relative wind direction is given in Appendix A. The tuning time before the experiment started was equal to 30 min, if nothing else is remarked. The value of IVVC is equal to 1. The experiments were performed during a period of 3 days.

The following standard parameter values are used during most of the remaining experiments:

$$\begin{aligned}
 T_s &= 10 \text{ s} \\
 v_0 &= 6 \text{ m/s} \\
 IVVC &= 1 \\
 NC1 &= 1 \\
 NC2 &= 1 \\
 k &= 7 \\
 q &= 0
 \end{aligned} \tag{4.8}$$

The good performance of the self-tuning regulator in different weather conditions is illustrated by e.g. experiments A15 and A22, where the wind velocity was 0 resp. 13 m/s. Experiments A34 and A36 show the good performance of the self-tuning regulator when the forward speed was 15.8 resp. 12.1 knots.

Experiments A1, D2 and D3 show the initial performance of the self-tuning regulator when the autopilot is switched on. It is concluded that the steering quality is quite acceptable from the beginning. Experiment D3 also illustrates the performance of the self-tuning regulator in connection with the Sailmaster and the Course Correction. From experiments C1-C6 and D1 it is concluded that the self-tuning regulator has no initial problems after the yaw regulator has terminated a turn.

Straight course keeping experiments to compare the performance of the self-tuning regulator and the PID-regulator are summarized in Table 4.3. The performance of both the self-tuning regulator and the PID-regulator is improved when Kalman filter estimates are used instead of non-filtered measurements. When Kalman filter estimates are used, the performance of the self-tuning regulator is

Ex- peri- ment	Rel. wind dir.	Wind velo- city [m/s]	NC1	NC2	δ_c		$\psi - \psi_{ref}$		Mean value of u [knots]	V ₁	V ₂
					Mean value [deg]	Std. dev. [deg]	Mean value [deg]	Std. dev. [deg]			
A 16	1	5	0	1	-0.43	0.62	-0.066	0.169	12.9	0.065	-
A 17	1	5	0	0	0.01	0.89	-0.188	0.247	12.9	0.162	-
A 18	1	5	0	0	0.24	1.01	-0.052	0.245	12.8	0.148	-
A 19	1	9	1	1	0.45	1.11	-0.005	0.176	13.0	0.134	-
A 20	1	9	-	-	0.53	2.48	0.026	0.556	13.1	0.822	-
A 21	1	4	-	-	0.53	0.91	-0.018	0.293	12.9	0.155	-
A 27	1	7	1	1	0.30	0.92	0.043	0.197	13.2	0.111	-
A 28	1	4	1	1	0.16	0.95	0.006	0.239	13.5	0.132	-
A 29	1	3	0	0	-0.01	1.51	0.001	0.324	13.4	0.295	-
A 30	1	5	-	-	-0.10	0.89	-0.026	0.256	13.5	0.132	-
A 31	1	3	-	-	0.22	2.41	-0.103	1.085	13.4	1.672	-
A 35	1	11	-	-	0.01	1.66	0.008	0.295	12.1	0.317	-
A 36	1	11	1	1	-0.05	1.08	-0.058	0.206	12.1	0.143	-
F 1	6	3	1	1	-	-	-0.002	-	14.4	-	0.038
F 2	7	3	-	-	-	-	-0.016	-	14.4	-	0.259
F 3	1	11	1	1	-	-	-0.073	-	12.1	-	0.160
F 4	1	11	-	-	-	-	-0.009	-	12.2	-	0.304

Table 4.3 - Comparable straight course keeping experiments. An explanation of the relative wind direction is given in Appendix A. All measurement signals v_1 , r , ψ and δ are used by the Kalman filter, if nothing else is remarked. The following standard values are used, if nothing else is remarked: $T_s = 10$ s, $V_0 = 6$ m/s, IVVC = 1, $k = 7$, $q = 0$, $k_p = 3$, $k_D = 75$ s, $k_I = 0.02$ l/s. The standard values of the PID-regulator are obtained by simulations, see Källström (1976c). The standard values are used in the experiments A20, A21, and F2, while the values of k_p , k_D , and k_I were manually tuned before the experiments A30, A31, A35, and F4 started. The groups of experiments A16-A21 and A27-A31 were both performed during a period of 6 h, while the groups A35-A36, F1-F2, and F3-F4 were performed during a period of 2 h each. The experiments within each group are fairly comparable.

Ex-periment	Kalman filter esti-mates used		Non-filtered measurements used		Remarks
	Self-tuning regulator	PID-regulator	Self-tuning regulator	PID-regulator	
A 16	x				
A 17	x				
A 18			x		
A 19	x				
A 20				x	
A 21		x			
A 27	x				v ₁ , r and δ not used by filter.
A 28	x				
A 29			x		
A 30		x			k _D = 120 s.
A 31				x	k _P = 2, k _D = 100 s.
A 35		x			k _D = 140 s.
A 36	x				
F 1	x				$\left\{ \begin{array}{l} V_0 = 8 \text{ m/s}, IVVC = 3, V_c = 7 \text{ m/s}. \\ v_1 \text{ not used by filter. Sailmaster.} \end{array} \right.$
F 2				x	
F 3	x				$\left\{ \begin{array}{l} V_0 = 8 \text{ m/s}, IVVC = 3, V_c = 7 \text{ m/s}. \\ \text{Sailmaster.} \end{array} \right.$
F 4		x			
					k _D = 140 s.

Table 4.3 - Continued.

significantly better than the performance of the PID-regulator, particularly when the wind speed is increased. The good steering quality of the self-tuning regulator compared to the PID-regulator is still more emphasized, when non-filtered measurements are used in both regulators. Of course, the self-tuning regulator using Kalman filter estimates is consequently also to prefer in front of the PID-regulator using non-filtered measurements. Finally, it is not possible to conclude anything definitively when the self-tuning regulator using non-filtered measurements is compared to the PID-regulator using Kalman filter estimates.

It is now possible to sum up that, even if the heading is the only measurement signal available, a self-tuning regulator with the standard values (4.8) combined with a Kalman filter is very much advantageous to a well tuned PID-regulator.

4.3 Yawing

Experiments C1-C6 and D1 show turns performed by the yaw regulator. The Kalman filter estimates were fed into both the self-tuning regulator and the yaw regulator during all the experiments, which are summarized in Tables D.3 and D.4 of Appendix D.

It is concluded from experiment D1, where $V_0 = 8 \text{ m/s}$, that the rudder deviations are too large during phase 4.

A simple way to improve the performance of the yaw regulator in this respect is to decrease the value of V_0 . Thus $V_0 = 7 \text{ m/s}$ during experiment C1 and $V_0 = 6 \text{ m/s}$ during experiments C2-C6. Experiments C1, C2 and D1 show the importance of skipping the updating of the bias estimates

$\hat{\delta}_0'$, \hat{d}_v' , \hat{d}_r' , and \hat{d}_δ' during large course changes. This is performed during experiments C3 and C4, where the very good performance of the yaw regulator for large turns is illustrated. The same good performance for small course changes is shown in experiments C5 and C6.

4.4 Experiments for Identification

Two different kinds of identification experiments were performed, viz. open loop experiments (E1, E2, E4) and closed loop experiment using additive rudder disturbances (E3). The experiments are summarized in Table D.5 of Appendix D. The sampling interval was equal to 10 s. Notice that experiment E2 is a $5^\circ/5^\circ$ zig-zag test. The rudder commands δ_c during experiments E1 and E4 and the additive rudder disturbances δ_{add} during experiment E3 were approximately chosen as a PRBS containing the values $+\delta_{amp}$, $-\delta_{amp}$, and zero.

The feedback is explained by Fig. 4.1. The rudder command δ_c is obtained as

$$\delta_c = -k_{id}(\psi - \psi_{ref}) + \delta_{add}$$

Obviously an open loop experiment is performed by assigning k_{id} the value zero.

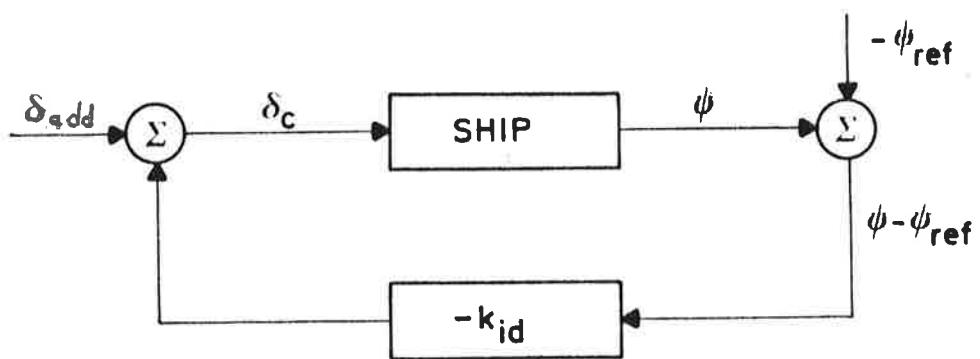


Fig. 4.1 - Proportional feedback from the course error
used for identification experiments.

5. CONCLUSIONS

An adaptive autopilot, consisting of a Kalman filter, a self-tuning regulator and a yaw regulator, was tested on a ballasted 355 000 tdw oil tanker. Comparative straight course keeping experiments with a well tuned PID-regulator were also performed. The average speed of the ship varied between 12.1 knots and 15.9 knots during the experiments. The range of the wind velocity measured was 0-15 m/s, which corresponds to complete calm and moderate gale. Fifty-six experiments were performed during a total time of 33 h. The testing, however, was in fact going on during almost all the days and nights of the voyage, i.e. during about 2 weeks.

The performance of the Kalman filter was very good in the different speed and wind conditions during straight course keeping as well as during turning. Notice, however, that it is important to skip the updating of the bias estimates during turns. Usually all measurement signals, i.e. the transversal velocity of bow, the yaw rate, the heading and the rudder angle were used by the Kalman filter. However, the performance, when the only measurement signal used was the heading angle, was approximately of the same quality as the performance when all measurement signals were used. One experiment showed that it was possible to obtain an acceptable course keeping during at least 15 min. after the heading measurement signal was rejected by the Kalman filter, when the three other measurement signals were used. The initial performance of the Kalman filter, when the autopilot was switched on, was quite acceptable and the bias estimates were approximately tuned after about 30 min.

The straight course keeping performance of the self-tuning regulator using Kalman filter estimates was very good in the different speed and wind conditions. The use of the estimates of transversal velocity and yaw rate as

feedforward signals was improving the steering quality significantly, even if the only measurement signal used by the Kalman filter was the heading angle. The initial performance of the self-tuning regulator when the autopilot was switched on as well as the performance after the termination of a turn was quite satisfactory.

The performance of both the self-tuning regulator and the PID-regulator was improved when Kalman filter estimates were used instead of non-filtered measurements. When Kalman filter estimates were used, the performance of the self-tuning regulator was significantly better than the performance of the PID-regulator, particularly when the wind speed was increased. The good steering quality of the self-tuning regulator compared to the PID-regulator was still more emphasized when non-filtered measurements were used in both regulators. The self-tuning regulator using Kalman filter estimates was consequently also to prefer in front of the PID-regulator using non-filtered measurements. It was not possible to conclude anything definitively when the self-tuning regulator using non-filtered measurements was compared to the PID-regulator using Kalman filter estimates.

The yaw regulator was tested by performing small course changes as well as large turns. The performance was very good in both cases.

It is now possible to confirm a rather good consistency between the experiments on the Sea Stratus and the simulations reported in Källström (1976c). However, the performance of a well tuned PID-regulator seems to be overestimated in simulations compared to full-scale experiments.

6. ACKNOWLEDGEMENTS

I would like to express my gratitude to the Salén Shipping Co for their willingness to allow experiments to be performed with their ship. I am particularly grateful to the captain of the Sea Stratus, Mr B Svensson.

This work has been supported by the Swedish Board for Technical Development under contracts 734187 and 744127.

7. REFERENCES

- Aspernäs B and Foisack P (1975), "Simulering av styr-system för tankfartyg", TFRT-5154, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.
- Aspernäs B and Källström C (1975), "Simulering av adaptiv fartygsstyrning med Kalmanfilter", TFRT-3123, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.
- Källström C (1974), "The Sea Scout Experiments, October 1973", TFRT-7063, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.
- Källström C (1975), "The Sea Swift Experiments, October 1974", TFRT-7078, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.
- Källström C (1976a), "Simulation of Adaptive Ship Steering with Penalty on the Rudder Motion", TFRT-3133, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.
- Källström C (1976b), "Simulation of Ship Yawing", Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden, CODEN: LUTFD2/(TFRT-7108)/1-092/(1976).
- Källström C (1976c), "Simulation of Ship Steering", Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden, CODEN: LUTFD2/(TFRT-7109)/1-353/(1976).
- Wittenmark B (1973), "A Self-tuning Regulator", TFRT-3054, Dept of Automatic Control, Lund Institute of Technology, Lund, Sweden.

APPENDIX A - NOTATIONS

A	system matrix of Kalman filter
a_i , $i = 1, 2, \dots$	parameters of self-tuning regulator
a_{ij} , $i=1,2,\dots, j=1,2,\dots$	elements of system matrix A
B	system matrix of Kalman filter
BV	weighting factor
b_0	parameter of self-tuning regulator
b_i , $i = 1, 2, \dots$	parameters of self-tuning regulator
b_{i1} , $i = 1, 2, 3, 4$	elements of system matrix B
C	system matrix of Kalman filter
CGR	conversion factor from degrees to radians
CKM	conversion factor from knots to m/s
c_1 , c_2	parameters of self-tuning regulator
\bar{c}_1 , \bar{c}_2 , \bar{c}_3	parameters of yaw regulator
\hat{d}_v , \hat{d}_r , \hat{d}_δ	estimated measurement biases of v_1 , r , and δ , resp.
\hat{d}'_v , \hat{d}'_r , \hat{d}'_δ	normalized estimates corresponding to \hat{d}_v , \hat{d}_r , and \hat{d}_δ , resp.
e	disturbances of the self-tuning regulator model
h	sampling interval of V_2
IDEXP	control parameter of AUTP3
IFLAG	control parameter of printing and punching
IKAL	control parameter of AUTP3
IKMX	number of times the measurement testing is skipped when the Kalman filter is initialized
ILOS	control parameter of AUTP3

IMX	number of consecutive times a measurement signal must be rejected to definitively reject the signal
IPC	control parameter of punching
IPID	control parameter of AUTP3
IPK	control parameter of punching
IPR	sampling interval of punching
IREGY	sampling interval of yaw regulator
IREGYT	sampling interval of yaw testing
IST	control parameter of AUTP3
IVVC	control parameter of computation of V_s
IYAW	control parameter of AUTP3
J_1, J_2, J_3	criteria of self-tuning regulator
K	gain matrix of Kalman filter
k	number of pure time-delays of self-tuning regulator
k_P, k_D, k_I	parameters of PID-regulator
k_{id}	parameter of P-regulator used for identification experiments
$k_i, i = 1, 2, \dots, 8$	parameters of yaw regulator
L	length of ship
ℓ_1	distance from origin to forward doppler log
MEAS	control parameter vector of AUTP3
M_Y	yaw phase indicator
m_δ	mean value of δ
m_{δ_c}	mean value of δ_c
NA	number of a-parameters of self-tuning regulator
NB	number of b-parameters of self-tuning regulator

NC1	indicator of parameter c_1 of self-tuning regulator
NC2	indicator of parameter c_2 of self-tuning regulator
N_1, N_2	number of sampling events to compute V_1 and V_2 , resp.
n	number of propeller revolutions
P	covariance matrix of self-tuning regulator
PI	parameter of AUTP3 containing π
PI2	parameter of AUTP3 containing $2 \times \pi$
PP0	vector containing initial diagonal values of P
PSI0	reference course used for identification experiments
P_s	propeller effect
q	penalty on rudder deviation when self-tuning regulator is used
q_2	weighting factor of J_2 and J_3
R_1	covariance matrix of process noise
r	yaw rate
\hat{r}	estimated yaw rate
\hat{r}'	normalized estimate corresponding to \hat{r}
\hat{r}_d	estimated yaw rate computed by difference approximation
r_{ref}	reference value of yaw rate
r_0	reference value of yaw rate including sign
TH0	vector containing initial parameter values of self-tuning regulator
T_k	sampling interval of Kalman filter
T_s	sampling interval
T_1, T_3, T_4	parameters of yaw regulator

t	time
t_0	initial time
$t_\delta, t_v, t_r, t_\psi$	test values of Kalman filter for δ, v_l, r , and ψ , resp.
$t'_\delta, t'_v, t'_r, t'_\psi$	normalized test values corresponding to t_δ, t_v, t_r , and t_ψ , resp.
u	forward velocity
u'	normalized input signal of Kalman filter
V_{MAX}	parameter of AUTP3
V_{MIN}	parameter of AUTP3
v_c	parameter containing a constant forward velocity
v_s	scaling speed
v_0	design speed
v_1, v_2	loss functions
v	transversal velocity of origin
\hat{v}	estimated transversal velocity of origin
\hat{v}'	normalized estimate corresponding to \hat{v}
v_1	transversal velocity of bow
\hat{v}_1	estimated transversal velocity of bow
\hat{x}	state estimate vector of Kalman filter
\hat{x}'	normalized state estimate vector of Kalman filter
y'	Normalized measurement vector of Kalman filter
γ	parameter of yaw regulator
$\Delta\psi_{ref}$	change of reference value of course
δ	rudder angle
$\hat{\delta}$	estimated rudder angle

$\hat{\delta}'$	normalized estimate corresponding to $\hat{\delta}$
δ_{add}	additive rudder disturbance signal used for identification experiments
δ_{amp}	rudder amplitude used for identification experiments
δ_c	rudder command
$\bar{\delta}_c$	moving average value of δ_c
$\hat{\delta}_d$	estimated value equal to $\hat{\delta} - \hat{\delta}_0$
$\hat{\delta}'_d$	normalized estimate corresponding to $\hat{\delta}_d$
δ_l	rudder limit
δ_s	rudder servo position
$\hat{\delta}_0$	estimated rudder bias
$\hat{\delta}'_0$	normalized estimate corresponding to $\hat{\delta}_0$
ε	residual vector of Kalman filter
ε'	normalized residual vector of Kalman filter
$\varepsilon_\delta, \varepsilon_v, \varepsilon_r, \varepsilon_\psi$	elements of residual vector ε
$\varepsilon'_\delta, \varepsilon'_v, \varepsilon'_r, \varepsilon'_\psi$	normalized values corresponding to $\varepsilon_\delta, \varepsilon_v, \varepsilon_r$, and ε_ψ , resp., i.e. elements of normalized residual vector ε'
$\varepsilon_1, \varepsilon_2, \varepsilon_3$	parameters of yaw regulator
λ	weighting factor of V_1 and V_2
λ_f	exponential forgetting factor of self-tuning regulator
τ	duration of experiment
ψ	heading angle
$\hat{\psi}$	estimated heading angle
$\hat{\psi}'$	normalized estimate corresponding to $\hat{\psi}$
ψ_{ref}	reference value of course
ψ_1, ψ_2, ψ_3	parameters of yaw regulator
∇	change of value (e.g. $\nabla \delta_c(t) = \delta_c(t) - \delta_c(t-1)$)

The absolute wind direction related to the ship is explained by Fig. A.1.

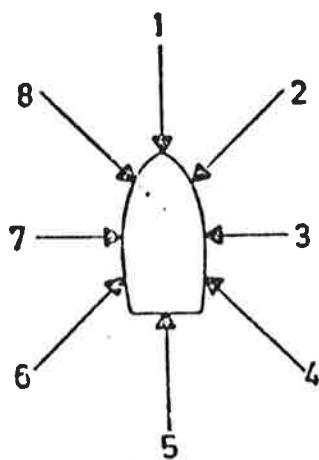


Fig. A.1 - Explanation of the relative wind direction.
Notice that the absolute wind is used.

APPENDIX B - STANDARD PARAMETER VALUES

The standard parameter values of the autopilot used during the experiments are summarized in this appendix. When the notation used in this report differs from the variable name used in the computer programs, the latter name is given in brackets.

IDEXP	0
IFLAG	30
MEAS (1)	0
MEAS (2)	0
MEAS (3)	0
MEAS (4)	0
CGR	0.0174533
CKM	0.514444
PI	3.141593
PI2	6.283185
L (AL)	350
ℓ_1 (ALL)	164.35
a_{11} (A(1))	0.99163
a_{12} (A(2))	-0.0100810
a_{14} (A(3))	-0.00208207
a_{15} (A(4))	0.000212358
a_{21} (A(5))	-0.0759537
a_{22} (A(6))	0.96485
a_{24} (A(7))	0.0164706
a_{25} (A(8))	-0.00170991
a_{31} (A(9))	-0.000874514

a_{32}	(A(10))	0.0224515
a_{34}	(A(11))	0.000195418
a_{35}	(A(12))	-0.0000132723
a_{44}	(A(13))	0.81873
a_{45}	(A(14))	-0.18127
b_{11}	(A(15))	-0.000212358
b_{21}	(A(16))	0.00170991
b_{31}	(A(17))	0.0000132723
b_{41}	(A(18))	0.18127
$K(1,1)$	(AK(1,1))	$-9.27 \cdot 10^{-5}$
$K(2,1)$	(AK(2,1))	$6.30 \cdot 10^{-4}$
$K(3,1)$	(AK(3,1))	$1.69 \cdot 10^{-5}$
$K(4,1)$	(AK(4,1))	$1.66 \cdot 10^{-2}$
$K(5,1)$	(AK(5,1))	$1.03 \cdot 10^{-3}$
$K(6,1)$	(AK(6,1))	$-1.26 \cdot 10^{-4}$
$K(7,1)$	(AK(7,1))	$1.63 \cdot 10^{-6}$
$K(8,1)$	(AK(8,1))	$2.54 \cdot 10^{-3}$
$K(1,2)$	(AK(1,2))	$8.82 \cdot 10^{-2}$
$K(2,2)$	(AK(2,2))	0.481
$K(3,2)$	(AK(3,2))	$7.86 \cdot 10^{-3}$
$K(4,2)$	(AK(4,2))	$-2.90 \cdot 10^{-3}$
$K(5,2)$	(AK(5,2))	$2.98 \cdot 10^{-3}$
$K(6,2)$	(AK(6,2))	$2.00 \cdot 10^{-2}$
$K(7,2)$	(AK(7,2))	$-1.68 \cdot 10^{-3}$
$K(8,2)$	(AK(8,2))	$7.61 \cdot 10^{-6}$
$K(1,3)$	(AK(1,3))	$-2.40 \cdot 10^{-2}$
$K(2,3)$	(AK(2,3))	$9.65 \cdot 10^{-2}$
$K(3,3)$	(AK(3,3))	$3.14 \cdot 10^{-3}$

K(4,3) (AK(4,3))	$5.65 \cdot 10^{-3}$
K(5,3) (AK(5,3))	$-5.63 \cdot 10^{-3}$
K(6,3) (AK(6,3))	$-6.69 \cdot 10^{-5}$
K(7,3) (AK(7,3))	$3.02 \cdot 10^{-3}$
K(8,3) (AK(8,3))	$1.24 \cdot 10^{-5}$
K(1,4) (AK(1,4))	-0.367
K(2,4) (AK(2,4))	1.02
K(3,4) (AK(3,4))	0.326
K(4,4) (AK(4,4))	$6.51 \cdot 10^{-2}$
K(5,4) (AK(5,4))	$-6.49 \cdot 10^{-2}$
K(6,4) (AK(6,4))	$-5.06 \cdot 10^{-3}$
K(7,4) (AK(7,4))	$-5.77 \cdot 10^{-2}$
K(8,4) (AK(8,4))	$1.41 \cdot 10^{-4}$
t'_δ (TEST(1))	1
t'_v (TEST(2))	0.06
t'_r (TEST(3))	0.25
t'_ψ (TEST(4))	0.015
V _C (VCONST)	8
VMIN	0.2
VMAX	12
V ₀ (V0)	6
TH0(1) (initial value of -a ₁)	6.91
TH0(2) (" - a ₂)	-5.95
TH0(3) (" - a ₃)	-3.88
TH0(4) (" - a ₄)	3.57
TH0(5) (" - b ₁)	0.48
TH0(6) (" - b ₂)	0.11
TH0(7) (" - c ₁)	-2.10
TH0(8) (" - c ₂)	34.73

TH0(9)		0
TH0(10)		0
PP0(1) (initial value of P(1,1))		1
PP0(2) (" - P(2,2))		1
PP0(3) (" - P(3,3))		1
PP0(4) (" - P(4,4))		1
PP0(5) (" - P(5,5))		0.01
PP0(6) (" - P(6,6))		0.01
PP0(7) (" - P(7,7))		1
PP0(8) (" - P(8,8))		100
PP0(9)		0
PP0(10)		0
λ_f (RL)		0.99
b_0 (B0)		1
q (Q2)		0
k_p (AK1)		3
k_D (AK2)		75
k_I (AK3)		0.02
ψ_1 (Y(1))		0.35
ψ_2 (Y(2))		2.5
ψ_3 (Y(3))		2.5
ε_1 (Y(4))		0
ε_2 (Y(5))		0.02
ε_3 (Y(6))		1
\bar{c}_1 (Y(7))		60
\bar{c}_2 (Y(8))		50
\bar{c}_3 (Y(9))		60
k_1 (Y(10))		5
k_2 (Y(11))		200

k_3 (Y(12))	0.005
k_4 (Y(13))	200
k_5 (Y(14))	200
k_6 (Y(15))	8
k_7 (Y(16))	2
k_8 (Y(17))	200
γ (BD)	0.05
BV	0.05
λ (ALAM)	0.0833333
δ_{amp} (DELAMP)	3
PSIO	0
k_{id} (AKID)	0
T_k (IREGK)	1
IKAL	1
IKMX	900
IMX	10
IVVC	1
ILOS	1
IREGYT	5
T_s (IREG)	10
IPID	0
IST	2
NA	4
NB	2
NC1	1
NC2	1
k (K)	7
IREGY	10

IYAW	2
T ₁ (IT1Y)	30
T ₃ (IT3Y)	100
T ₄ (IT4Y)	300
IPK	0
IPC	0
IPR	0

APPENDIX C - PROGRAM LISTINGS

SUBROUTINE AUTP3

C AUTOPilot FOR SHIP, INCLUDING KALMAN FILTER,
C SELF-TUNING REGULATOR AND PID-REGULATOR FOR
C STRAIGHT COURSE KEEPING, AND YAW REGULATOR.

C AUTHOR, C.KALLSTROM 1976-02-22.
C REVISED, C.KALLSTROM 1976-04-04.

C SUBROUTINE REQUIRED

C STUR
C COSC

COMMON /DATA/ ITIME, IDELC, MODYAW, IDEXP, ISTBD, IPORT,

* IFLAG, IPRTNT, INAUT, IKX, MEAS(4),
* DELCO, DELTA(2), V1(2), R(2), PSI(2), DELO, DELCOM, DELTAS, U, AN,
* P, VEST, PSIREF, RREF, DLIM, V(2), DELTA0, D1, D2, D3, TH(10),
* CGR, CKM, PI, PI2, AL, AL1, A(18),
* AK(8,4), TEST(4), VCONST, VMIN, VMAX, VO, TH0(10),
* PP0(10), RL, R0, Q2, AK1, AK2, AK3, Y(17),
* BD, BV, ALAM, DELAMP, PSI0, AKID,
* IREGK, IKAL, IKMX, IMX, IVVC, ILOS, IREGYT, IREG, IPID,
* IST, NA, NB, NC1, NC2, K, IREGY, IYAW, IT1Y, IT3Y, IT4Y, IPK, IPC, IPR,
* EPS(4), VV, PP(55), VL0S(8),
* CN, EDELTA, EPS12, VL0S2, ENM2,
* MEASUM(4), IVV1,
* X(8), VVV(3), VOV, VOV2,
* PF01, PF02, DELOLD, VOLD, ROLD, DAT(46), SINT, RRF, AINT2,
* AINT4, STD, STV, SL1, SL2, SL3, SL4, SL5, DUM(10),
* IRK, IMEAS(4), IRYT, IR, NC, NAB, NP, K1, NDAT, NDAT1,
* NU1, N1, IRY, ITIM1, ITIM3, ITIM4, IP, I, J, L

C COMPUTE THE SWAY VELOCITY V(1).

V(1)=V1(1)-AL1*R(1)*CGR/CKM

IF(INAUT) 80,80,10

C INITIALIZE IF INAUT=1.

10 IVV1=IVVC
VVV(1)=U*CKM
VVV(2)=AN*0.18*CKM
VVV(3)=VCONST
12 IF(VVV(IVV1)-VMIN) 16,14,14
14 IF(VVV(IVV1)-VMAX) 18,18,16
16 IVV1=IVV1+1
GO TO 12
18 VV=VVV(IVV1)
VOV=VO/VV
VOV2=VOV*VOV
VEST=VV/CKM

C

IRK=IREGK
IKX=0
DELCOM=0,
DELCO=0.
IF(IKAL) 50,50,20

20 IF(MEAS(1)) 22,22,24
22 X(4)=DELTA(1)*CGR
GO TO 26
24 X(4)=0.

```

26    IF(MEAS(3)) 28,28,30
28    X(2)=R(1)*AL*CGR/VV
      GO TO 32
30    X(2)=0.
      GO TO 36
32    IF(MEAS(2)) 34,34,36
34    X(1)=V(1)*CKM/VV
      GO TO 38
36    X(1)=0.
      IF(MEAS(4)) 40,40,999
40    X(3)=PSI(1)*CGR
      X(5)=0.
      X(6)=0.
      X(7)=0.
      X(8)=0.
      DO 42 I=1,4
      IMEAS(I)=0
42    MEASUM(I)=0
C
50    IRYT=IREGYT
      PF01=PSI(1)
      MODYAW=0
      IR=IREG
      NC=NC1+NC2
      NAB=NA+N
      NP=NAB+NC
      K1=K+1
      NDAT=NAB+(K1+1)*(NC+2)-2
      NDAT1=NDAT+1
      NU1=NA+K+2
      N1=NU1+K
      J=NU1-1
      SL1=PSI(1)-PSIREF
      IF(SL1 .LE. -180.) SL1=SL1+360.
      IF(SL1 .GT. 180.) SL1=SL1-360.
      DO 52 I=1,J
      DAT(I)=SL1
      J=J+1
      DO 54 I=J,46
54    DAT(I)=0.
      DELOAD=0.
      VOLD=0.
      ROLD=0.
      SINT=0.
      DO 60 I=1,10
      DO 60 J=1,I
      L=I*(I-1)/2+J
      IF(I-J) 58,56,58
56    PP(L)=PP0(I)
      GO TO 60
58    PP(L)=0.
60    CONTINUE
      DO 62 I=1,10
62    TH(I)=TH0(I)
      EDELT=0.
      STD=1.-BD
      EPS12=0.
      VLOS2=0.
      ENM2=0.
      STV=1.-BV
      ISTBD=0
      IPRT=0
      IP=IPR
      INAUT=0

```

```

80      IF(IREGK) 200,200,90
90      IF(IRK-IREGK) 180,100,200
C
C      LOOP WITH SAMPLING INTERVAL IREGK.
C
100     IRK=1
101     IF(IKAL) 140,140,102
C
C      KALMAN FILTER.
C
102     SL5=CGR*DELCOM
SL1=A(1)*X(1)+A(2)*X(2)+A(3)*X(4)+A(4)*X(5)+A(15)*SL5
SL2=A(5)*X(1)+A(6)*X(2)+A(7)*X(4)+A(8)*X(5)+A(16)*SL5
SL3=A(9)*X(1)+A(10)*X(2)+X(3)+A(11)*X(4)+A(12)*X(5)+A(17)*SL5
SL4=A(13)*X(4)+A(14)*X(5)+A(18)*SL5
X(1)=SL1
X(2)=SL2
X(3)=SL3
X(4)=SL4
C
EPS(1)=DELTA(1)*CGR-X(4)-X(5)-X(8)
EPS(2)=V1(1)*CKM/VV-X(1)-X(2)*AL1/AL-X(6)
EPS(3)=R(1)*CGR*AL/VV-X(2)-X(7)
EPS(4)=PSI(1)*CGR-X(3)
IF(EPS(4) .LE. -PI) EPS(4)=EPS(4)+PI2
IF(EPS(4) .GT. PI) EPS(4)=EPS(4)-PI2
C
104     IF(IKX-IKMX) 104,108,108
IKX=IKX+1
DO 106 I=1,4
106     IMEAS(I)=0
GO TO 122
C
108     DO 120 I=1,4
IF(MEAS(I)) 112,112,118
112     IF(ABS(EPS(I))-TEST(I)) 118,118,114
114     IMEAS(I)=IMEAS(I)+1
MEASUM(I)=MEASUM(I)+1
IF(IMEAS(I)-IMX) 120,116,116
116     MEAS(I)=1
118     IMEAS(I)=0
120     CONTINUE
C
122     DO 134 I=1,4
IF(MEAS(I)+IMEAS(I)) 130,130,134
130     DO 132 J=1,8
IF((J .EQ. 8) .AND. (MEAS(1) .GT. 0)) GO TO 132
IF((J .EQ. 6) .AND. (MEAS(2) .GT. 0)) GO TO 132
IF((J .EQ. 7) .AND. (MEAS(3) .GT. 0)) GO TO 132
X(J)=X(J)+AK(J,I)*EPS(I)
132     CONTINUE
134     CONTINUE
C
IF(X(3) .LT. 0.) X(3)=X(3)+PI2
IF(X(3) .GE. PI2) X(3)=X(3)-PI2
C
V(2)=VV*X(1)/CKM
R(2)=VV*X(2)/(AL*CGR)
PSI(2)=X(3)/CGR
DELTA(2)=(X(4)+X(5))/CGR
V1(2)=VV*(X(1)+X(2)*AL1/AL)/CKM
DELTA0=X(5)/CGR
D1=VV*X(6)/CKM
D2=VV*X(7)/(AL*CGR)

```

```

D3=X(8)/CGR
C
C COMPUTE THE FORWARD SPEED VV.
C
140 VVV(1)=U*CKM
    VVV(2)=AN*0,18*CKM
    VVV(3)=VCONST
C
148 IF(VVV(1)<VMIN) 152,150,150
150 IF(VVV(1)>VMAX) 154,154,152
152 IVV1=IVV1+1
    GO TO 148
154 VV=VVV(IVV1)
    VOV=V0/VV
    VOV2=VOV*VOV
    VEST=VV/CKM
C
C COMPUTE THE LOSS FUNCTIONS.
C
160 IF(ILOS) 170,166,162
162 ILOS=0
    CN=0.
    DO 164 I=1,8
164 VL0S(I)=0.
    CN=CN+1.
    SL1=(CN-1.)/CN
    DO 168 I=1,2
168 SL2=PSI(I)-PSIREF
    IF(SL2 .LE. -180.) SL2=SL2+360.
    IF(SL2 .GT. 180.) SL2=SL2-360.
    VL0S(I)=SL1*VL0S(I)+SL2/CN
    L=I+2
    VL0S(L)=SL1*VL0S(L)+DELTA(I)/CN
    L=L+2
    J=L-2
    VL0S(L)=SL1*VL0S(L)+(SL2*SL2+ALAM*(DELTA(I)-VL0S(J))*
    * (DELTA(I)-VL0S(J)))/CN
    L=L+2
168 VL0S(L)=SL1*VL0S(L)+P/(CKM*U*COSC(SL2*CGR)*CN)
C
170 IF(IPK .GT. 0) IPRINT=1
    GO TO 200
C
180 IRK=IRK+1
C
200 IF(IDEXP) 201,201,700
C
C LOOP WITH SAMPLING INTERVAL IREGYT FOR YAW TEST.
C
201 IF(IRYT-IREGYT) 206,202,208
C
202 IRYT=1
    SL1=PSIREF-PF01
    PF01=PSIREF
    IF(MODYAW) 204,204,300
204 PF02=PSIREF-SL1
    IF(SL1 .LE. -180.) SL1=SL1+360.
    IF(SL1 .GT. 180.) SL1=SL1-360.
    IF(ABS(SL1)-Y(1)) 500,500,302
C
206 IRYT=IRYT+1
C
208 IF(MODYAW) 500,500,300
C

```

C LOOP WITH SAMPLING INTERVAL IREGY FOR YAWING.

C

300 IF(IHY-IREGY) 390,302,392

C

302 IHY=1
 SL1=PSIREF-PF02
 PF02=PSIREF
 IF(SL1 .LE. -180.) SL1=SL1+360.
 IF(SL1 .GT. 180.) SL1=SL1-360.
 SL2=PSI(IYAW) - PSIREF
 IF(SL2 .LE. -180.) SL2=SL2+360.
 IF(SL2 .GT. 180.) SL2=SL2-360.
 IF(MODYAW) 309,309,304
 304 IF(ABS(SL1)-Y(3)) 320,320,306
 306 IF(MODYAW-2) 314,314,308
 308 MODYAW=1
 ITIM1=-IREGY
 309 IF(SL2) 310,310,312
 310 RRF=RREF
 GO TO 320
 312 RRF=-RREF
 GO TO 320
 314 IF(RRF) 316,316,318
 316 IF(SL2) 308,320,320
 318 IF(SL2) 320,320,308

C

320 RRF=RREF*ABS(RRF)/RRF
 SL3=R(IYAW)-RRF

C

322 IF(MODYAW) 322,322,324
 324 IF(ABS(SL1)-Y(2)) 338,338,326
 325 IF(MODYAW-2) 328,332,325
 325 IF(MODYAW-4) 336,339,339

C

326 MODYAW=1
 ITIM1=-IREGY
 328 ITIM1=ITIM1+IREGY
 IF(RRF .GE. 0. .AND. SL3 .GT. -Y(4)) GO TO 330
 IF(RRF .LT. 0. .AND. SL3 .LT. Y(4)) GO TO 330
 IF(ITIM1-IT1Y) 332,332,330

C

330 MODYAW=2
 AINT2=0.
 332 IF(RRF .GE. 0. .AND. -Y(8)*R(IYAW) .LT. SL2) GO TO 334
 IF(RRF .LT. 0. .AND. -Y(8)*R(IYAW) .GT. SL2) GO TO 334
 IF(MODYAW-1) 340,340,350

C

334 MODYAW=3
 ITIM3=-IREGY
 336 ITIM3=ITIM3+IREGY
 IF(ABS(R(IYAW)) .LT. Y(5)) GO TO 338
 IF(RRF .GE. 0. .AND. SL2 .GT. -Y(6)) GO TO 338
 IF(RRF .LT. 0. .AND. SL2 .LT. Y(6)) GO TO 338
 IF(ITIM3-IT3Y) 360,360,338

C

338 MODYAW=4
 ITIM4=-IREGY
 AINT4=0.
 339 ITIM4=ITIM4+IREGY
 IF(ITIM4-IT4Y) 370,370,400

C

C YAW PHASE 1.

C

340 SL4=Y(13)*SL3

```

SL5=ABS(Y(7)*RRF)
IF(SL4 .GT. SL5) SL4=SL5
IF(SL4 .LT. -SL5) SL4=-SL5
DELCOM=-V0V2*SL4+EDELTA
GO TO 380
C
C      YAW PHASE 2.
C
350  DELCOM=-V0V2*(Y(14)*SL3+Y(15)*AINT2)+EDELTA
     AINT2=AINT2+SL3*FLOAT(IREGY)
     GO TO 380
C
C      YAW PHASE 3.
C
360  SL4=Y(16)*SL2+Y(17)*R(IYAW)
     SL5=ABS(Y(9)*RRF)
     IF(SL4 .GT. SL5) SL4=SL5
     IF(SL4 .LT. -SL5) SL4=-SL5
     DELCOM=-V0V2*SL4
     GO TO 380
C
C      YAW PHASE 4.
C
370  DELCOM=-V0V2*(Y(10)*SL2+Y(11)*R(IYAW)+Y(12)*AINT4)
     AINT4=AINT4+SL2*FLOAT(IREGY)
C
C
380  IF(DELCOM .GT. DLIM) DELCOM=DLIM
     IF(DELCOM .LT. -DLIM) DELCOM=-DLIM
     GO TO 600
C
390  IRY=IRY+1
C
392  GO TO 900
C
C      INITIALIZING OF STRAIGHT COURSE KEEPING.
C
400  J=NU1-1
     SL1=PSI(IST)-PSIREF
     IF(SL1 .LE. -180.) SL1=SL1+360.
     IF(SL1 .GT. 180.) SL1=SL1-360.
     DO 402 I=1,J
     DAT(I)=SL1
     J=J+1
     DO 404 I=J,46
     DAT(I)=0.
404
     DELOLD=EDELTA
     VOLD=V(IST)
     ROLD=R(IST)
     MODYAW=0
     SINT=0.
     GO TO 502
C
C      LOOP WITH SAMPLING INTERVAL IREG FOR STRAIGHT COURSE KEEPING.
C
500  IF(IR=IREG) 540,502,542
C
502  IR=1
     SL1=PSI(IST)-PSIREF
     IF(SL1 .LE. -180.) SL1=SL1+360.
     IF(SL1 .GT. 180.) SL1=SL1-360.
     IF(IPID) 504,504,520
C
504  SL2=V(IST)-VOLD

```

```

SL3=R(IST)-ROLD
VOLD=V(IST)
ROLD=R(IST)
DAT(1)=SL1
IF(NC-1) 514,506,508
506 IF(NC1) 512,512,508
508 J=NAB+2*K+3
DAT(J)=SL2*VV
IF(NC-1) 514,514,510
510 J=NAB+3*K+5
DAT(J)=SL3
GO TO 514
512 J=NAB+2*K+3
DAT(J)=SL3
C
514 CALL STUR(DAT,TH,PP,DUM,RL,NA,NAB,NP,K1,NDAT,NDAT1,NU1,N1)
C
SL2=V0V2*B0/(B0*B0+Q2)
DELCOM=SL2*DAT(NU1)+DELOLD
GO TO 530
C
520 DELCOM=-V0V2*(AK1*SL1+AK2*R(IST)+AK3*SINT)
SINT=SINT+SL1*FLOAT(IREG)
C
530 IF(DELCOM .GT. DLIM) DELCOM=DLIM
IF(DELCOM .LT. -DLIM) DELCOM=-DLIM
IF(IIDEXP) 531,531,800
531 IF(IPID) 532,532,534
532 DAT(NU1)=B0*(DELCOM-DELOLD)/V0V2
DELOLD=DELCOM
534 GO TO 600
C
540 IR=IR+1
C
542 GO TO 900
C
C COMPUTE THE MEAN RUDDER COMMAND EDELTA AND THE LOSS FUNCTIONS.
C
600 IF(MODYAW) 604,604,602
602 IF(MODYAW-4) 800,604,604
604 EDELTA=EDELTA+(STD+BD)*(DELCOM-EDELTA)
STD=(1.-BD)*STD/(1.-RD+STD)
IF(MODYAW) 606,606,800
606 EPS12=EPS12+(STV+BV)*(SL1-EPS12)
SL2=DELCOM-EDELTA
SL3=SL1*SL1+ALAM*SL2*SL2
VL0S2=VL0S2+(STV+BV)*(SL3-VL0S2)
SL2=P/(CKM*U*COSC(SL1*CGR))
ENM2=ENM2+(STV+BV)*(SL2-ENM2)
STV=(1.-BV)*STV/(1.-BV+STV)
GO TO 800
C
C IDENTIFICATION EXPERIMENT.
C
700 IF(IR-IREG) 720,702,900
C
702 IR=1
IF(ISTBD+IPORT-1) 712,704,710
704 IF(ISTBD) 708,708,706
706 DELO=DELAMP
GO TO 712
708 DELO=-DELAMP
GO TO 712
710 DELO=0.

```

```
712  ISTBD=0
      IPORT=0
      SL1=PS1(1)-PS10
      IF(SL1.LE.-180.) SL1=SL1+360.
      IF(SL1.GT.180.) SL1=SL1-360.
      DELCOM=DEL0+AK1D*SL1
      GO TO 530
C
720  IR=IR+1
      GO TO 900
C
C      INDICATE RUDDER CHANGE.
C
800  DELCO=DELCOM
      IDELC=1
C
      IF(CIPC.GT.0) IPRINT=1
C
900  IF(CPR) 999,999,902
C
902  IF(CP=IPR) 906,904,999
C
904  IP=1
      IPRINT=1
      GO TO 999
C
906  IP=IP+1
C
999  RETURN
      END
```

SUBROUTINE STUR(DAT,TH,P,DUM,RL,NA,NAB,NP,K1,NDAT,NDAT1,NU1,N1)

SELF-TUNING REGULATOR BASED ON LEAST SQUARES IDENTIFICATION
AND MINIMUM VARIANCE CONTROL, ADMITS FEEDFORWARD AND
EXPLOITS SYMMETRY OF P.

AUTHOR, C.KALLSTROM 1976-02-18.

THE ALGORITHM IS BASED ON THE MODEL

$Y(T) + A(1)*Y(T-K-1) + \dots + A(NA)*Y(T-K-NA) =$
 $B_0*(U(T-K-1) + B(1)*U(T-K-2) + \dots + B(NB)*U(T-K-NB-1)) +$
 $C(1)*V1(T-K-1) + C(2)*V2(T-K-1) + \dots + C(NC)*VNC(T-K-1) + EPS(T)$

AT EACH STEP THE LEAST SQUARES ESTIMATES OF THE PARAMETERS
OF THE MODEL ARE COMPUTED. THE CONTROL VARIABLE U(T) TO
BE APPLIED AT TIME T IS THEN COMPUTED FROM

$US(T) = AE(1)*Y(T) + \dots + AE(NA)*Y(T-NA+1)$
 $- BE(1)*US(T-1) - \dots - BE(NB)*US(T-NB)$
 $- CE(1)*V1(T) - \dots - CE(NC)*VNC(T)$

WHERE AE,BE AND CE ARE THE PARAMETER ESTIMATES
AND US THE SCALED CONTROL SIGNAL I.E. $US = B_0 * U$

WHEN USING THE ALGORITHM THE PROCESS OUTPUT Y(T) AND THE
FEEDFORWARD SIGNALS V(T) ARE READ AT TIME T AND THE CONTROL
SIGNAL U(T) TO BE APPLIED AT TIME T IS THEN COMPUTED

DAT- VECTOR OF DIMENSION NA+N_B+(K+2)*(N_C+2)-2 CONTAINING
PROCESS OUTPUTS Y, SCALED CONTROL VARIABLES U
AND FEED FORWARD SIGNALS V ORGANIZED AS FOLLOWS

DAT(1)=Y(T)	RETURNED AS Y(T)
DAT(2)=Y(T-1)	RETURNED AS Y(T)
DAT(3)=Y(T-2)	RETURNED AS Y(T-1)
.	
DAT(NA+K+1)=Y(T-K-NA)	RETURNED AS Y(T-K-NA+1)
DAT(NA+K+2)=US(T-1)	RETURNED AS US(T)
DAT(NA+K+3)=US(T-2)	RETURNED AS US(T-1)
.	
DAT(NA+NB+2*K+2)=US(T-K-NB-1)	RETURNED AS US(T-K-NB)
DAT(NA+NB+2*K+3)=V1(T)	RETURNED AS US(T-K-NB-1)
DAT(NA+NB+2*K+4)=V1(T-1)	RETURNED AS V1(T)
.	
DAT(NA+NB+3*K+4)=V1(T-K-1)	RETURNED AS V1(T-K)
.	
DAT(NA+NB+(K+2)*(N _C +1)-1)=VNC(T)	RETURNED AS V(NC-1)(T-K-1)
.	
DAT(NA+NB+(K+2)*(N _C +2)-2)=VNC(T-K-1)	RETURNED AS VNC(T-K)

TH- VECTOR OF DIMENSION NP=NA+N_B+N_C CONTAINING THE PARAMETER
ESTIMATES ORGANIZED AS FOLLOWS

TH(1)=-AE(1)
TH(2)=-AE(2)
.
TH(NA)=-AE(NA)
TH(NA+1)=BE(1)
TH(NA+2)=BE(2)
.
TH(NA+NB)=BE(NB)
TH(NA+NB+1)=CE(1)
TH(NA+NB+2)=CE(2)

```

C
TH(NA+NB+NC)=CE(NC)

C
C= COVARIANCE MATRIX STORED AS FOLLOWS
C P(1)=P(1,1)
C P(2)=P(2,1)
C P(3)=P(2,2)
C
C P(I*(I-1)/2+J)=P(I,J)
C
C P(NP*(NP+1)/2)=P(NP,NP)

C
C DUM= DUMMY VECTOR OF DIMENSION NP
C RL= BASE OF EXPONENTIAL WEIGHTING FACTOR
C NA= NUMBER OF A-PARAMETERS (MAX 10, MIN 0)
C     NB= NUMBER OF B-PARAMETERS (MAX 10, MIN 0)
C     NC= NUMBER OF C-PARAMETERS (MAX 10, MIN 0)
C     K =NUMBER OF TIME DELAYS IN THE MODEL
C         (MAX ((46-NA-NB+2)/(NC+2))-2 , MIN 0)
C NAB= NA+NB
C NP= NA+NB+NC (MAX 10, MIN 1)
C K1= K+1
C NDAT= NAB+(K1+1)*(NC+2)-2
C NDAT1= NDAT+1
C NU1= NA+K+2
C N1= NU1+K

C
C SUBROUTINE REQUIRED
C     NONE

C
C DIMENSION DAT(46),TH(10),P(55),DUM(10)
C
RES=DAT(1)-DAT(N1)
DENOM=1.
DO 12 I=1,NP
R=0.
DO 10 J=1,NP
L=I*(I-1)/2+J
IF (J.GT.I) L=J*(J-1)/2+I
M=K1+J
IF (J.GT.NA) M=M+K1
IF (J.GT.NAB) M=2*K1+(J-NAB)*(K1+1)+NAB
R=R+P(L)*DAT(M)
DUM(I)=R
M=K1+I
IF (I.GT.NA) M=M+K1
IF (I.GT.NAB) M=2*K1+(I-NAB)*(K1+1)+NAB
DENOM=DENOM+R*DAT(M)
RES=RES-DAT(M)*TH(I)
12
C
DO 20 I=1,NP
R=DUM(I)/DENOM
TH(I)=TH(I)+R*RES
DO 20 J=1,I
L=I*(I-1)/2+J
P(L)=(P(L)-R*DUM(J))/RL
20
C
R=0.
DO 30 I=1,NP
L=I
IF (I.GT.NA) L=L+K1
IF (I.GT.NAB) L=NAB+K1+(K1+1)*(I-NAB)
30

```

```
30      R=R-TH(I)*DAT(L)
C
DO 32 I=2,NDAT
L=NDAT1-I
DAT(L+1)=DAT(L)
DAT(NU1)=R
C
RETURN
END
```

APPENDIX D - EXPERIMENTS

Plots from all the experiments, excluding F1 - F3 where no recording of data was performed, are shown in this appendix. Several plots are often shown in the same figure, and the plots are then slided in relation to each other. The corresponding straight line is the level zero. Usually the data were punched on paper tape every time a new rudder command δ_c was computed, i.e. with sampling interval T_s . However, during experiments B1 - B3 the data were punched every second. In experiments B1 - B3 a yaw rate estimate \dot{r}_d is computed from the heading ψ and plotted.

The Kalman filter was running during all the experiments, including E1 - E4, but the estimates were not always used by the regulators. If nothing else is remarked, all measurement signals v_1 , r , ψ and δ were used by the Kalman filter. If the value of the rudder limit is not given, the rudder limit has not been active during the experiment. The water below the keel was deep, except during the last 15 min of experiment D1 when the water depth was about 100 m.

Experiments of straight course keeping are shown in Table D.1. A summary of experiments of Kalman filter testing is given in Table D.2, and the yawing experiments are summarized in Table D.3. Normal operating experiments are shown in Table D.4. Note that yaws were performed during experiment D1, while D2 and D3 are straight course keeping experiments. Table D.5 shows the experiments for identification and Table D.6 the experiments of straight course keeping, where no recording of data was performed. A summary of the final parameter values of the self-tuning regulator is given in Table D.7.

Ex- peri- ment	Dura- tion [min]	Draught For- ward [m]	Rel. wind dir. Aft	Wind velo- city [m/s]	T_s [s]	V_0 [m/s]	TWC	Structure of self-tuning reg.			Parameters of PID-reg.			
								NC1	NC2	K	q	k_p	k_D	k_I [1/s]
A1	51	8.5	12.5	3	9	10	8	3	1	1	7	0	-	-
A2	26	8.5	12.5	5	5	10	7	1	1	1	7	0	-	-
A3	24	8.5	12.5	5	10	10	7	1	1	1	5	0	-	-
A4	24	8.5	12.5	5	5	10	7	1	1	1	6	0	-	-
A5	24	8.5	12.5	5	4	10	7	1	1	1	7	0	-	-
A6	24	8.5	12.5	4	4	10	7	1	1	1	7	0	-	-
A7	25	8.5	12.5	3	4	10	7	1	1	1	8	0	-	-
A8	24	8.5	12.5	5	4	15	6	1	1	1	4	0	-	-
A9	25	8.5	12.5	5	4	15	6	1	1	1	5	0	-	-
A10	33	8.5	12.5	5	3	10	6	1	1	1	7	0	-	-
A11	24	8.5	12.5	5	3	10	6	1	1	1	6	0.05	-	-
A12	26	8.5	12.5	5	3	10	6	1	1	1	6	0.1	-	-
A13	24	8.5	12.5	6	3	10	6	1	1	1	6	0.2	-	-
A14	24	8.5	12.5	-	0	10	6	1	1	1	7	0	-	-
A15	25	8.5	12.5	-	0	10	6	1	1	0	7	0	-	-
A16	24	8.5	12.5	1	5	10	6	1	0	1	7	0	-	-
A17	25	8.5	12.5	1	5	10	6	1	0	0	7	0	-	-
A18	24	8.5	12.5	1	5	10	6	1	0	0	7	0	-	-
A19	25	8.5	12.5	1	9	10	6	1	1	1	7	0	-	-
A20	25	8.5	12.5	1	9	10	6	1	-	-	-	3	75	0.02

Table D.1a - Summary of experiments of straight course keeping. An explanation of the relative wind direction is given in Appendix A. If nothing else is remarked, all measurement signals v_1 , r , ψ and δ were used by the Kalman filter and the tuning time before the experiment started was equal to 30 min. The estimates from the Kalman filter were used by the regulator, if it is not remarked that non-filtered measurements were used.

Ex- peri- ment	δ_c		$\psi - \psi_{ref}$		Mean value			V ₁	Remarks
	Mean value [deg]	Std. dev. [deg]	Mean value [deg]	Std. dev. [deg]	n	u	P _s		
A1	-0.83	2.24	-0.004	0.161	72.3	14.2	16.4	0.444	Defect rudder servo. V ₁ not used by filter. Tuning time: 0 min. $V_c = 7 \text{ m/s}.$ Tuning time: > 120 min
A2	0.41	1.14	0.017	0.182	69.6	13.9	14.5	0.142	
A3	0.74	1.20	0.009	0.239	69.4	14.2	14.5	0.177	
A4	1.39	1.41	-0.009	0.246	68.5	14.0	14.0	0.226	
A5	0.66	1.17	0.014	0.219	69.7	14.0	14.4	0.162	
A6	-0.73	1.32	-0.051	0.290	69.1	13.5	13.9	0.232	The speed was reduced. Tuning time: > 120 min
A7	-0.17	1.19	0.034	0.260	69.5	14.1	14.2	0.187	
A8	0.17	1.46	-0.027	0.309	69.2	13.9	14.1	0.274	
A9	0.05	1.24	-0.022	0.301	69.0	13.8	14.0	0.219	
A10	0.08	1.62	0.013	0.344	69.0	13.7	14.1	0.337	
A11	-0.06	1.79	-0.033	0.400	69.2	13.9	14.2	0.428	Non-filt. meas. used. Stand. param. values
A12	0.05	1.69	0.013	0.444	69.2	13.7	14.2	0.435	
A13	0.24	1.84	0.016	0.420	66.7	13.6	13.1	0.459	
A14	-0.61	1.66	-0.017	0.111	69.7	13.5	14.6	0.242	
A15	-0.68	0.82	0.015	0.158	69.4	13.3	14.4	0.081	
A16	-0.43	0.62	-0.066	0.169	69.3	12.9	14.4	0.065	Non-filt. meas. used. Stand. param. values
A17	0.01	0.89	-0.188	0.247	69.2	12.9	14.4	0.162	
A18	0.24	1.01	-0.052	0.245	69.2	12.8	14.3	0.148	
A19	0.45	1.11	-0.005	0.176	69.3	13.0	14.4	0.134	
A20	0.53	2.48	0.026	0.556	69.5	13.1	14.5	0.822	

Table D.1a - Contd.

Ex- peri- ment	Dura- tion [min]	Draught For- ward [m]	Rel. wind dir. [m]	Wind velo- city [m/s]	T_s [s]	V_0 [m/s]	TWC	Structure of self-timing reg.				Parameters of PIM-reg.		
								NCL	NC2	K	q	k_p	k_D [s]	k_I [1/s]
A21	25	8.5	12.5	1	4	10	6	1	-	-	-	3	75	0.02
A22	24	8.5	12.5	1	13	10	6	1	1	7	0	-	-	-
A23	25	8.5	12.5	1	13	10	6	1	1	7	0	-	-	-
A24	25	8.5	12.5	1	14	10	6	1	1	7	0	-	-	-
A25	25	8.5	12.5	1	14	10	6	1	1	7	0	-	-	-
A26	27	8.5	12.5	1	6	10	6	1	1	7	0	-	-	-
A27	22	8.5	12.5	1	7	10	6	1	1	7	0	-	-	-
A28	24	10.9	12.9	1	4	10	6	1	1	7	0	-	-	-
A29	24	10.9	12.9	1	3	10	6	1	0	7	0	-	-	-
A30	25	10.9	12.9	1	5	10	6	1	-	-	-	3	120	0.02
A31	24	10.9	12.9	1	3	10	6	1	-	-	-	2	100	0.02
A32	25	10.9	12.9	1	9	10	6	1	1	7	0	-	-	-
A33	51	10.9	12.9	1	10	10	6	1	1	7	0	-	-	-
A34	48	10.9	12.9	1	10	10	6	1	1	7	0	-	-	-
A35	45	10.9	12.9	1	11	10	6	1	1	7	0	-	3	140
A36	47	10.9	12.9	1	11	10	6	1	1	7	0	-	-	-

Table D.1b

Ex- peri- ment	δ_c		$\psi - \psi_{ref}$		Mean value			V_1	Remarks
	Mean value [deg]	Std. dev. [deg]	Mean value [deg]	Std. dev. [deg]	n	u	P_s		
					[rgm]	[knots]	[MW]		
A21	0.53	0.91	-0.018	0.293	69.3	12.9	14.4	0.155	Stand. parameter values.
A22	2.32	0.95	-0.006	0.204	68.9	12.8	14.5	0.117	δ not used by filter.
A23	1.71	0.94	0.015	0.217	69.0	12.6	14.5	0.121	v_1 not used by filter.
A24	1.34	1.25	0.130	0.317	68.9	12.5	14.5	0.248	r not used by filter.
A25	1.25	0.90	-0.034	0.240	69.6	12.5	14.9	0.126	After 9.5 min, ψ was not used by filter.
A26	0.24	0.89	0.030	0.230	69.7	13.4	14.9	0.120	v_1' , r and δ not used by filter.
A27	0.30	0.92	0.043	0.197	68.9	13.2	14.4	0.111	Correct K. v_1 , r and δ not used by filter.
A28	0.16	0.95	0.006	0.239	69.9	13.5	15.0	0.132	
A29	-0.01	1.51	0.001	0.324	69.5	13.4	14.6	0.295	Non-filt. meas. used.
A30	-0.10	0.89	-0.026	0.256	69.6	13.5	14.6	0.132	Tuned param. values.
A31	0.22	2.41	-0.103	1.085	69.4	13.4	14.5	1.672	Non-filt. meas. used. Tuned param. values.
A32	-0.01	0.98	-0.082	0.223	69.9	13.6	14.9	0.136	Tuning time: 120 min.
A33	-0.24	1.18	0.016	0.181	69.0	13.2	14.4	0.149	Tuning time: > 120 min.
A34	-0.33	0.95	0.001	0.251	87.6	15.8	29.6	0.138	Tuning time: > 120 min.
A35	0.01	1.66	0.008	0.295	68.6	12.1	14.7	0.317	Tuned param. values.
A36	-0.05	1.08	-0.058	0.206	68.5	12.1	14.7	0.143	Tuning time: > 120 min.

Table D.1b - Contd.

Ex- peri- ment	Dura- tion [min]	Draught		Rel. wind dir.	Wind velo- city [m/s]	Standard dev.			Mean value		
		For- ward [m]	Aft [m]			\hat{r} [deg/s]	$\hat{\psi}$ [deg/s]	\hat{r}_d [deg/s]	n	u	P_s [MW]
B1	26	10.9	12.9	1	6	0.022	0.009	0.014	69.2	13.7	14.9
B2	25	10.9	12.9	1	8	0.023	0.007	0.014	70.1	13.3	15.2
B3	26	10.9	12.9	1	15	0.034	0.011	0.021	87.4	15.9	29.5

Table D.2 - Summary of experiments of Kalman filter testing, where the data were punched on paper tape every second. An explanation of the relative wind direction is given in Appendix A. All measurement signals v_1 , r , ψ and δ were used by the Kalman filter.

Ex- peri- ment	Dura- tion [min]	Draught For- ward [m]	Rel. wind dir. Aft [m]	Wind velo- city [m/s]	T_s [s]	V_0 [m/s]	IVVC NC1	Structure of self-tuning reg.			ψ_{ref} [deg]	r_{ref} [deg/s]	n [rpm]	u [knots]	P_s [MW]	Remarks	
								NC2	k	q							
C1	41	9.0	12.0	5	9	10	7	1	1	1	7	0	175-195	0.05,0.1	69.5	14.2	The sign of v_1 was incorrect.
C2	33	8.5	12.5	4.5	6	10	6	1	1	1	8	0	143-180	0.1	69.3	13.7	14.0
C3	63	10.9	12.9	1	7	10	6	1	1	1	7	0	122-162	0.05,0.1	69.8	13.4	14.9 $\hat{\delta}_0^0, \hat{d}_v^0, \hat{d}_x^0$ and \hat{d}_y^0 were not up-dated.
C4	49	10.9	12.9	1	11	10	6	1	1	1	7	0	125-165	0.1,0.2	69.1	12.5	14.5 $\hat{\delta}_0^0, \hat{d}_v^0, \hat{d}_x^0$ and \hat{d}_y^0 were not up-dated
C5	27	10.9	12.9	1	8	10	6	1	1	1	7	0	139-149	0.1	69.7	13.2	14.7
C6	72	10.9	12.9	1	12	10	6	1	1	1	7	0	142-146	0.1	69.0	13.0	14.4

Table D.3 - Summary of experiments of yawing. An explanation of the relative wind direction is given in Appendix A. All measurement signals v_1 , r , ψ and δ were used by the Kalman filter. The estimates from the Kalman filter were used by the self-tuning regulator and the yaw regulator.

Ex- peri- ment	Dura- tion [min]	Draught For- ward [m]	Rel. Aft	Wind wind- dir.	Wind velo- city [m/s]	T_s [s]	V_0 [m/s]	IWC	Structure of self-turning reg.				ψ_{ref} [deg]	r_{ref} [deg/s]	n [rpm]	u [knots]	P_s [MW]	Remarks
									NC1	NC2	k	q						
D1	83	8.5	12.5	7	5	10	8	3	-1	1	7	0	180-205	0.1	69.6	14.2	14.7	Water depth was abt 100 m during the last 15 min. Rudder limit: 15 deg. v_1 not used by v ₁ filter $V_c = 7$ m/s Tuning time: > 120 min.
D2	40	8.5	12.5	5	10	10	7	1	1	1	7	0	180	0.1	69.7	14.2	14.7	Tuning time: 0 min.
D3	68	10.9	12.9	1	9	10	6	1	1	1	7	0	144.3- -147.0	0.1	69.9	13.4	15.4	Sailmaster, Course Correc- tion. Tuning time: 0 min.

Table D.4 – Summary of normal operating experiments. An explanation of the relative wind direction is given in Appendix A. If nothing else is remarked, all measurement signals v_1 , r , ψ and δ were used by the Kalman filter. The estimates from the Kalman filter were used by the self-tuning regulator and the yaw regulator.

Ex- peri- ment	Dur- ation [min]	Draught		Rel. wind dir.	Wind velo- city [m/s]	T_s [s]	IVVC	δ amp	k_{id} [deg]	Mean value			Remarks
		For- ward [m]	Aft [m]							n	u	P_s [MW]	
E1	89	10.9	12.9	1	11	10	1	3,5	0	69.7	12.5	15.4	
E2	19	10.9	12.9	1	14	10	1	5	0	70.5	12.5	15.7	$5^\circ/5^\circ$ zig-zag test
E3	90	10.9	12.9	2	9	10	1	5	2	70.0	12.9	15.4	Rudder limit: 15 deg
E4	26	10.9	12.9	1	11	10	1	10	0	69.8	12.7	15.3	

Table D.5 – Summary of experiments for identification. An explanation of the relative wind direction is given in Appendix A.

Ex- peri- ment	Dura- tion	Draught	Rel.	Wind wind dir.	Wind velo- city	T_s	V_0	IVVC	Structure of self-tuning reg. of PID-reg.			Parameters			
	[min]	[m]	[m]	[m/s]	[s]	[m/s]		NCL	NC2	k	q	k_p	k_D	k_I	[1/s]
F1	60	8.5	12.5	6	3	10	8	3	1	1	7	0	-	-	-
F2	49	8.5	12.5	7	3	10	8	3	-	-	-	3	75	0.02	
F3	57	10.9	12.9	1	11	10	6	1	1	1	7	0	-	-	
F4	54	10.9	12.9	1	11	10	6	1	-	-	-	3	140	0.02	

Table D.6 - Summary of experiments of straight course keeping, where no data were punched on paper tape. An explanation of the relative wind direction is given in Appendix A. If nothing else is remarked, all measurement signals v_1 , r , ψ and δ were used by the Kalman filter. The estimates from the Kalman filter were used by the regulator, if it is not remarked that non-filtered measurements were used. The rudder limit was 15 deg during the experiments.

Ex- peri- ment	δ [deg]	Mean value					Remarks
		$\psi - \psi_{ref}$ [deg]	n [rpm]	u [knots]	P_s [MW]	V_2	
F1	1.71	-0.002	69.8	14.4	14.7	0.038	V_1 not used by filter. $V_C = 7$ m/s. Sailmaster.
F2	1.86	-0.016	69.6	14.4	14.7	0.259	Non-filt. meas. used. Stand. param. values. $V_C = 7$ m/s. Sailmaster.
F3	1.67	-0.073	69.1	12.1	15.1	0.160	Tuned parameter values.
F4	1.54	-0.009	69.7	12.2	15.5	0.304	

Table D.6 - Contd.

Ex-periment	a ₁	a ₂	a ₃	a ₄	b ₁	b ₂	c ₁	c ₂	Σa_i
A1	-6.93	6.69	3.50	-3.61	0.51	0.18	-2.02	35.77	-0.35
A2	-15.17	19.33	-2.62	-1.87	0.63	0.52	0.35	113.66	-0.33
A3	-8.60	6.39	4.38	-2.62	0.53	0.26	-2.34	44.87	-0.45
A4	-8.92	6.49	4.88	-2.75	0.48	0.16	-1.79	50.52	-0.30
A5	-8.00	6.67	4.55	-3.59	0.49	0.17	-1.40	49.73	-0.37
A6	-7.23	6.42	4.21	-3.31	0.55	0.16	-0.79	41.84	0.09
A7	-7.00	6.36	4.36	-3.64	0.48	0.09	-1.89	39.41	0.08
A8	-8.29	5.98	4.34	-2.58	0.50	0.18	-2.32	39.92	-0.55
A9	-7.36	5.86	4.03	-2.62	0.51	0.16	-1.97	36.59	-0.09
A10	-9.56	6.81	4.39	-1.97	0.53	0.26	-2.25	40.29	-0.33
A11	-9.16	6.39	4.29	-1.86	0.46	0.22	-2.60	37.18	-0.34
A12	-8.73	7.02	4.66	-3.33	0.29	0.08	-2.89	44.49	-0.38
A13	-9.65	6.81	5.19	-2.67	0.36	0.20	-1.29	44.29	-0.32
A14	-21.78	26.83	-2.30	-3.17	0.50	0.44	-0.54	74.46	-0.42
A15	-7.76	5.70	4.43	-2.61	0.49	0.17	-1.81	-	-0.24
A16	-7.26	6.59	4.46	-4.05	0.42	0.05	-	33.84	-0.26
A17	-7.84	6.75	4.75	-3.89	0.43	0.02	-	-	-0.23
A18	-7.88	6.86	4.67	-3.50	0.45	0.11	-	-	0.15
A19	-8.42	6.56	4.42	-2.96	0.49	0.16	-1.26	45.72	-0.40
A22	-8.04	6.23	4.52	-2.99	0.51	0.16	-1.89	35.94	-0.28
A23	-7.24	6.33	4.12	-3.37	0.50	0.12	-1.82	37.53	-0.16
A24	-8.40	7.15	4.96	-3.79	0.51	0.13	-1.76	40.37	-0.08
A25	-8.06	6.68	4.51	-3.45	0.48	0.13	-1.96	41.91	-0.32
A26	-7.72	6.23	4.27	-2.95	0.49	0.10	-2.20	34.95	-0.17
A27	-7.76	6.63	4.48	-3.73	0.45	0.08	-3.32	41.43	-0.38
A28	-8.13	6.65	4.67	-3.33	0.47	0.10	-1.94	39.40	-0.14
A29	-9.74	8.48	6.22	-5.25	0.29	-0.06	-	-	0.21
A32	-10.51	9.96	4.86	-4.33	0.49	0.12	-0.69	70.44	-0.02
A33	-13.33	16.86	-2.60	-1.14	0.41	0.23	-0.39	100.94	-0.21
A34	-9.25	10.23	-0.26	-0.85	0.48	0.21	-0.03	103.99	-0.13
A36	-11.12	12.52	1.53	-3.00	0.59	0.29	0.45	89.21	-0.07
C1	-7.27	6.10	2.67	-2.07	0.48	0.08	-0.09	95.45	-0.57
C2	-10.20	11.11	2.38	-3.34	0.54	0.26	-0.71	65.62	-0.05
C3	-10.55	12.90	-0.97	-1.57	0.38	0.17	-0.54	89.70	-0.19
C4	-15.46	18.76	-1.80	-2.39	0.40	0.19	0.29	108.85	-0.89
C5	-10.07	8.90	5.69	-4.90	0.41	0.05	-1.54	48.49	-0.38
C6	-11.31	11.45	4.34	-4.95	0.37	0.08	-0.96	61.38	-0.47
D1	-7.32	6.37	3.37	-2.70	0.38	0.02	1.41	112.69	-0.28
D2	-7.57	5.86	4.14	-2.95	0.51	0.12	-1.69	39.59	-0.52
D3	-8.24	6.08	4.67	-2.61	0.52	0.16	-1.30	46.13	-0.10
F1	-7.05	5.88	3.03	-1.67	0.46	0.06	3.88	152.75	0.19
F3	-11.47	13.11	0.48	-2.31	0.58	0.31	-0.07	79.27	-0.19

Table D.7 - Final parameter values of the self-tuning regulator.

EXPERIMENT A1

Date	1976-04-18	Forward draught	8.5 m
Time	15.40	Aft draught	12.5 m
Duration	51 min	Wind direction	NW (3; see App. A)
Position	N 33°09' W 120°37'	Wind velocity	9 m/s (fresh breeze)
ψ_{ref}	206 deg	Wave height	2 m

The forward speed u was measured by Sperry's log, and sometimes that signal had an incorrect value in the computer. The rudder was moving between the sampling events, because the rudder servo was defect. The sway velocity v_1 was not measured during the experiment.

Self-tuning regulator using estimates from the Kalman filter.

The sway velocity v_1 was not used by the Kalman filter.

Tuning time before the experiment started: 0 min (the yaw regulator was not used).

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 8 \text{ m/s} & IVVC = 3 & V_C = 7 \text{ m/s} \end{array}$$

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -6.93 \\ 6.69 \\ 3.50 \\ -3.61 \\ 0.51 \\ 0.18 \\ -2.02 \\ 35.77 \end{bmatrix} \quad P = \begin{bmatrix} 4.58 \\ -3.75 & 4.61 \\ -0.37 & -1.45 & 4.26 \\ -0.15 & 0.69 & -2.28 & 2.20 \\ -0.06 & -0.01 & 0.12 & -0.05 & 0.01 \\ -0.09 & 0.05 & -0.01 & 0.05 & 0.01 & 0.01 \\ -3.12 & 2.68 & 0.83 & -0.23 & -0.03 & -0.04 & 4.55 \\ -45.73 & 38.72 & 8.90 & 1.51 & -1.16 & -1.48 & 84.78 & 1714.04 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.35$$


$$\hat{\delta}_0 = -0.6 \text{ deg} \quad \hat{d}_v = - \quad \hat{d}_r = -0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)


PLT NIP1(16) NIP1(16) NIP1(16) NIP1(16) NIP1(16)

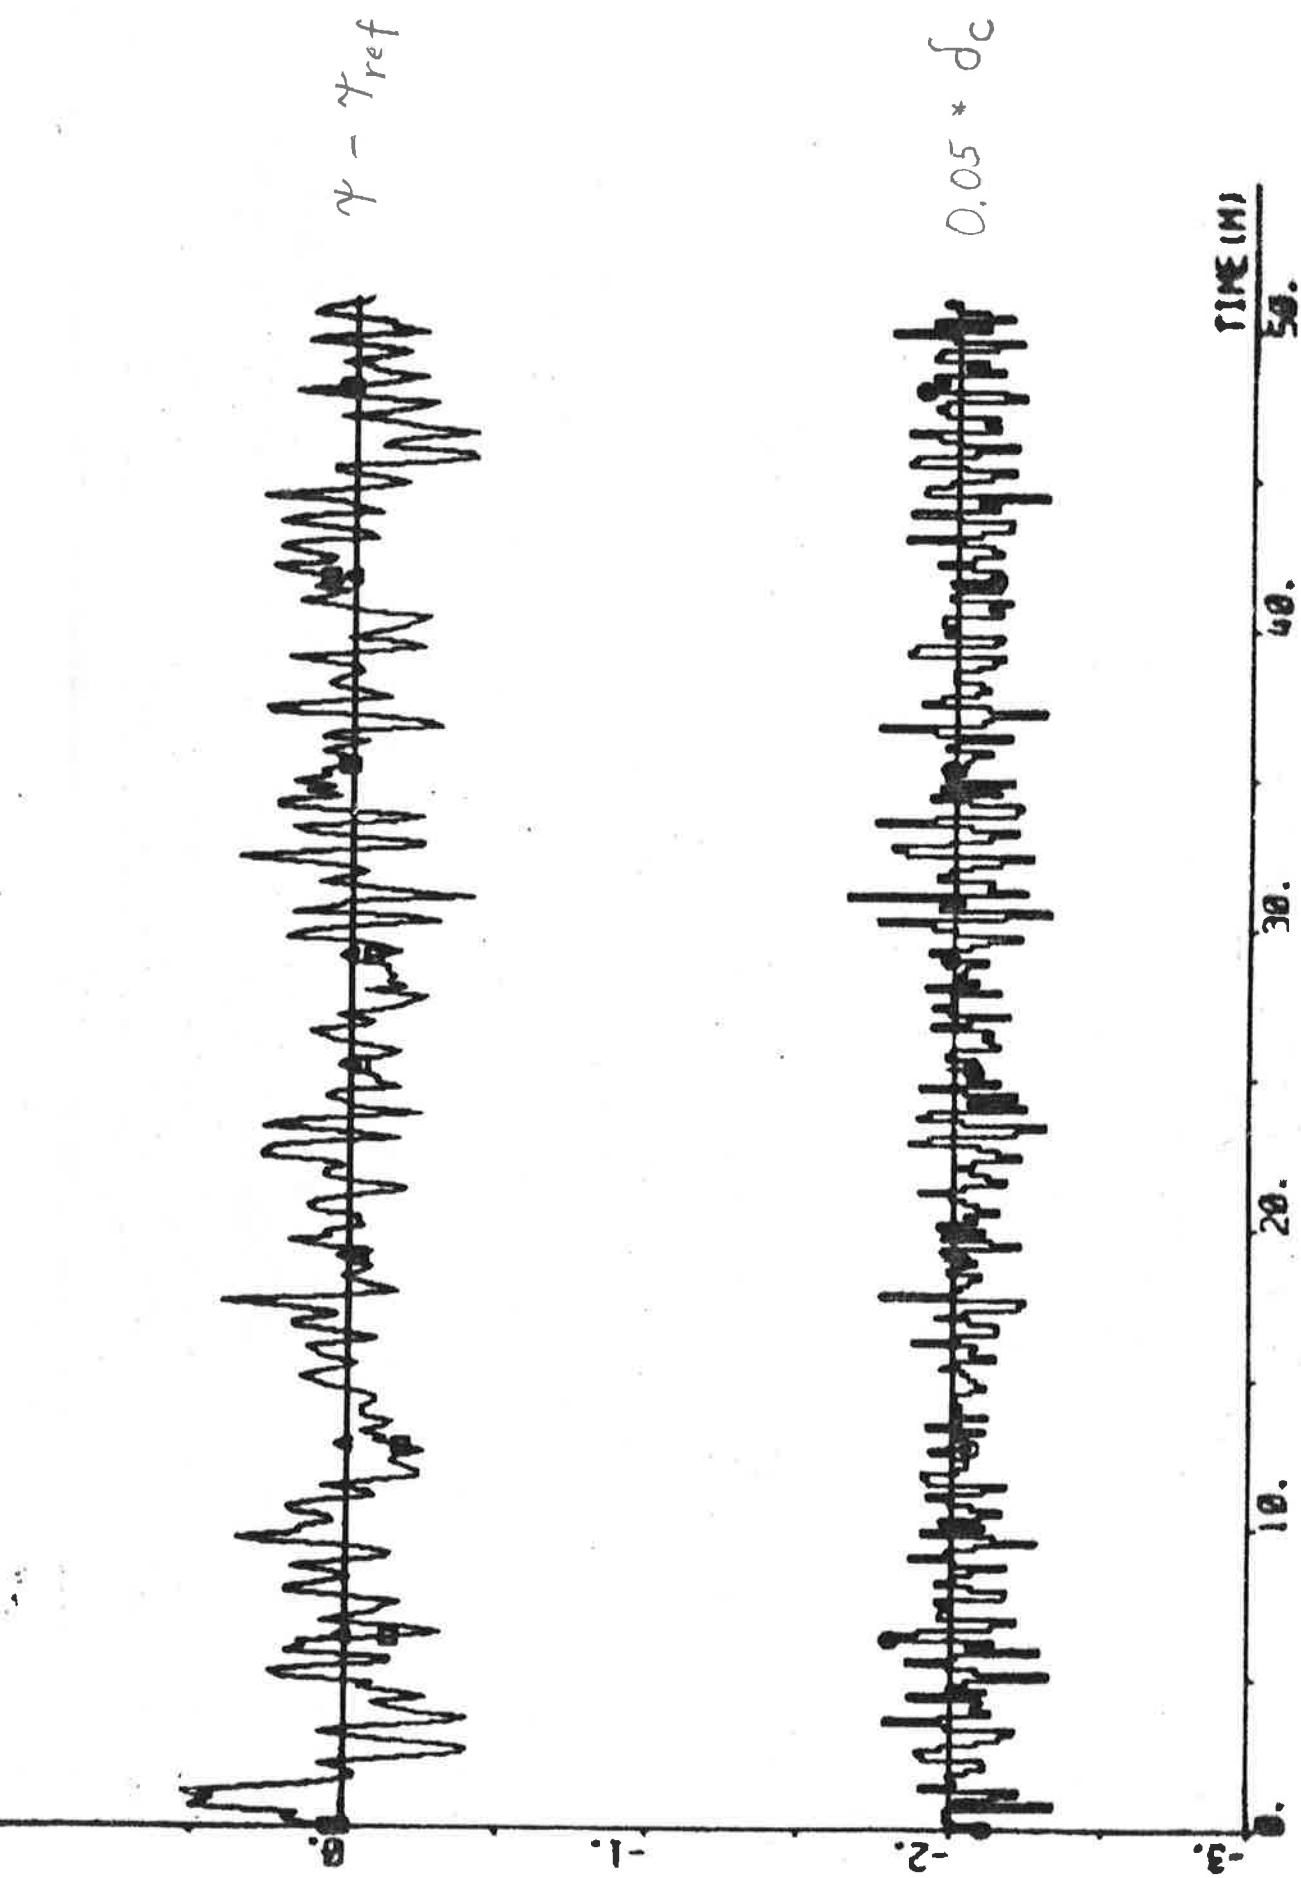


1001 MPI(11) MPI(12) MPI(13) MPI(14) MPI(111) 00 - 20 50


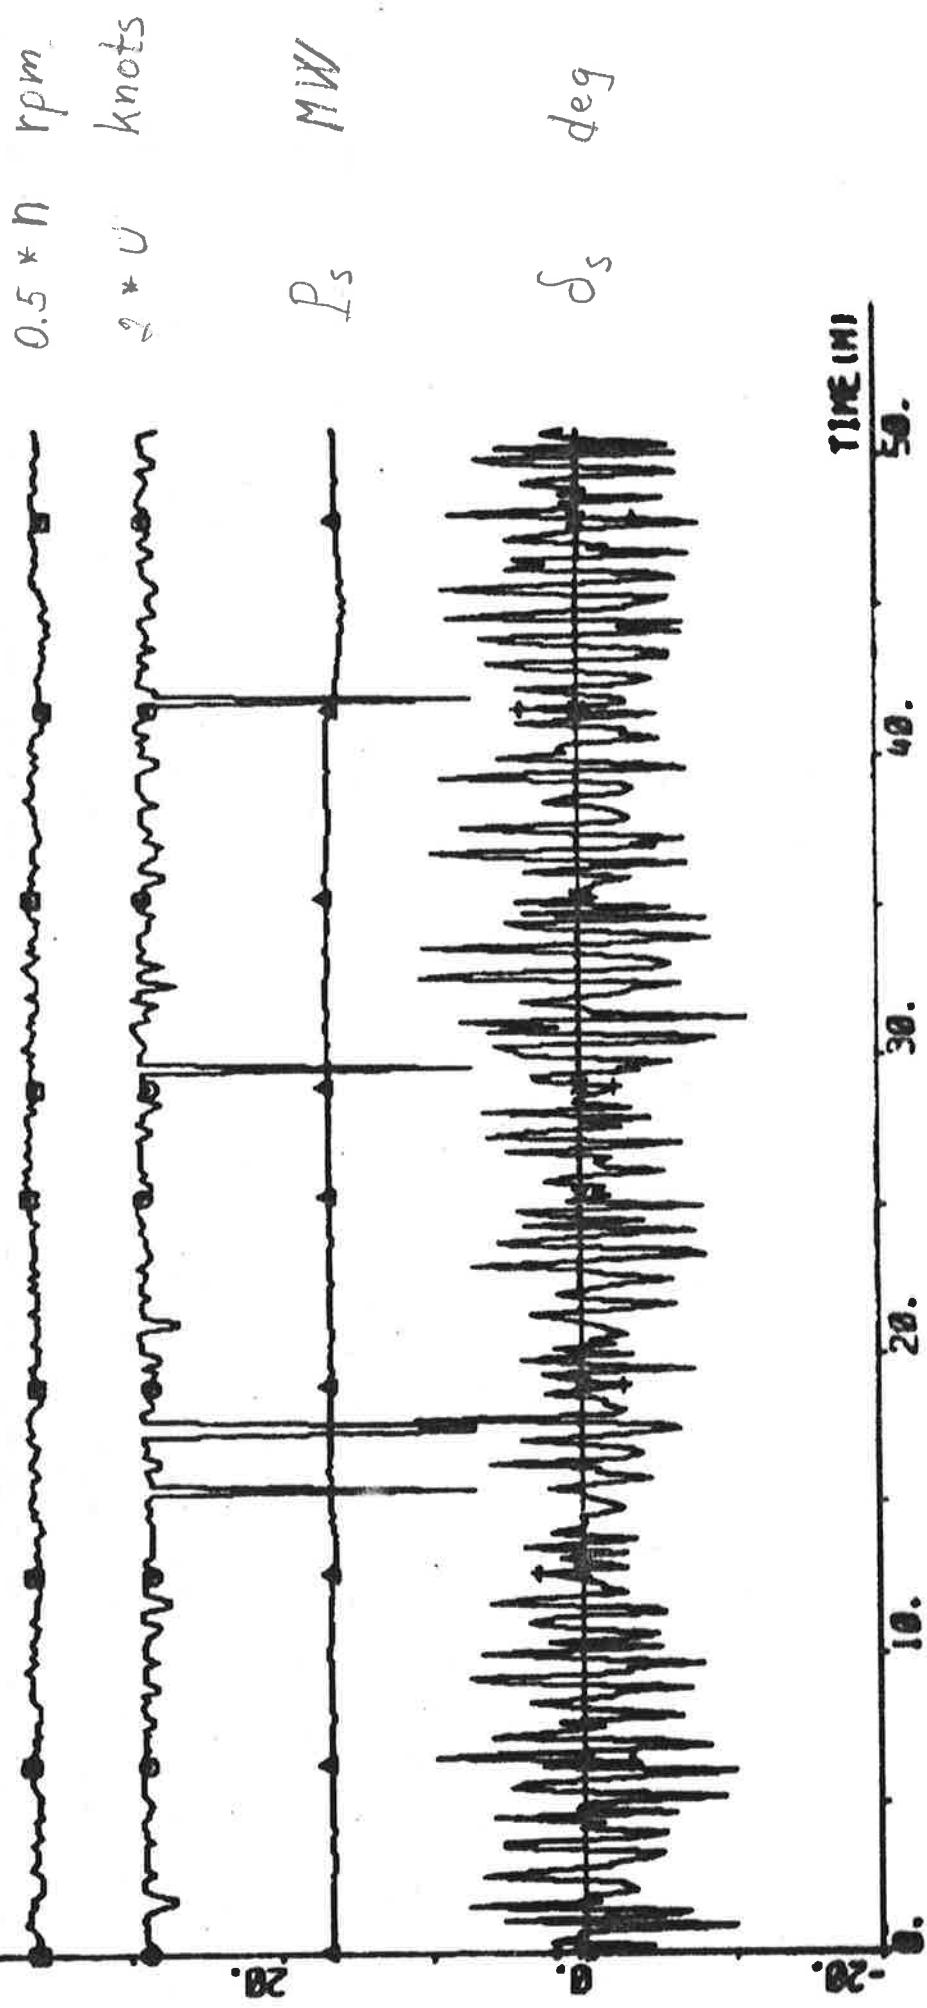



PLT API(11)-API2(2) 01 - 3.4 0.0 - 0000

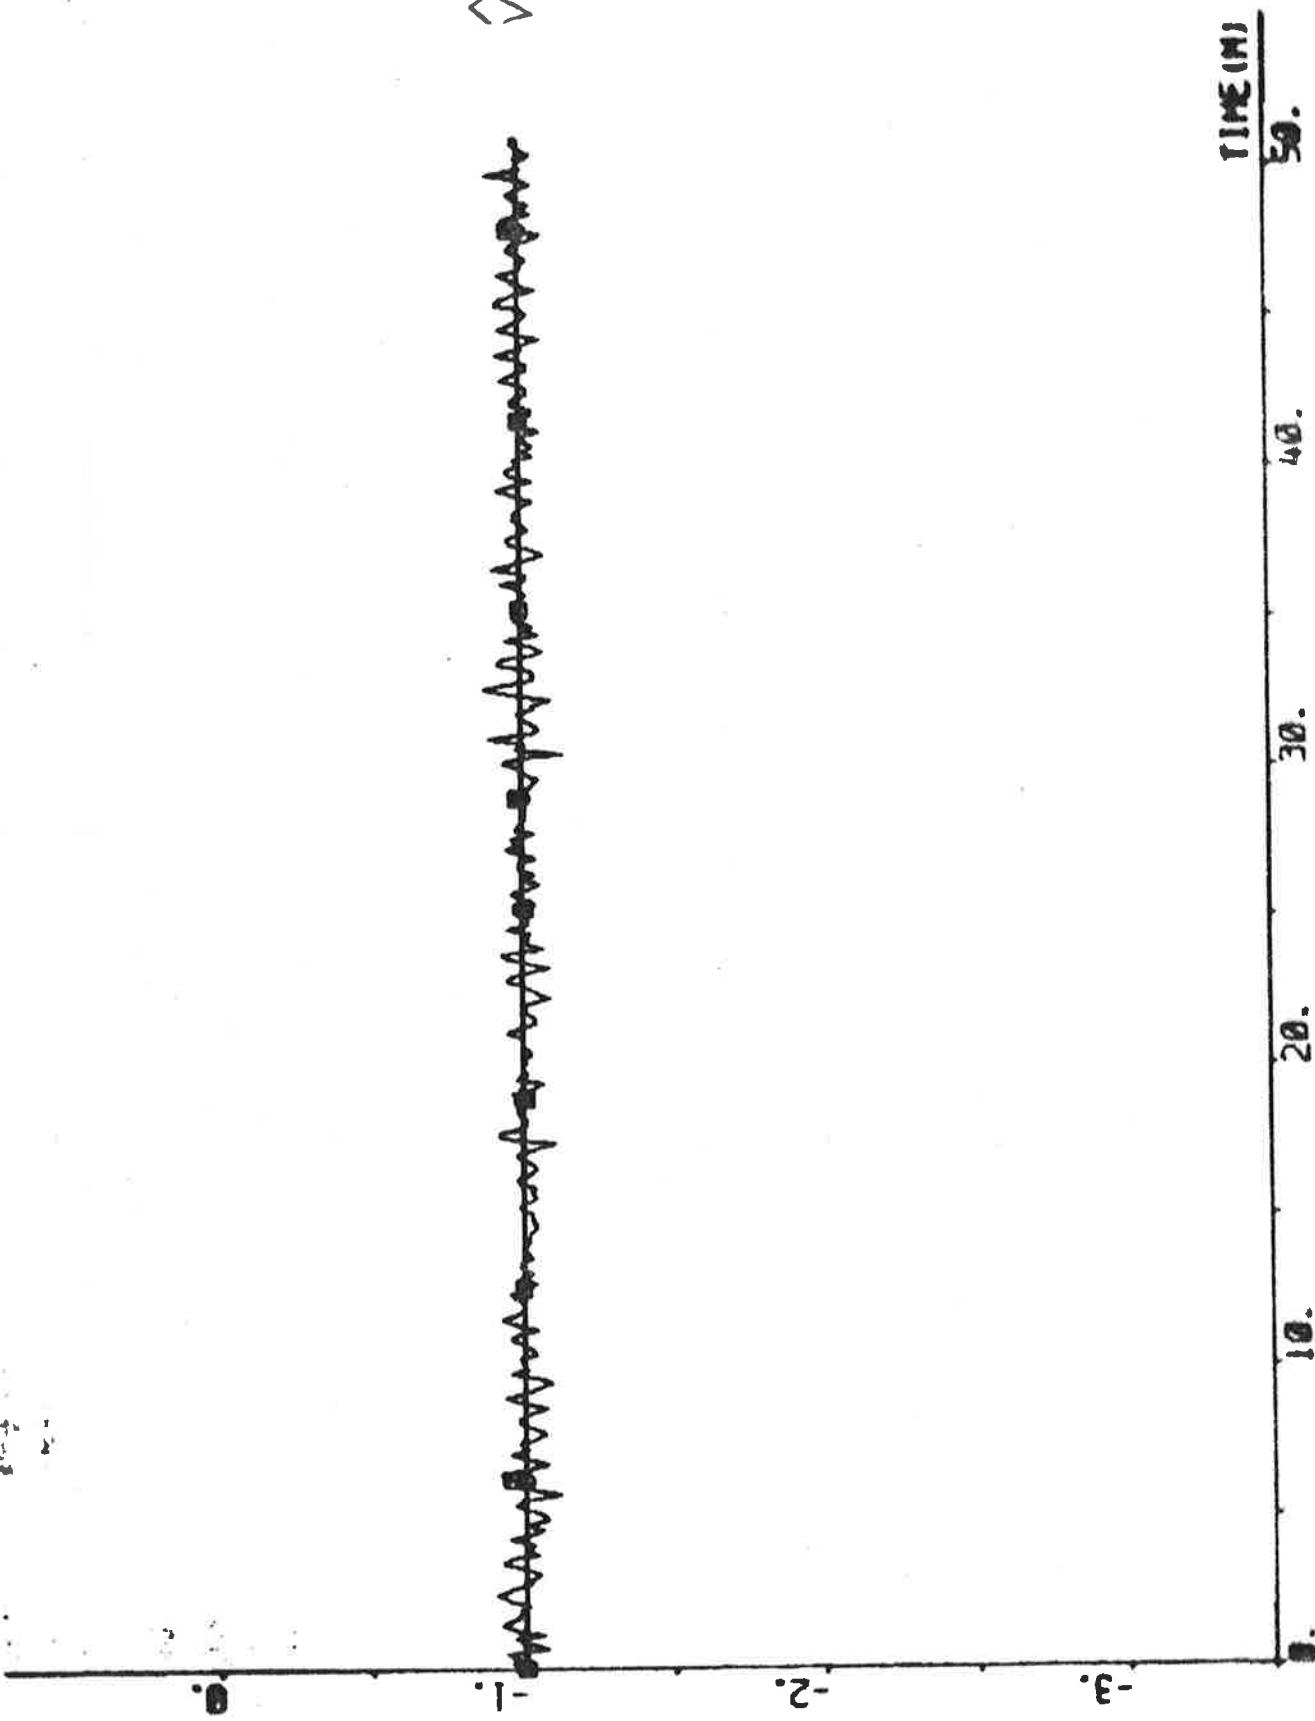


PLOT A1P1(1)-A1P1(5) 01 -3.4 0.0 - KNOTS

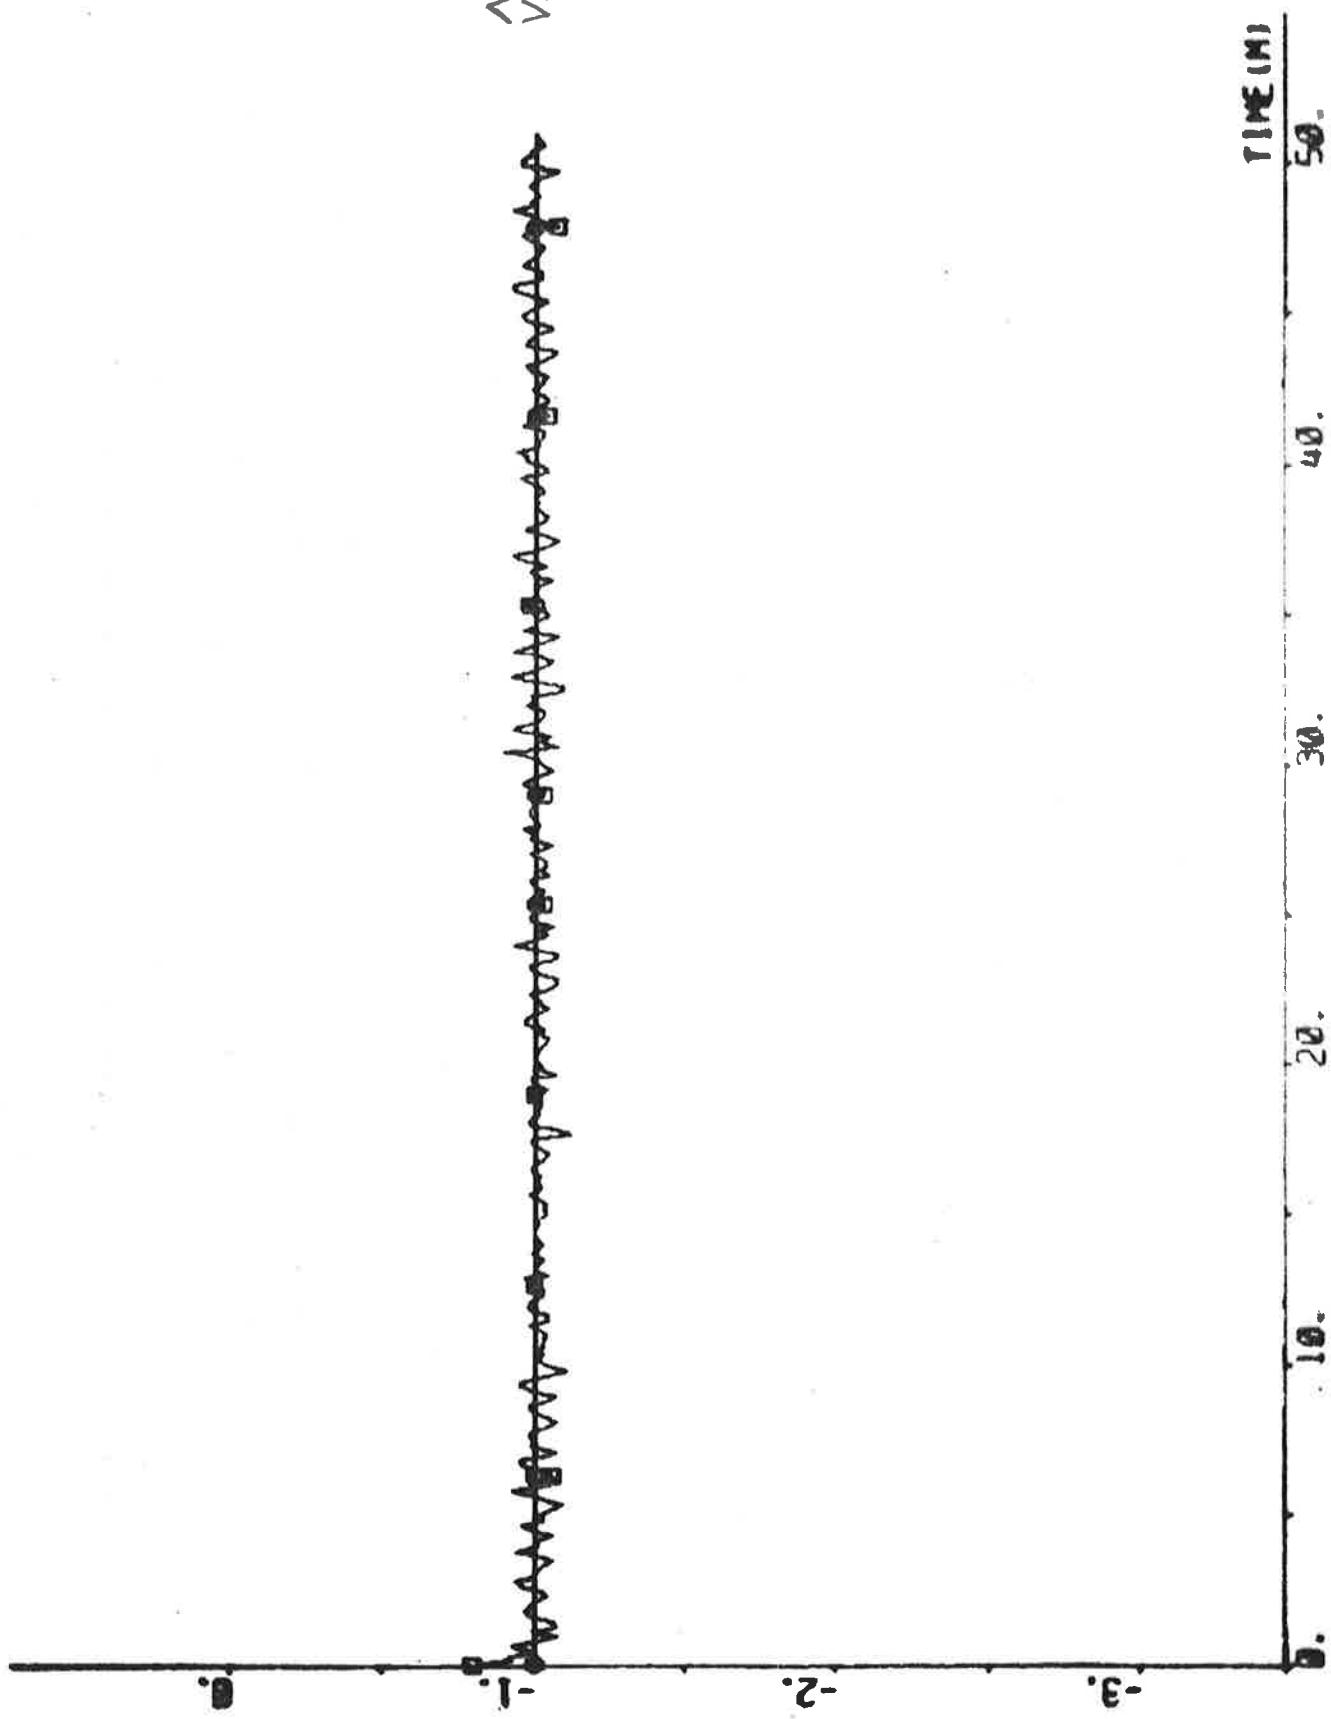


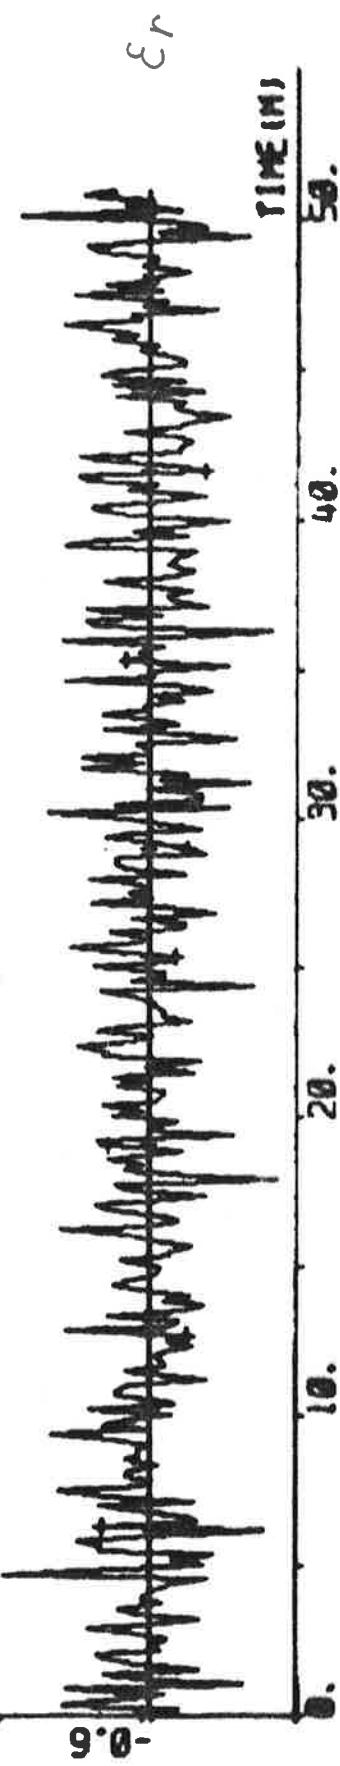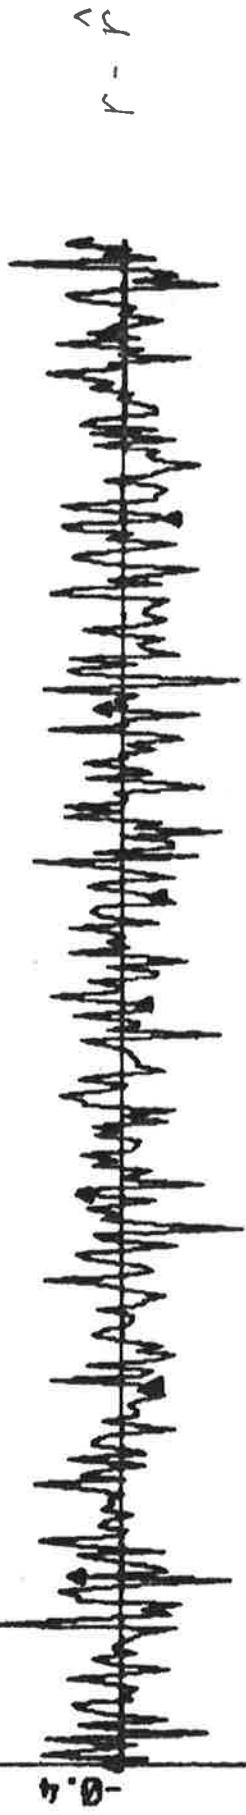


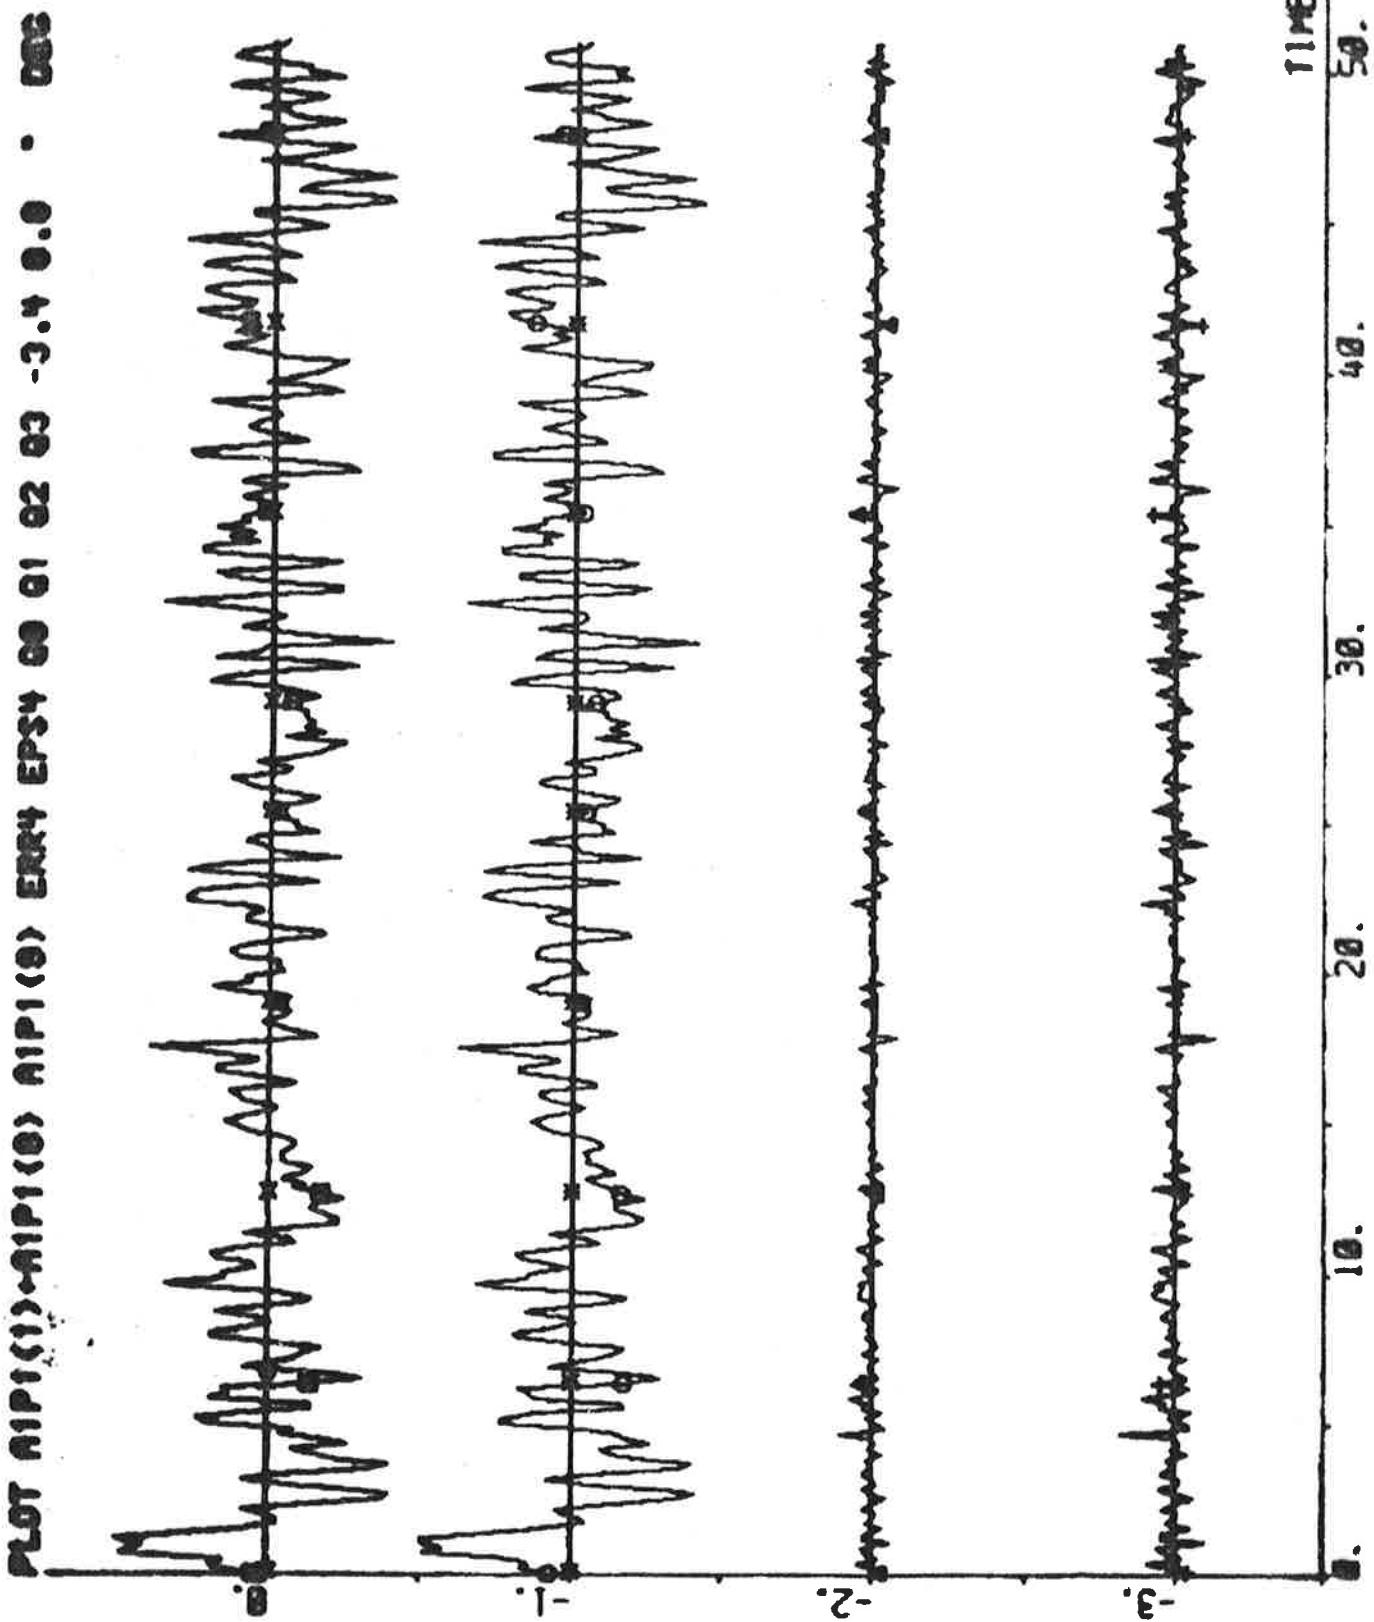

PLUT N1P1(1) - N1P1(2) N1P1(3) ENR1 EP21 EP22 EP23 EP24 EP25 EP26 EP27

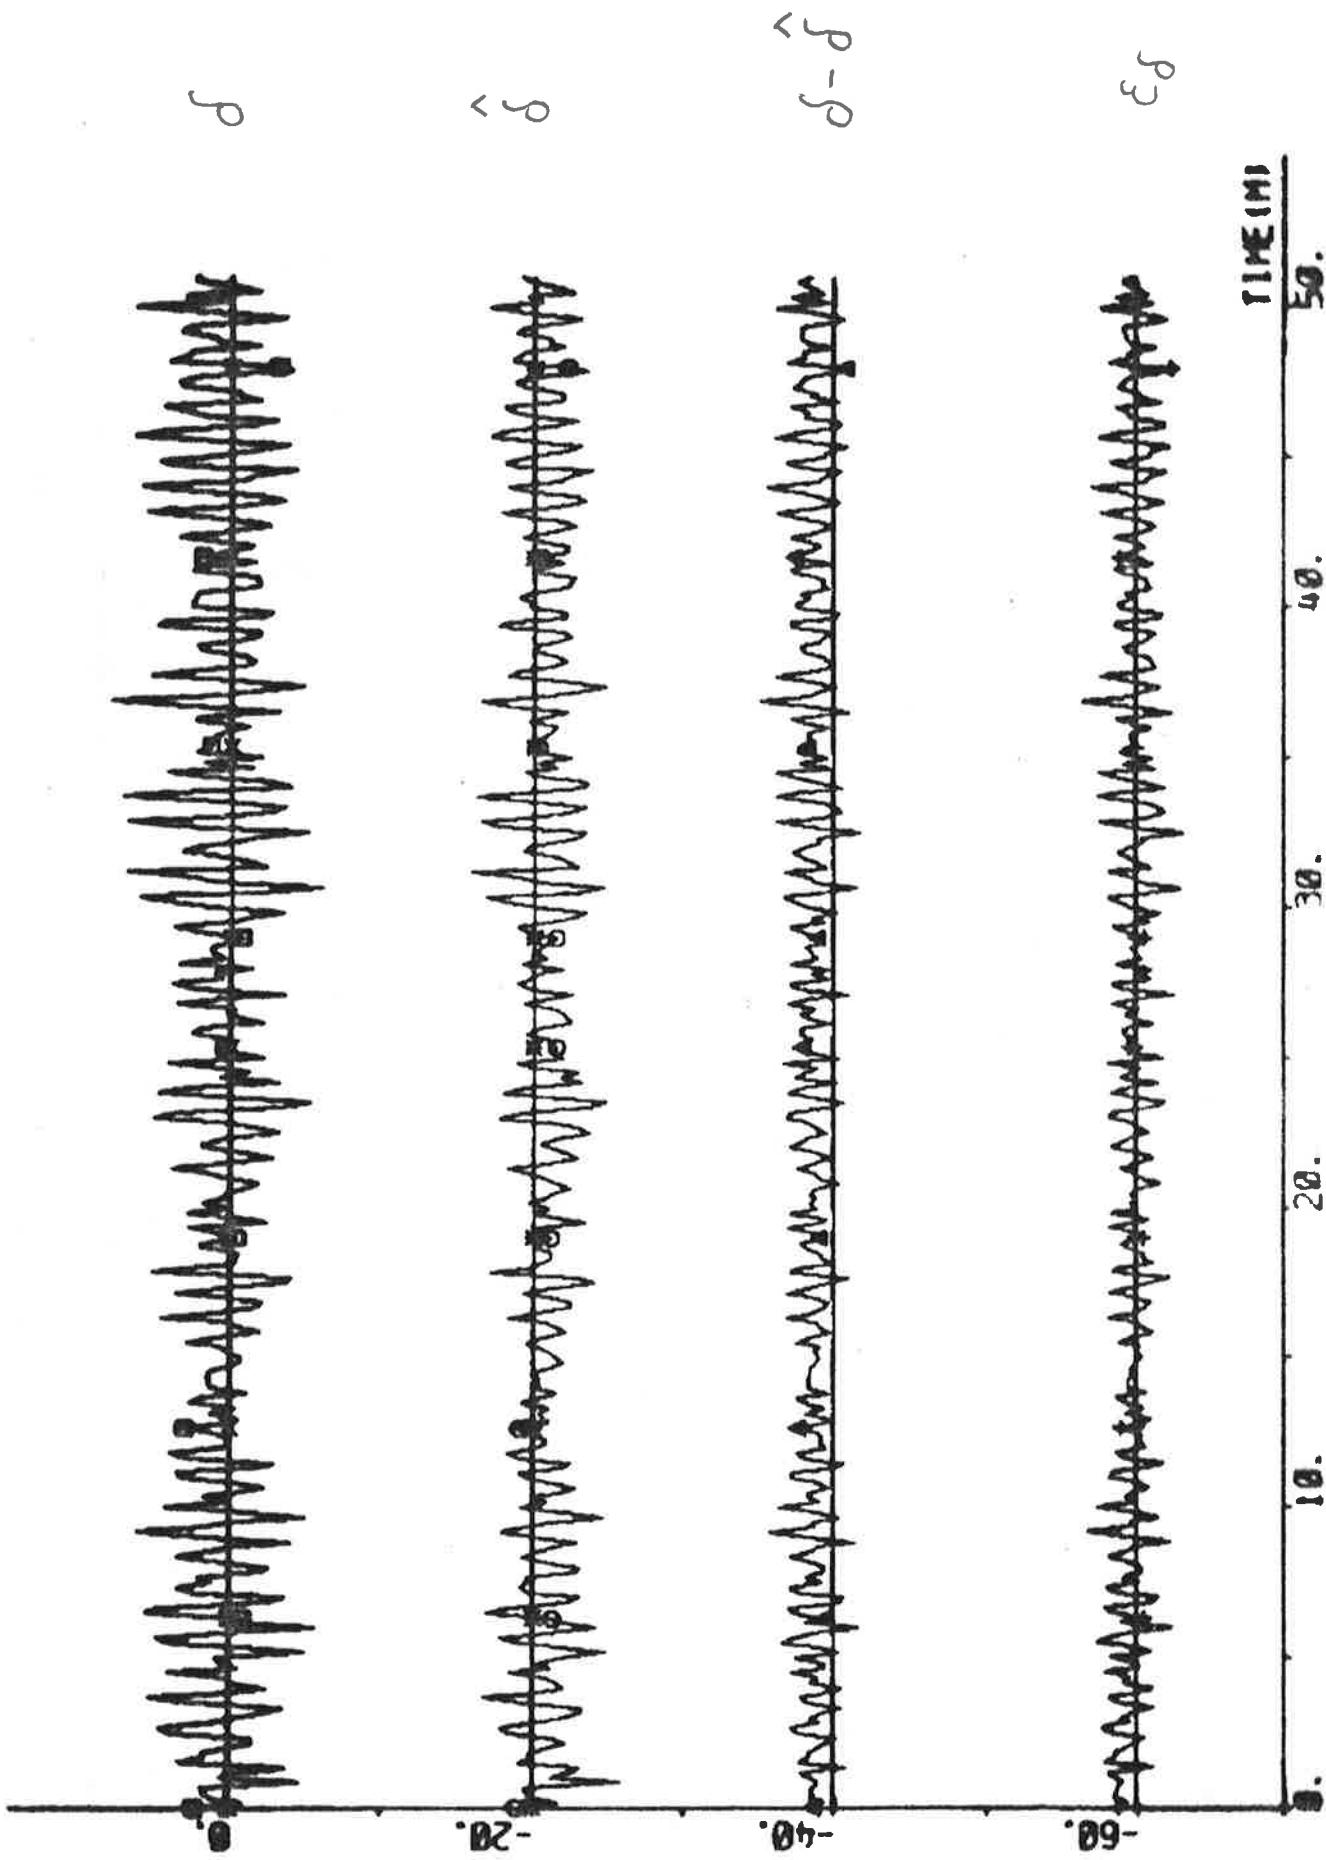

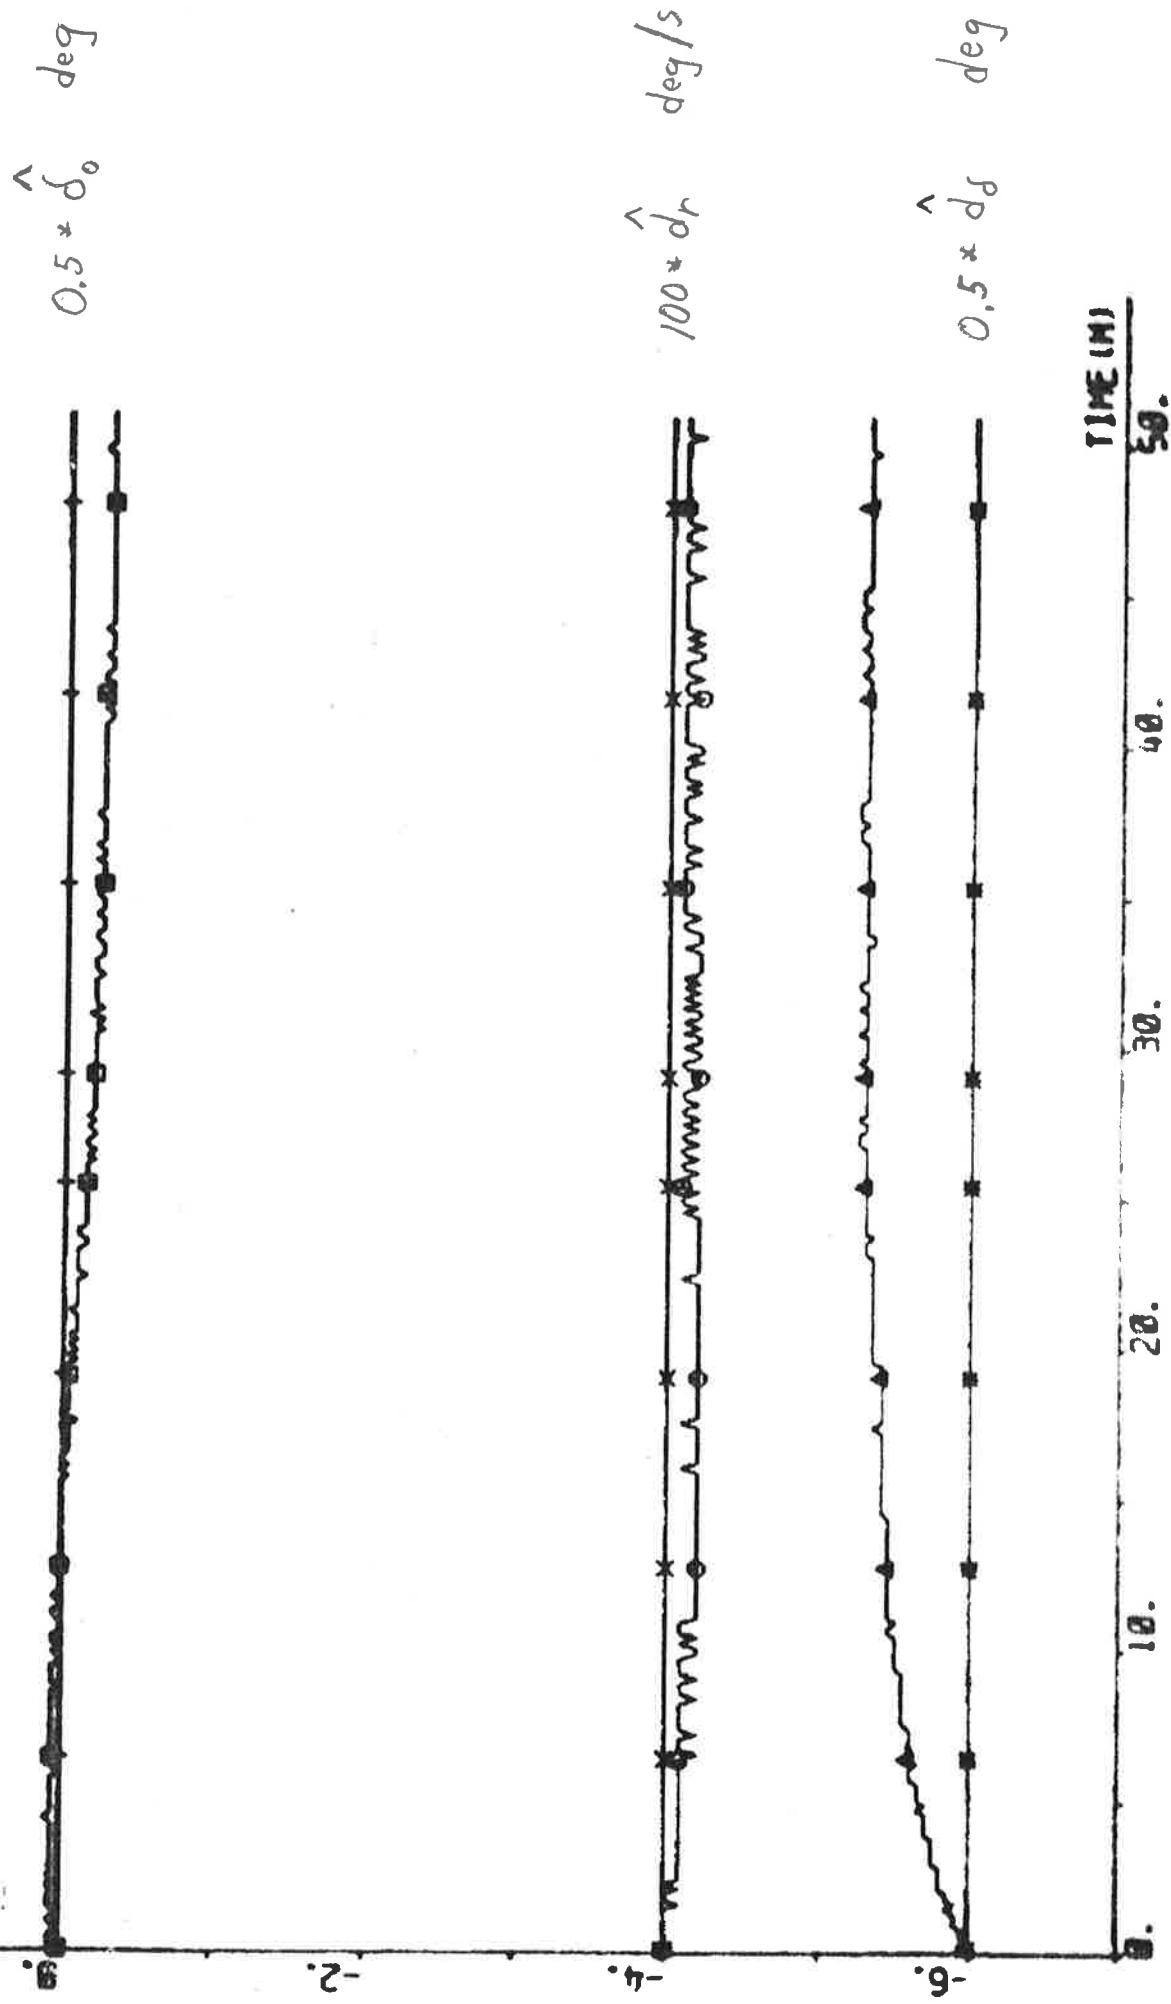

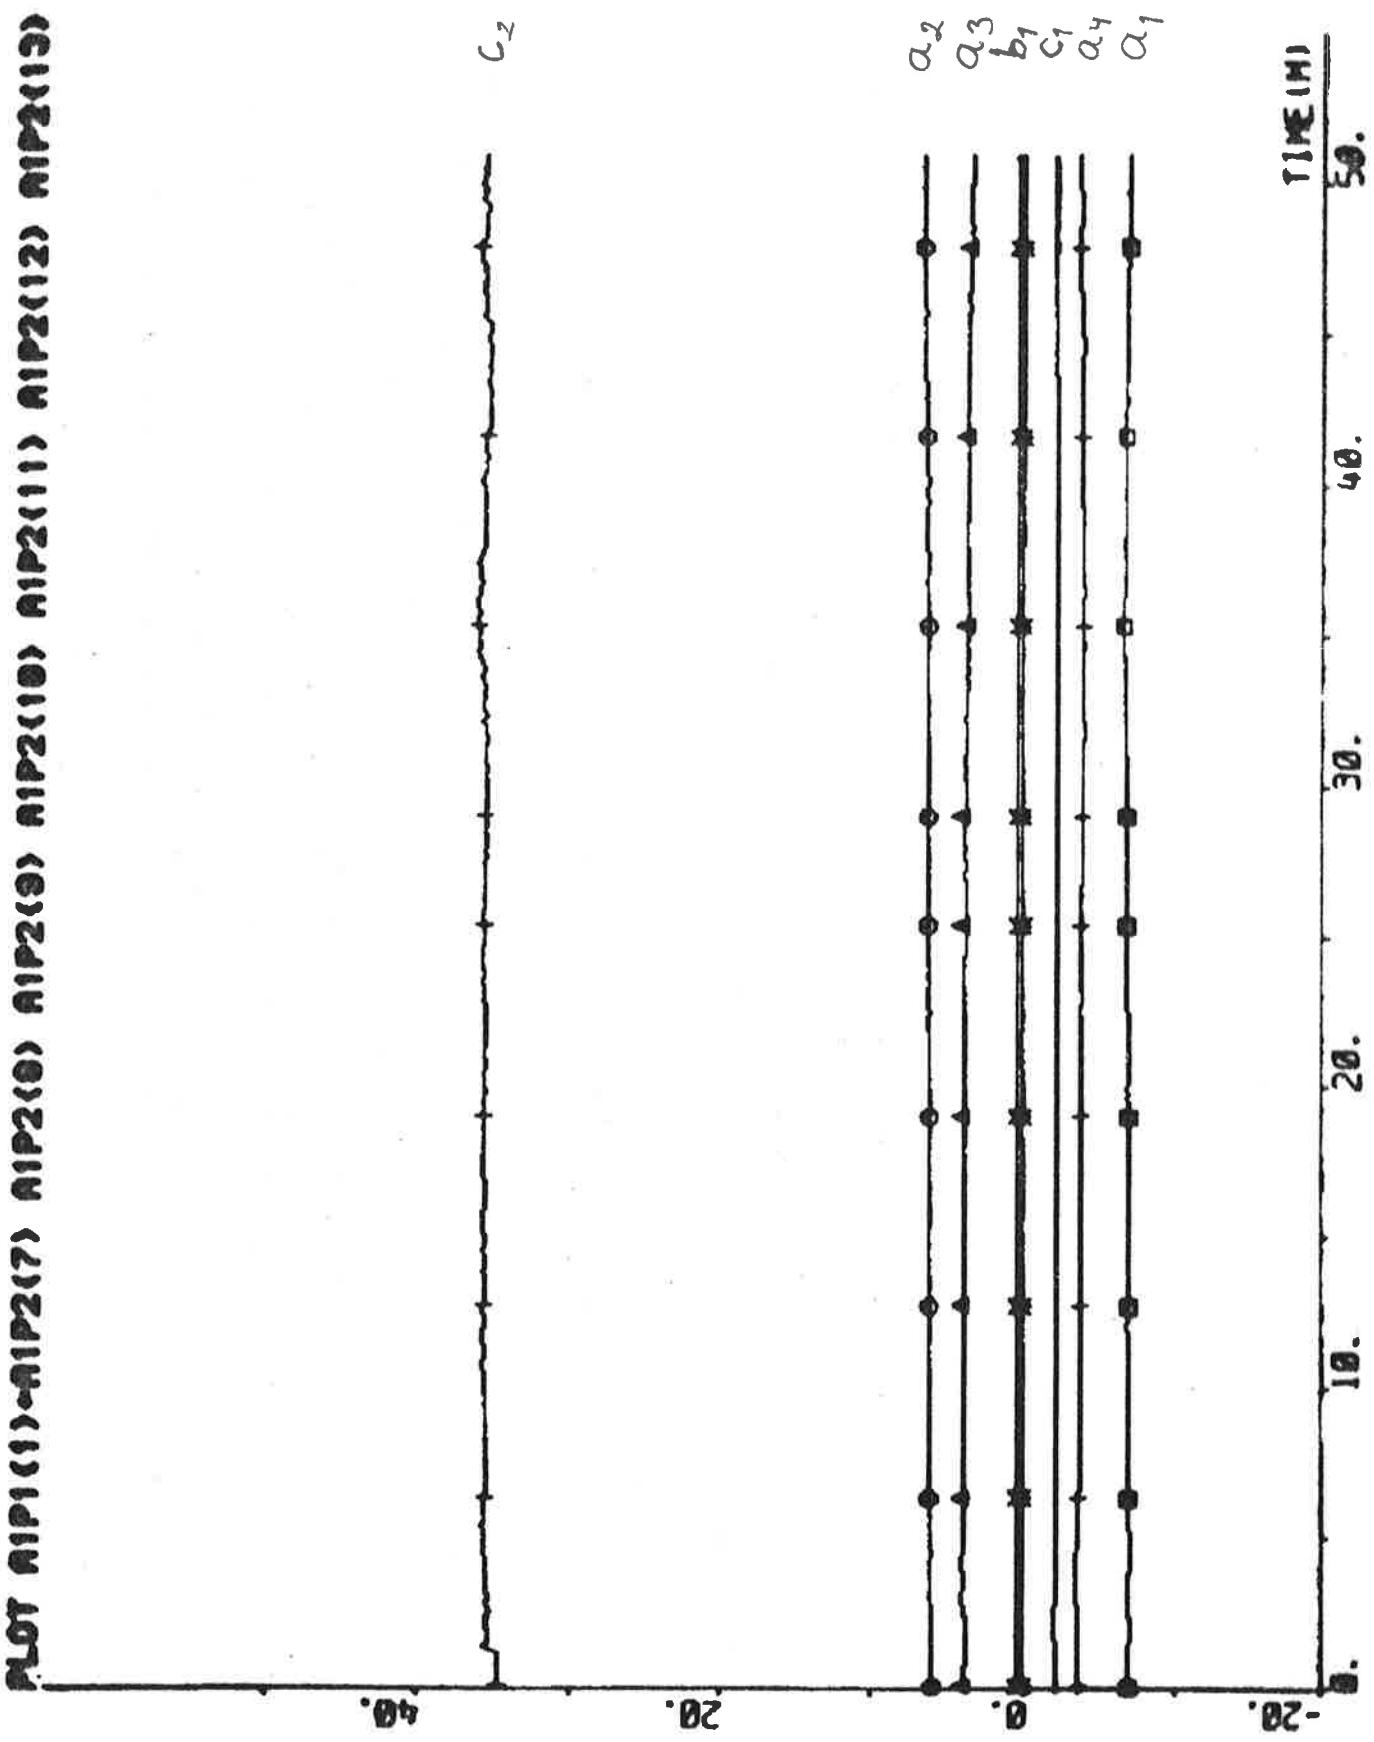

PILOT NIP1(1) NIP2(7) NIP2(8) NIP2(9) NIP2(10) NIP2(11) NIP2(12) NIP2(13)

EXPERIMENT A2

Date	1976-04-22	Forward draught	8.5 m
Time	08.19	Aft draught	12.5 m
Duration	26 min	Wind direction	N (5; see App. A)
Position	N 12°39' W 18°29'	Wind velocity	5 m/s (gentle breeze)
ψ_{ref}	180 deg	Wave height	Low swell from N

An incorrect measurement of the yaw rate r was obtained after about 6 min. This measurement was not skipped by the Kalman filter.

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: > 120 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 Ts = 10 s V0 = 7 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -15.17 \\ 19.33 \\ -2.62 \\ -1.87 \\ 0.63 \\ 0.52 \\ 0.35 \\ 113.66 \end{bmatrix} \quad P = \begin{bmatrix} 13.56 \\ -18.18 & 32.91 \\ -0.39 & -14.74 & 29.92 \\ 5.72 & -0.62 & -15.50 & 11.07 \\ -0.33 & 0.12 & 0.62 & -0.43 & 0.03 \\ -0.25 & 0.21 & 0.17 & -0.14 & 0.01 & 0.02 \\ -1.85 & 2.54 & 0.28 & -1.04 & 0.03 & 0.00 & 0.86 \\ 61.97 & -69.20 & -45.68 & 49.88 & -2.82 & -1.84 & 7.66 & 1171.60 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.33$$


$$\hat{\delta}_0 = 0.4 \text{ deg} \quad \hat{d}_V = 0.20 \text{ knots} \quad \hat{d}_r = -0.001 \text{ deg/s} \quad \hat{d}_{\delta} = 1.3 \text{ deg}$$

Statistics (mean value and standard deviation)


PLOT #2P1(10) #2P1(10) HP #2P1(10) #2P1(15) 02-31 - DEG

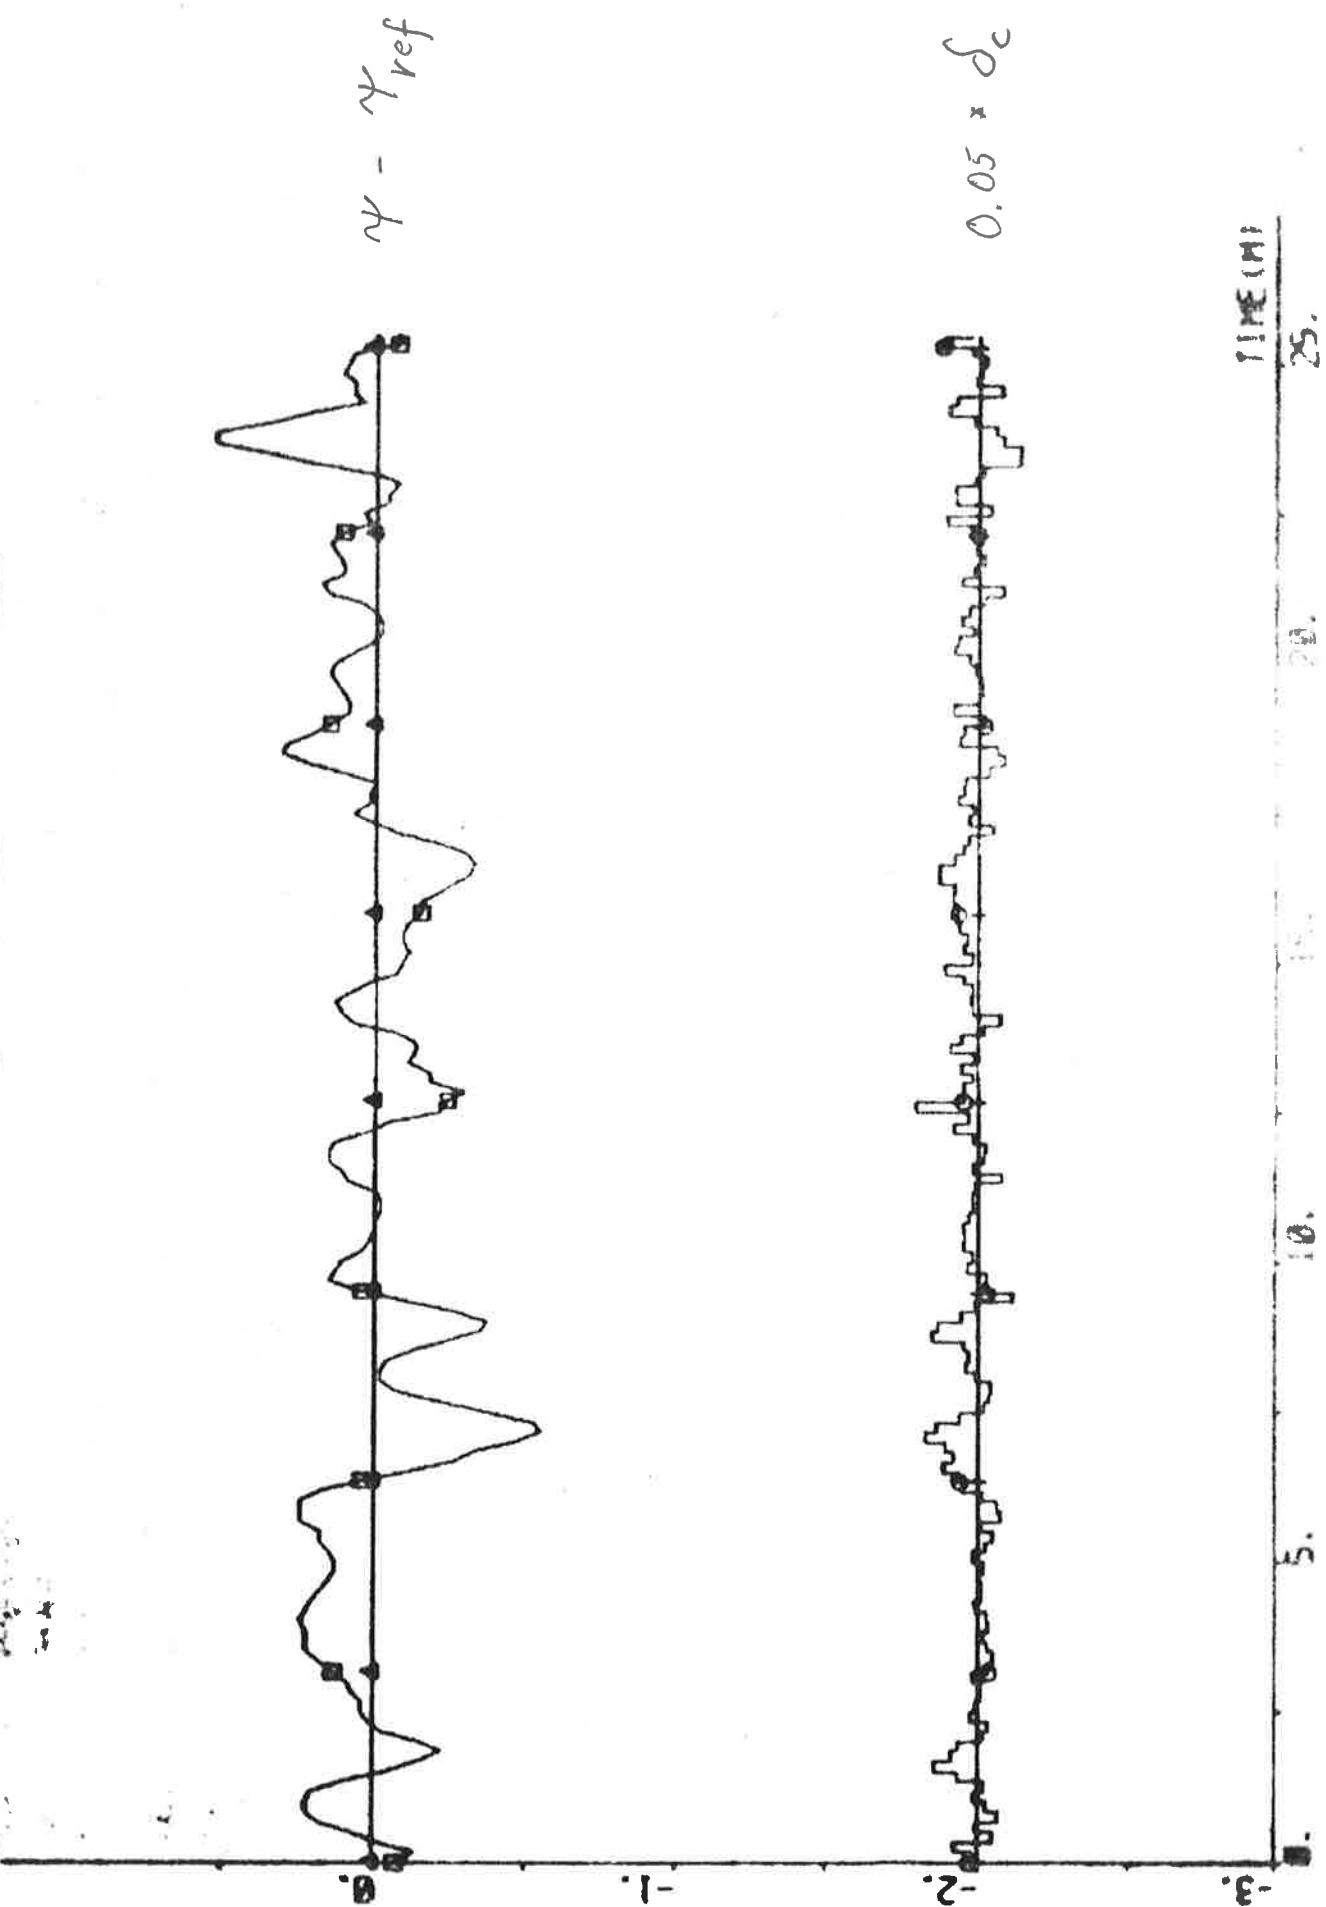


NOT R2P1(11) R2P1(14) R2P1(111) 00 - 20 00

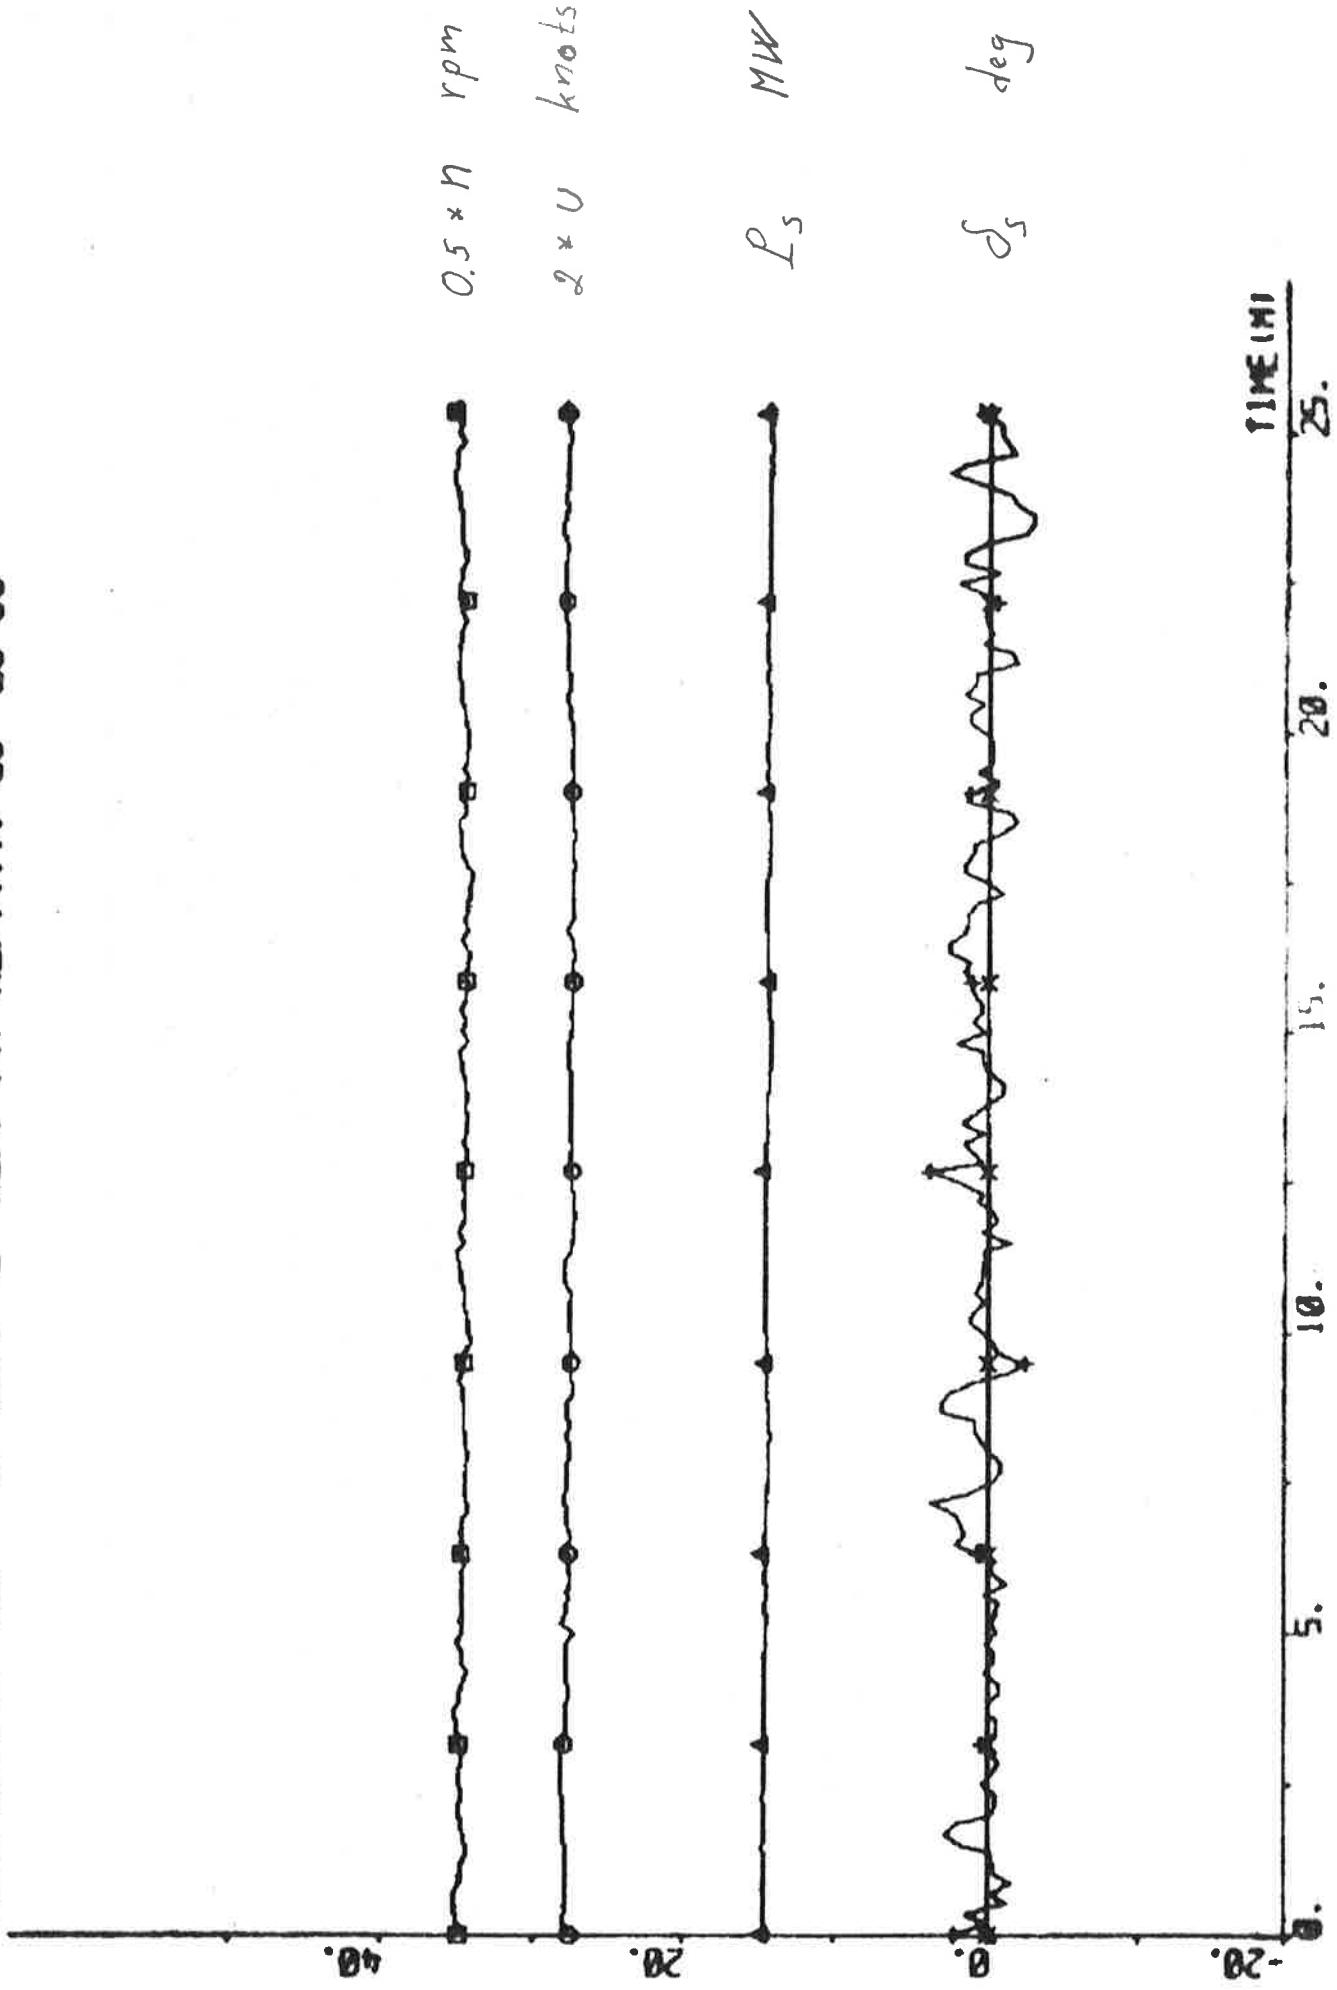


PLT R2P1(1)-R2P2(1) R2P2(2) ERRS 00 01 02 -3.4 0.9 - KNOTS

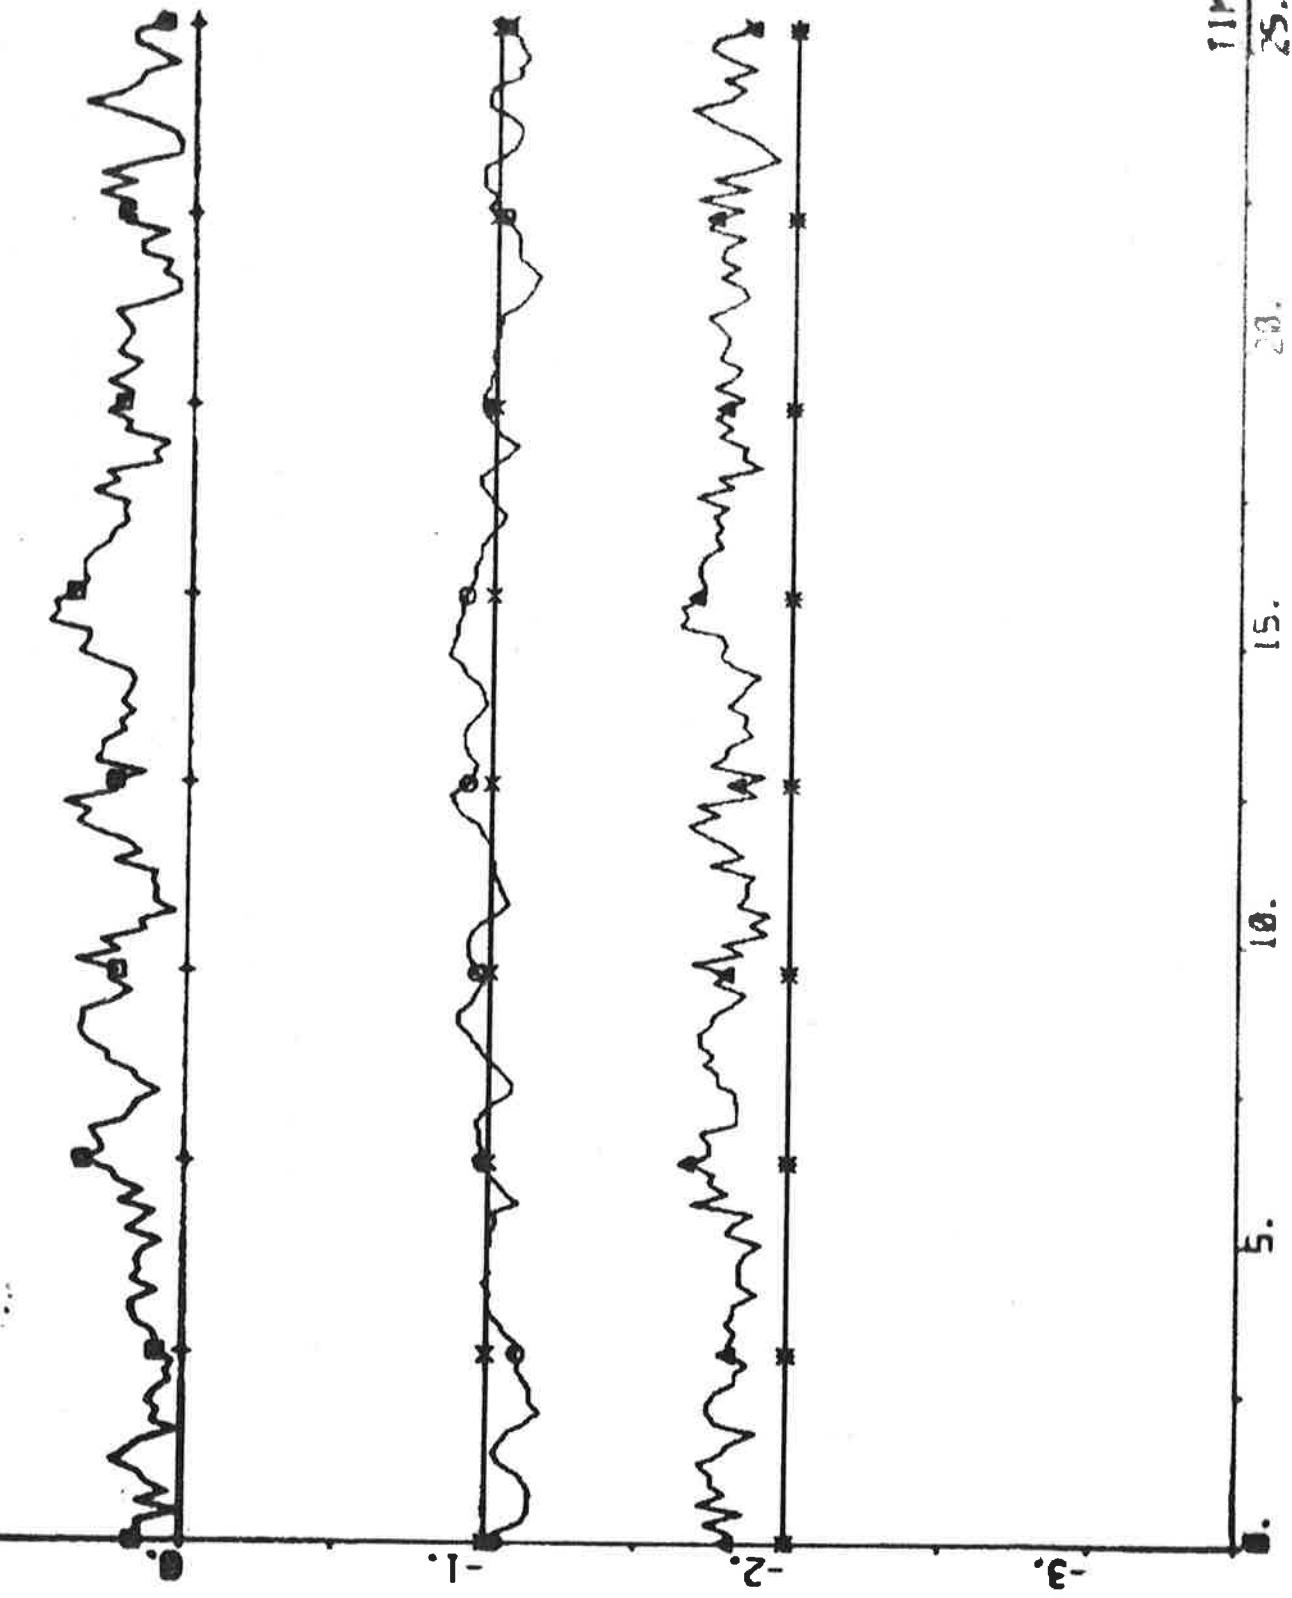

NET 22P1(11)-22P1(14) R2P1(5) E2P2 E2P2 00 01 02 03 -3.4 0.0 . waves

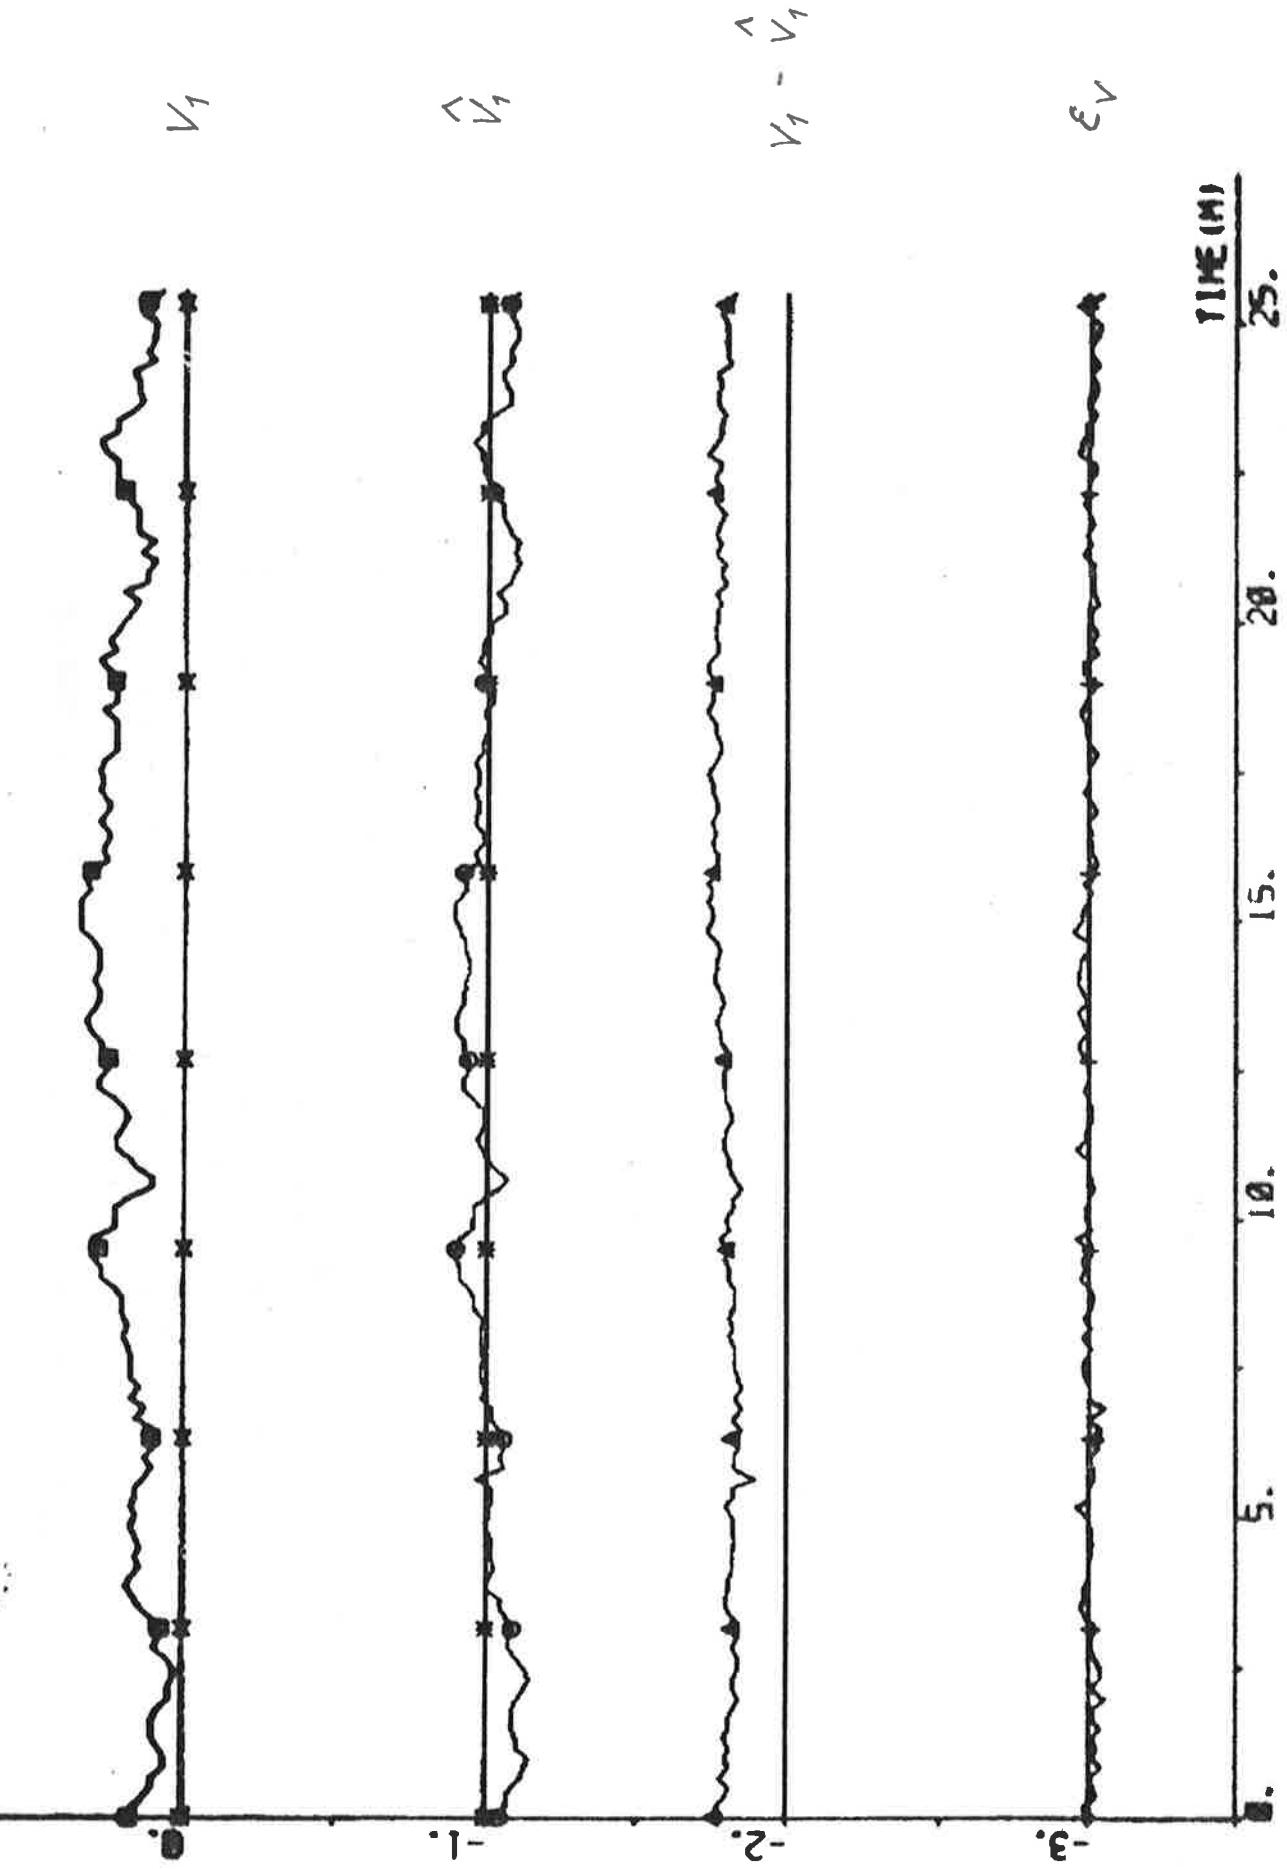


ALG1 ER2P1(7) ER2P1(8) ER2P1(9) ER2P1(10) ER2P1(11) ER2P1(12) ER2P1(13)

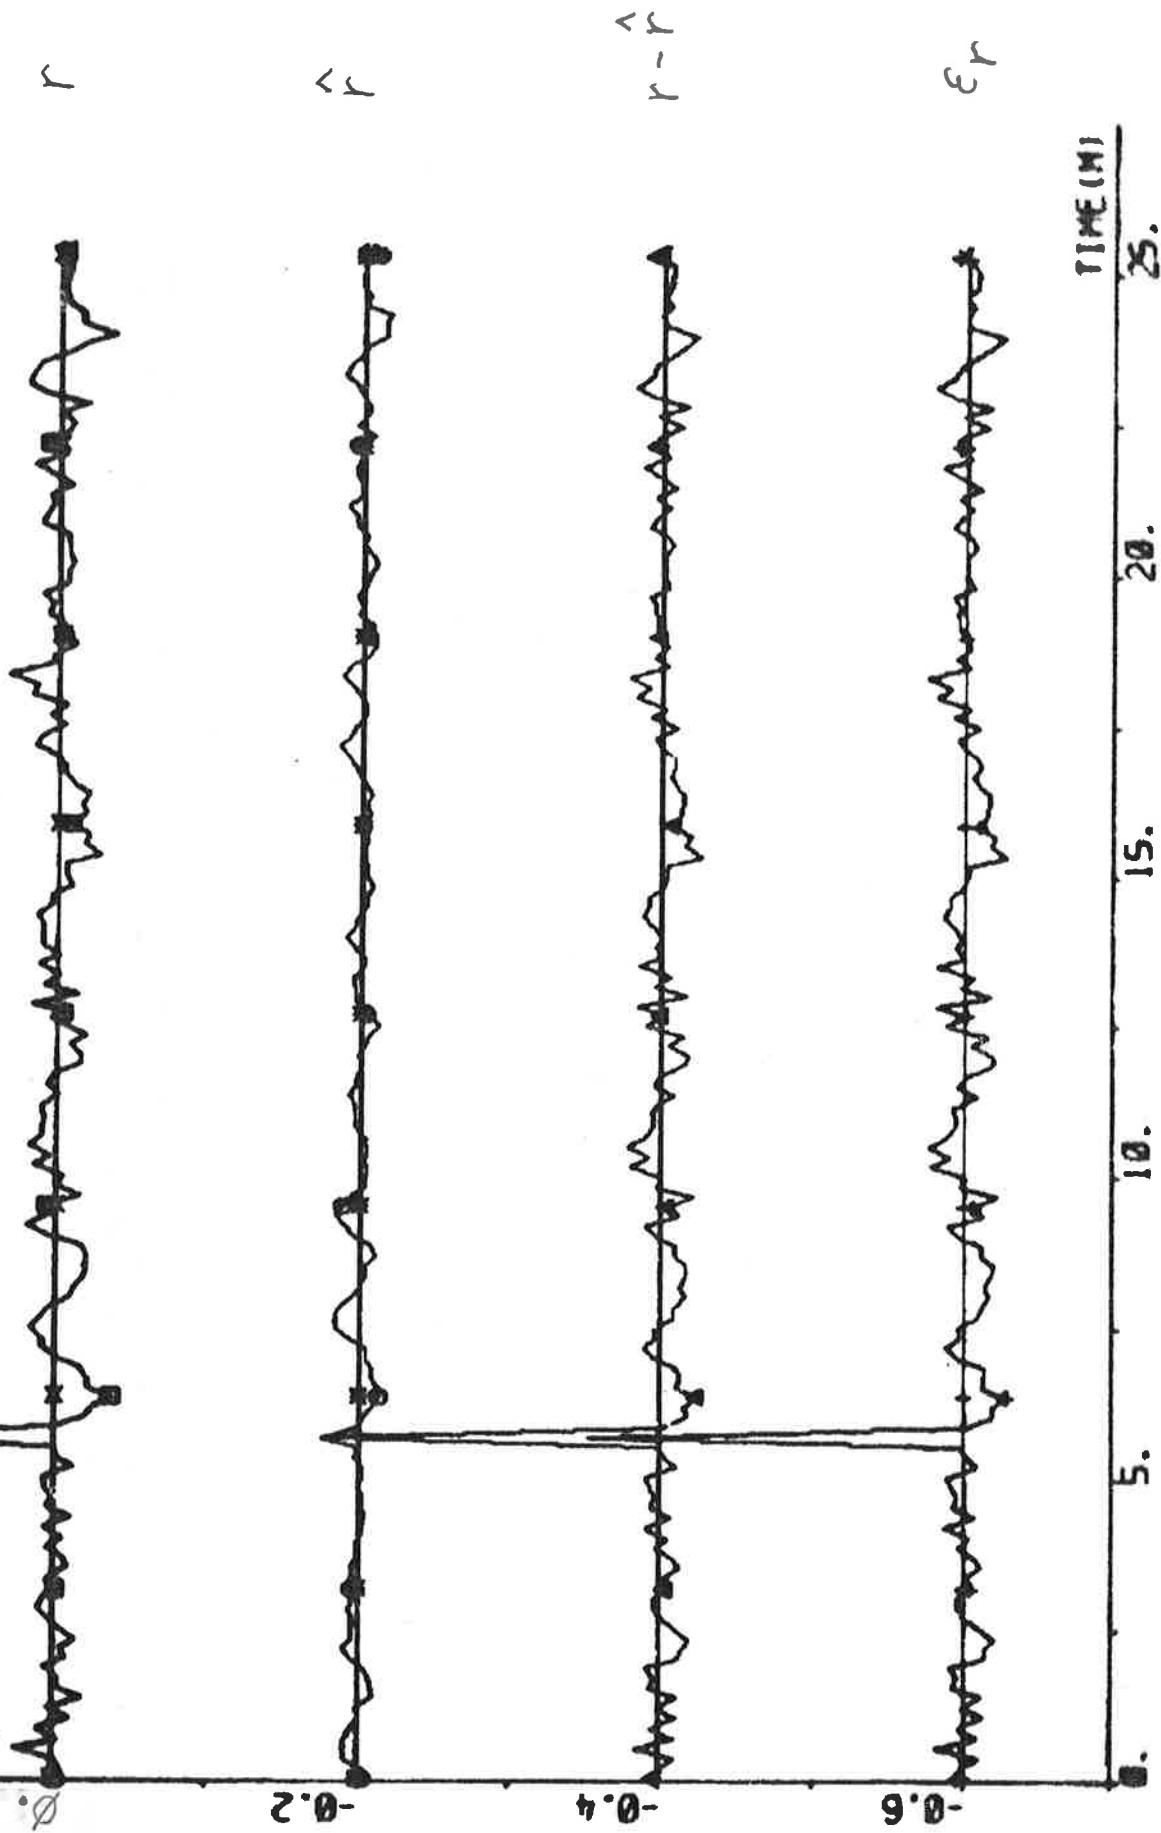


94


Plot M2P1(1)-M2P1(3) M2P1(3) ERMA ERMA 01 02 03 -3.4 0.3 -

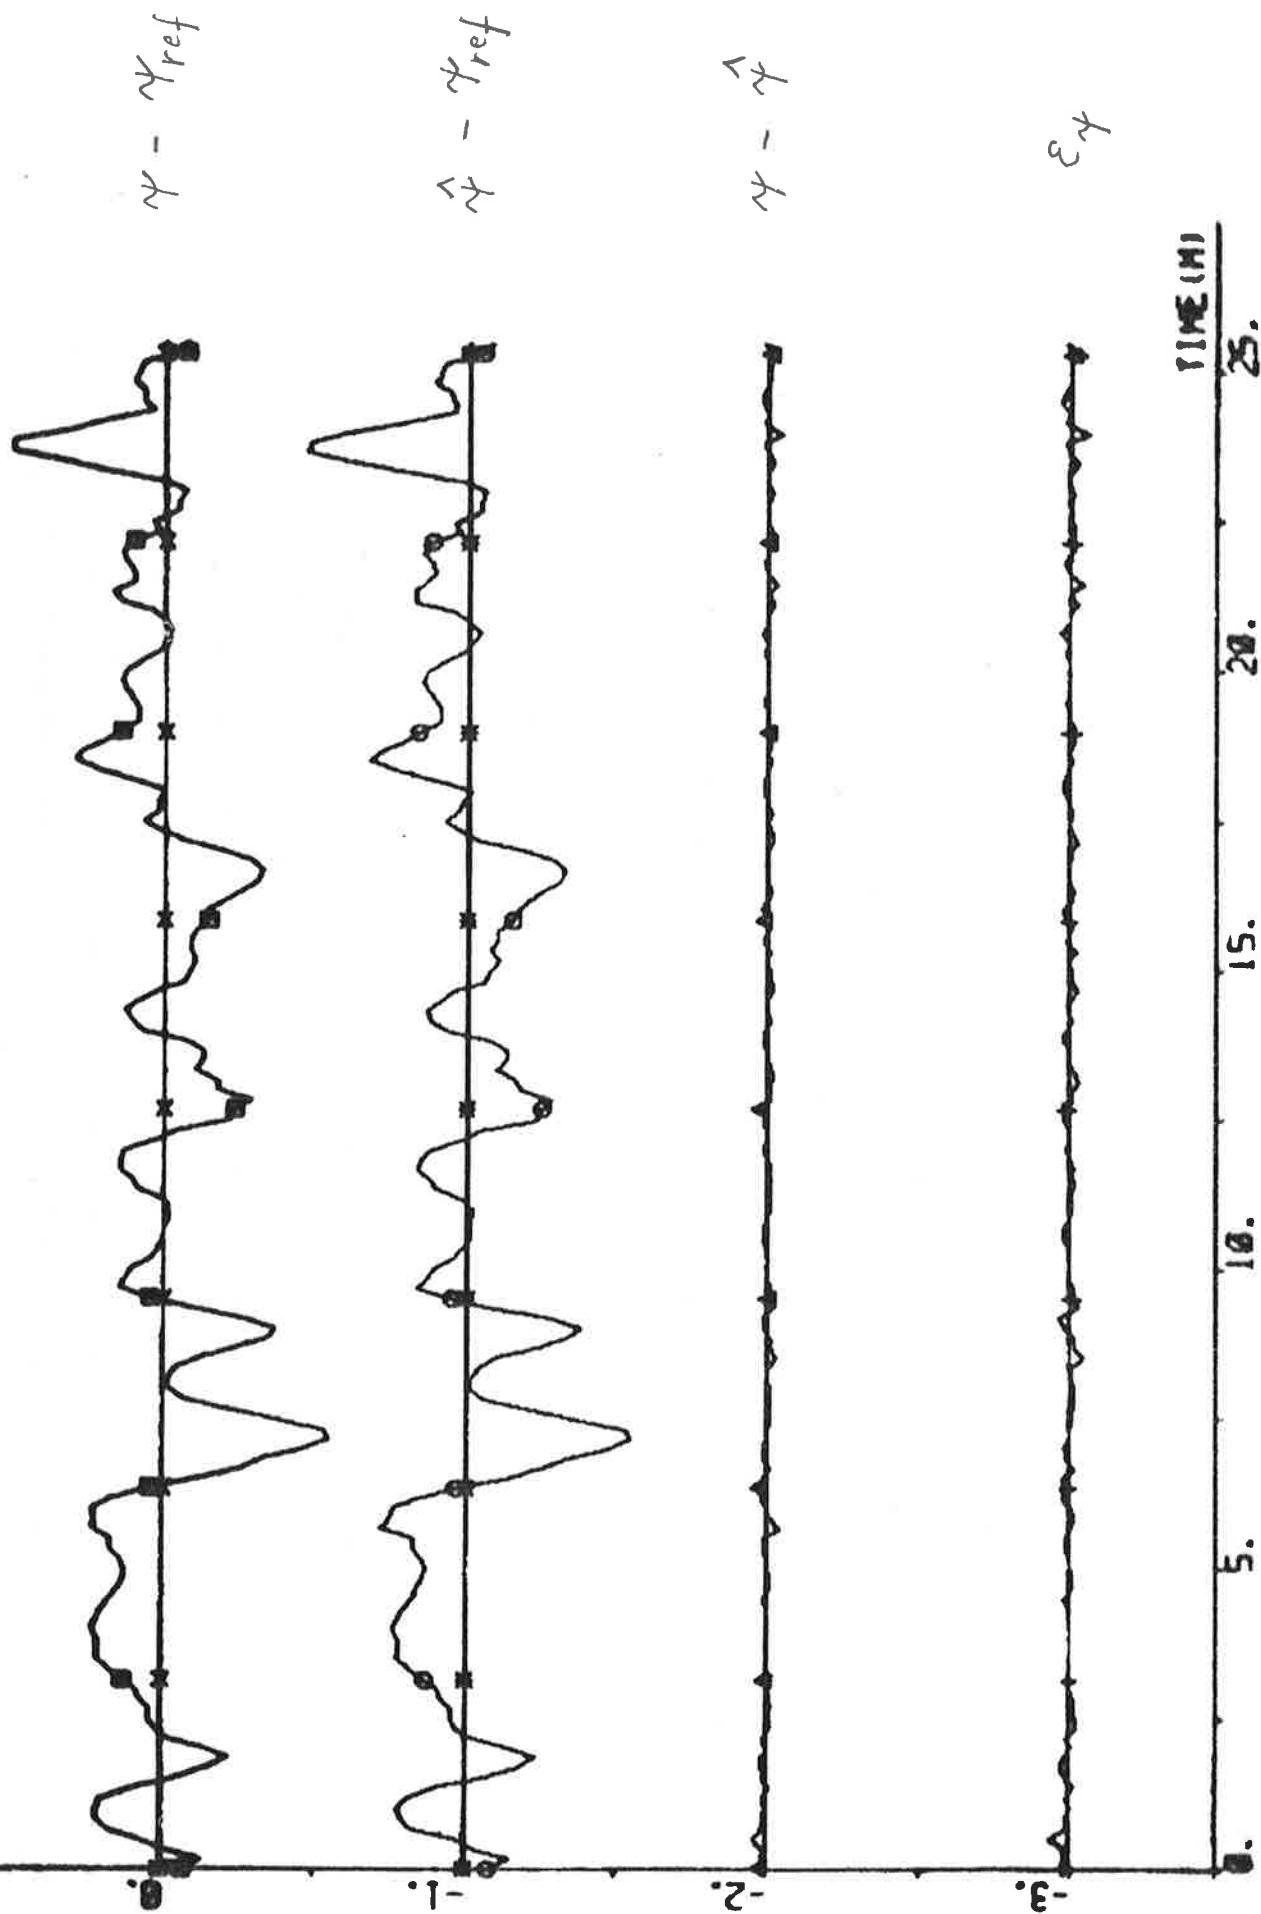


PL0T R2P1(1)-R2P1(2) ERRI EPS1 00 020 040 060 080 100 - DSC

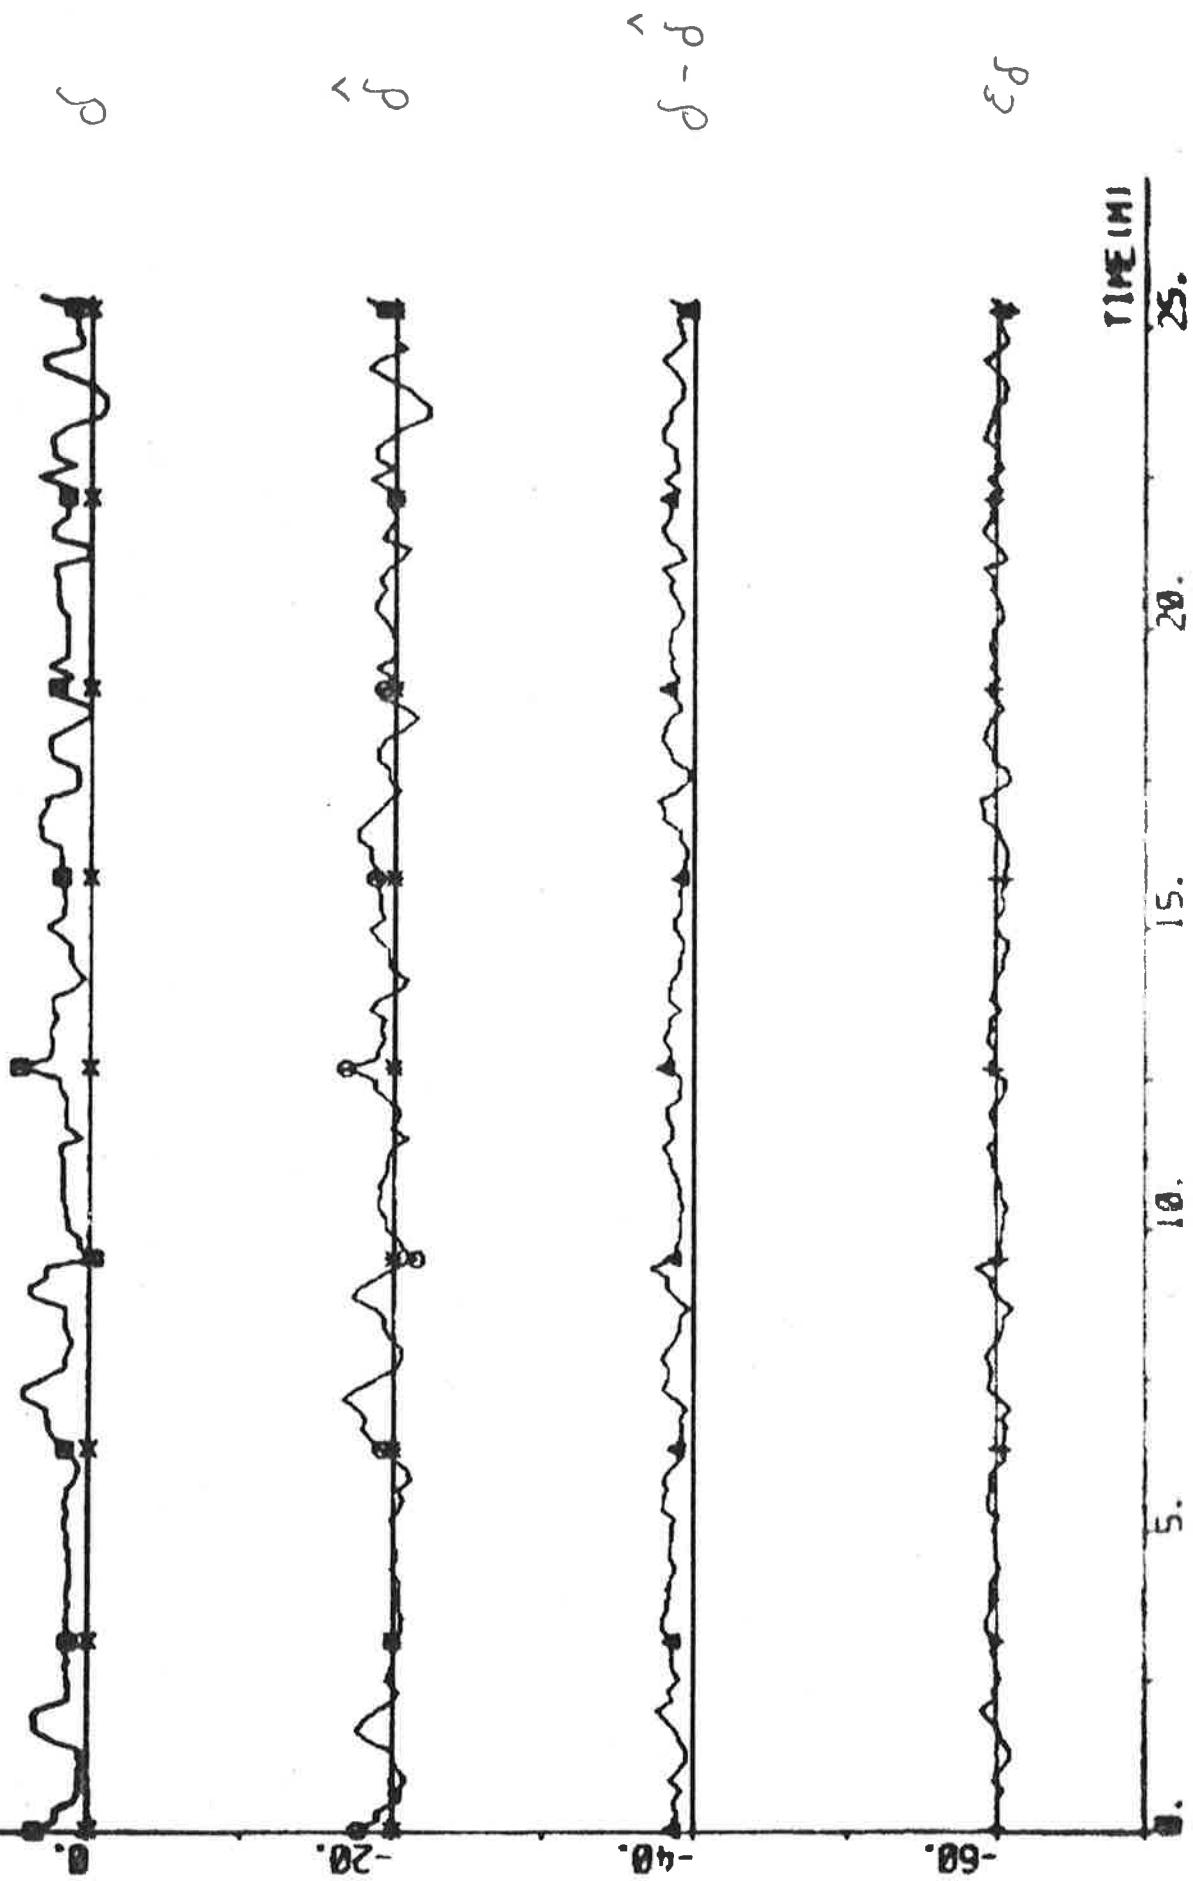

NOM 1221(11) 1221(13) 1221(14) 1221(15) 1221(16)

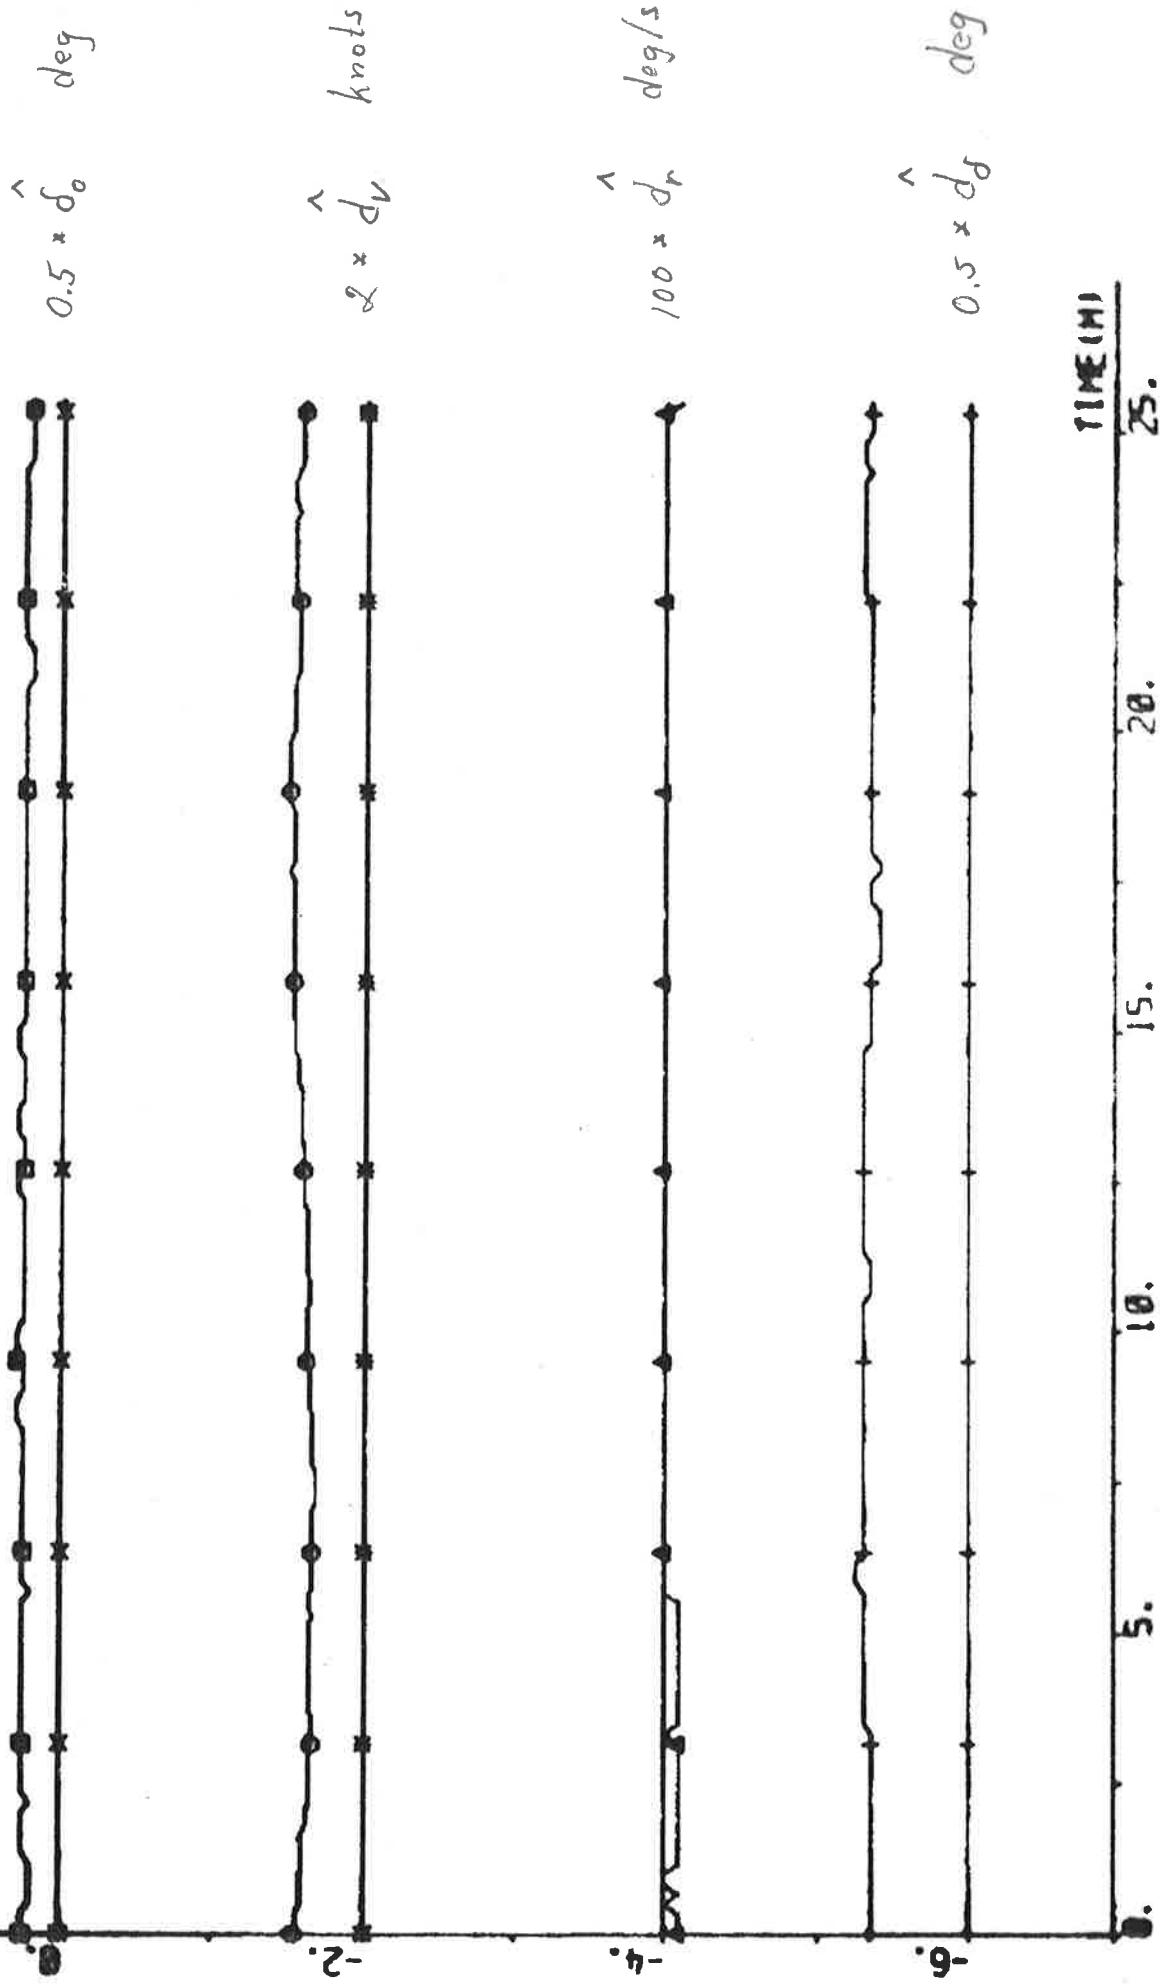

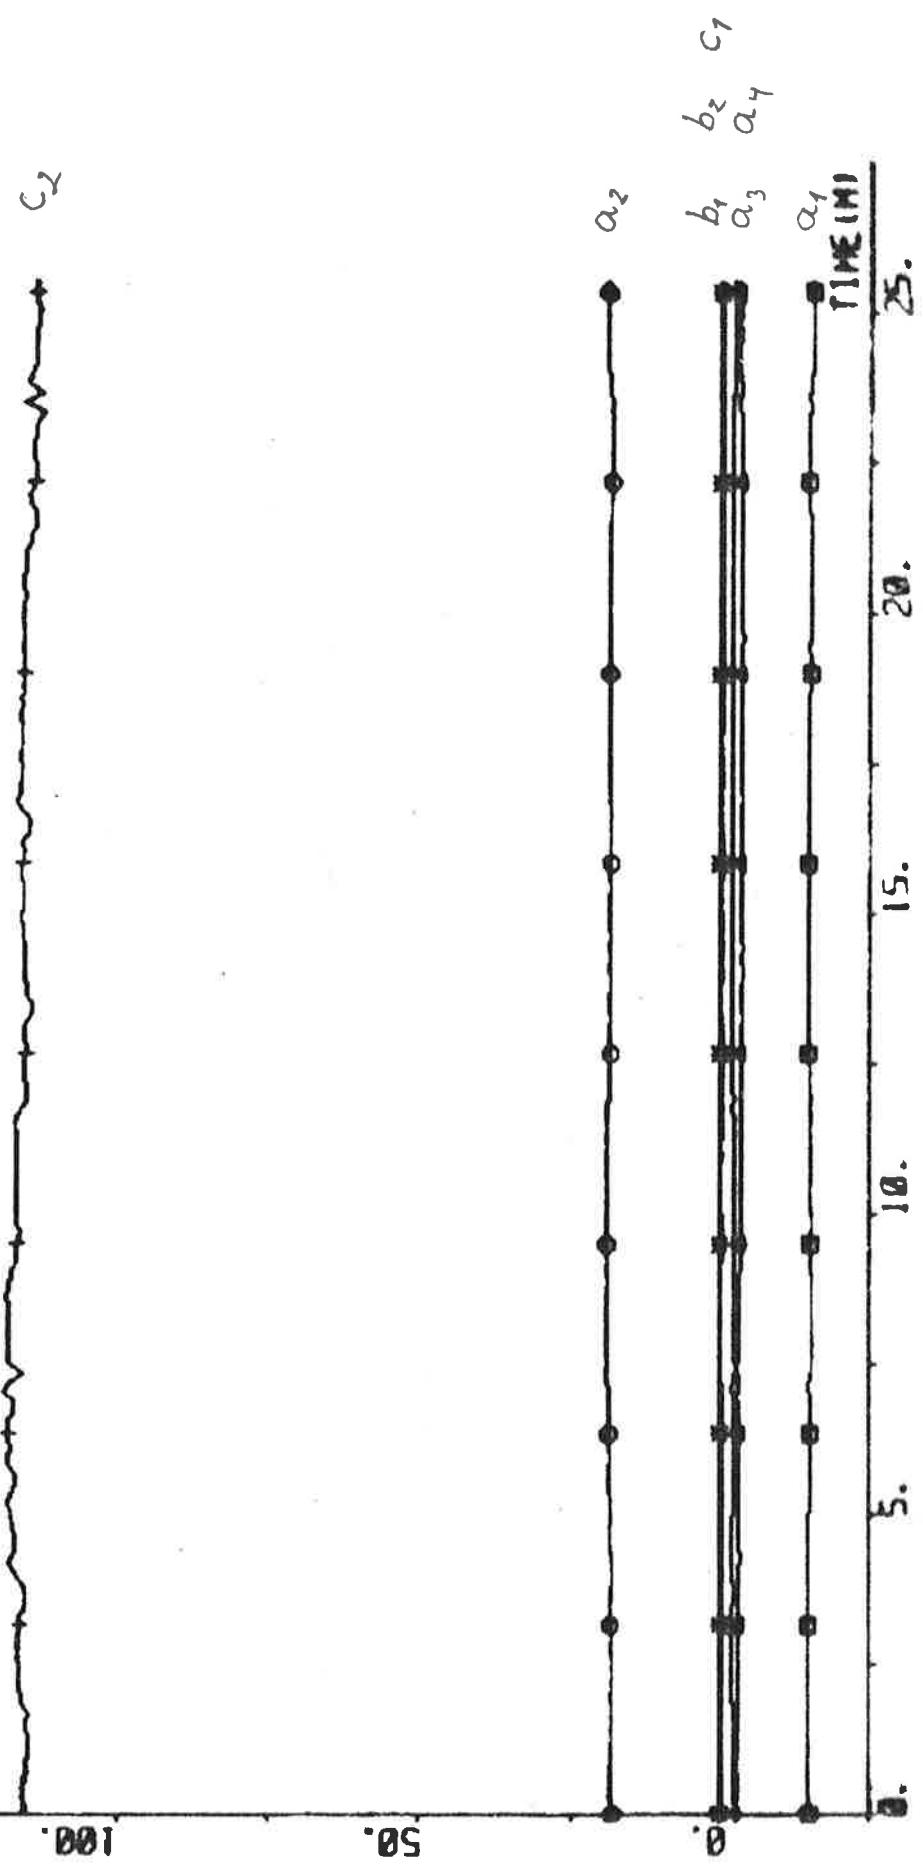

EXPERIMENT A3

Date	1976-04-22	Forward draught	8.5 m
Time	09.46	Aft draught	12.5 m
Duration	24 min	Wind direction	N (5; see App. A)
Position	N 12°17' W 18°29'	Wind velocity	10 m/s (fresh breeze)
ψ_{ref}	180 deg	Wave height	Low swell from N

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 5 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 7 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.60 \\ 6.39 \\ 4.38 \\ -2.62 \\ 0.53 \\ 0.26 \\ -2.34 \\ 44.87 \end{bmatrix} \quad P = \begin{bmatrix} 4.93 \\ -5.58 & 10.51 \\ -1.10 & -4.43 & 10.96 \\ 2.10 & -0.68 & -5.65 & 4.56 \\ -0.14 & -0.04 & 0.33 & -0.15 & 0.03 \\ -0.12 & 0.05 & -0.01 & 0.08 & 0.01 & 0.03 \\ -0.53 & 0.85 & 0.22 & -0.57 & -0.02 & -0.03 & 0.67 \\ 14.78 & -24.57 & -4.88 & 12.45 & -1.00 & 0.36 & 9.76 & 816.84 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.45$$

$$\hat{\delta}_0 = 0.7 \text{ deg} \quad \hat{d}_v = 0.12 \text{ knots} \quad \hat{d}_r = -0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)

δ_c	0.74	± 1.20	deg	P_s	14.5	± 0.1	MW
δ	2.12	± 1.04	deg	ϵ_v	0.00	± 0.02	knots
$\psi - \psi_{ref}$	0.009	± 0.239	deg	ϵ_r	0.00	± 0.01	deg/s
n	69.4	± 0.4	rpm	ϵ_ψ	0.00	± 0.02	deg
u	14.2	± 0.1	knots	ϵ_δ	0.0	± 0.5	deg
V_1	0.177						

100

Time (ms)


20.

15.

10.

5.

$0.05 \times D_c$

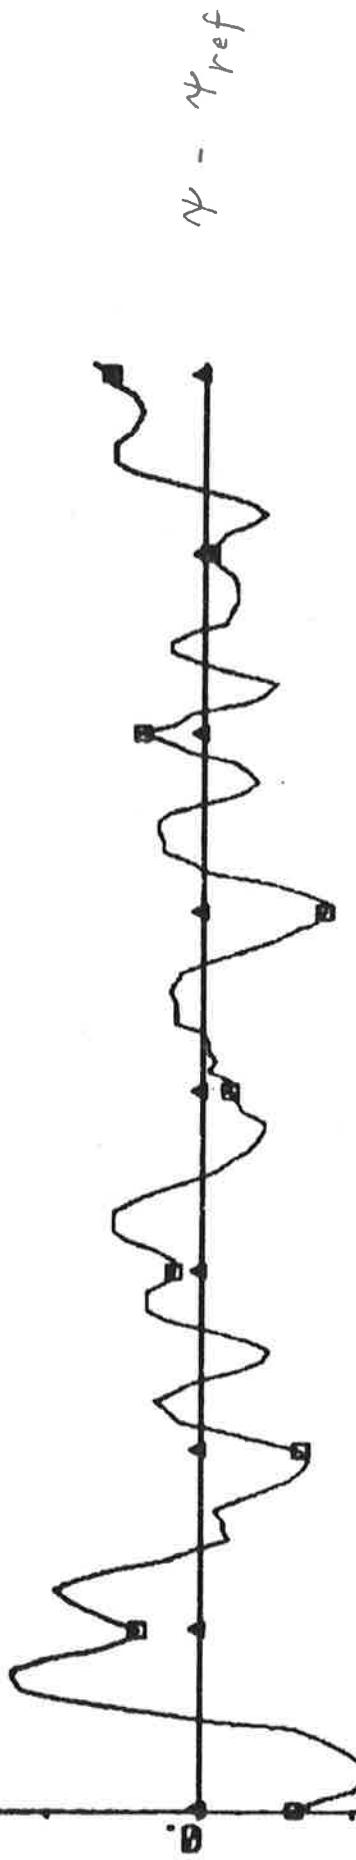

MOTOR ACCELERATION MEASURED (10) ms PACE (10) sec 1 - deg



deg

5

11K


P_s

0.5 * U
2 x U
1 rpm
Holes


40.

20.

PLT APP1 (1) - APP2 (2) ERRE 00 01 02 - 3.4 0.0 - KNOTS

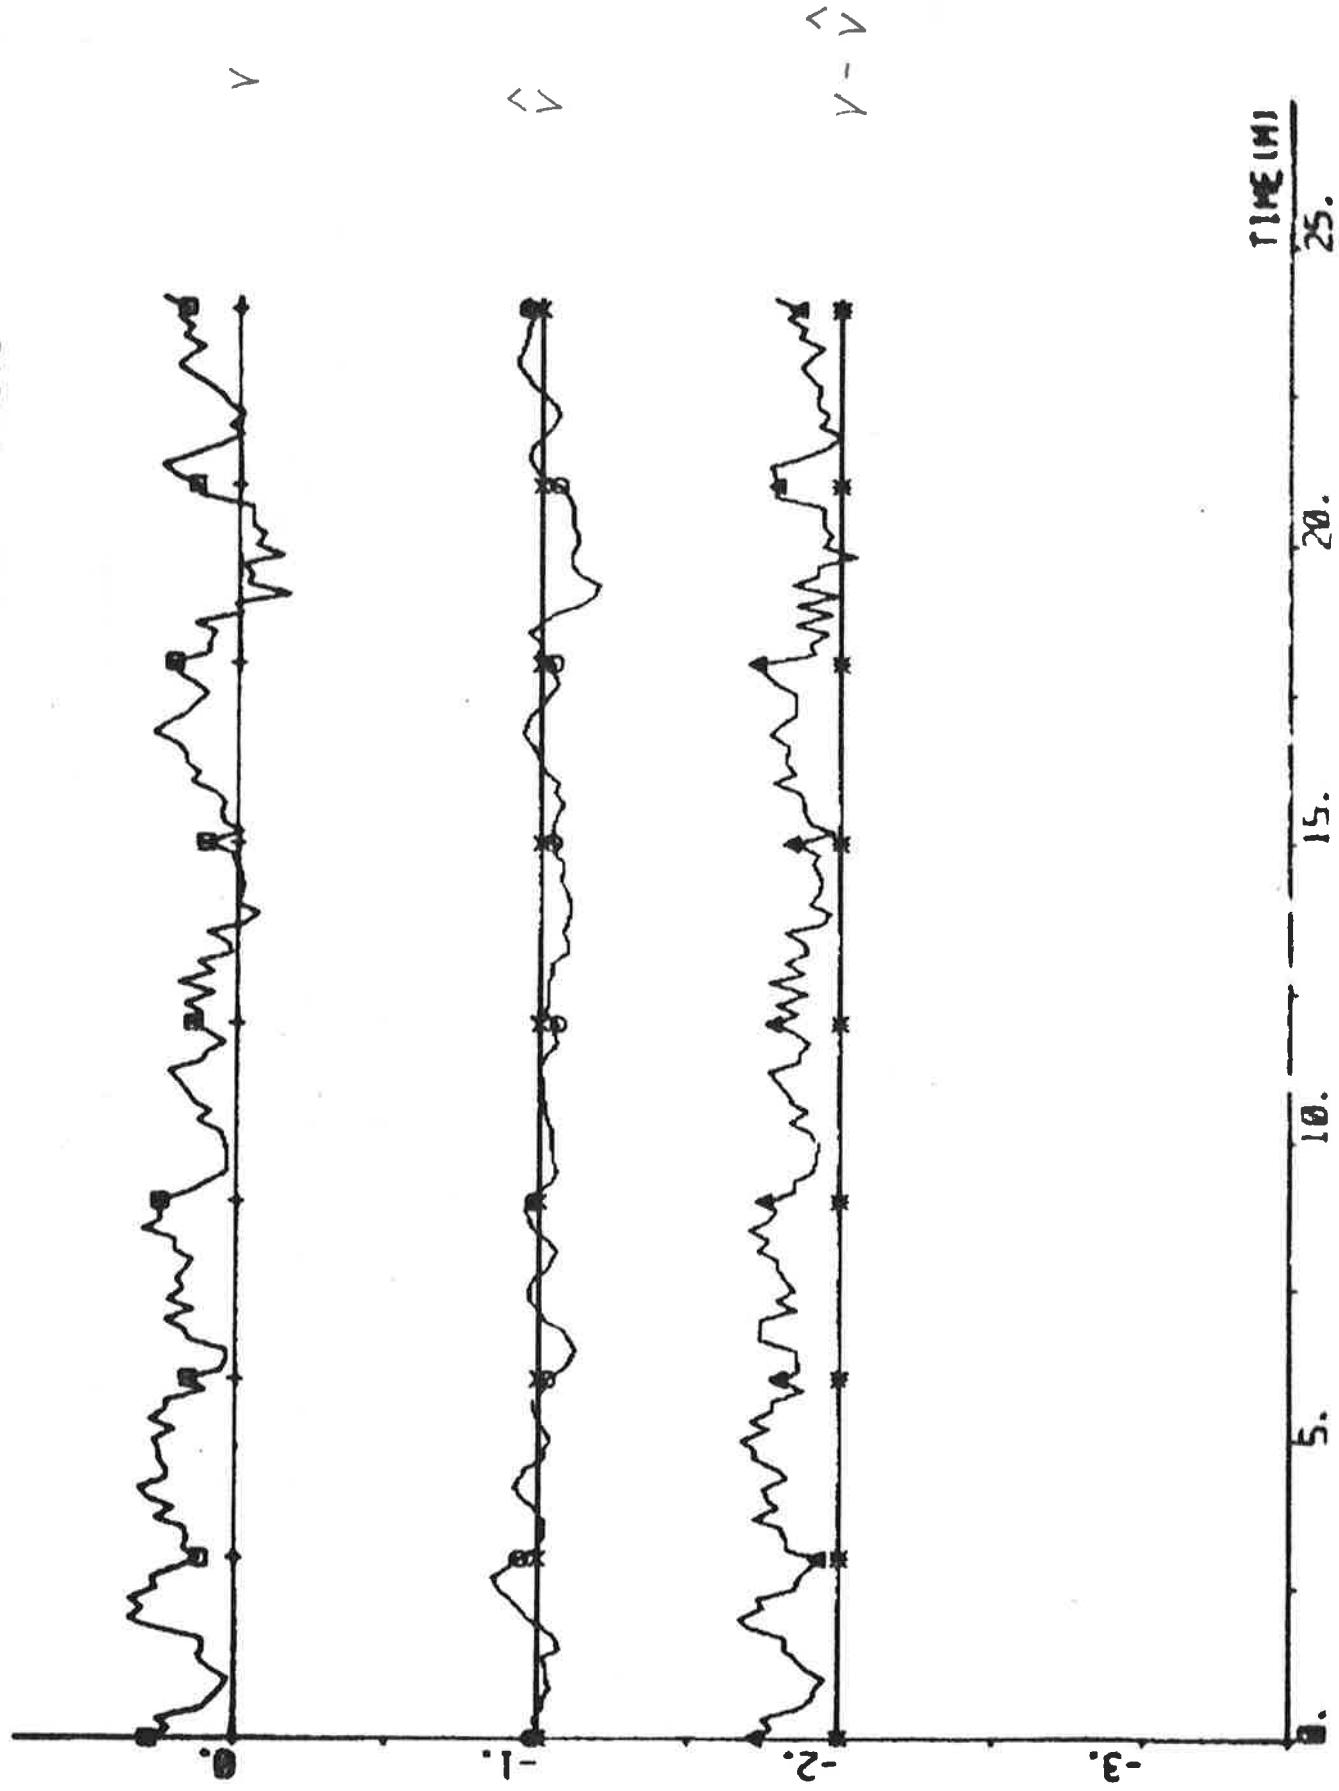


PLOT ACPI1(1) ACPI1(4) ER2 EPS2 00 01 92 93 -3.4 0.0 - NOTES

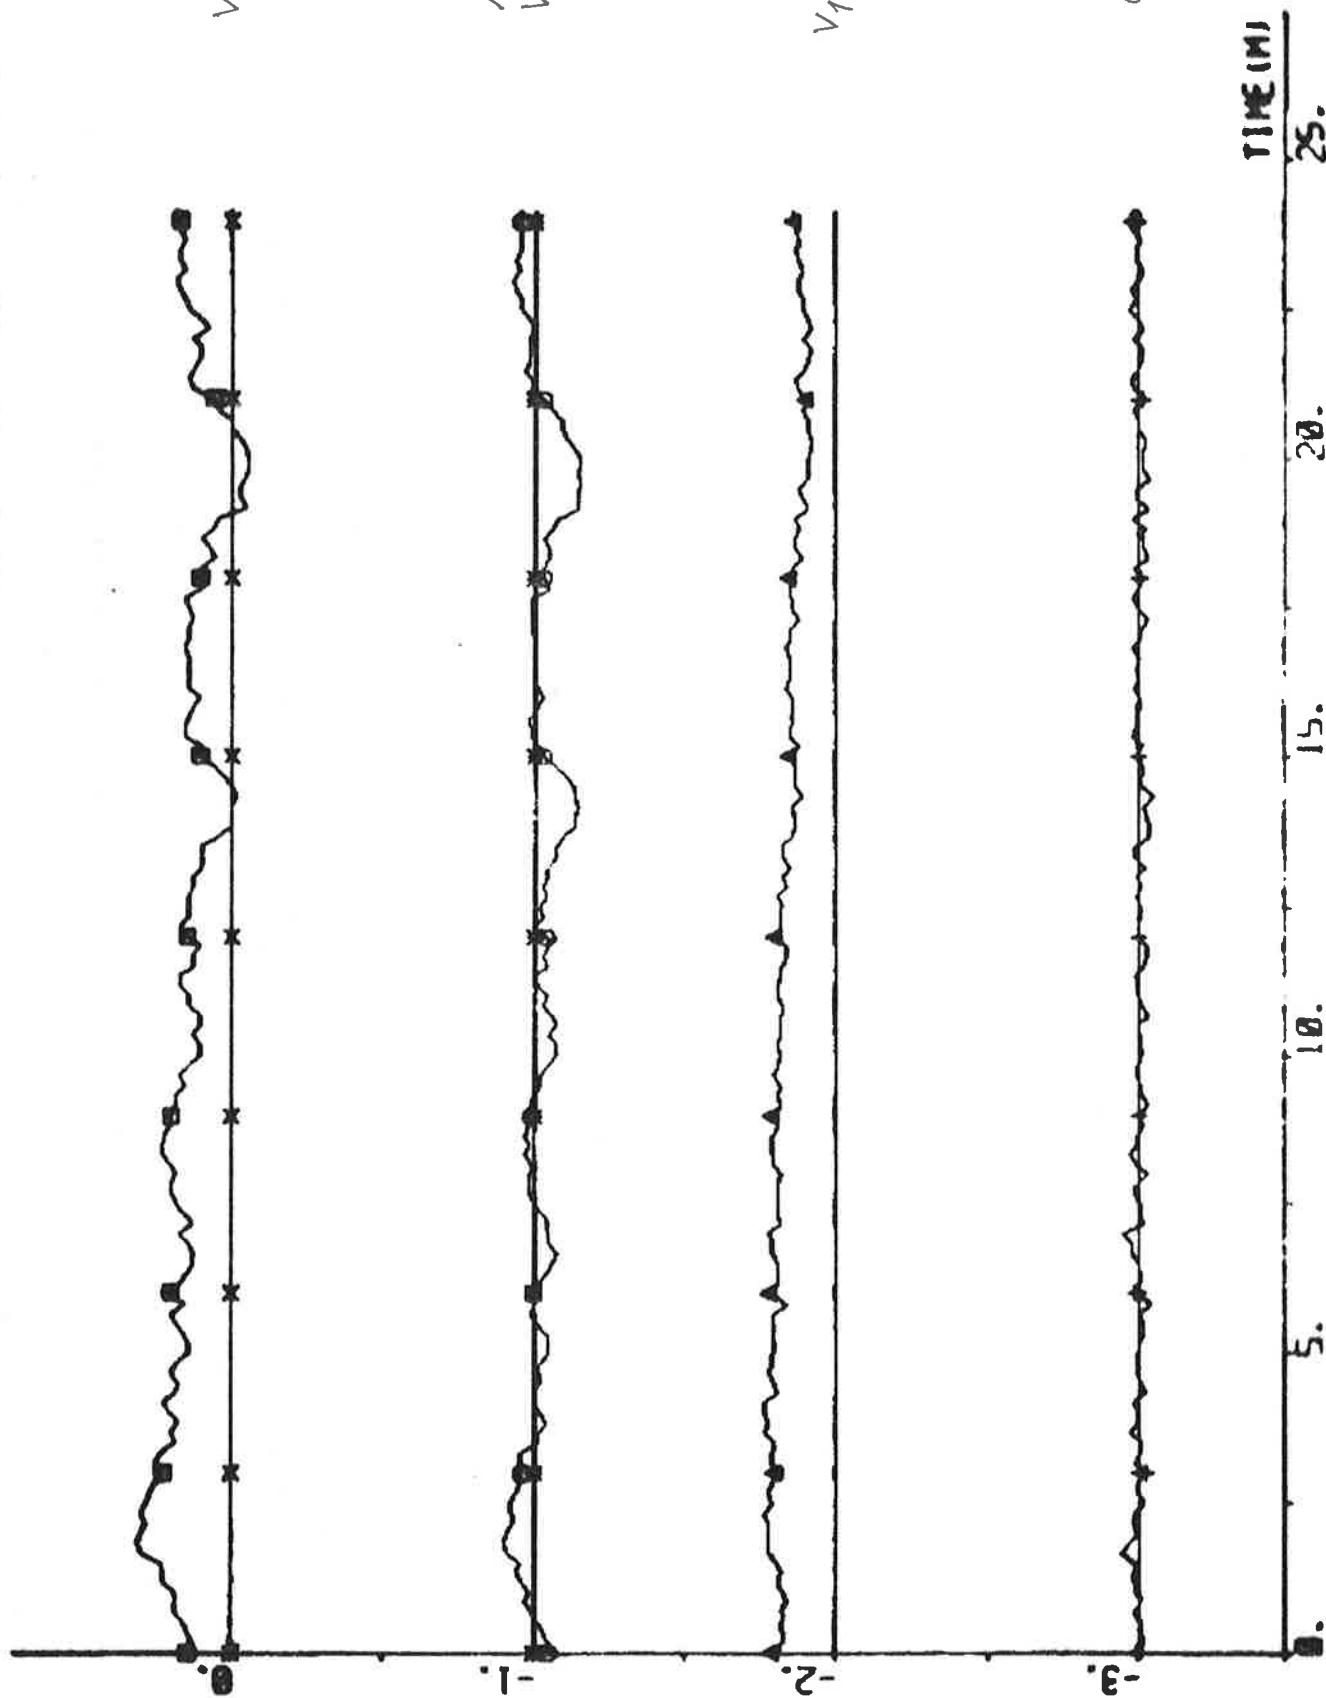





MOTOR MUSCLE (1) (MUSCLE 1) EMG ENDS OF 002 SEES - 0.070. - DATES


MOT M3P1(11)-M3P1(8) ERW E34 90 91 92 93 -3.1.0.0 - 0.0

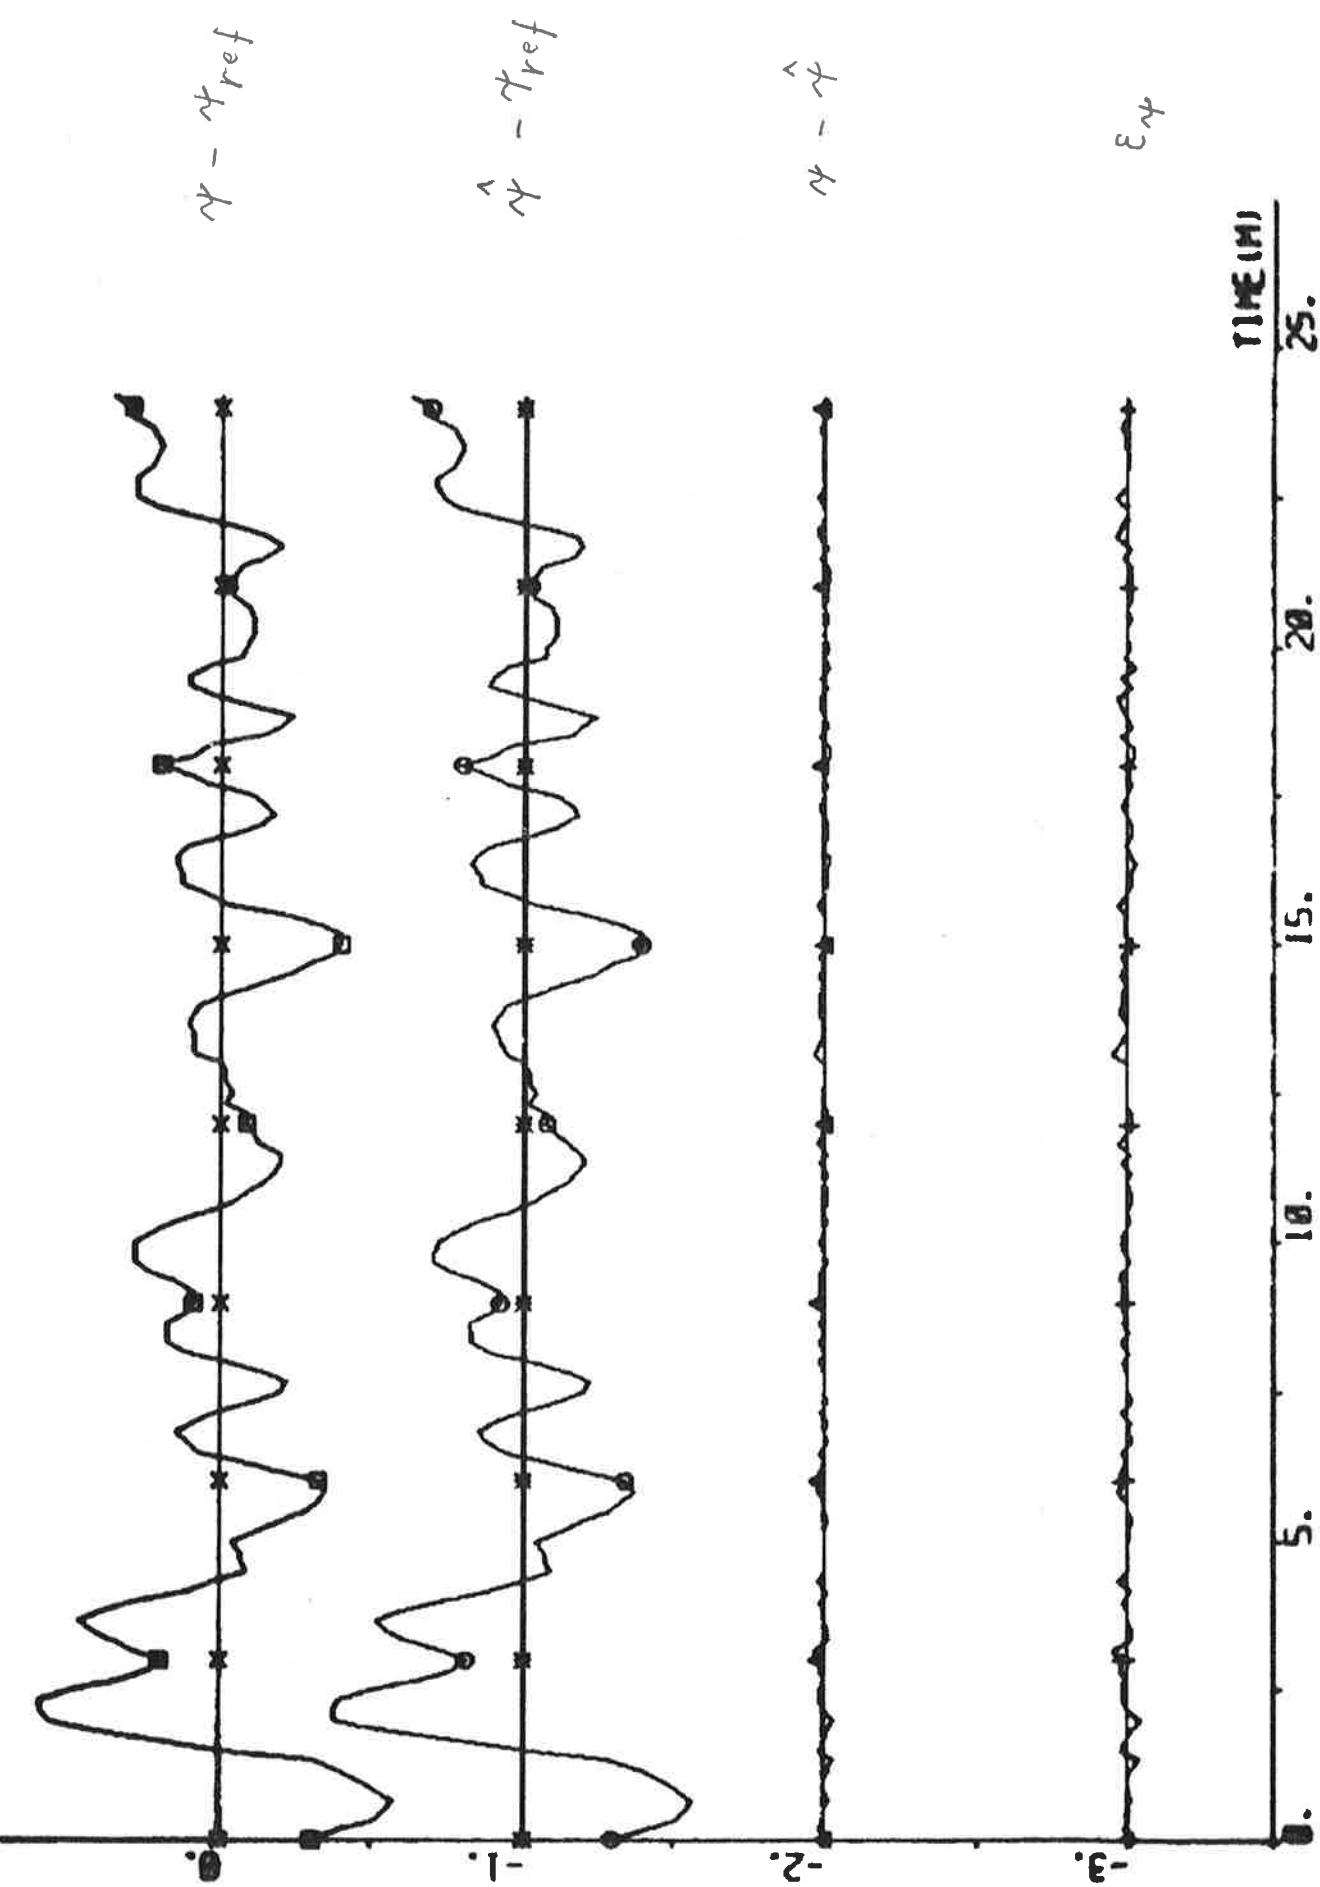

NOTE ACPI(1) - ACPI(2) ACPI(3) ERRI ERSI 00 0000 0000 0000 0000 0000

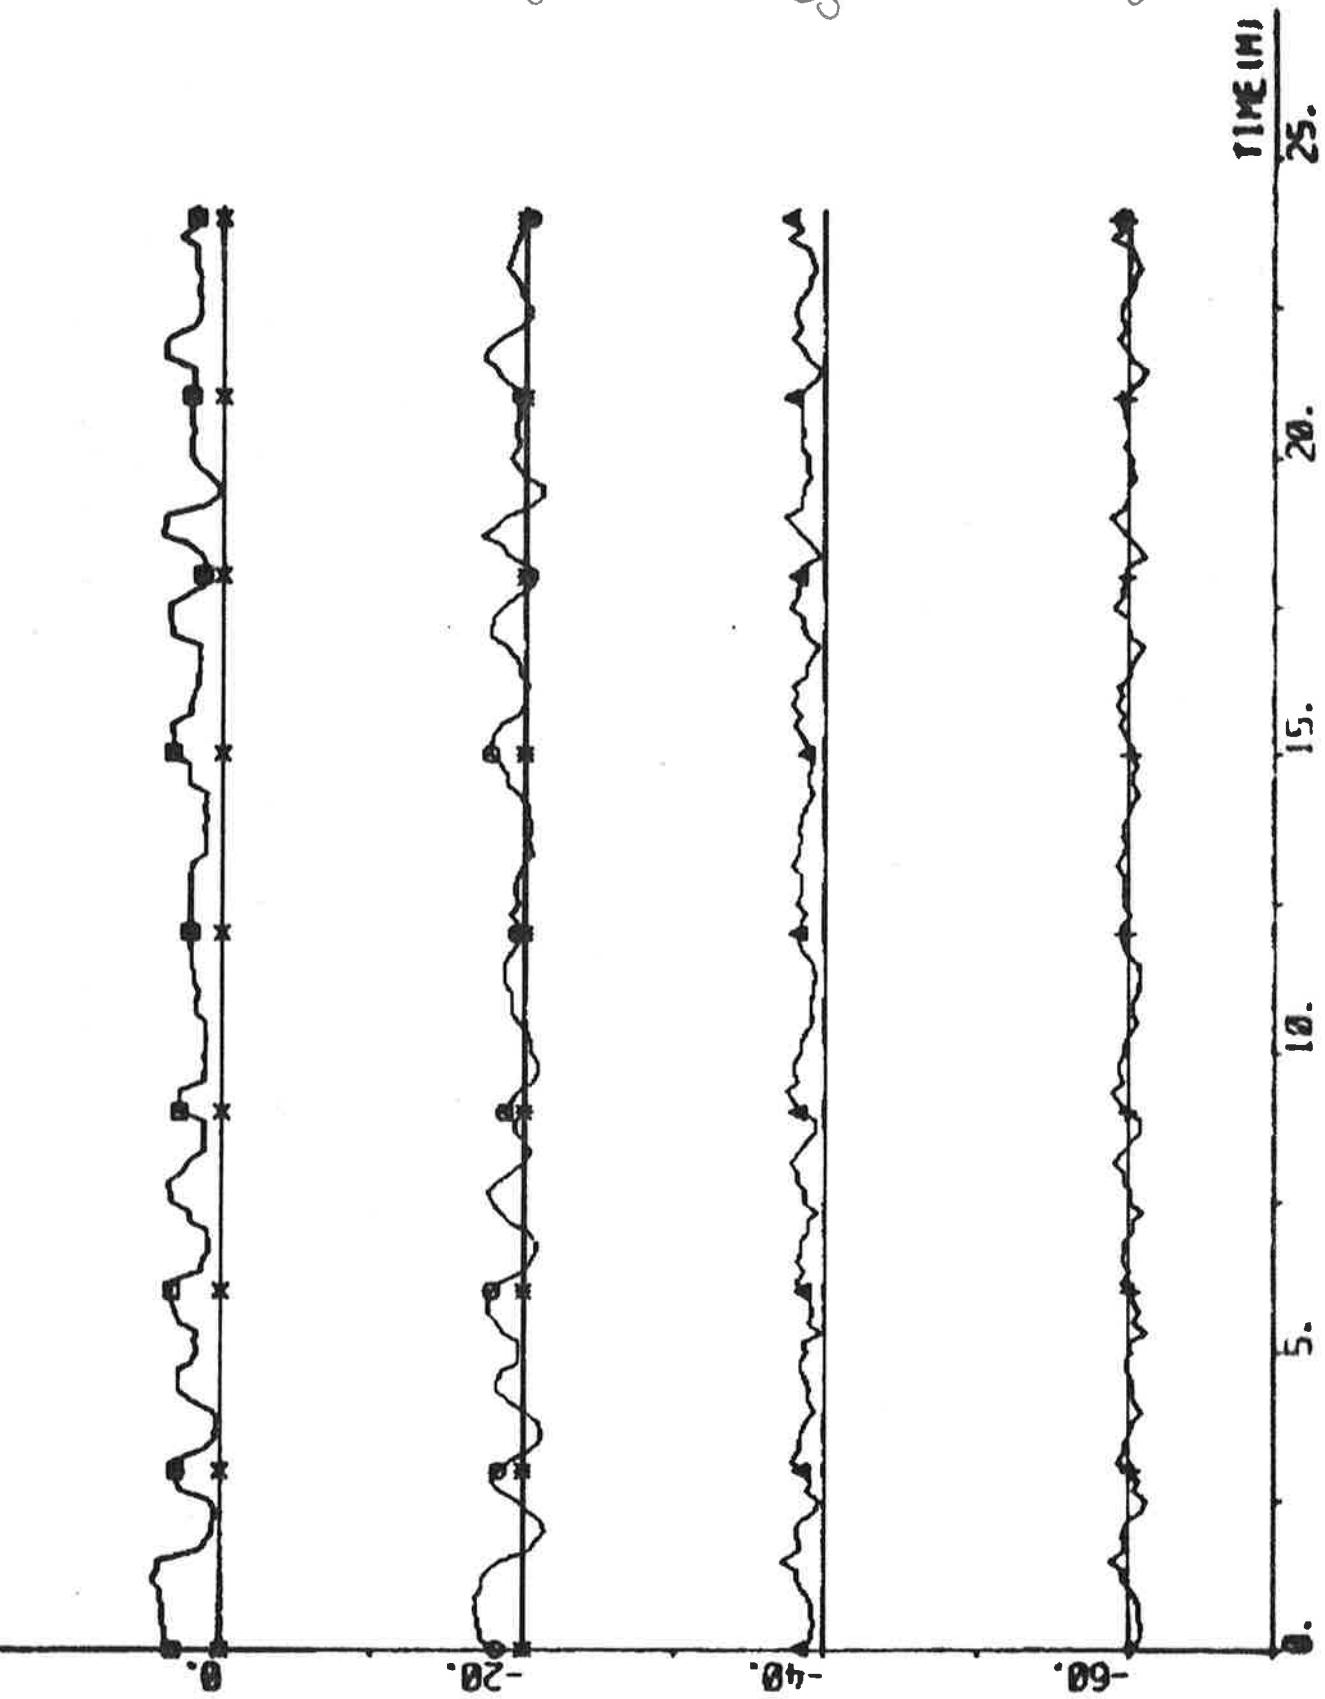

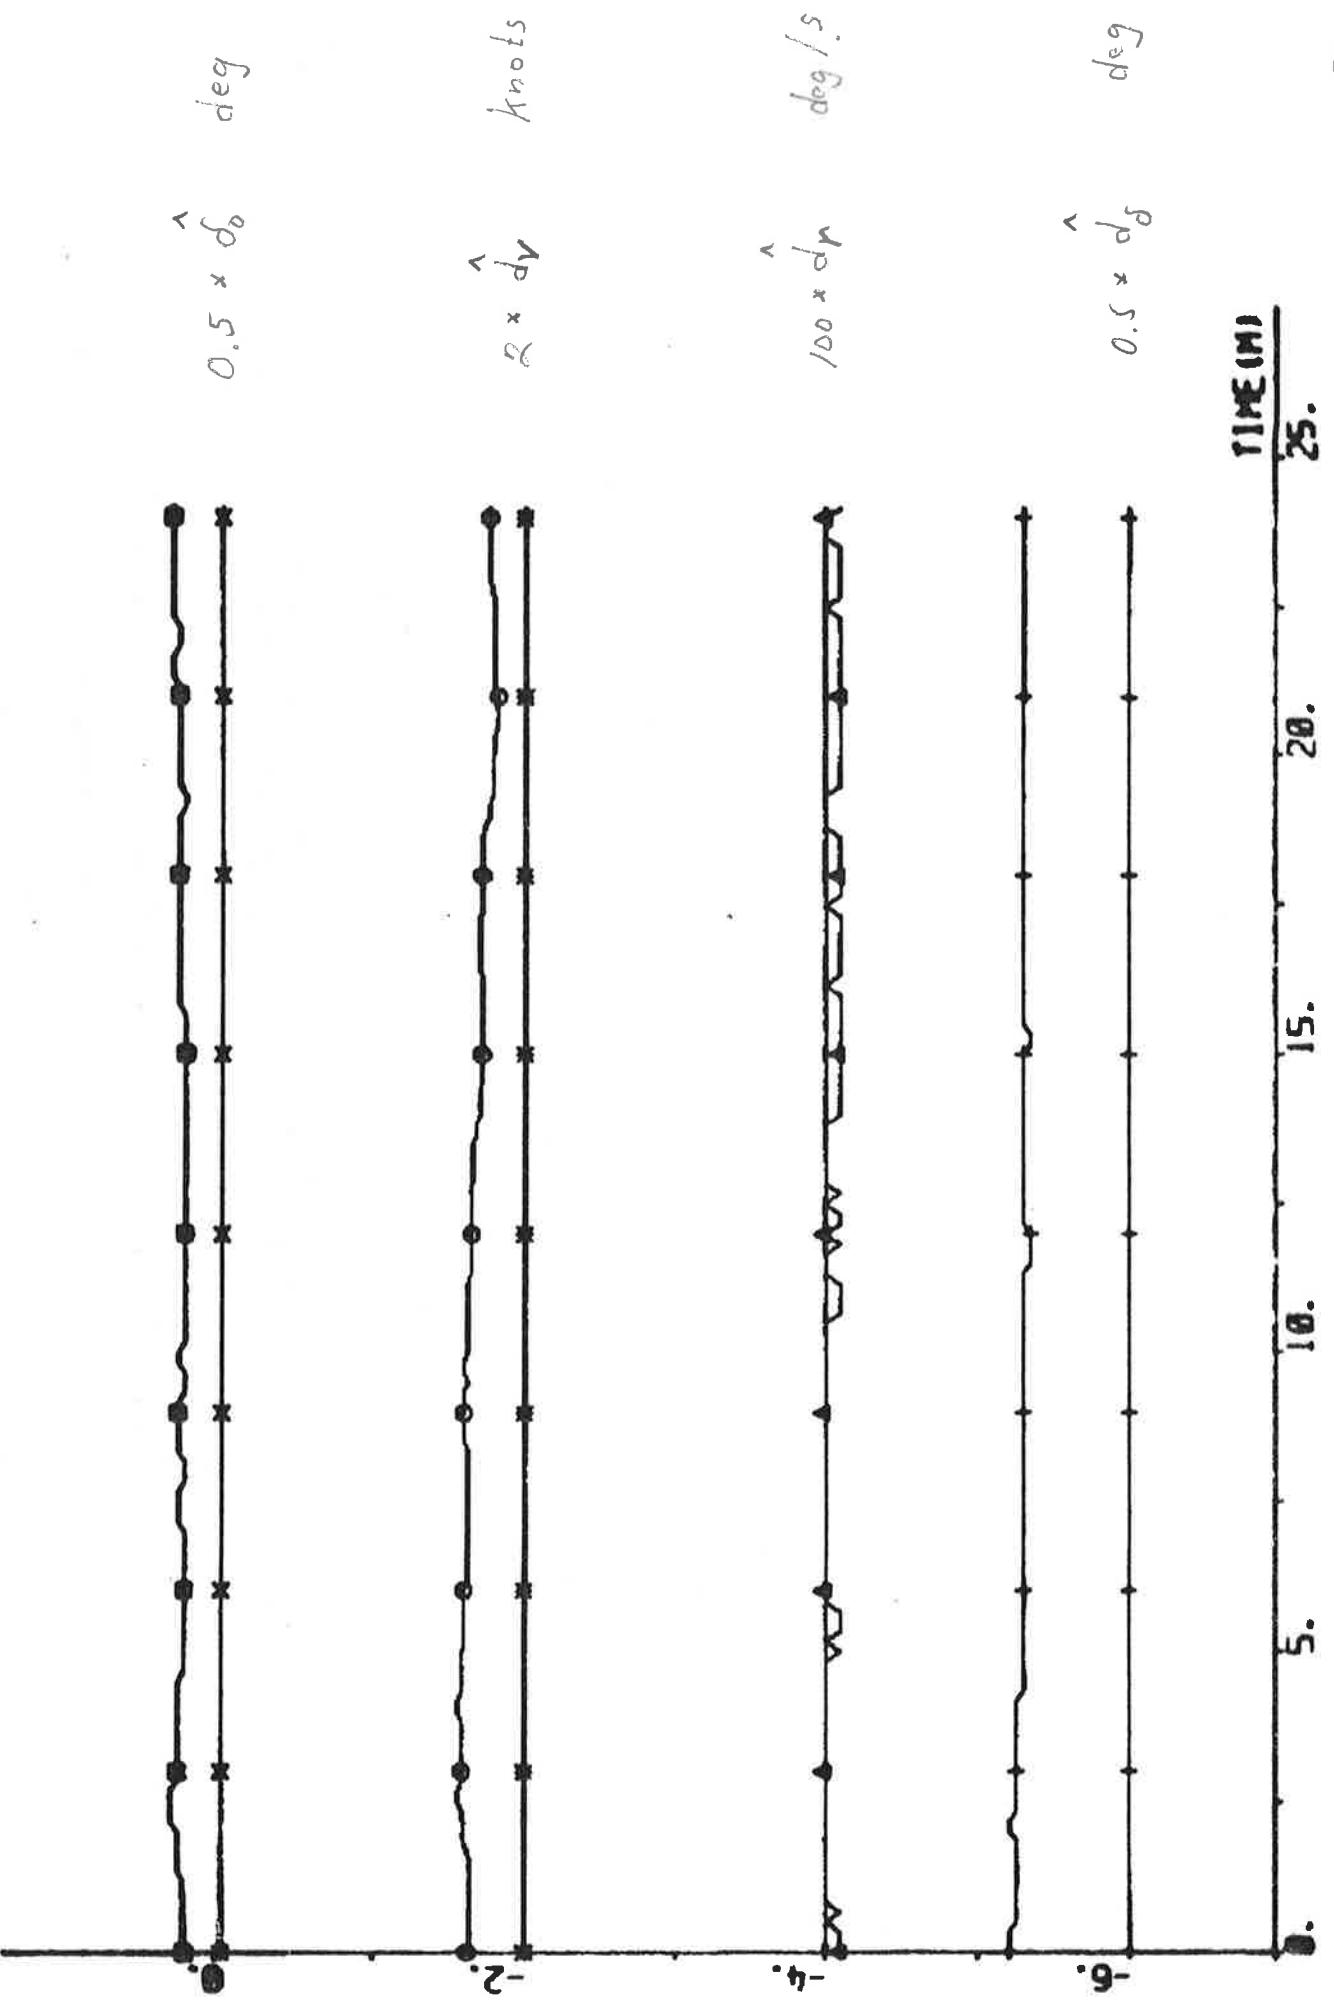

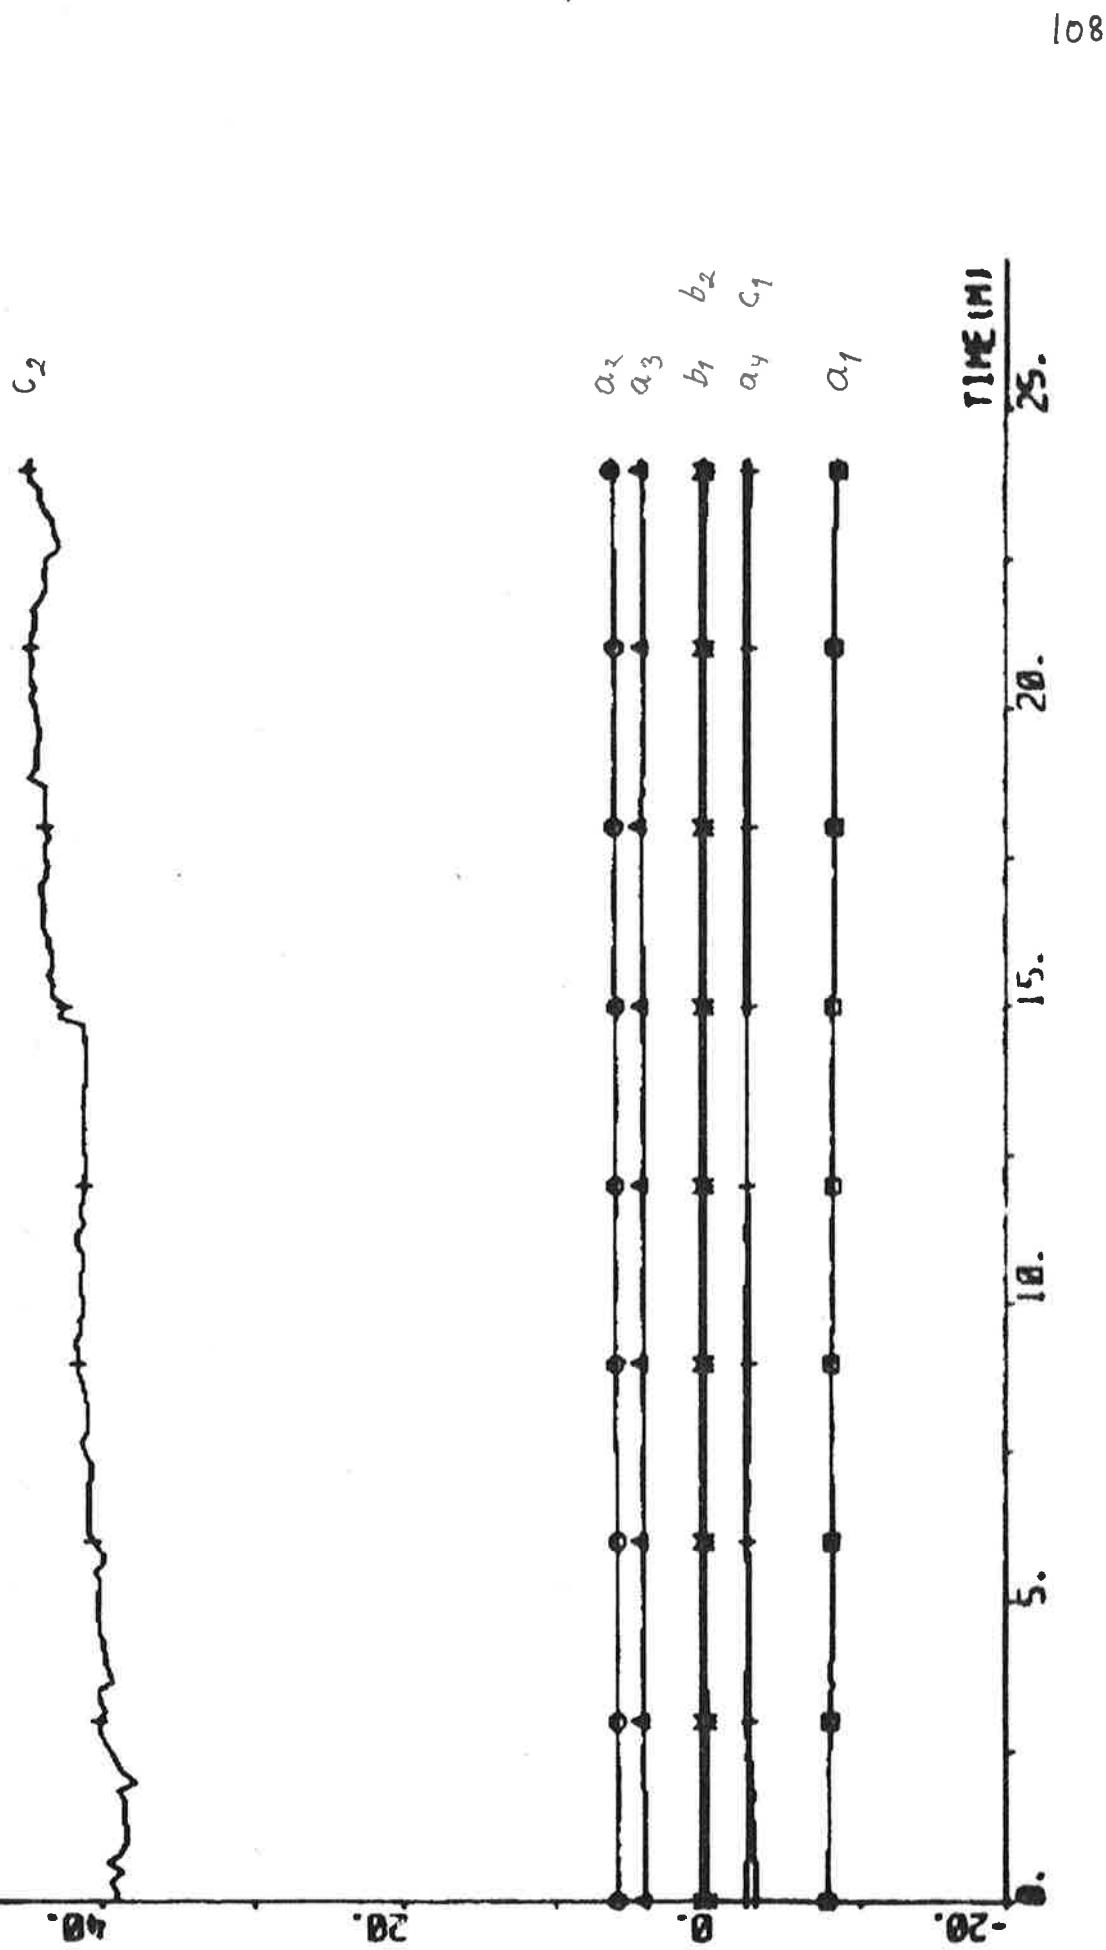

EXPERIMENT A4

Date	1976-04-22	Forward draught	8.5 m
Time	10.53	Aft draught	12.5 m
Duration	24 min	Wind direction	N (5; see App. A)
Position	N 12°01' W 18°28'	Wind velocity	5 m/s (gentle breeze)
ψ_{ref}	180 deg	Wave height	Low swell from N

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 6 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 7 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.92 \\ 6.49 \\ 4.88 \\ -2.75 \\ 0.48 \\ 0.16 \\ -1.79 \\ 50.52 \end{bmatrix} \quad P = \begin{bmatrix} 4.78 & & & & & & & \\ -5.62 & 11.34 & & & & & & \\ -1.02 & -5.32 & 12.23 & & & & & \\ 2.15 & -0.53 & -6.13 & 4.83 & & & & \\ -0.14 & -0.07 & 0.36 & -0.15 & 0.03 & & & \\ -0.10 & 0.02 & 0.00 & 0.08 & 0.01 & 0.03 & & \\ -0.65 & 1.02 & 0.22 & -0.62 & -0.01 & -0.01 & 0.70 & \\ 17.24 & -25.17 & -10.77 & 16.08 & -0.30 & -0.23 & 9.34 & 881.25 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.30$$


$$\hat{\delta}_0 = 1.1 \text{ deg} \quad \hat{d}_v = 0.38 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$


Statistics (mean value and standard deviation)

δ_c	1.39	\pm	1.41	deg	P_s	14.0	\pm	0.2	MW
δ	2.82	\pm	1.33	deg	ϵ_v	0.01	\pm	0.02	knots
$\psi - \psi_{ref}$	-0.009	\pm	0.246	deg	ϵ_r	0.00	\pm	0.01	deg/s
n	68.5	\pm	0.6	rpm	ϵ_ψ	0.00	\pm	0.02	deg
u	14.0	\pm	0.2	knots	ϵ_δ	0.0	\pm	0.6	deg


$$V_1 = 0.226$$

PL01 HTTP/1.1 (Java-1.8) HP API1 (10) API1 (15) API1 (16) 02 - 3 1 - DCE

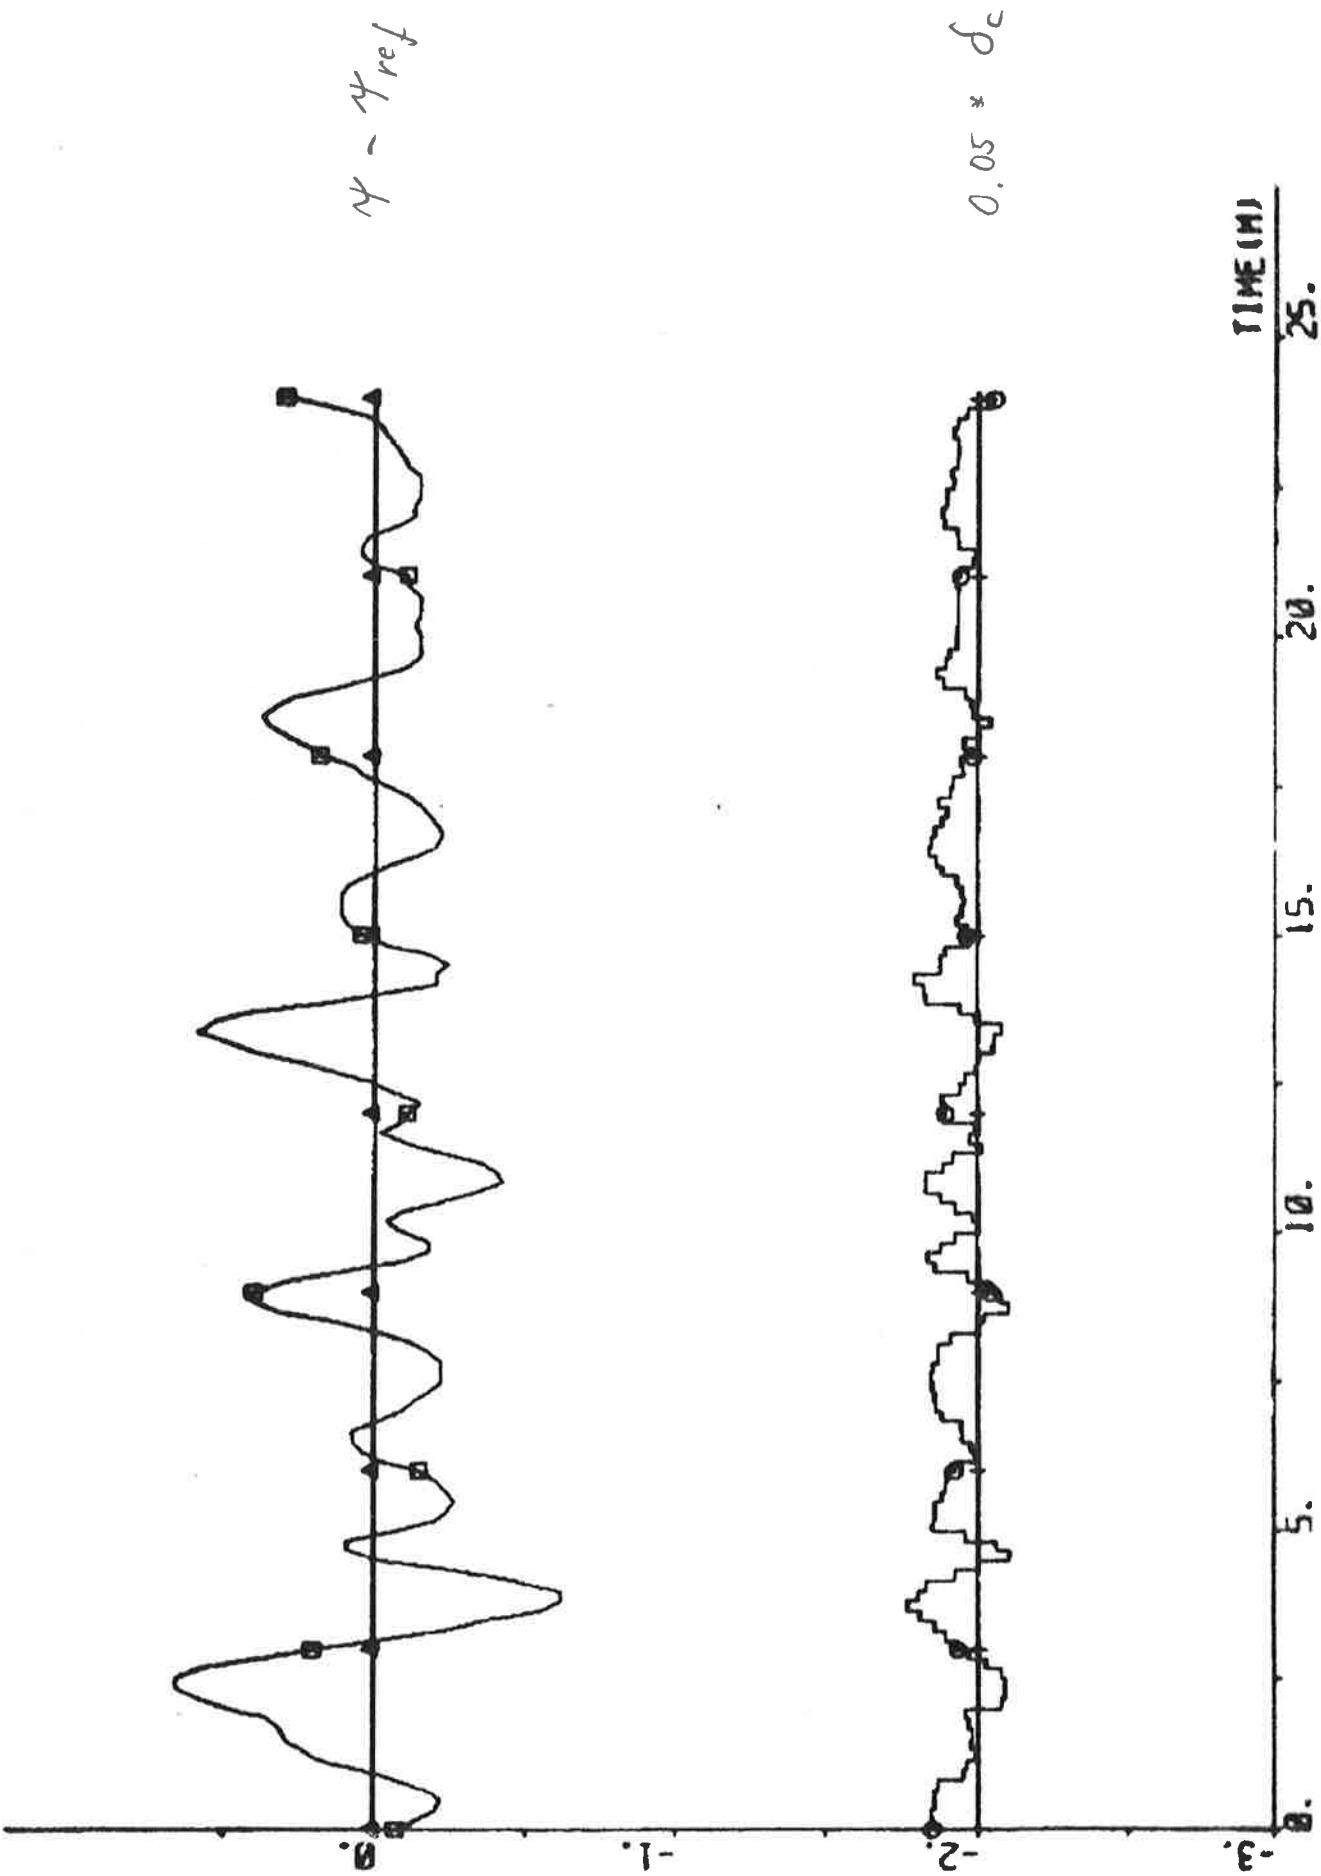

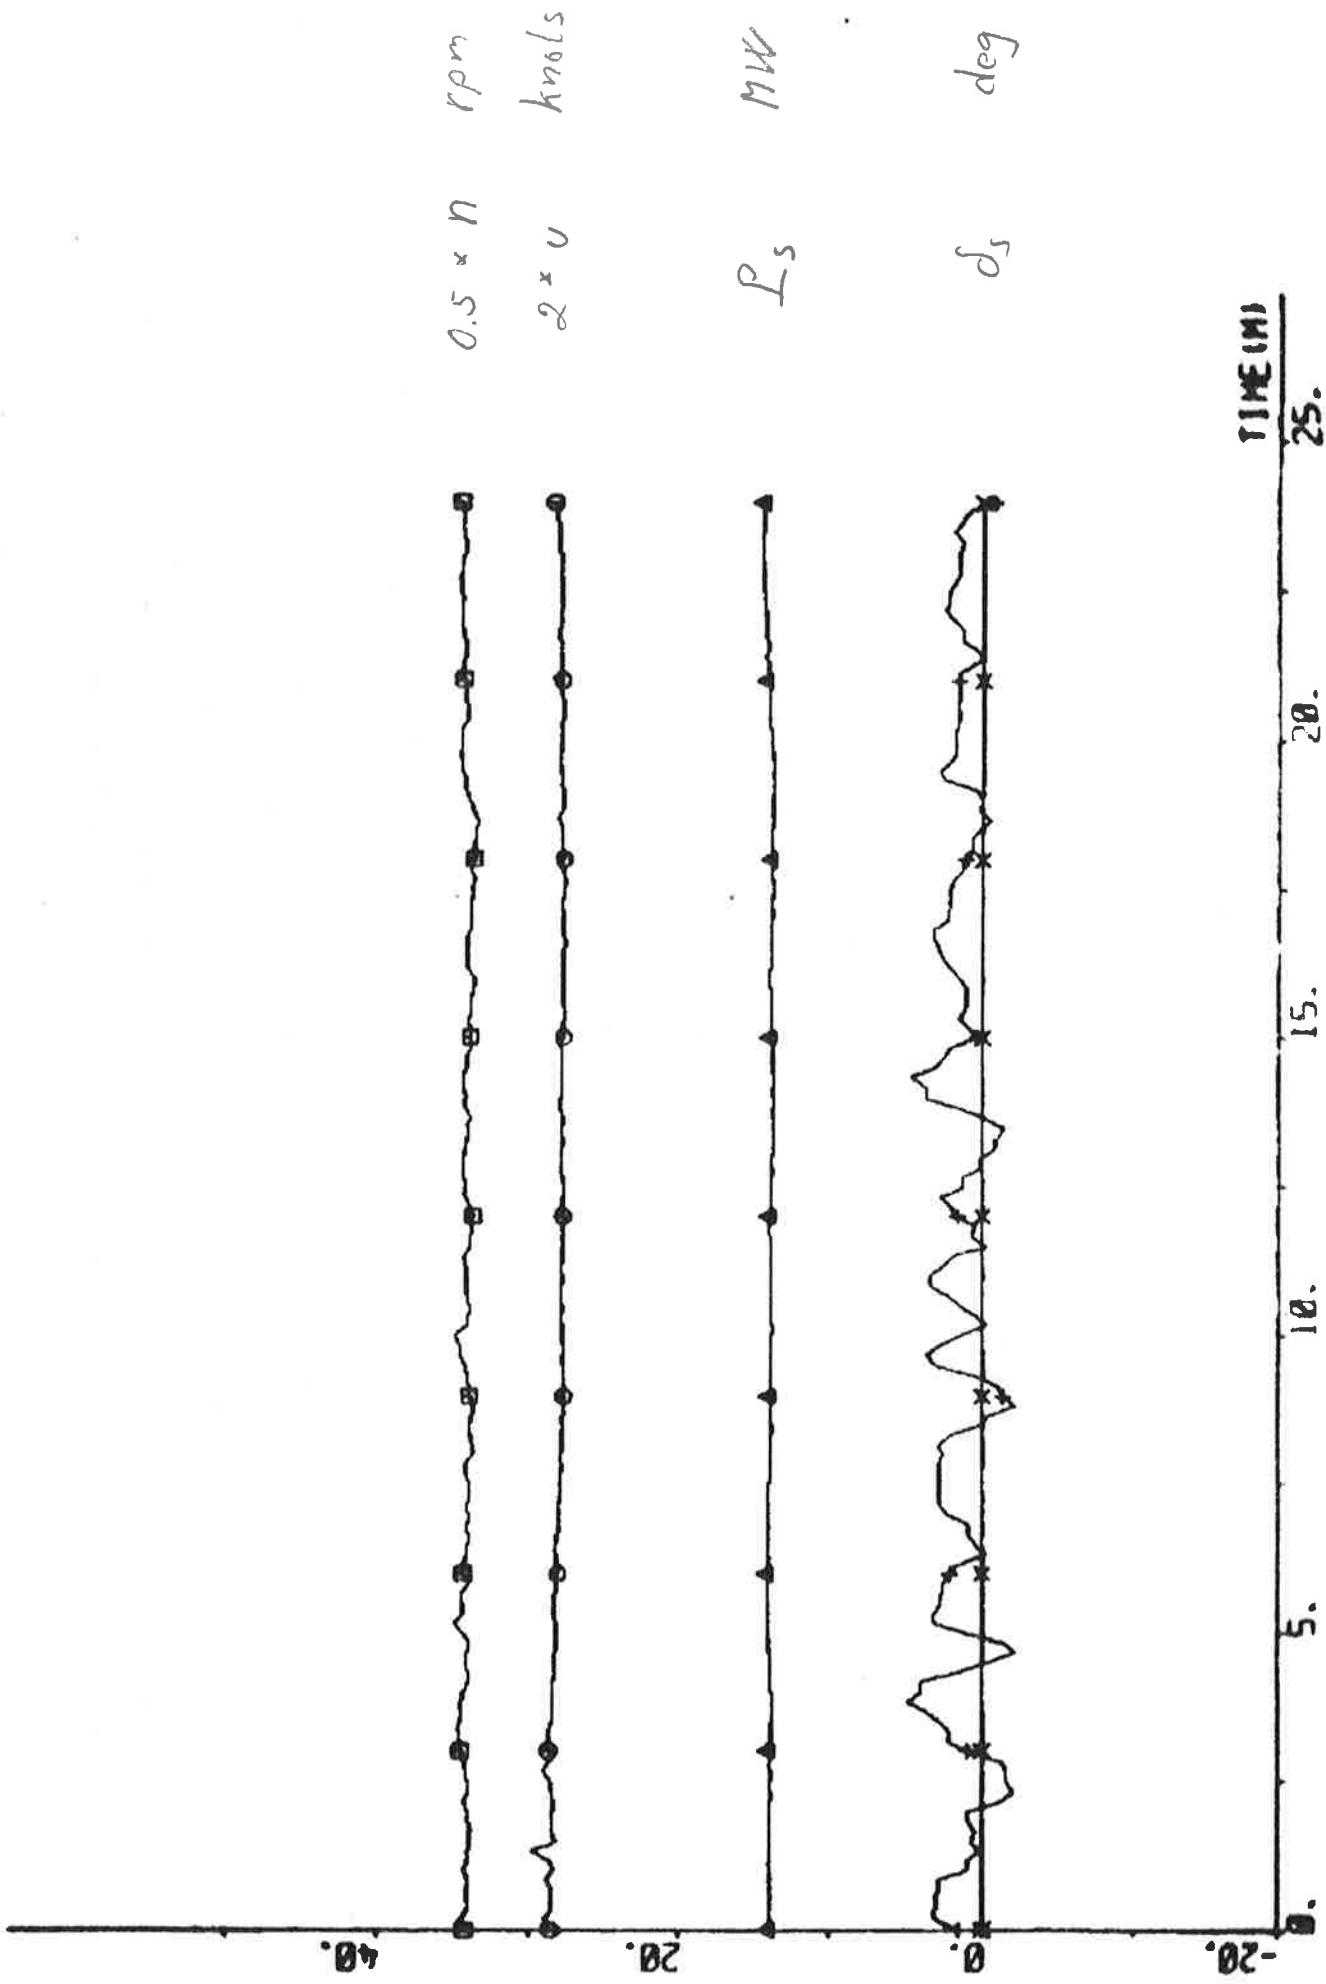


Plot MHP1(1),MHP2(1) MHP2(2) ERRE 00 01 02 - 3.4 0.0 - KNOTS

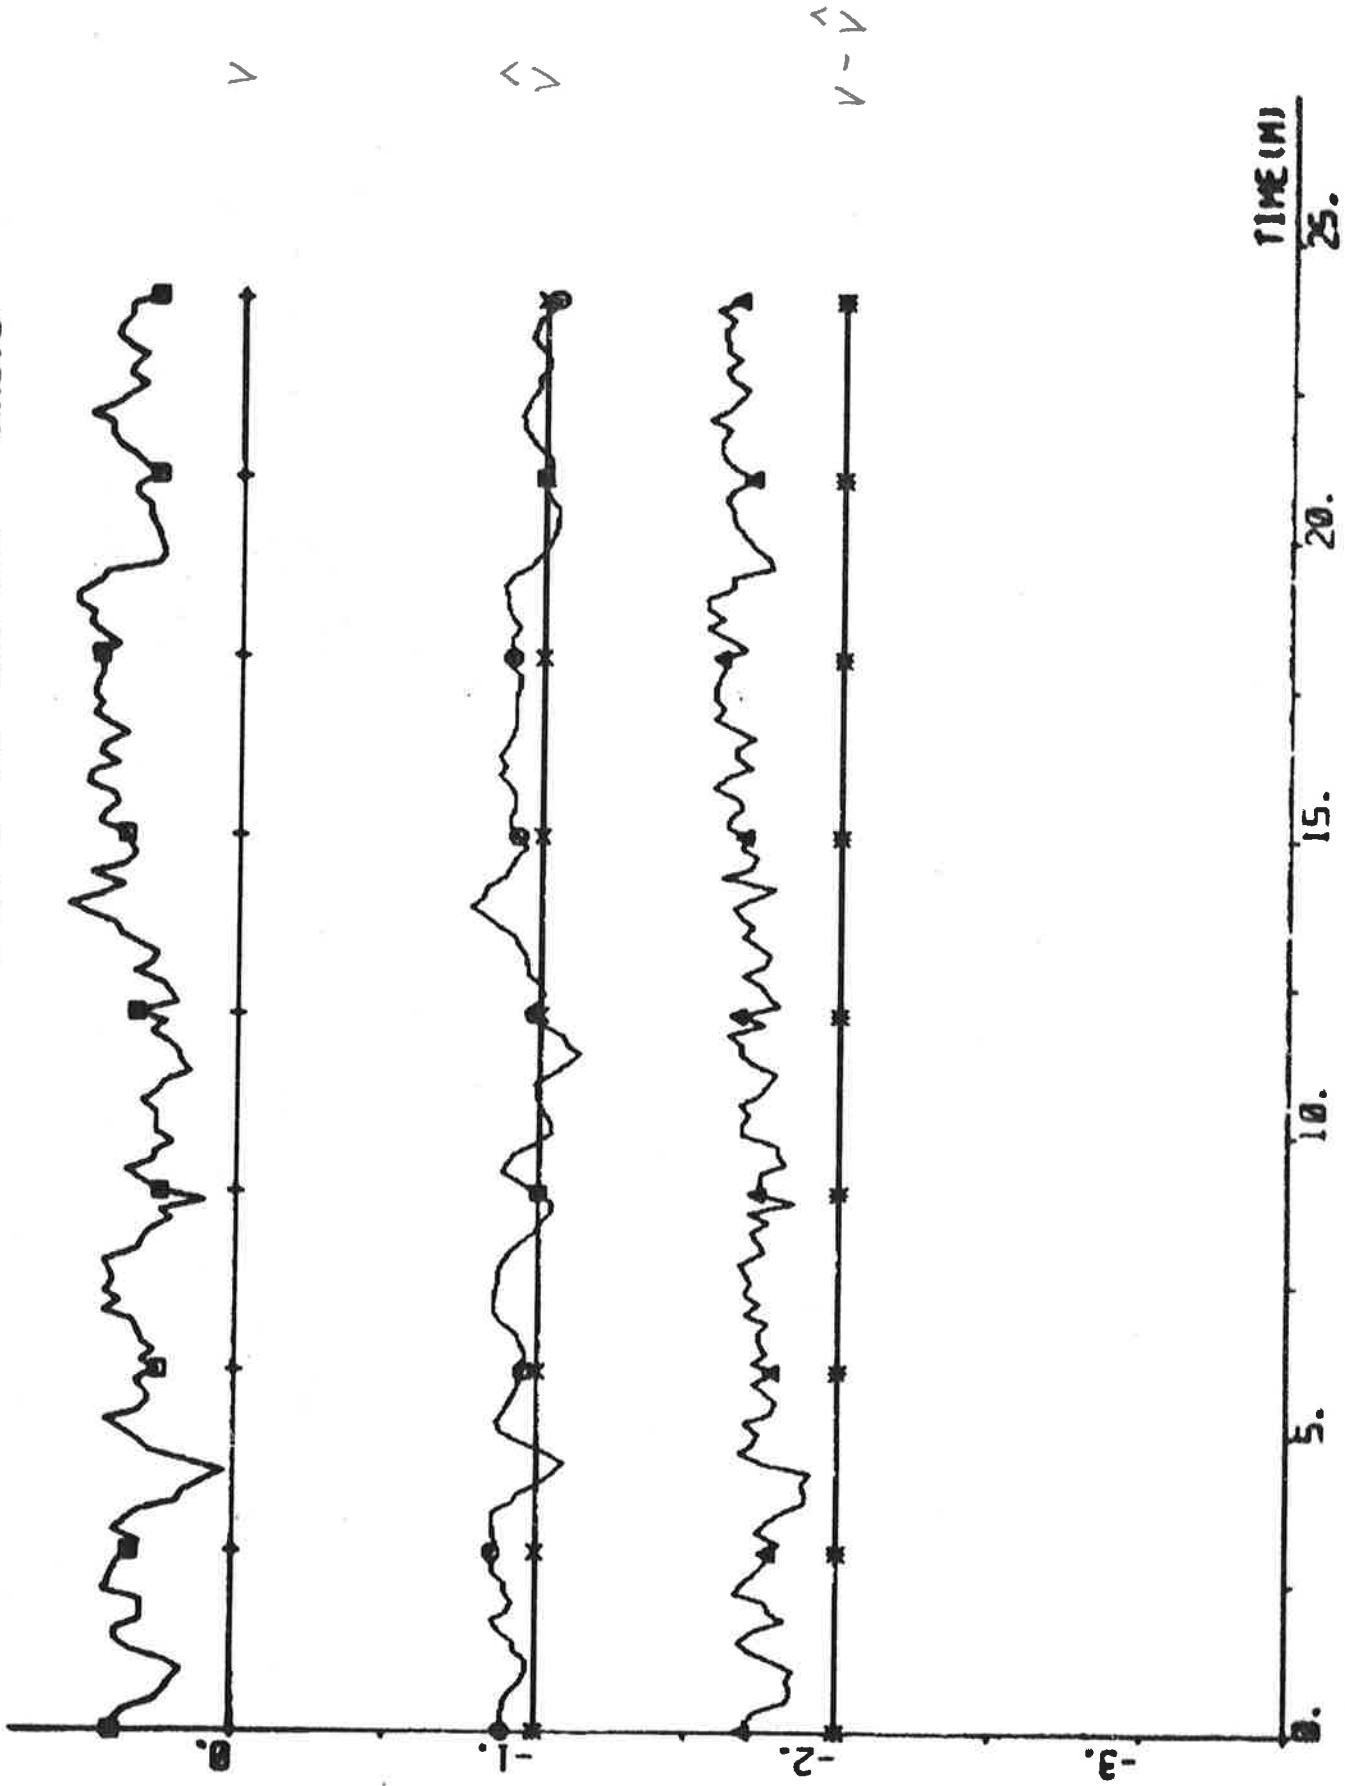


PLOT MHP1(1)-MHP1(4) MHP1(5) ERR2 EP32 08 01 02 03 -3.4 0.0 -

kmers

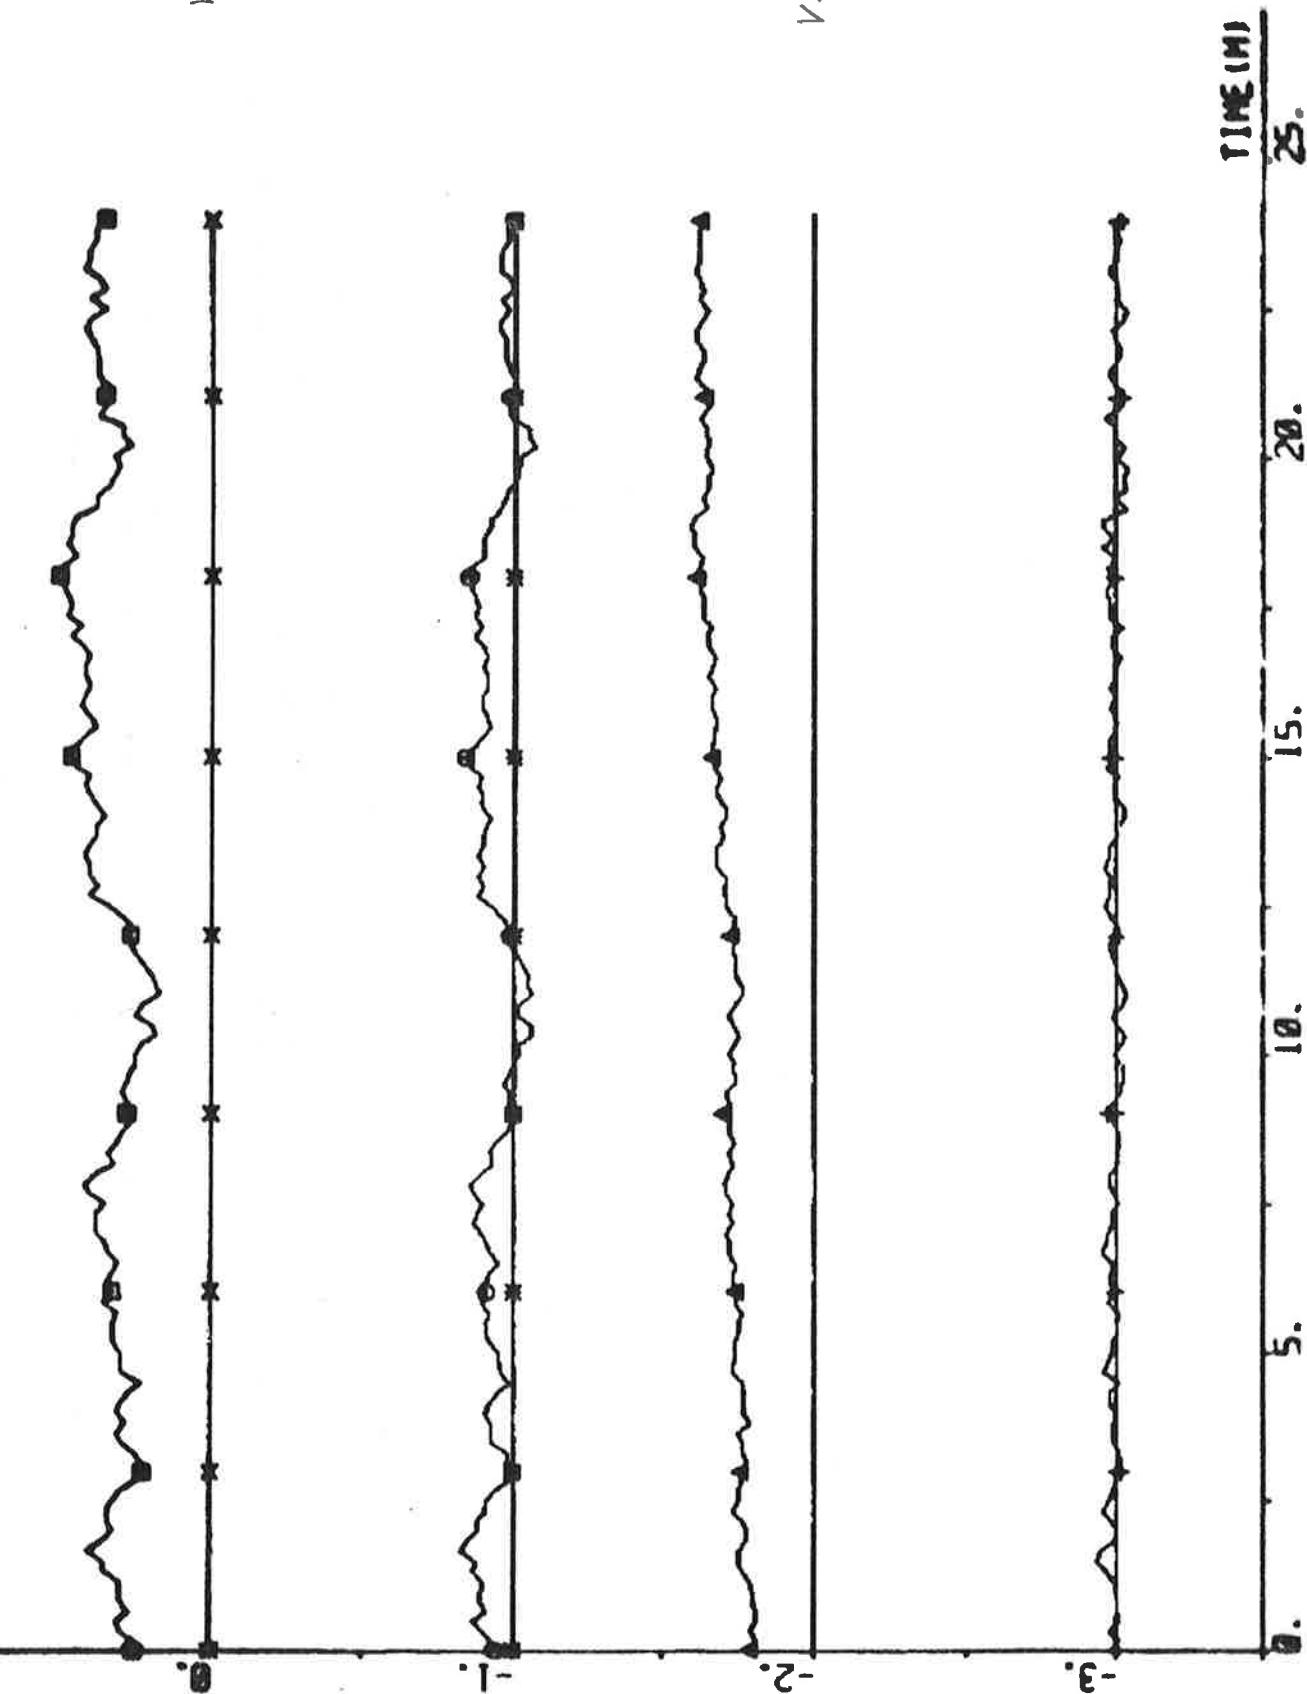





114

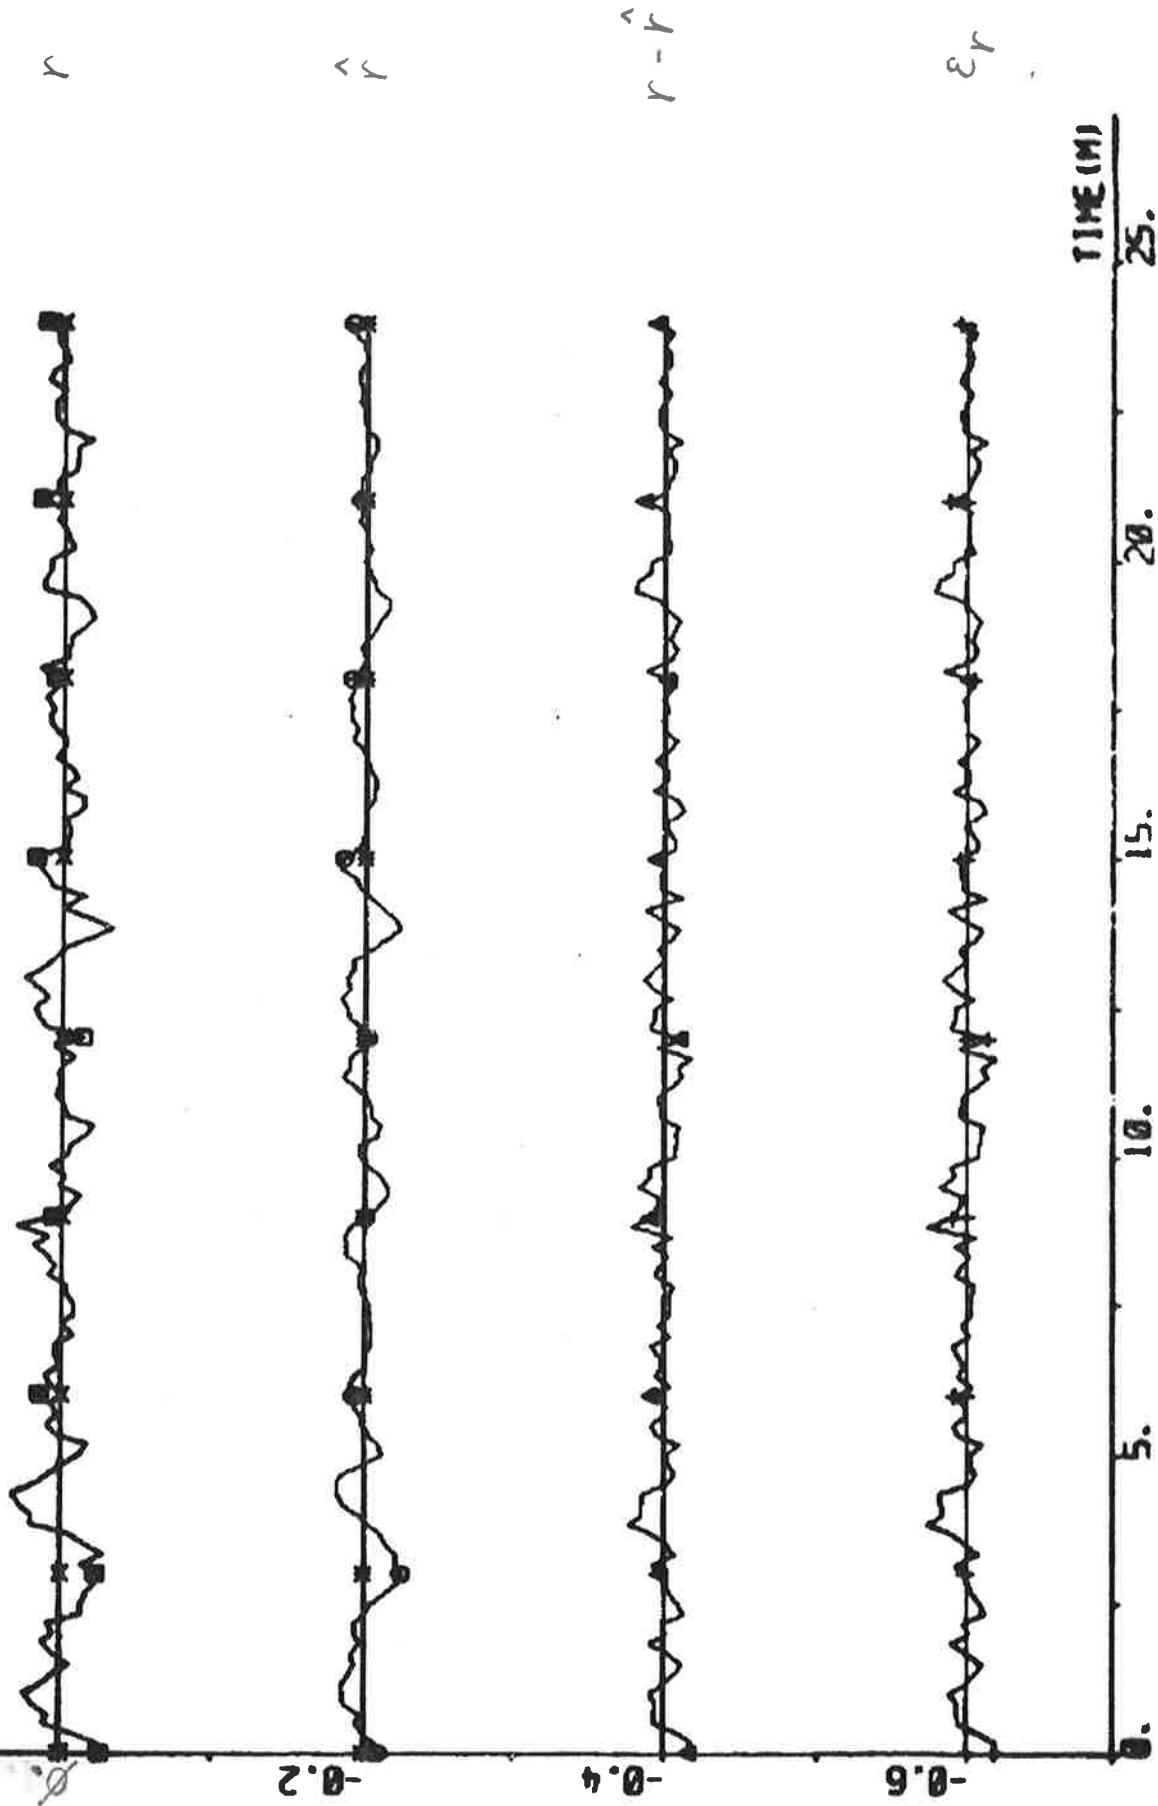

MOT MPP1 (1) -MPP1 (8) MPP1 (9), ERPA EPB1 01 02 03 04 05 -

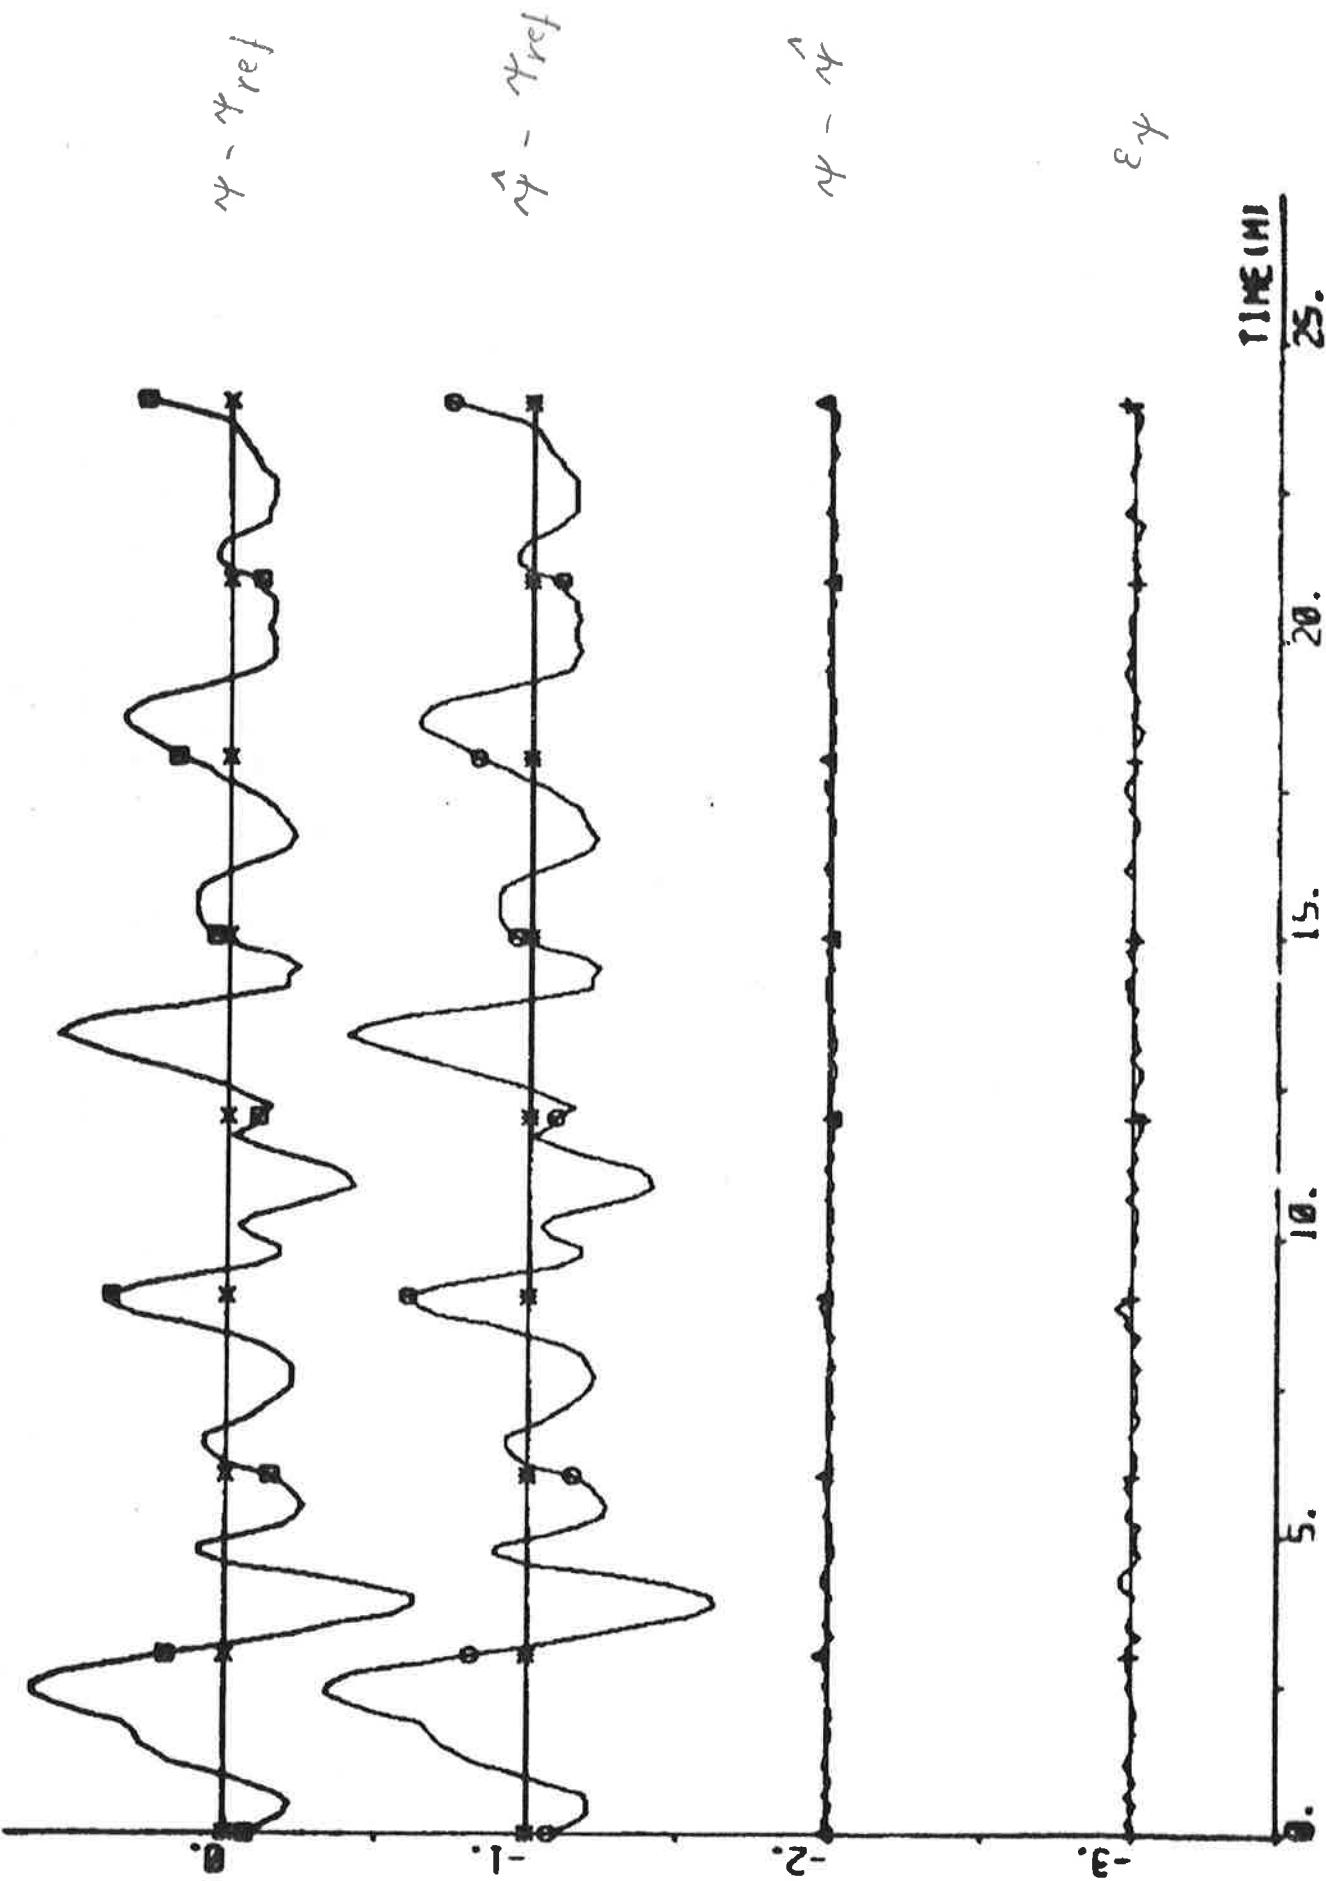


PLOT RHP1(1)-RHP1(2) ERR1 EPS1 00 020 040 060 -05 15 • DATA

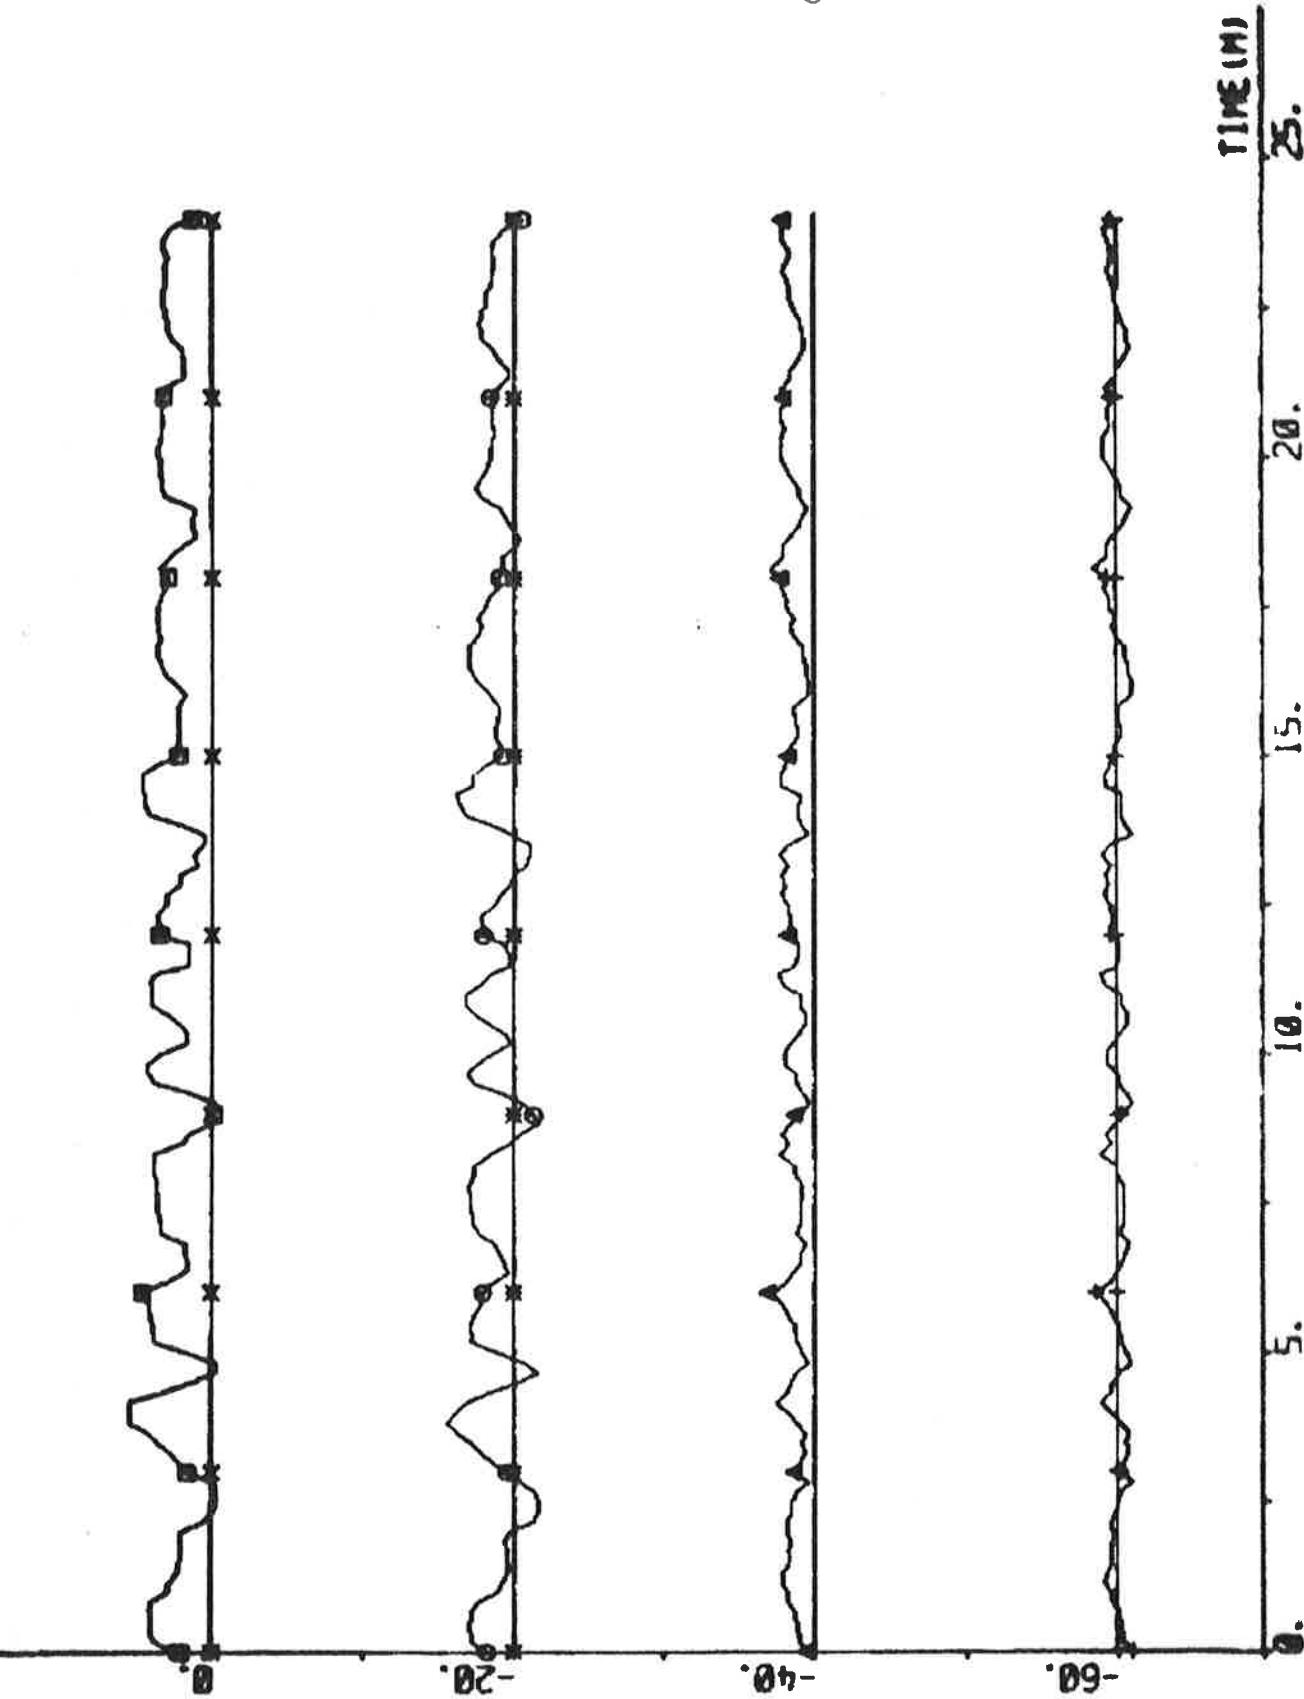


116

PLOT AHP1(1)-AHP2(3) AHP2(5) AHP2(6) 03 02 04 08 -0.6 1.6

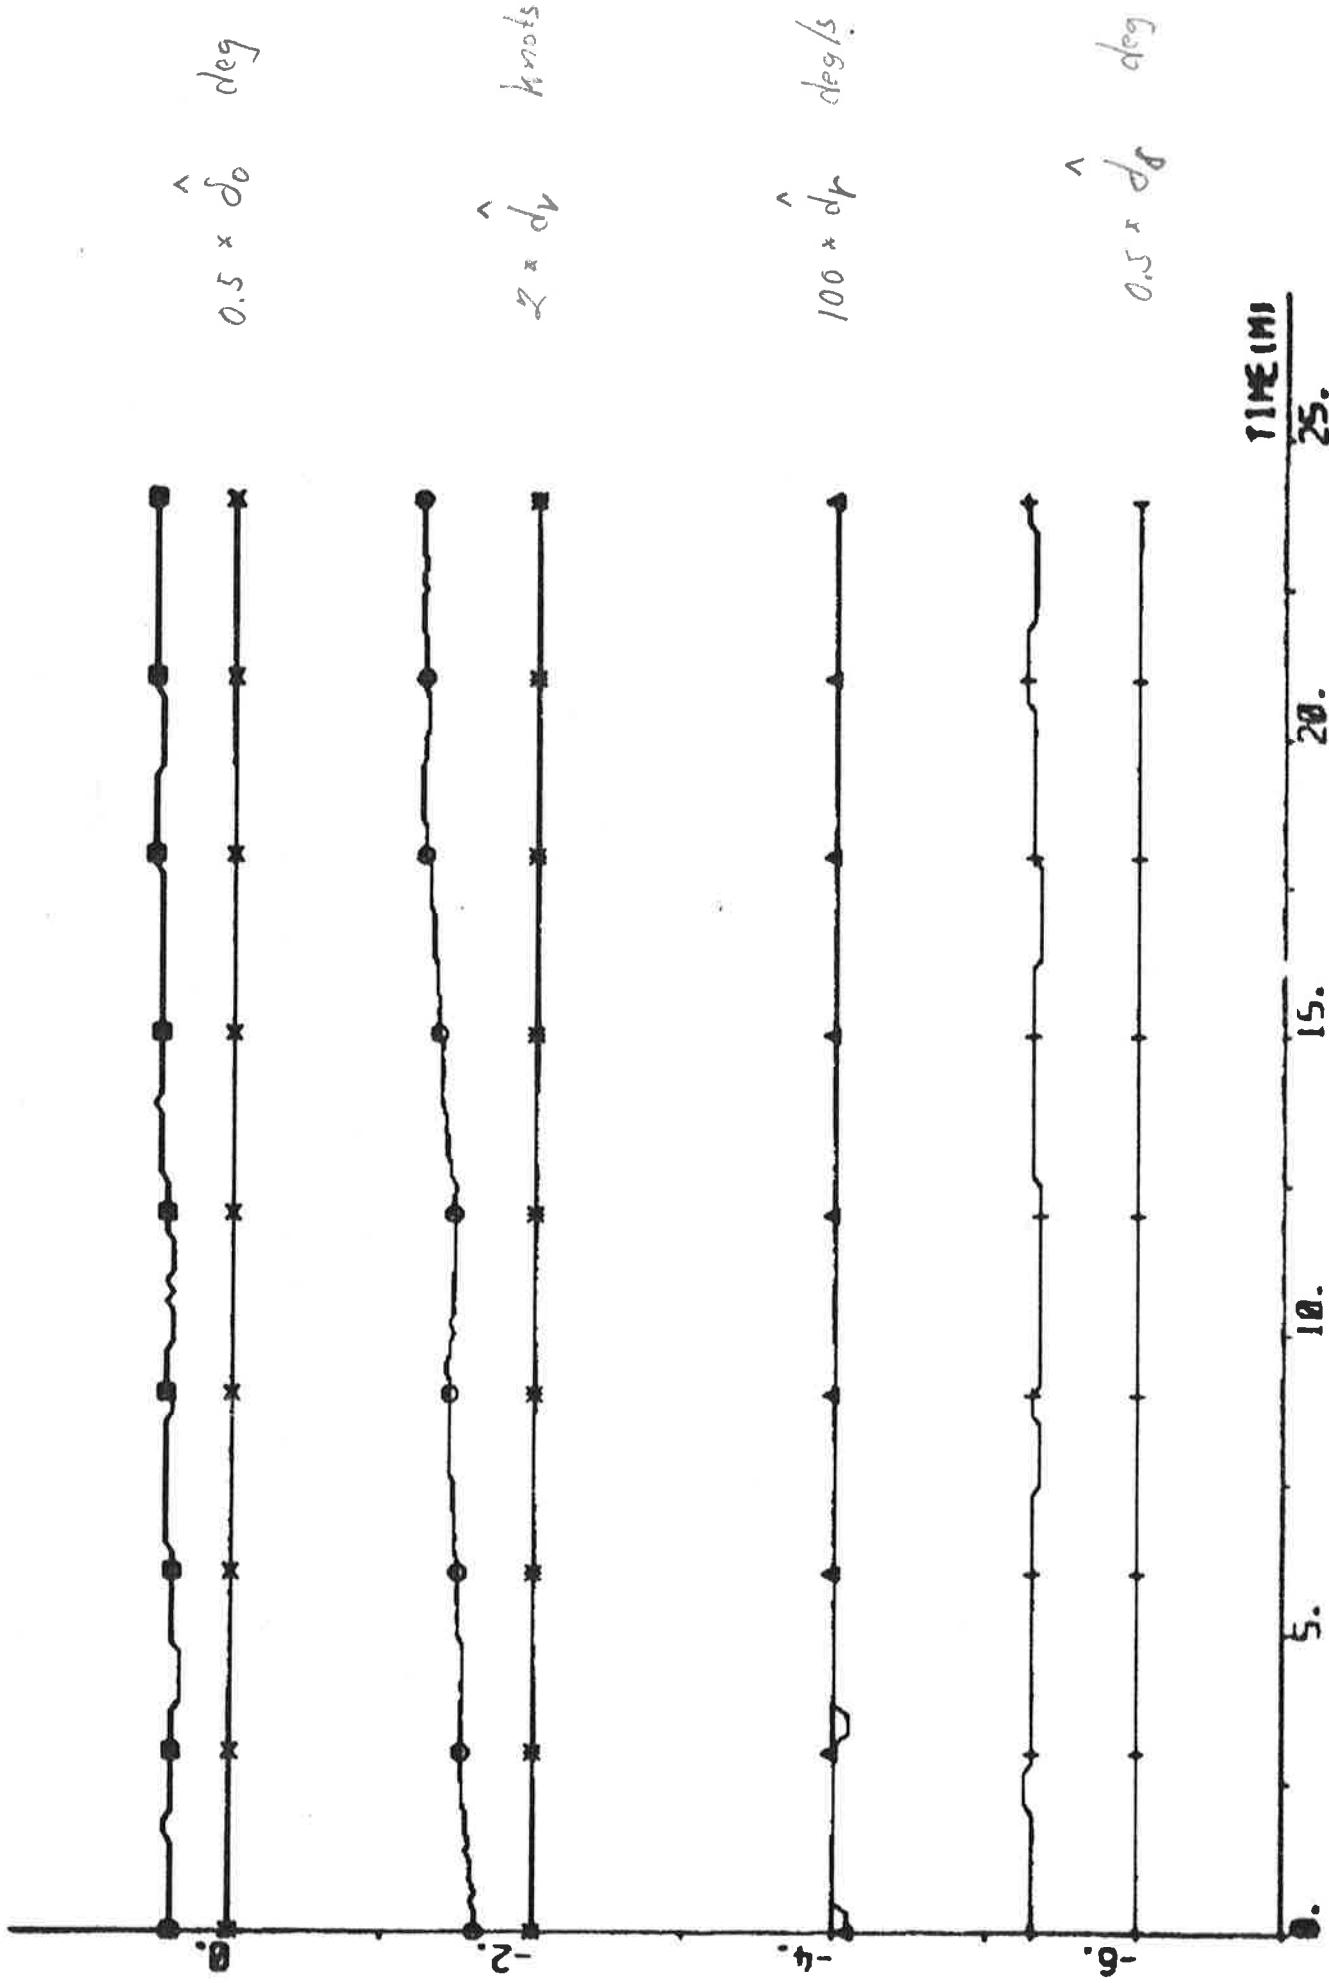

PLOT MMPI(11)-MMPI(2)(7) MMPI(2)(8) MMPI(2)(9) MMPI(2)(10) MMPI(2)(11) MMPI(2)(12) MMPI(2)(13)

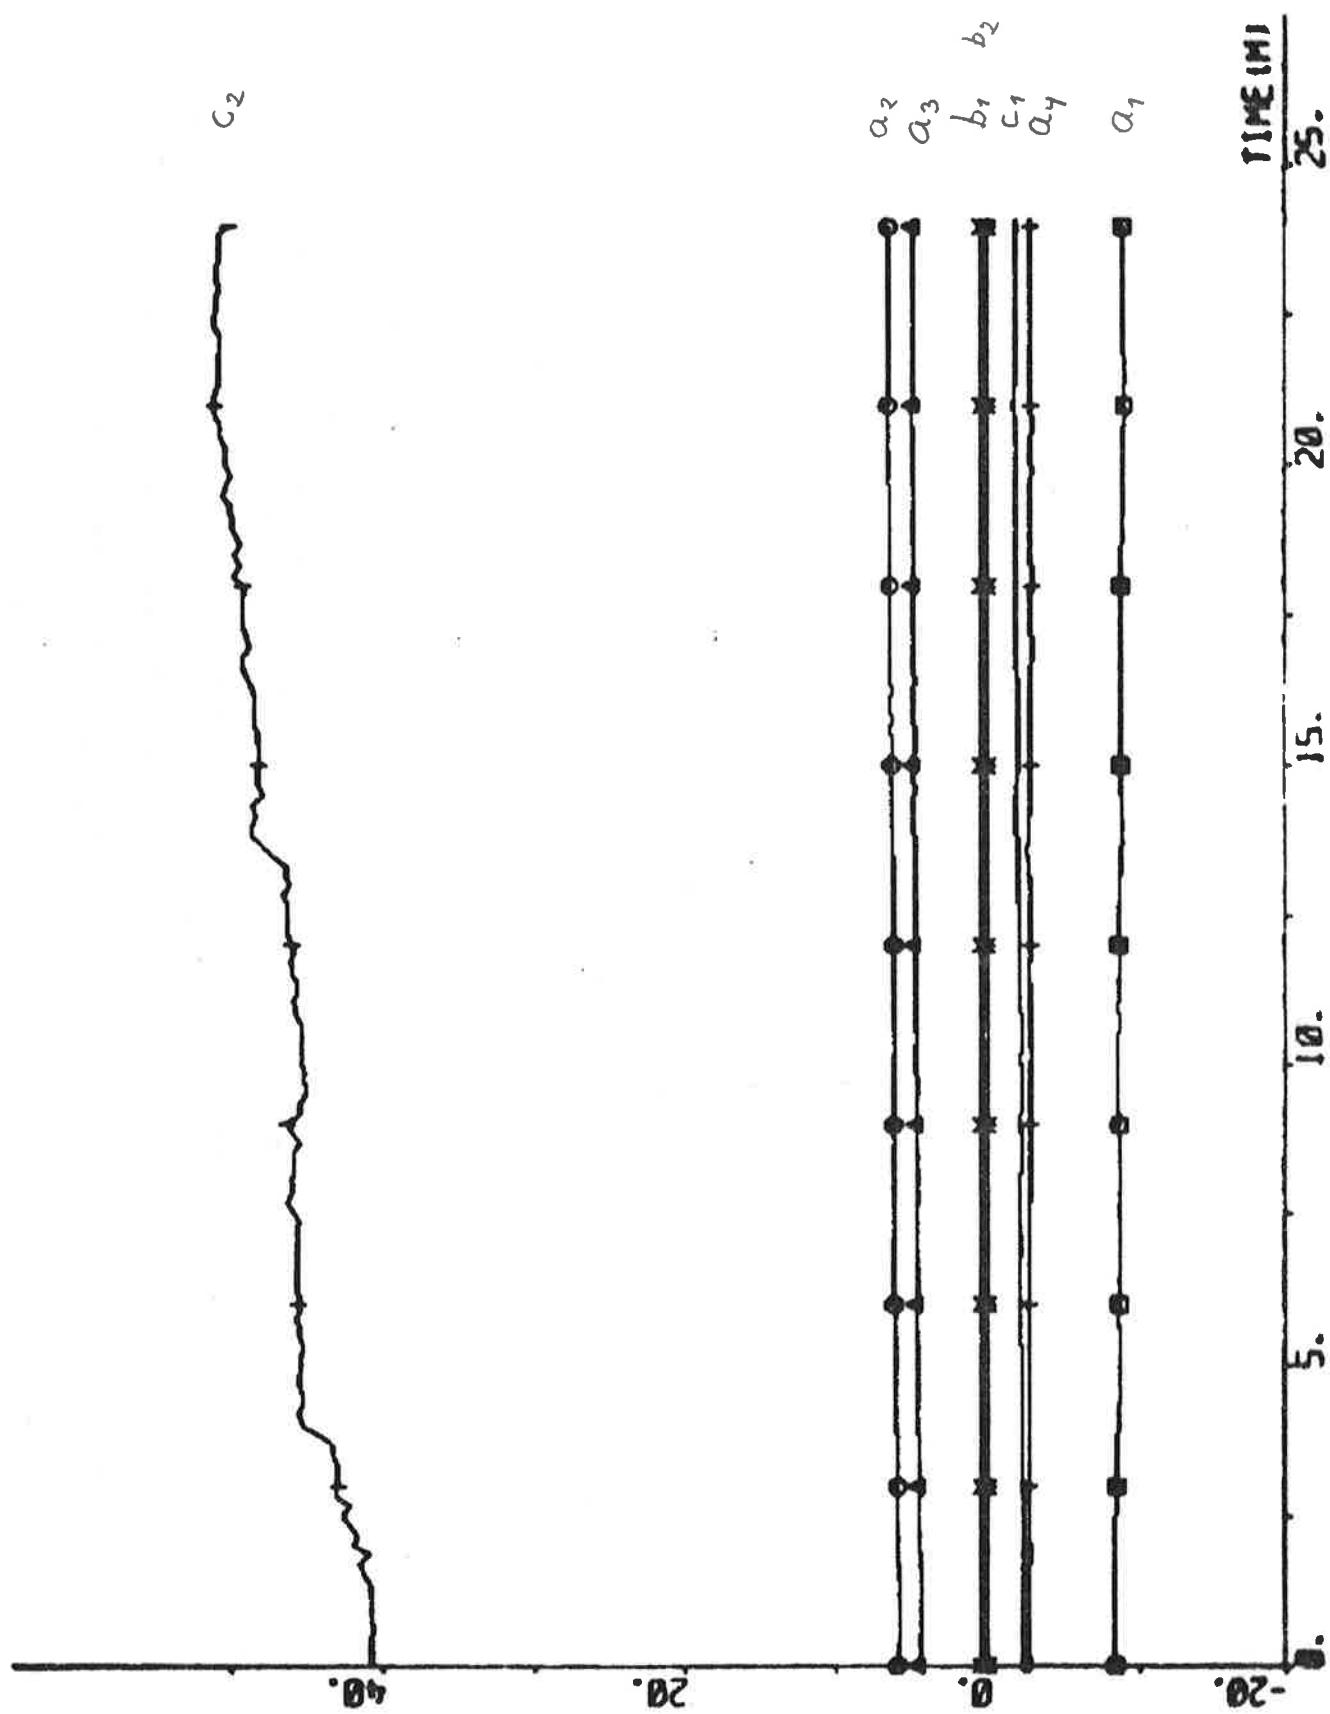

EXPERIMENT A5

Date	1976-04-22	Forward draught	8.5 m
Time	11.57	Aft draught	12.5 m
Duration	24 min	Wind direction	N (5; see App. A)
Position	N 11°46' W 18°28'	Wind velocity	4 m/s (gentle breeze)
ψ_{ref}	180 deg	Wave height	Low swell from N

Self-tuning regulator using estimates from the Kalman filter

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 $T_s = 10 \text{ s}$ $V_0 = 7 \text{ m/s}$ IVVC = 1

Final values:



$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.00 \\ 6.67 \\ 4.55 \\ -3.59 \\ 0.49 \\ 0.17 \\ -1.40 \\ 49.73 \end{bmatrix} \quad P \text{ unknown}$$

$$a_1 + a_2 + a_3 + a_4 = -0.37$$

$$\hat{d}_0 = 0.9 \text{ deg} \quad \hat{d}_v = 0.15 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$


Statistics (mean value and standard deviation)

PLOT #5P1(1) #REF1(16) H# REF1(10) #5P1(16) 02-31 - DEC

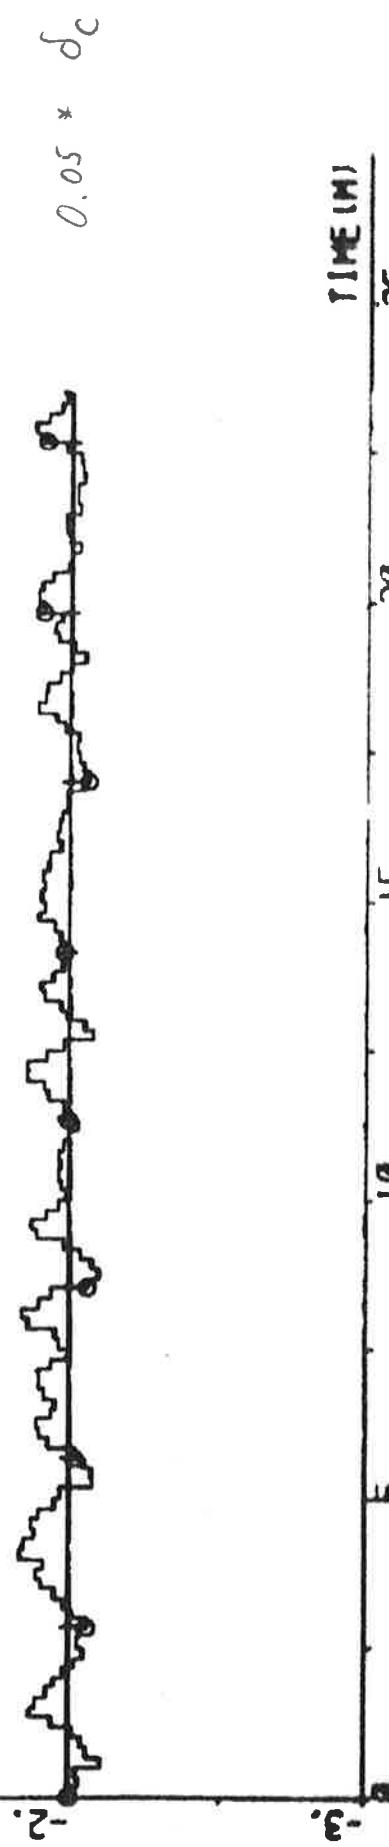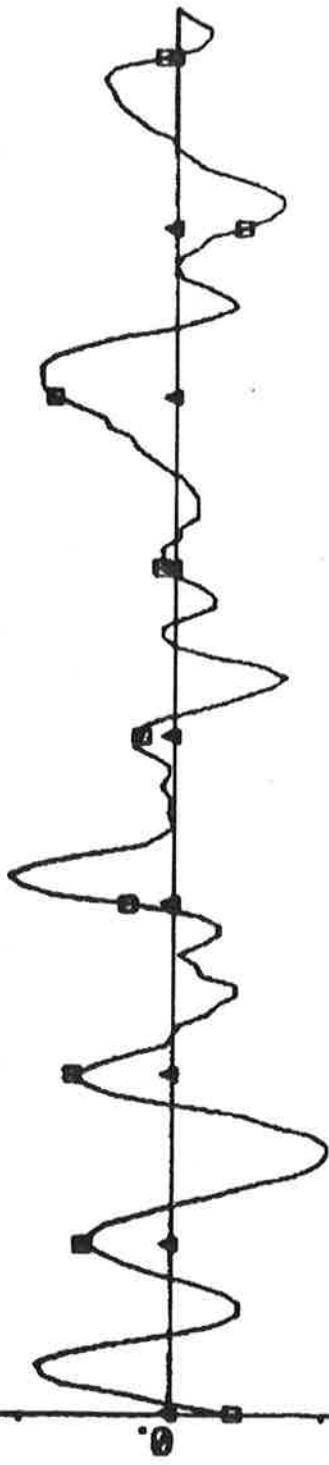

120


PLOT RSP1(1)-RSP1(13) RSP1(112) RSP1(114) RSP1(111) 00 - 20 00

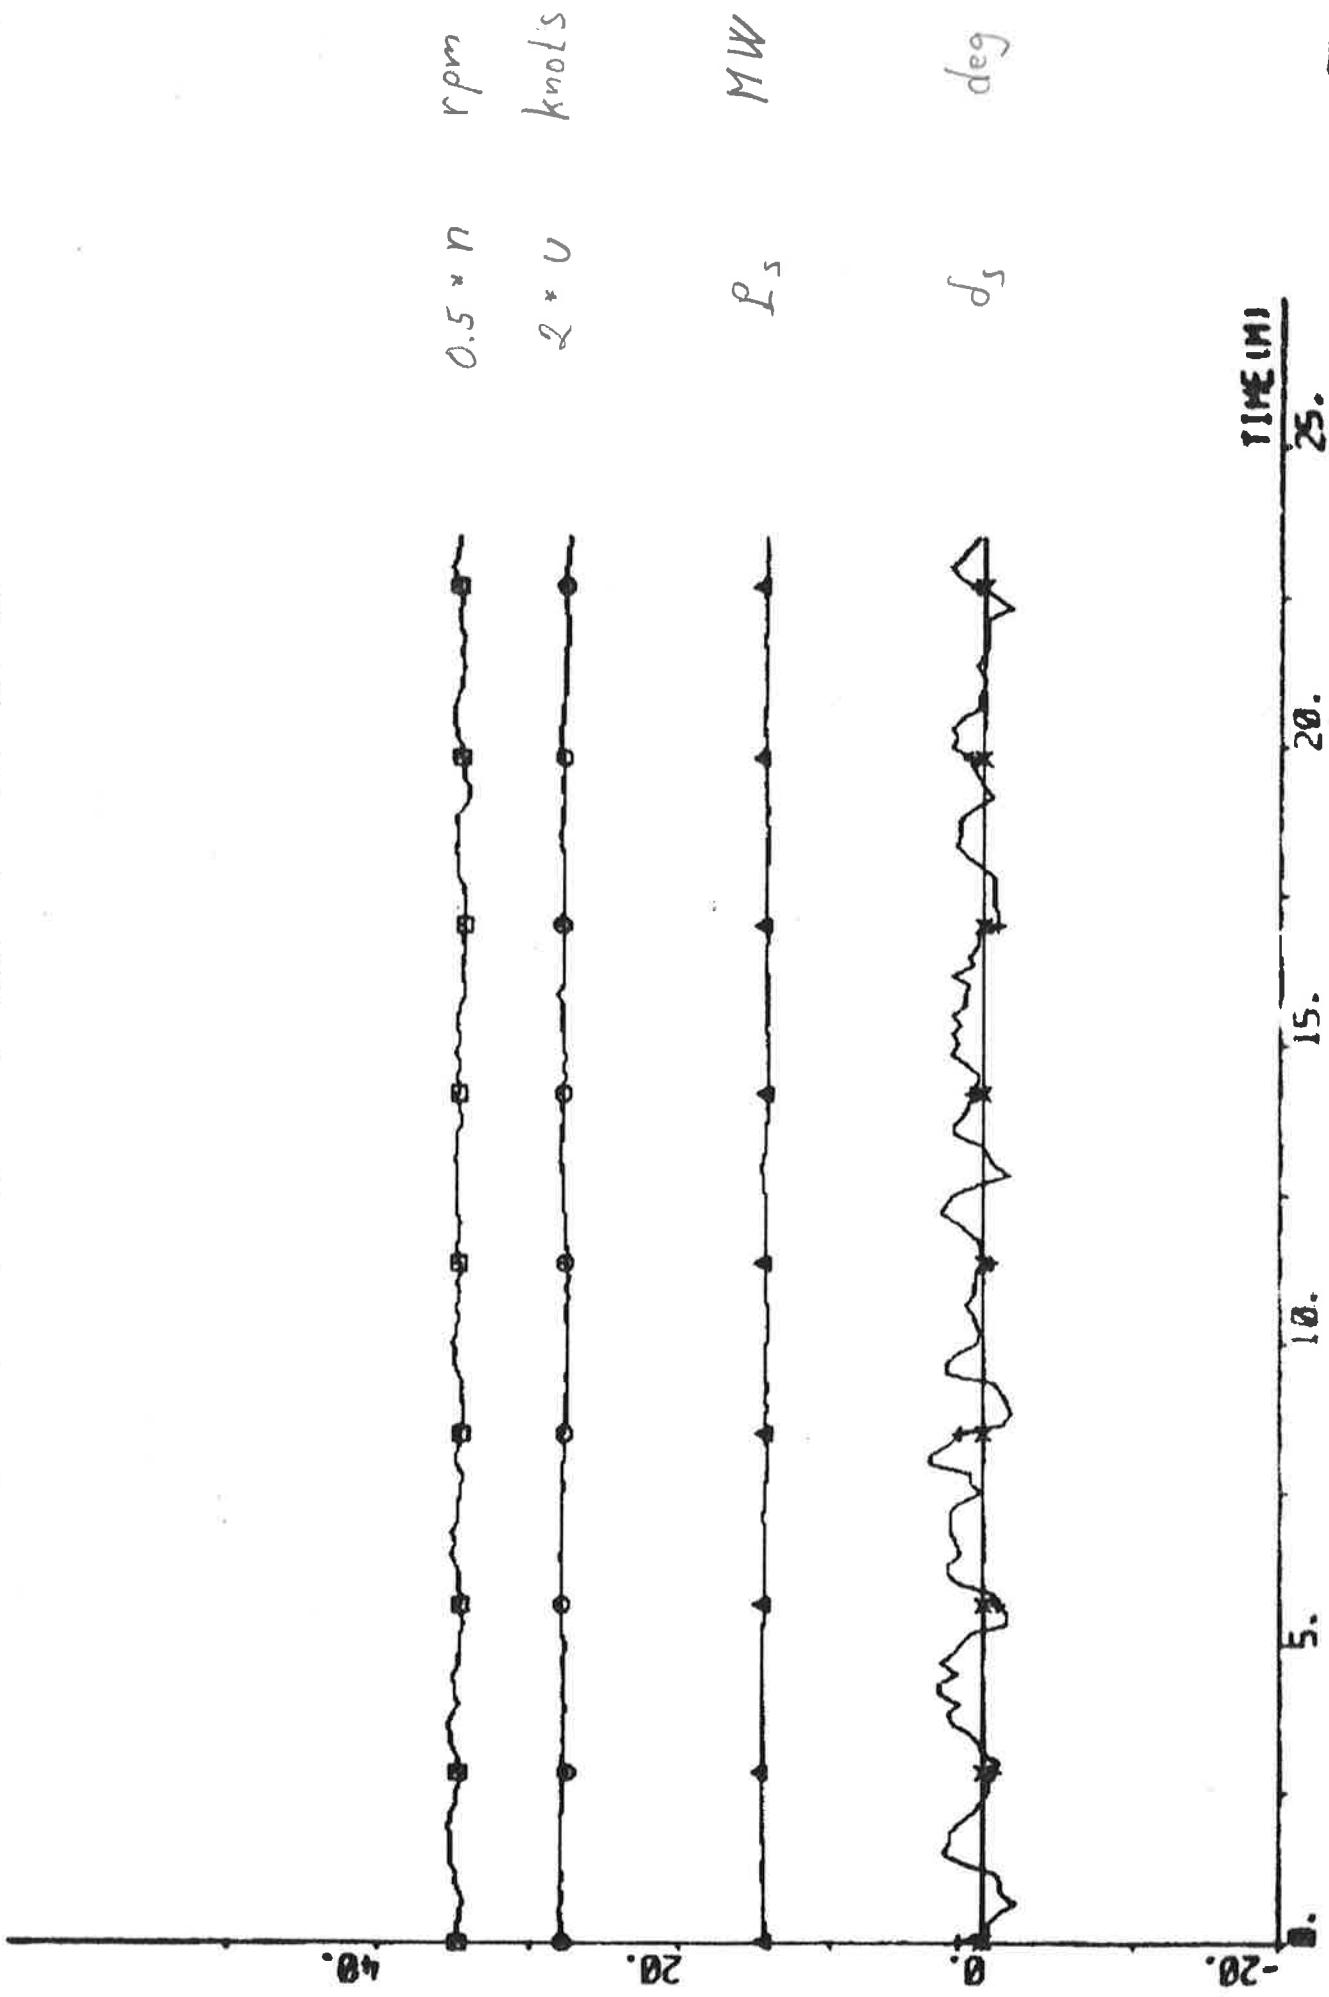




MOT MRE1(1) - MRE2(1) MRE2(2) ERRE 00 01 02 - 3.4 0.8 - MOTS

PLOT NUMBER (1) - MEASURED (5) ESR2 ESR2 00 01 02 03 04 05 • READS

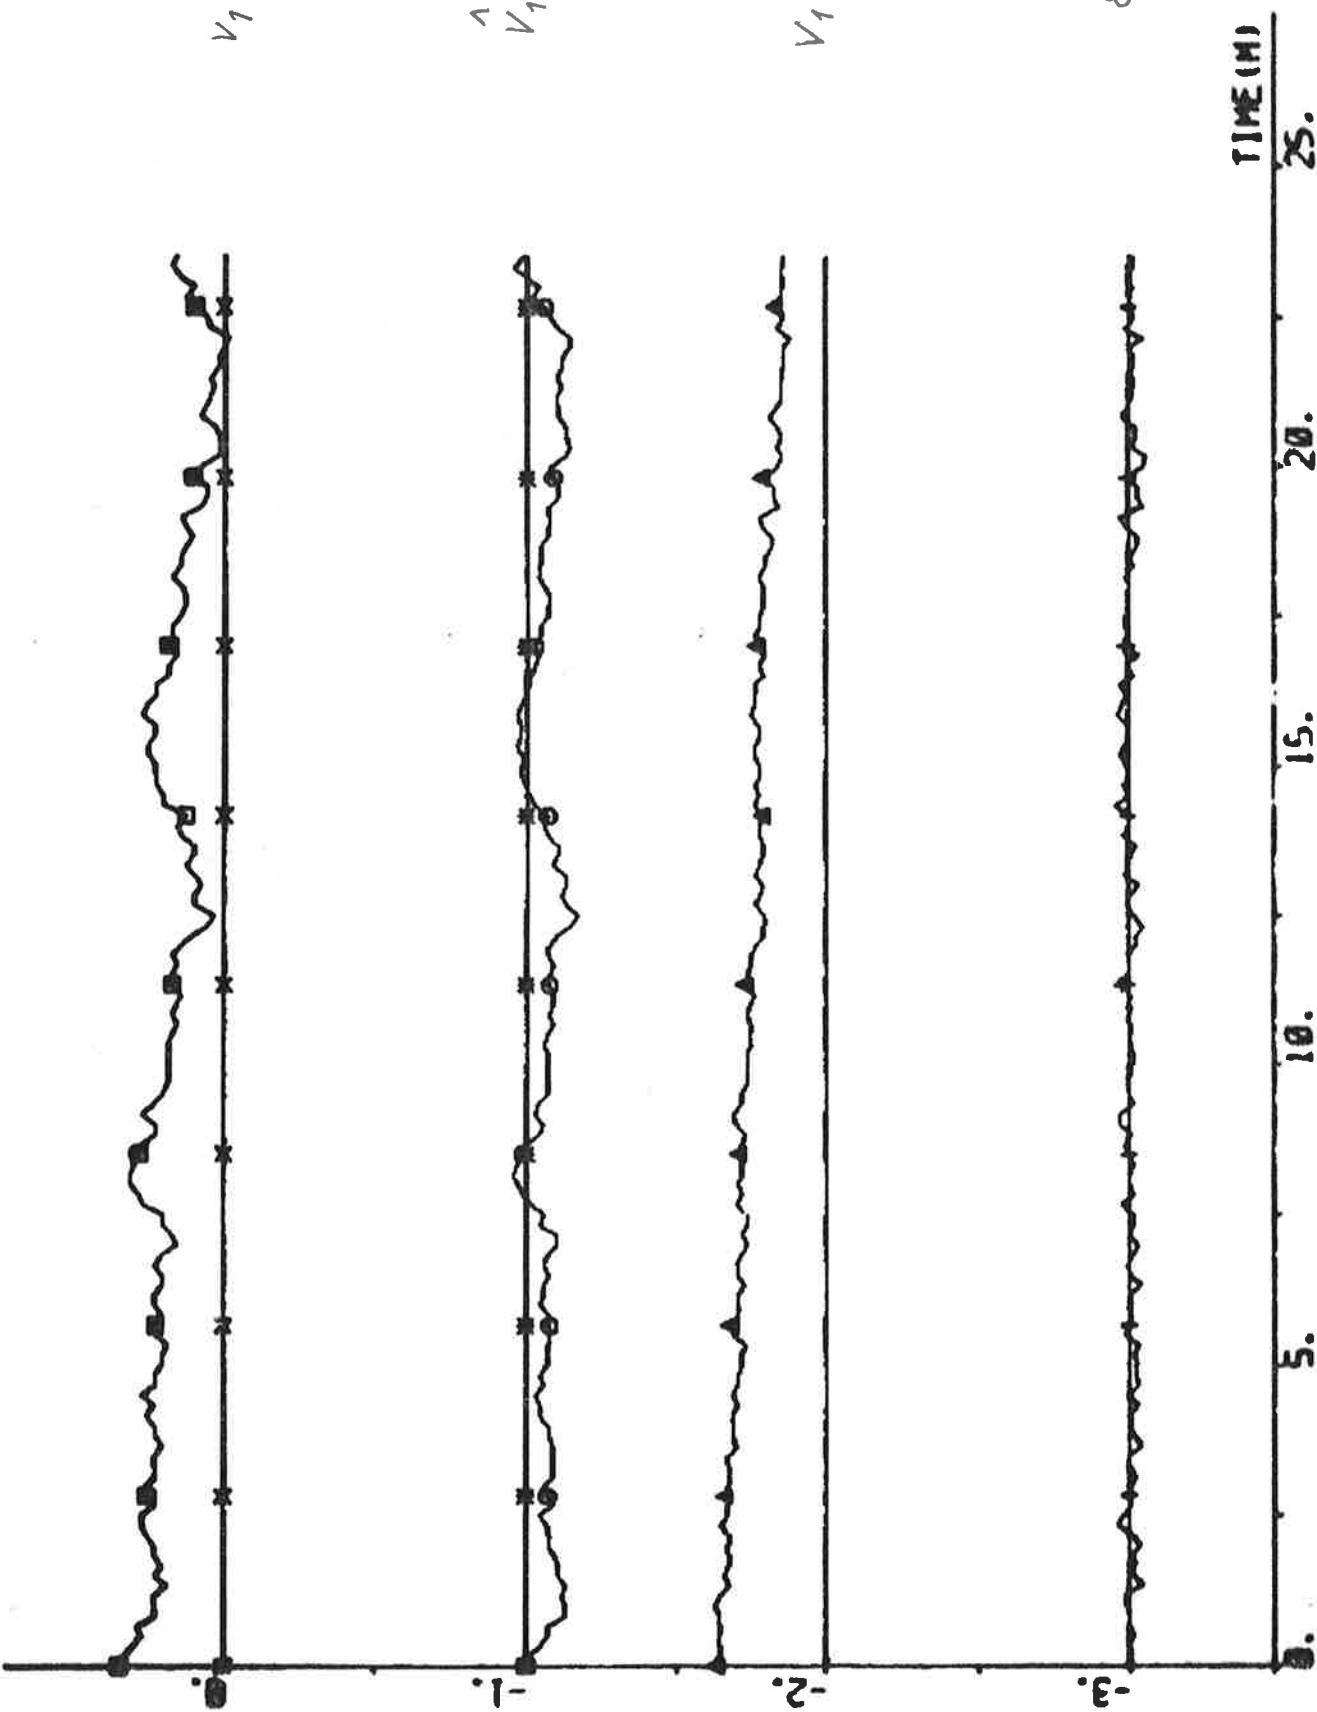

PLT100P1(11)-NETP1(8) NETP1(7) ERPS ERPS 08 002 001 000 - 0.7 0. - 000

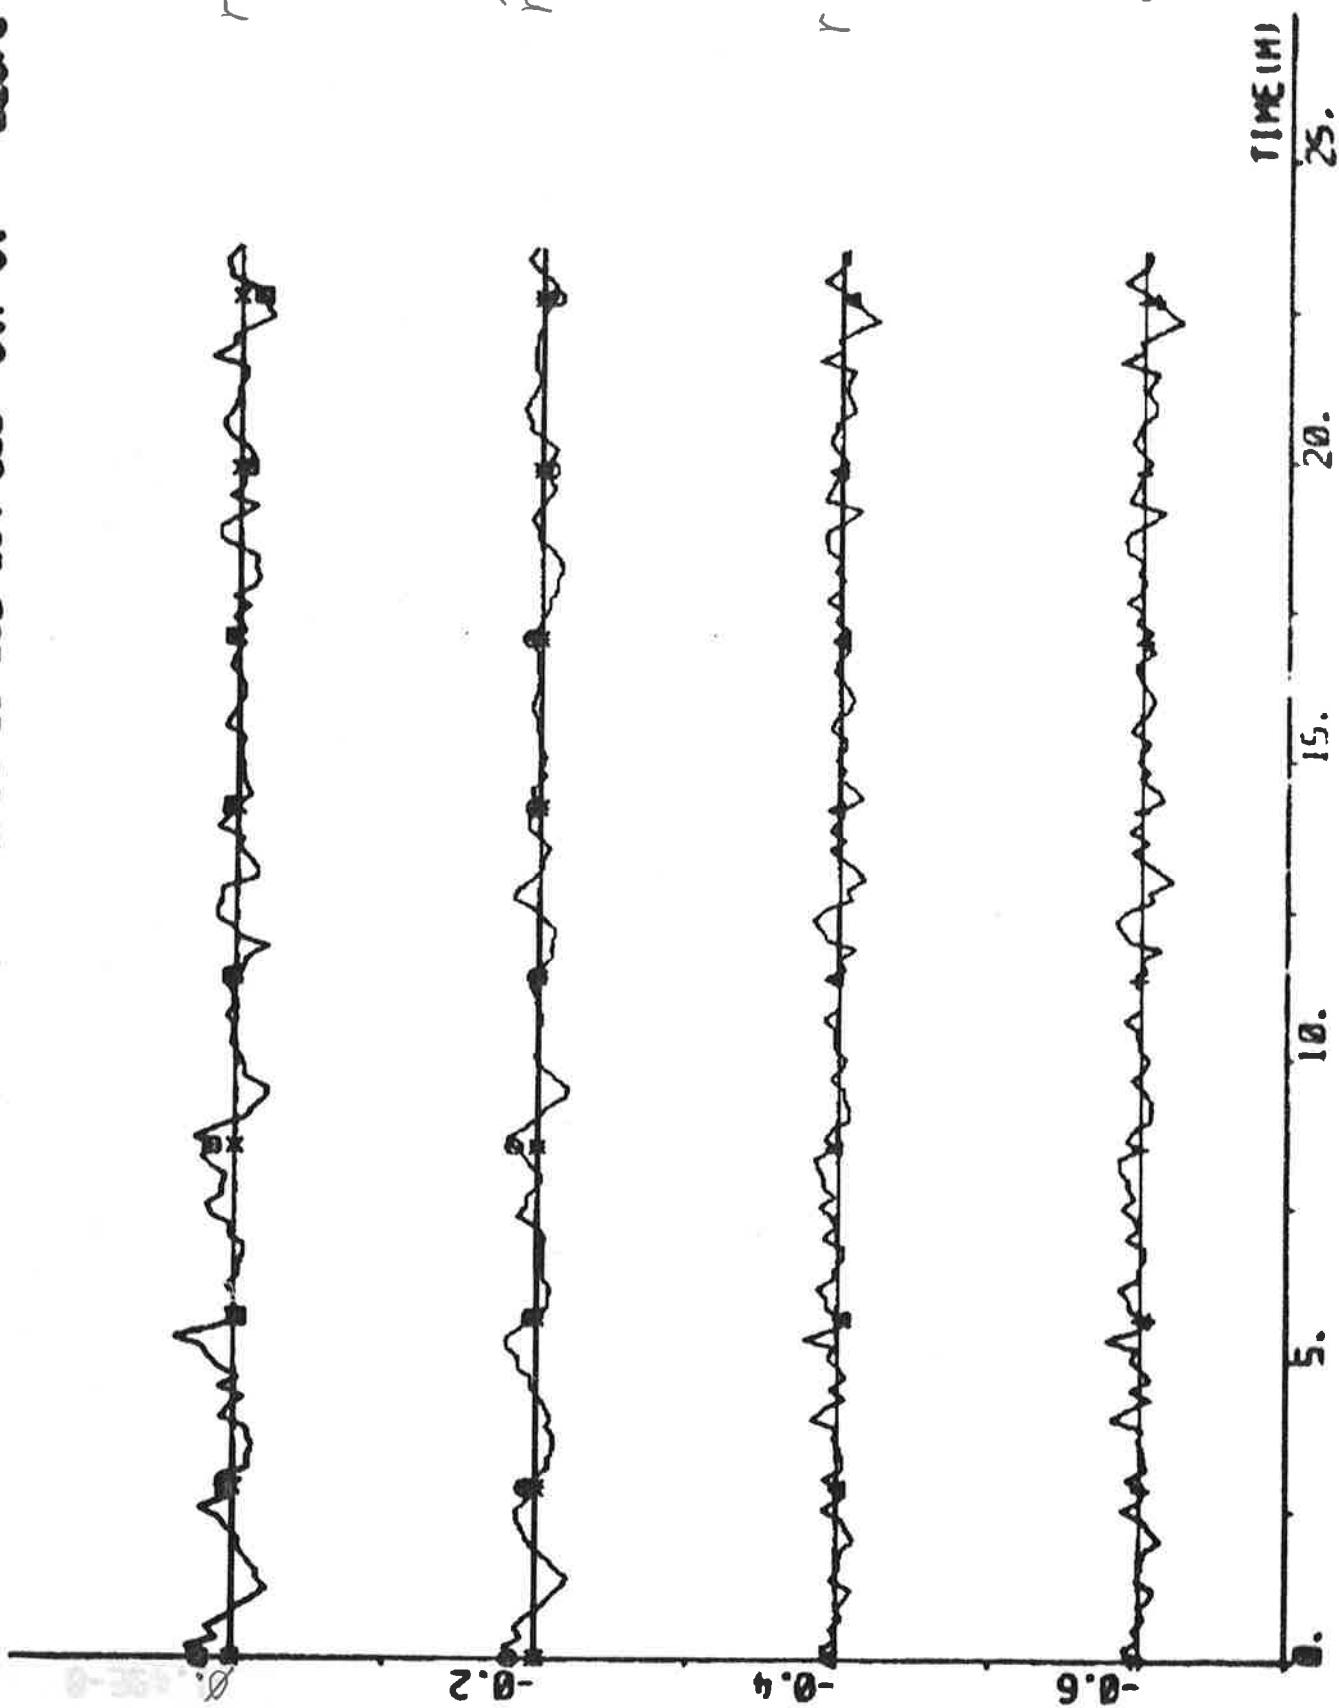

TIME (M)

20.


15.


10.

5.

 ϵ_4 $\alpha - \alpha_1$ $\alpha - \alpha_{ref}$ $\alpha - \alpha_{ref}$

NOTE: NSP1(11) - NSP1(2) NSP1(3) ER21 ER31 ER32 ER33 ER34 ER35 ER36

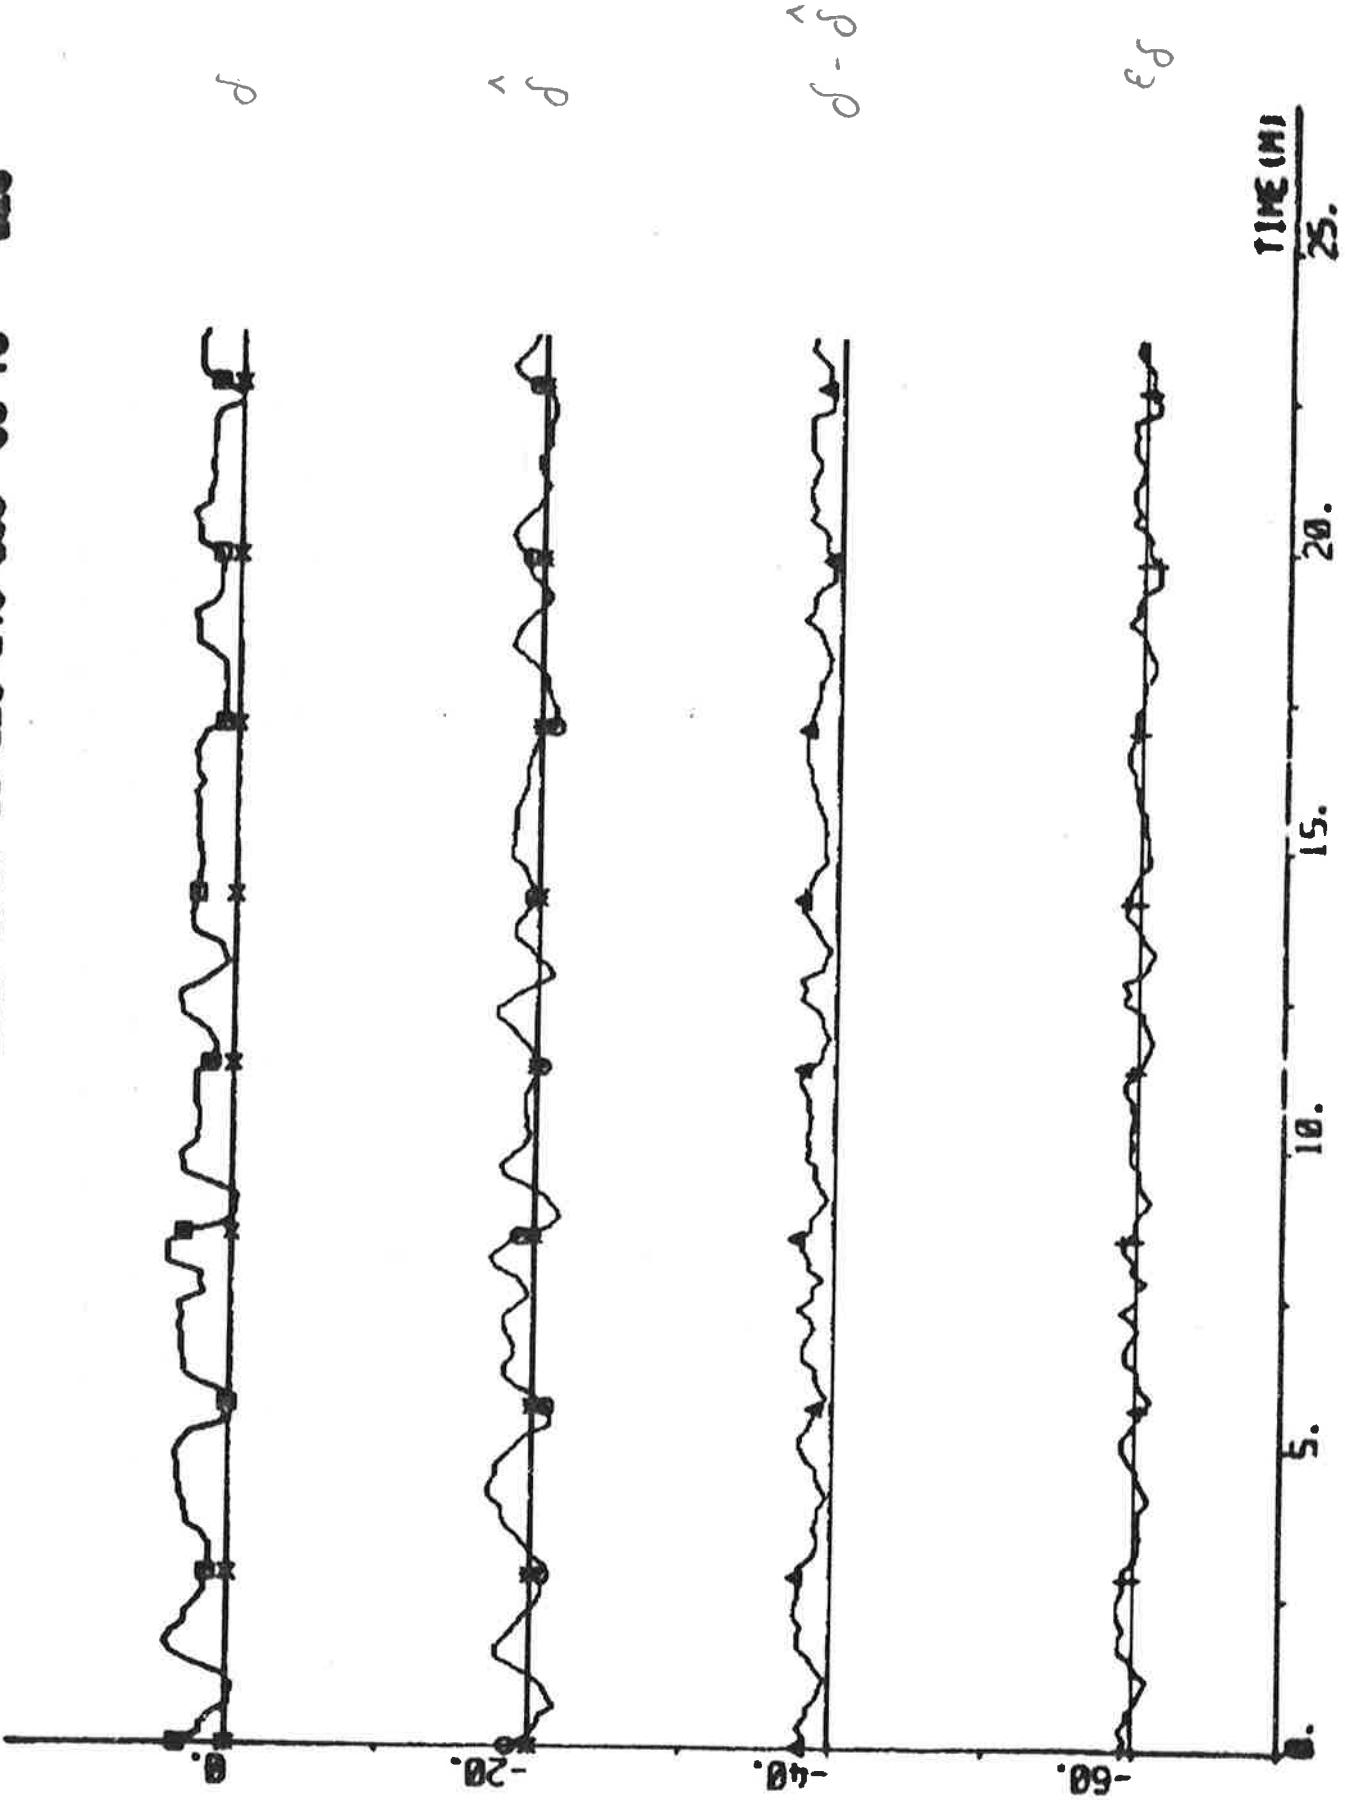

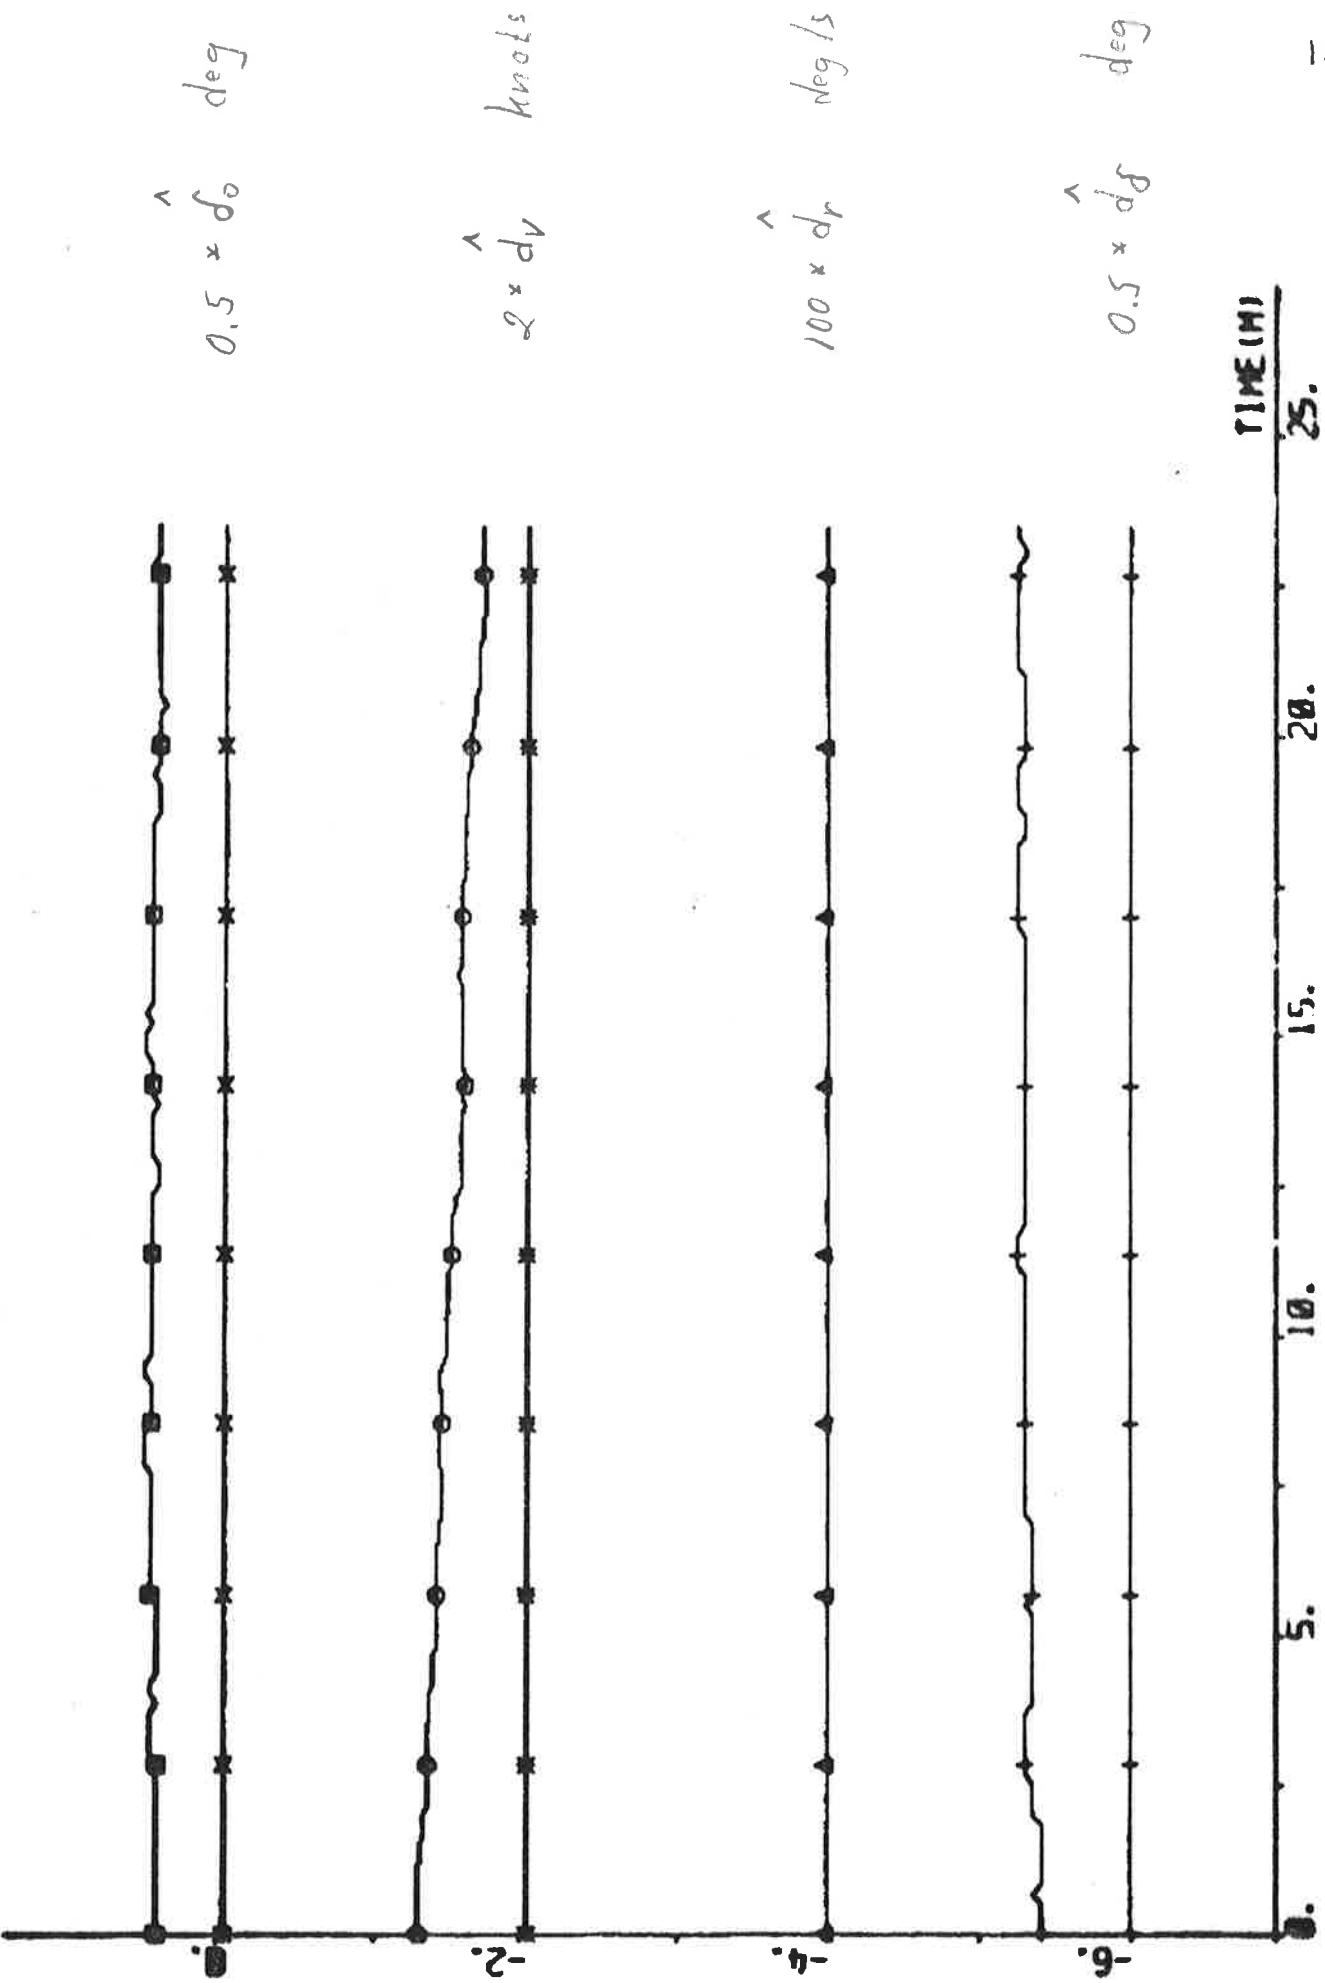

NMR NMR1(1) NMR2(7) NMR2(8) NMR2(9) NMR2(10) NMR2(11) NMR2(12) NMR2(13)

C_2

α_2
 α_3
 b_1
 b_2
 c_1
 α_4
 α_1

TIME (H)

25.

20.

15.

10.

5.

-20.

40.

20.

0.

EXPERIMENT A6

Date	1976-04-22	Forward draught	8.5 m
Time	15.05	Aft draught	12.5 m
Duration	24 min	Wind direction	NW (4; see App. A)
Position	N 11°01' W 18°30'	Wind velocity	4 m/s (gentle breeze)
ψ_{ref}	180 deg	Wave height	Moderate swell from N

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 $T_s = 10 \text{ s}$ $V_0 = 7 \text{ m/s}$ IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.23 \\ 6.42 \\ 4.21 \\ -3.31 \\ 0.55 \\ 0.16 \\ -0.79 \\ 41.84 \end{bmatrix} \quad P = \begin{bmatrix} 4.73 & & & & & & & \\ -5.79 & 10.88 & & & & & & \\ -0.95 & -4.87 & 12.01 & & & & & \\ 2.24 & -0.33 & -6.36 & 4.68 & & & & \\ -0.15 & -0.06 & 0.44 & -0.22 & 0.04 & & & \\ -0.14 & 0.11 & 0.01 & 0.03 & 0.01 & 0.03 & & \\ -0.86 & 1.17 & 0.27 & -0.62 & 0.00 & 0.00 & 0.82 & \\ 17.43 & -18.10 & -20.57 & 19.53 & -1.15 & -0.58 & 12.97 & 886.31 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = 0.09$$


$$\dot{a}_0 = -0.3 \text{ deg} \quad d_v = -0.24 \text{ knots} \quad \dot{d}_r = 0.000 \text{ deg/s} \quad \dot{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)


PLOT RESP1(1)-RESP1(8) HP RESP1(10) RESP1(15) 82-3 1 - DEG

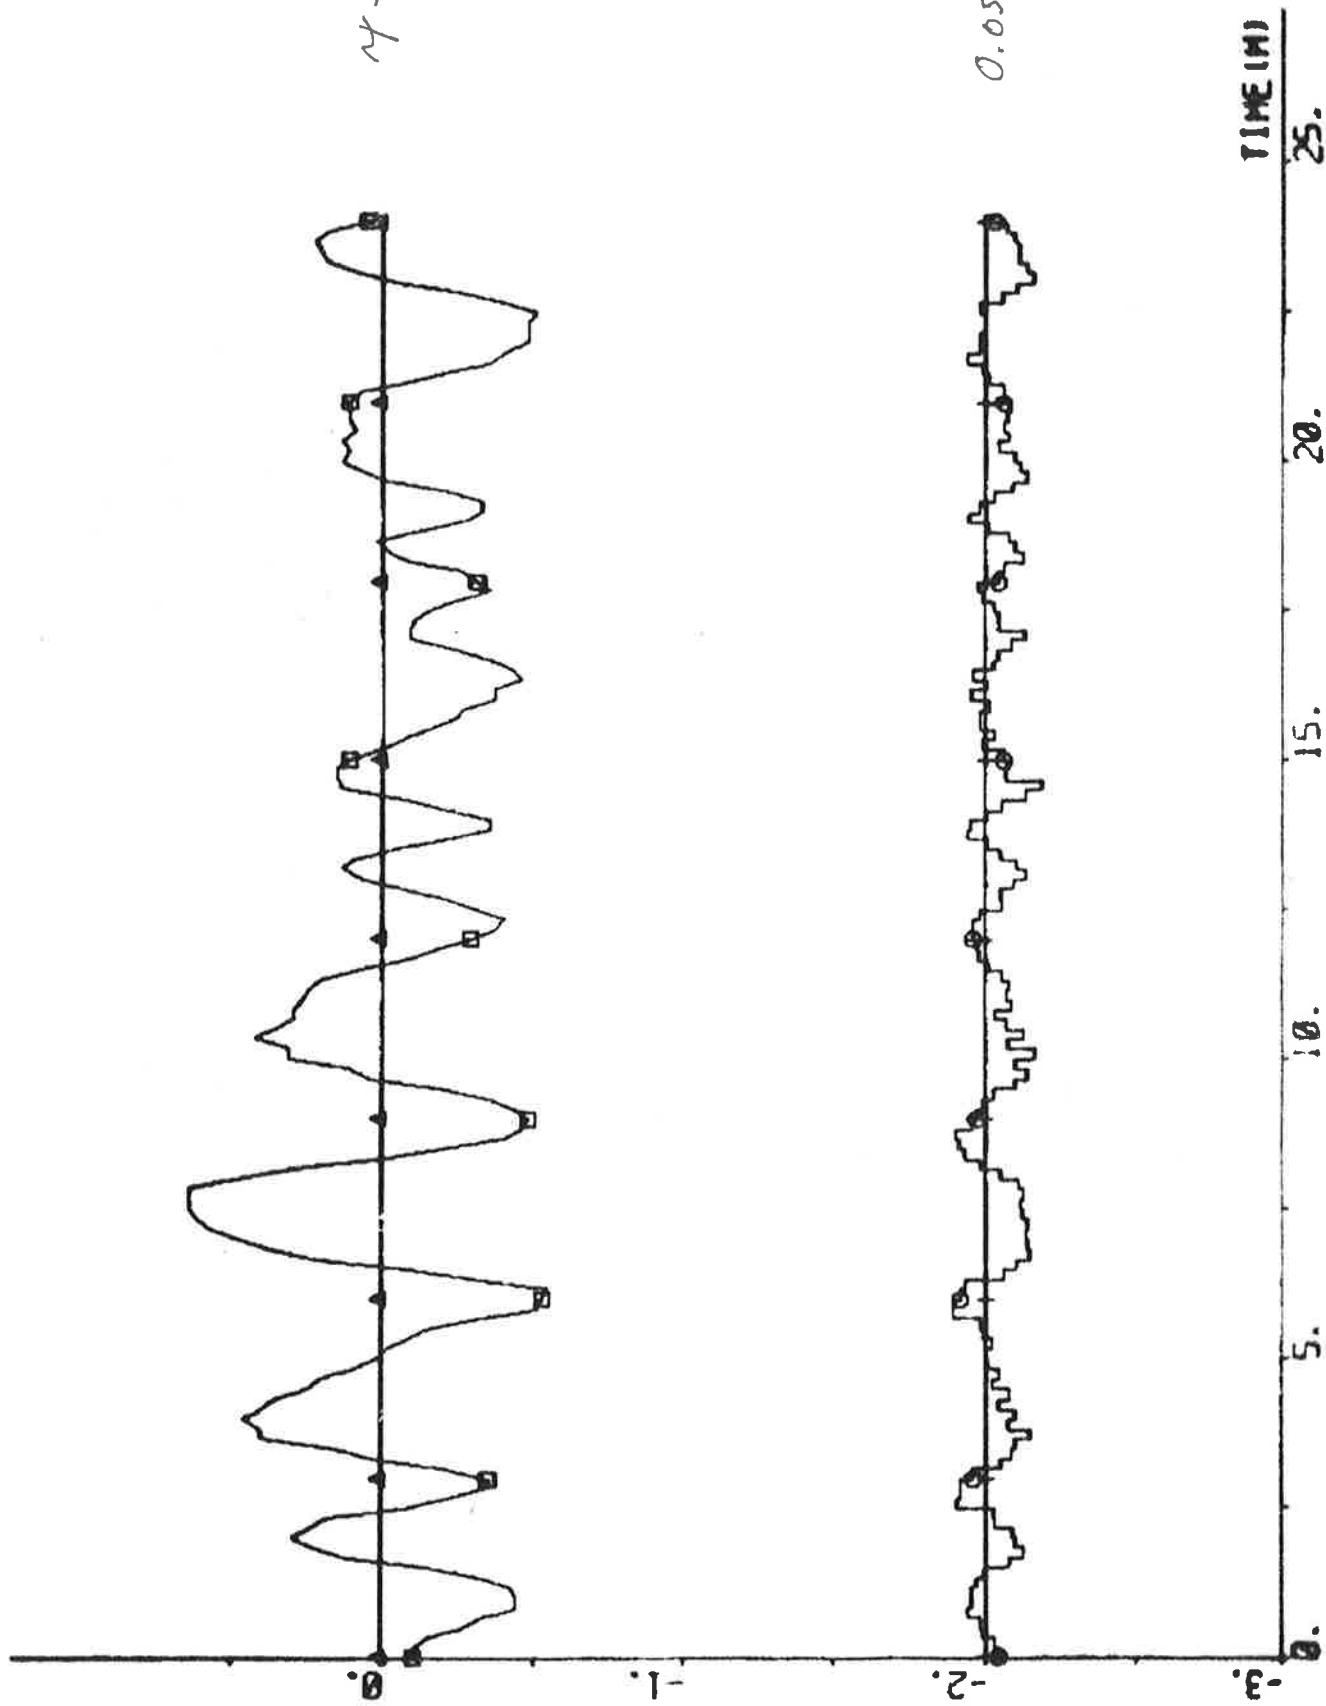


Plot NRP1(11) - NRP1(13) NRP1(12) NRP1(14) NRP1(11)

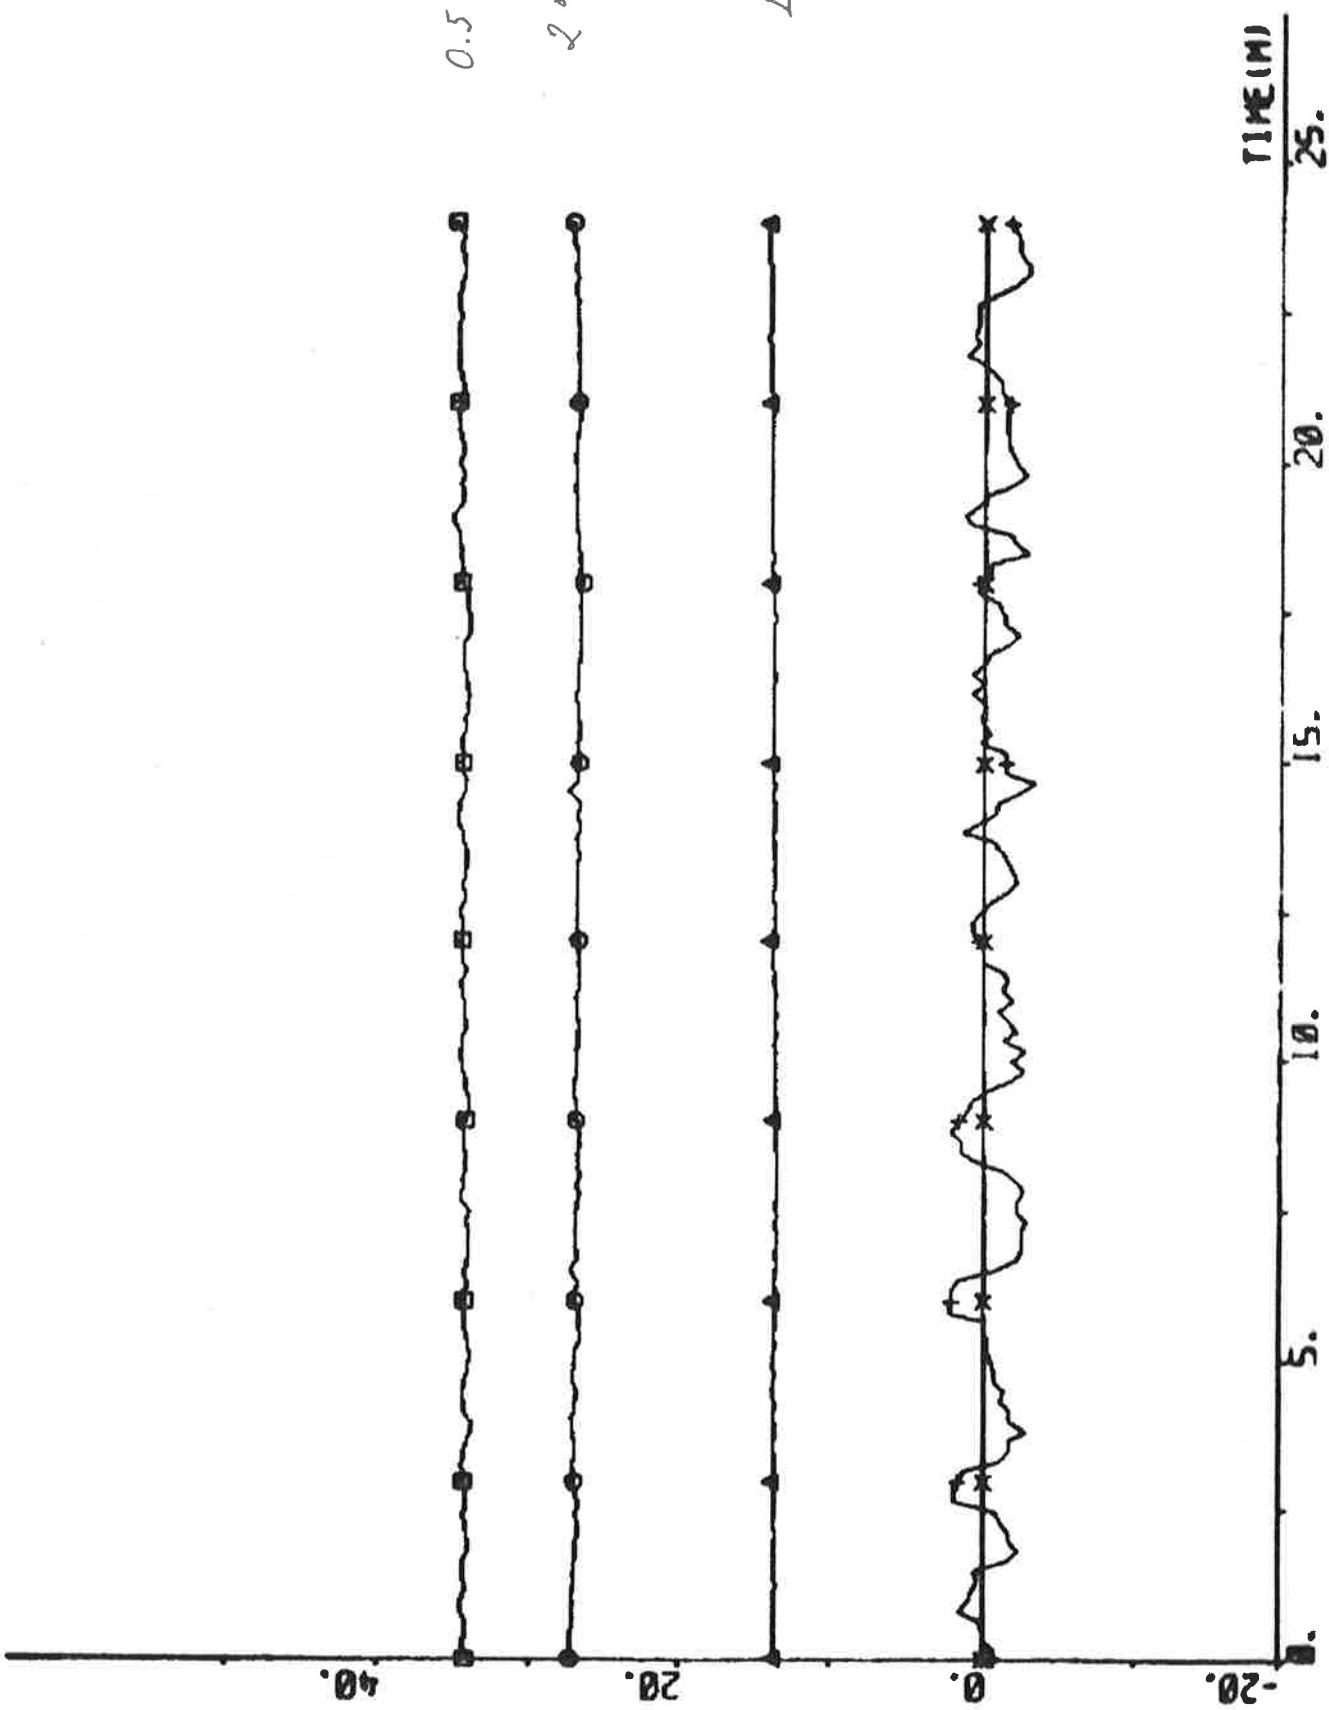


PLOT RSP1(1),RSP2(1) ERR5 00 01 02 -3.4 0.0 - KNOTS

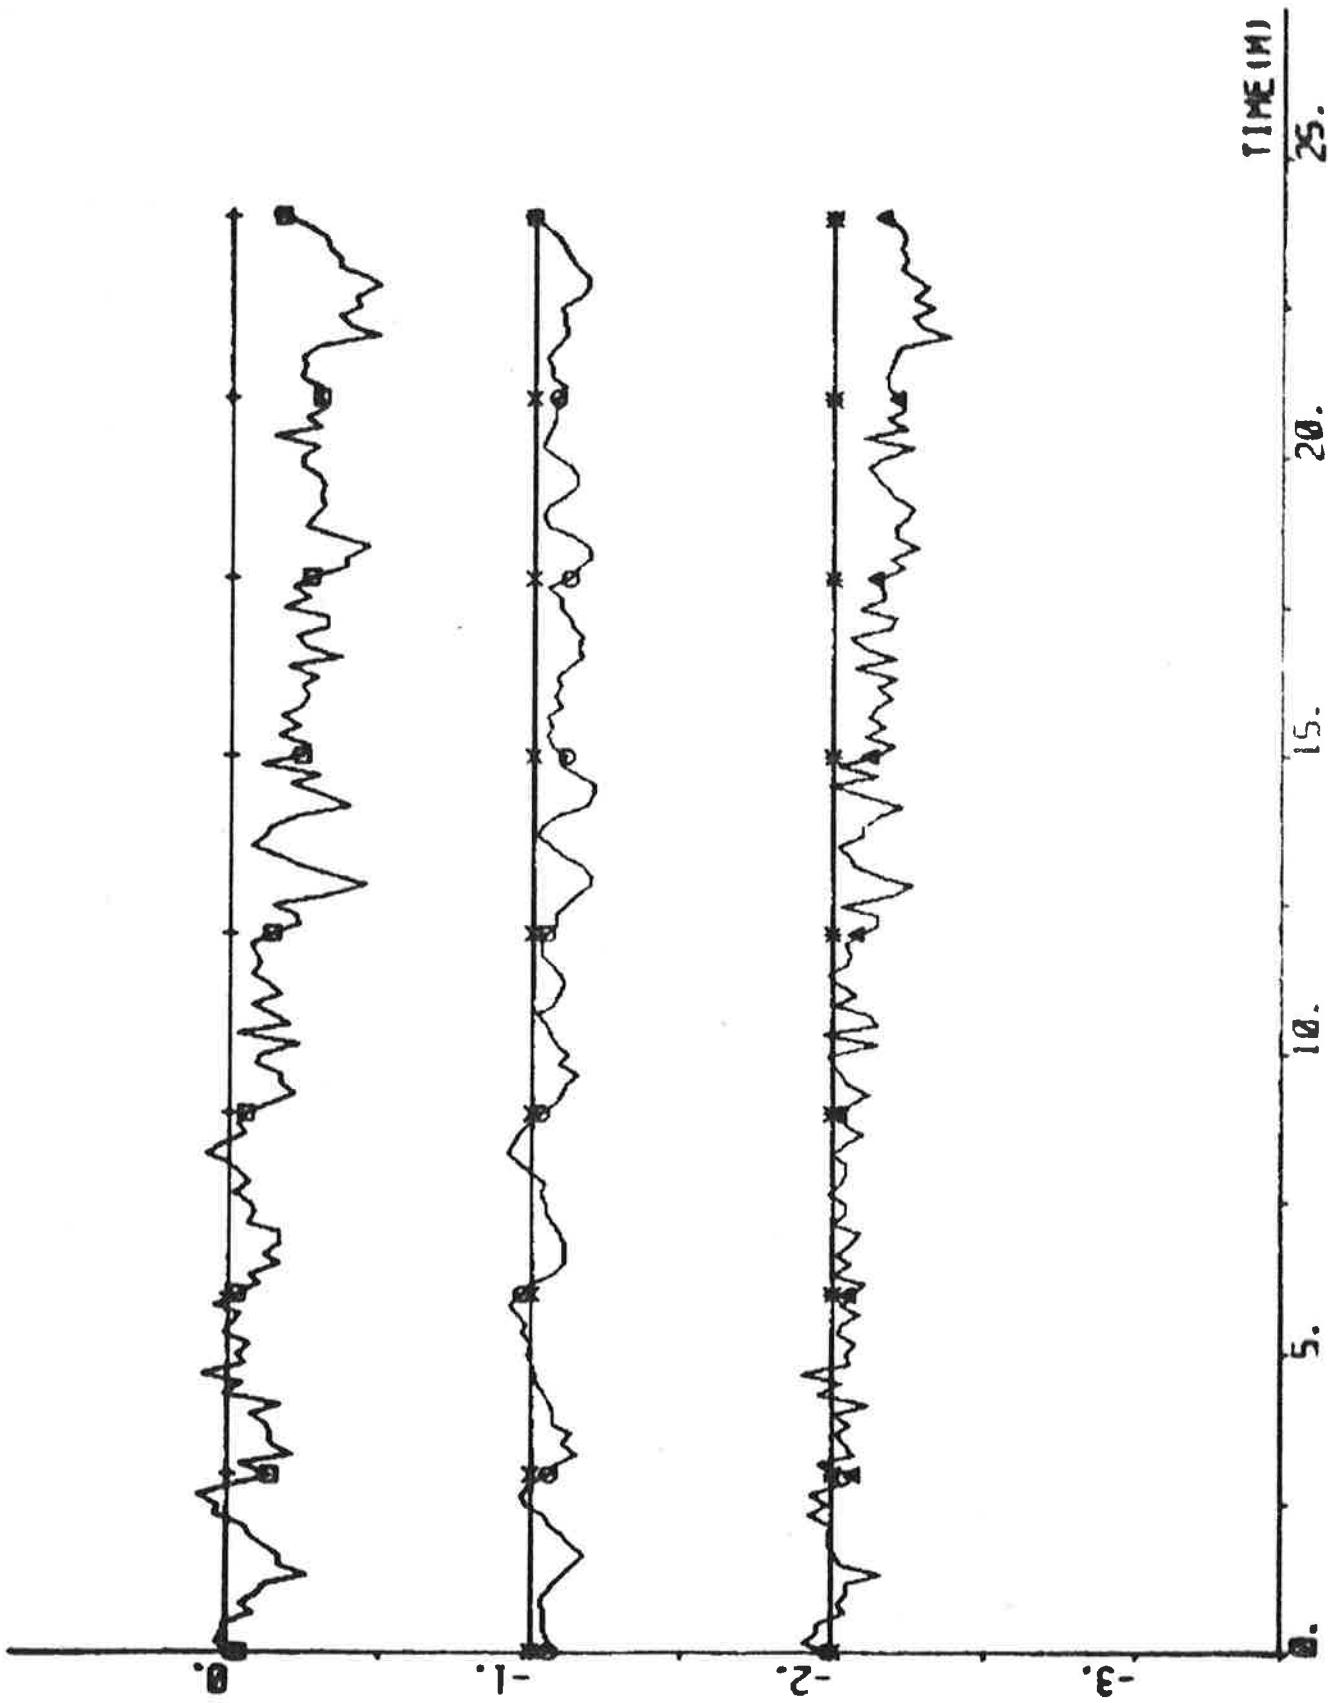


PLOT PEP1(1) PEP1(4) PEP1(5) ERR2 EP32 00 01 02 03 -3.4 0.0 -

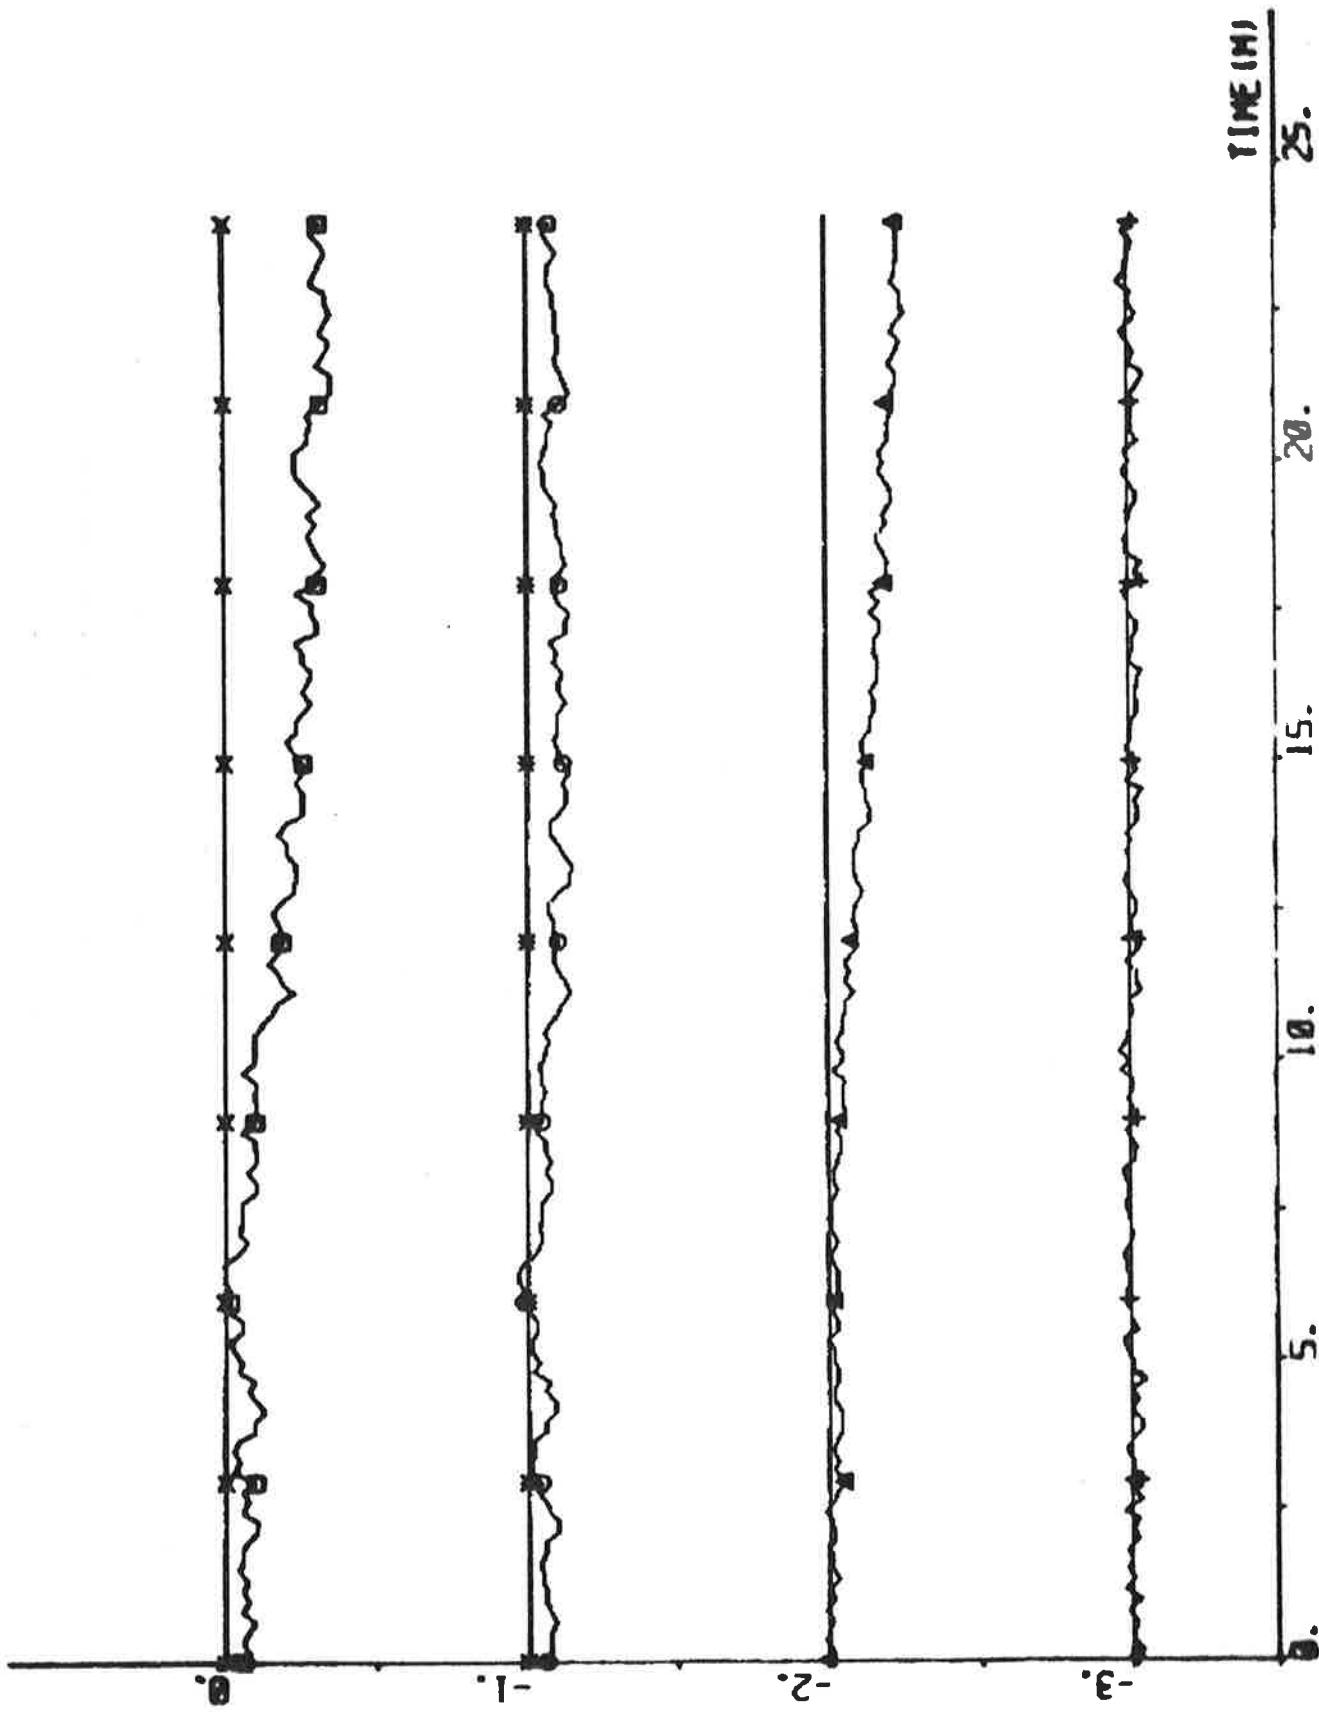


PLT RGP1(1) RGP1(8) RGP1(7) ERG3 EP3 00 002 003 003 - 0.7 0. " DATA

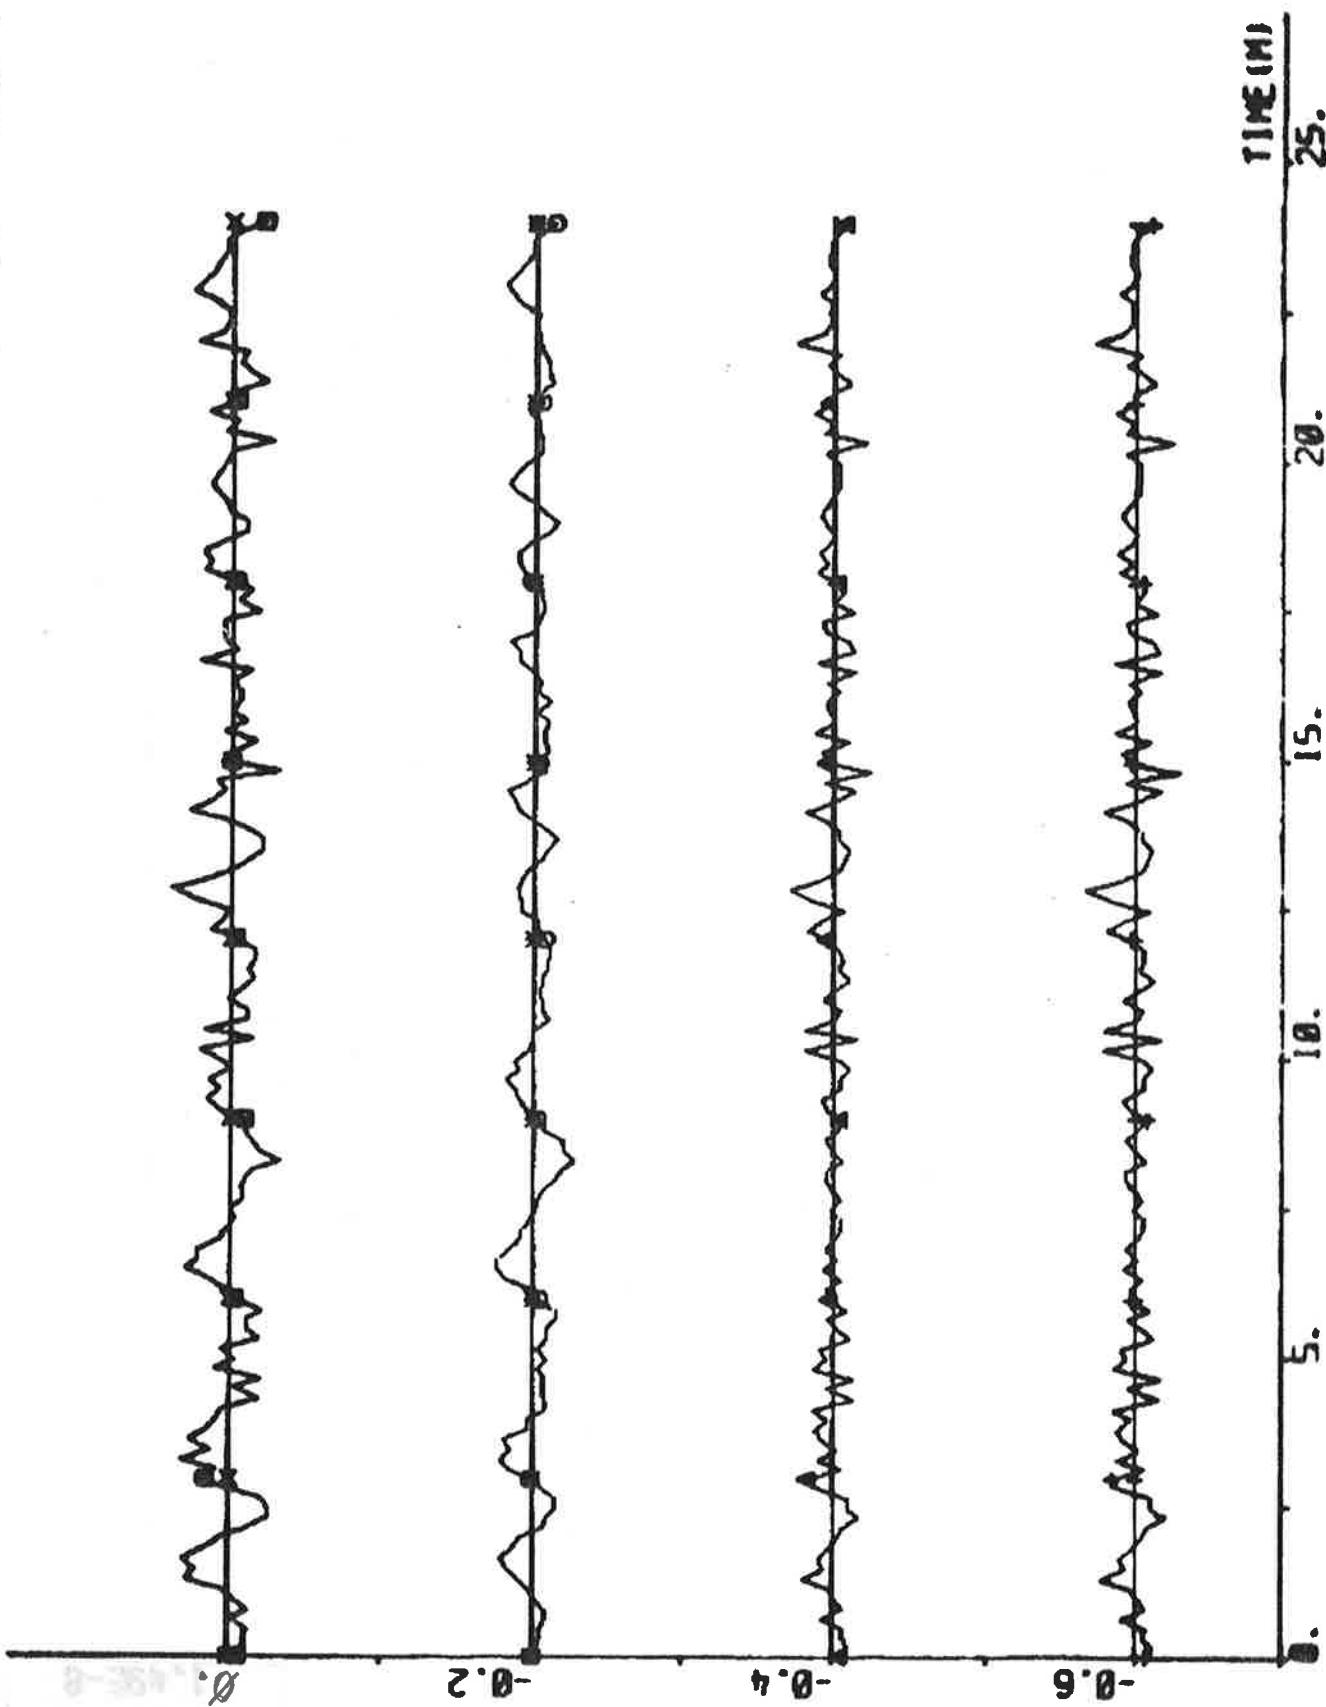


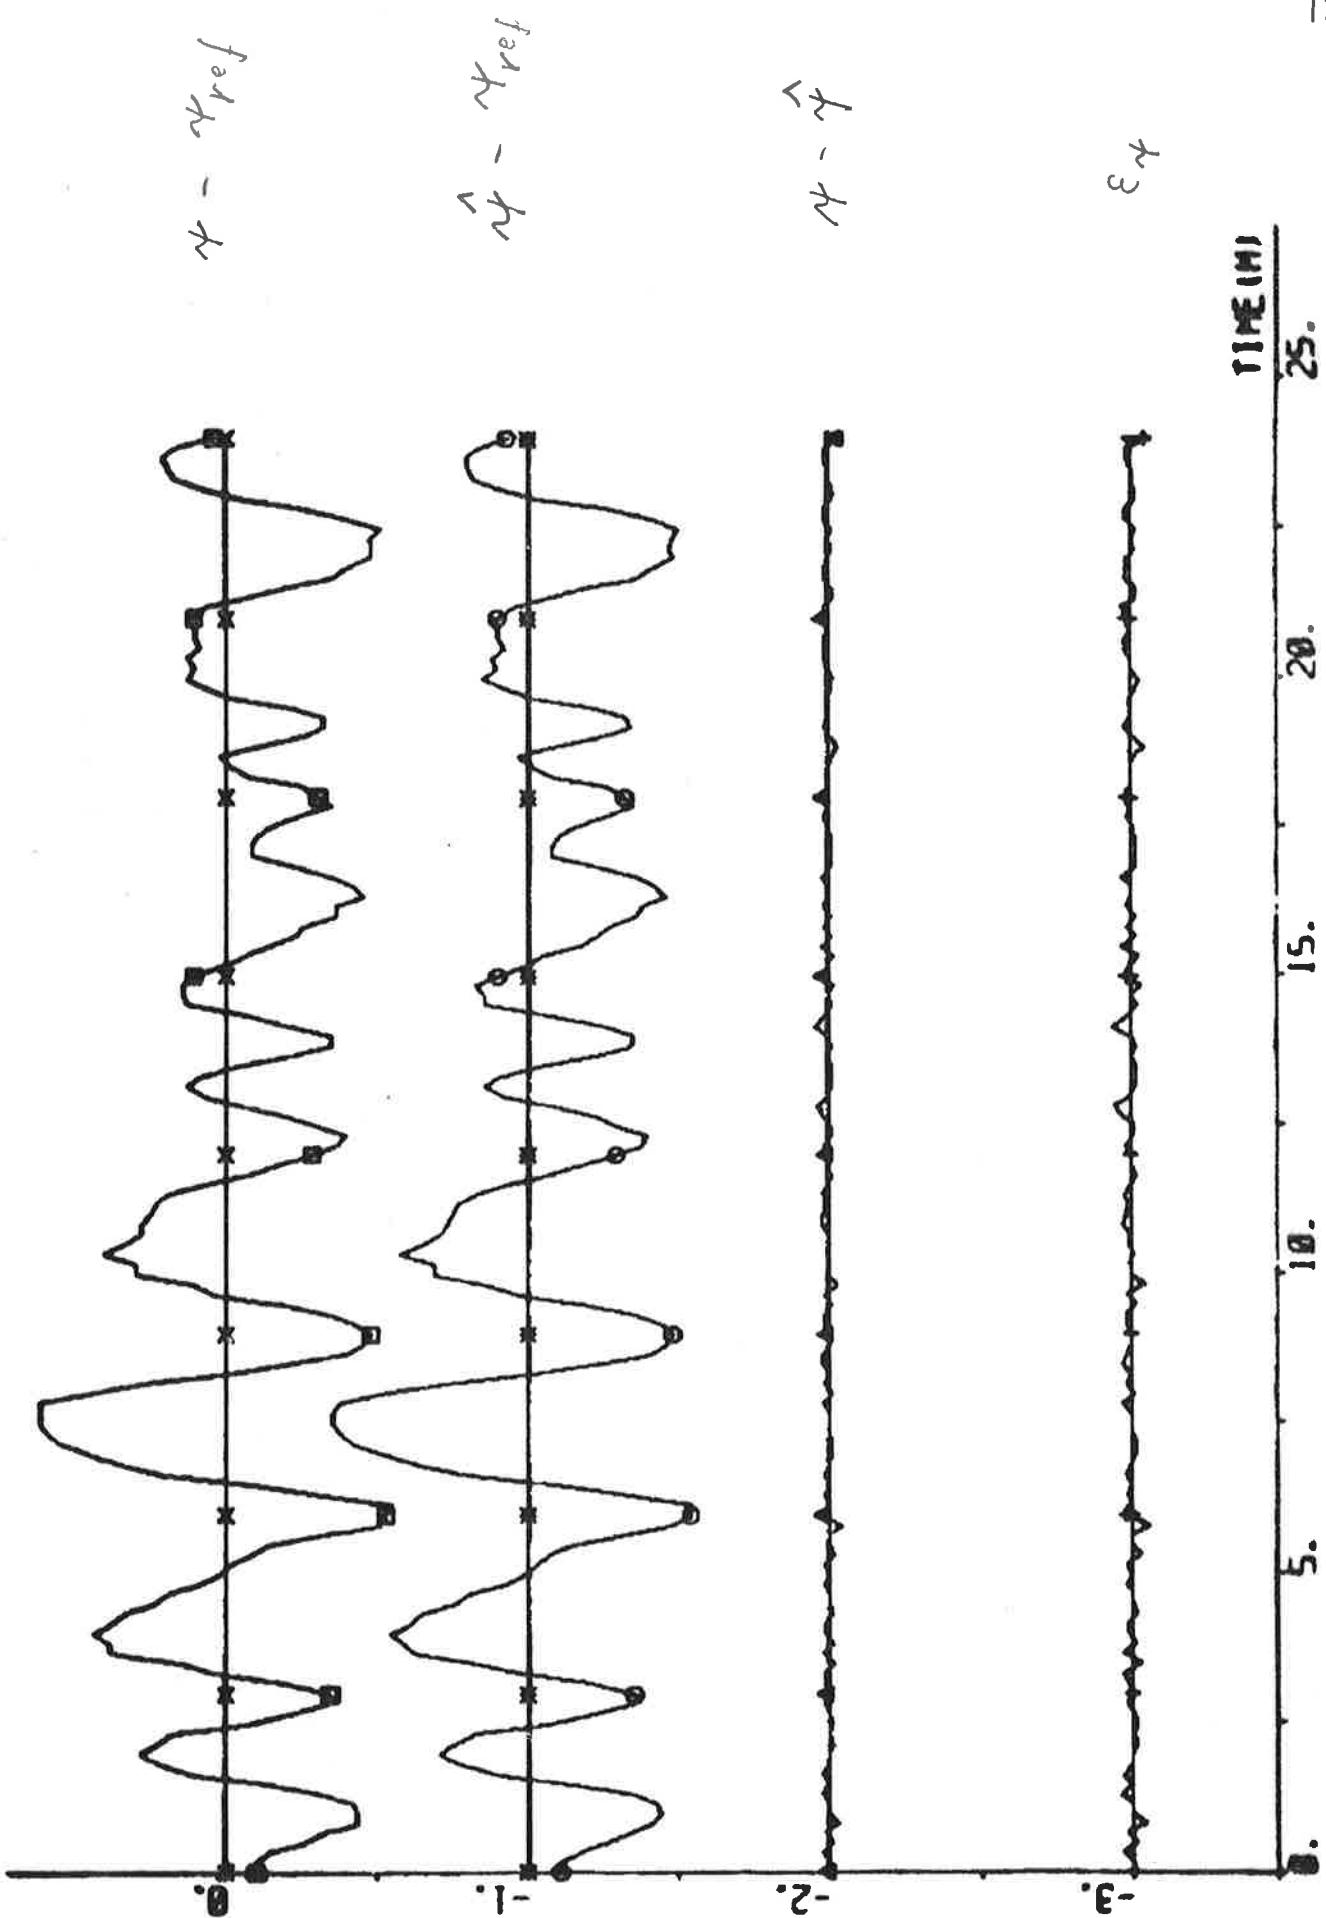


PLOT REPI(1) REPI(2) REPI(3) ERRI EPSI

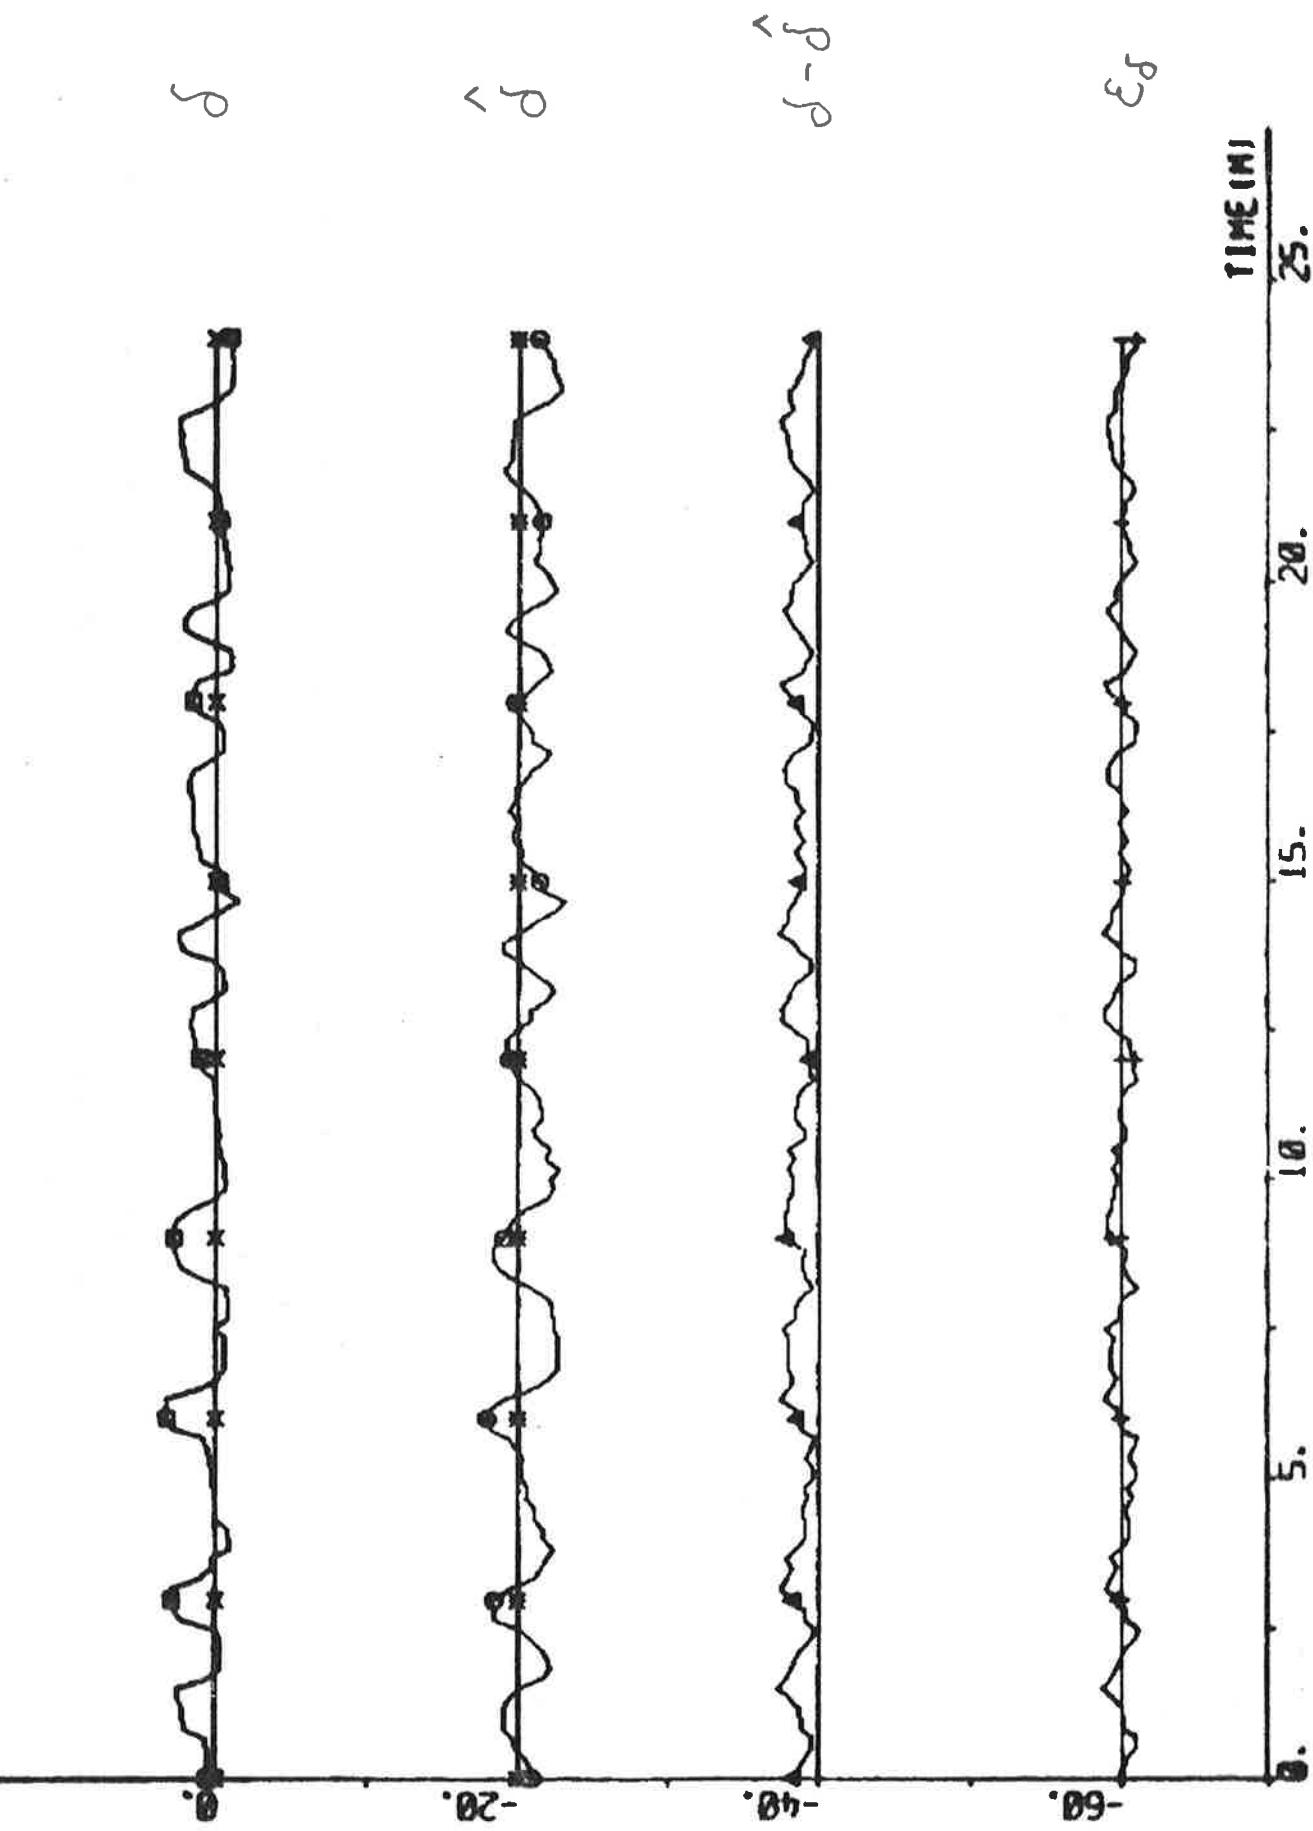

PLOT RSP2(11),RSP2(13),RSP2(15),RSP2(14) 09 02 01 03 - 0.5 1.5

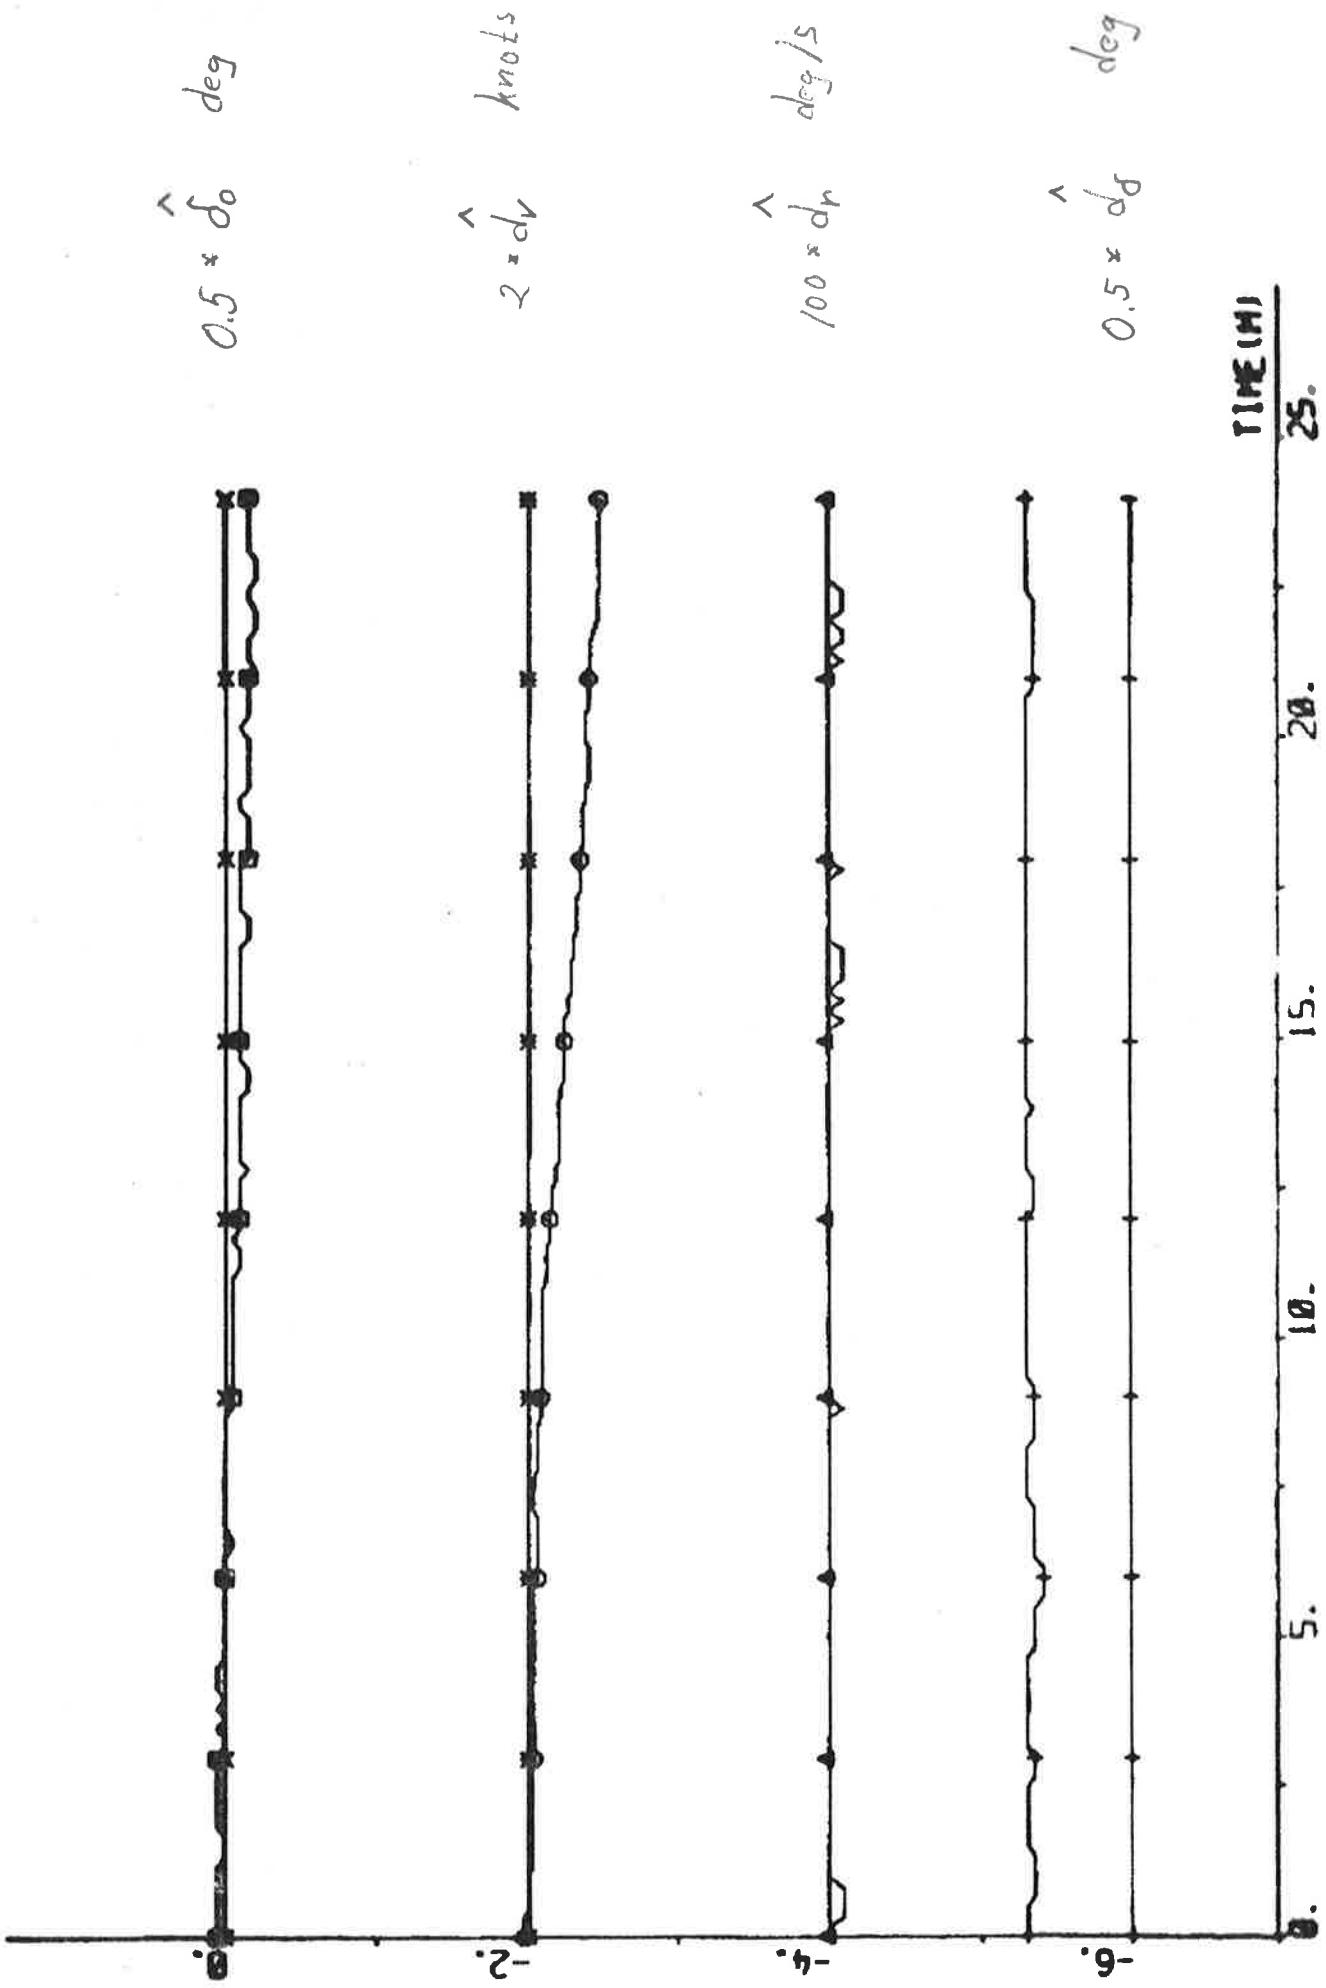

ALOT NSP1 (11) NSP2(17) NSP2(8) NSP2(9) NSP2(10) NSP2(11) NSP2(12) NSP2(13)

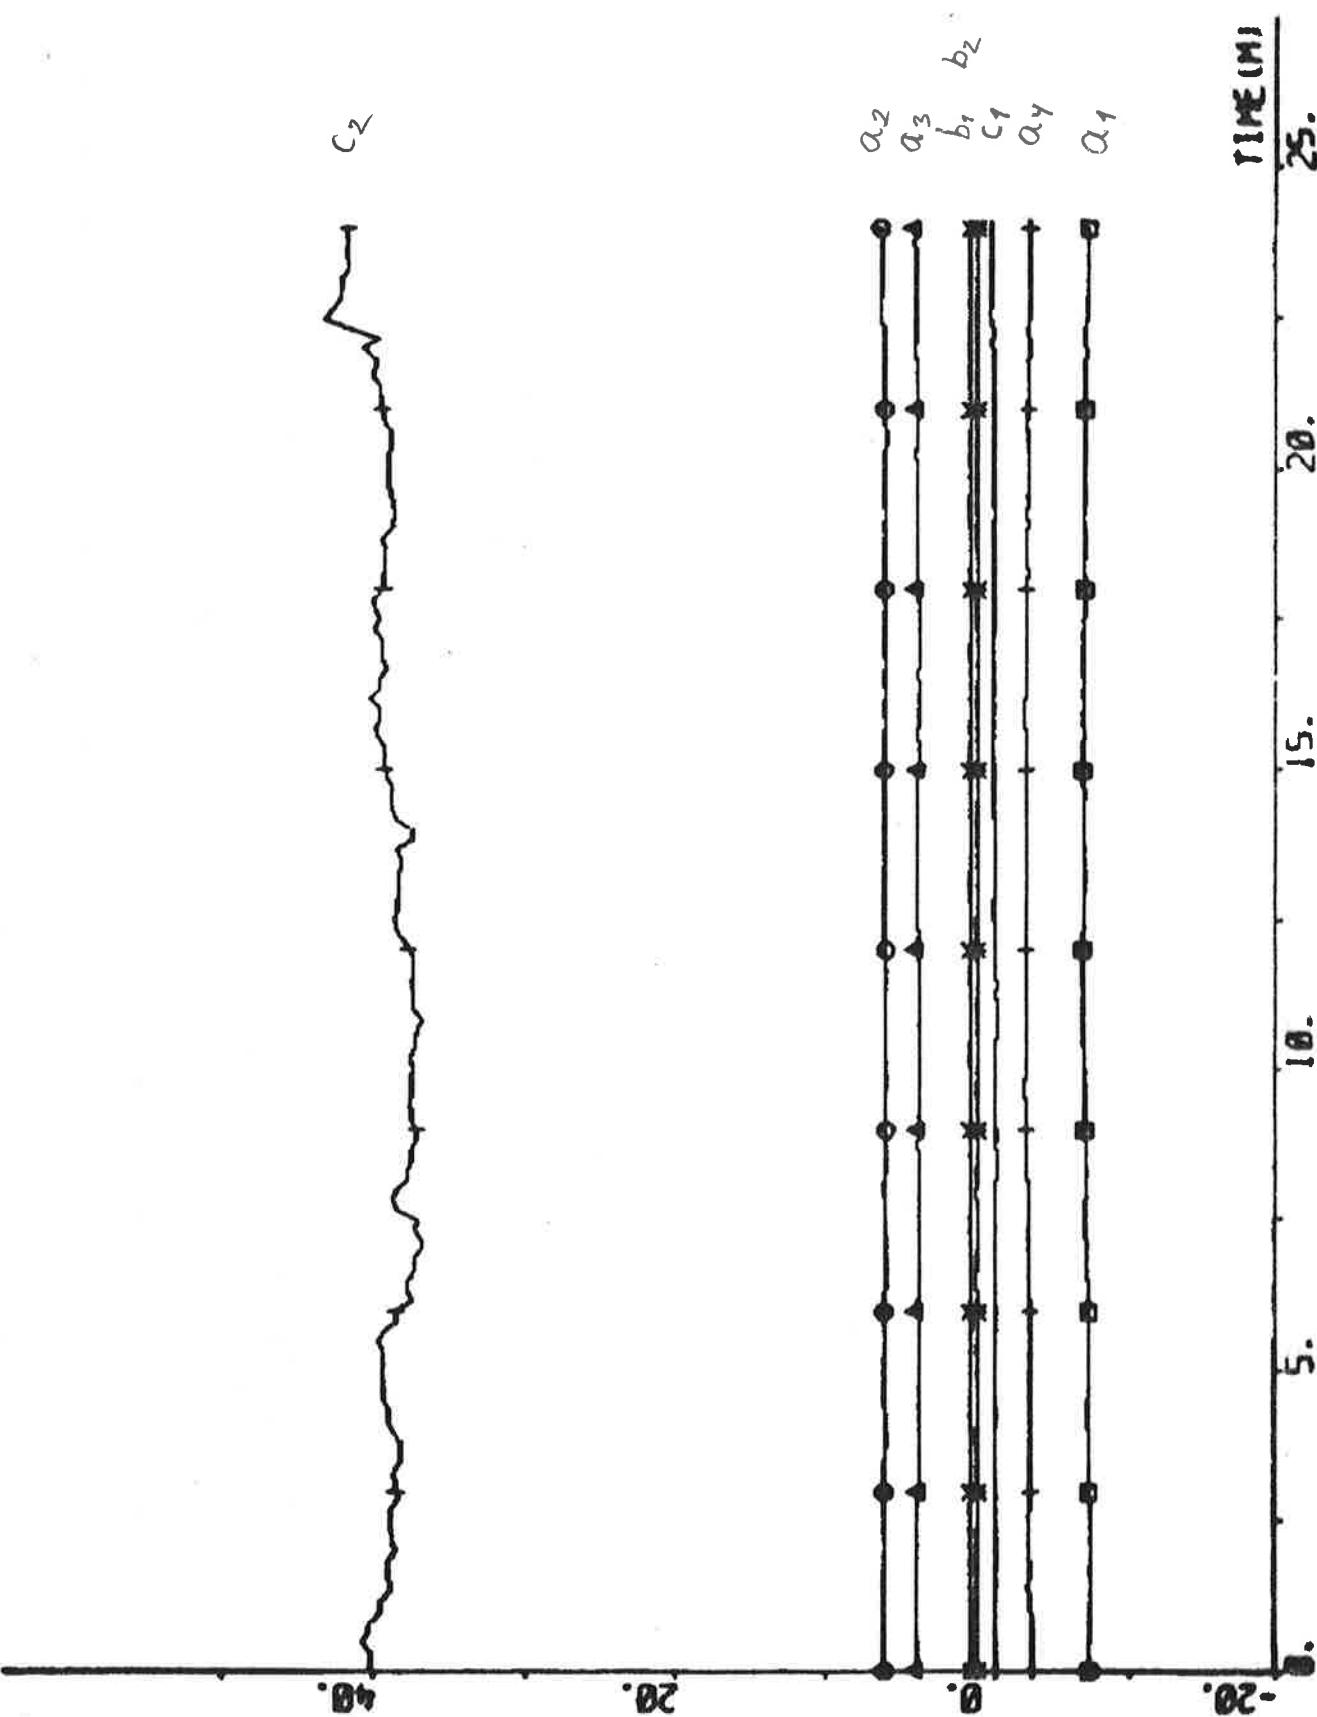

EXPERIMENT A7

Date	1976-04-22	Forward draught	8.5 m
Time	16.09	Aft draught	12.5 m
Duration	25 min	Wind direction	W (3; see App. A)
Position	N 10°47' W 180°29'	Wind velocity	4 m/s (gentle breeze)
ψ_{ref}	181 deg	Wave height	Moderate swell from N

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 8 q = 0
 T_s = 10 s V₀ = 7 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.00 \\ 6.36 \\ 4.36 \\ -3.64 \\ 0.48 \\ 0.09 \\ -1.89 \\ 39.41 \end{bmatrix} \quad P = \begin{bmatrix} 5.91 & & & & & & & \\ -7.08 & 12.98 & & & & & & \\ -1.24 & -5.93 & 15.13 & & & & & \\ 2.70 & -0.15 & -8.00 & 5.82 & & & & \\ -0.16 & -0.05 & 0.43 & -0.21 & 0.03 & & & \\ -0.15 & 0.14 & -0.03 & 0.05 & 0.01 & 0.03 & & \\ -0.88 & 1.10 & 0.41 & -0.64 & 0.02 & -0.02 & 0.80 & \\ 16.96 & -13.50 & -26.26 & 21.56 & -1.22 & -0.80 & 11.86 & 848.17 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = 0.08$$


$$\hat{\delta}_0 = -0.2 \text{ deg} \quad \hat{d}_v = 0.18 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)


PLOT A7P1(1)-A7P1(8) HP A7P1(18) A7P1(15) A7P1(16) A7P1(17)

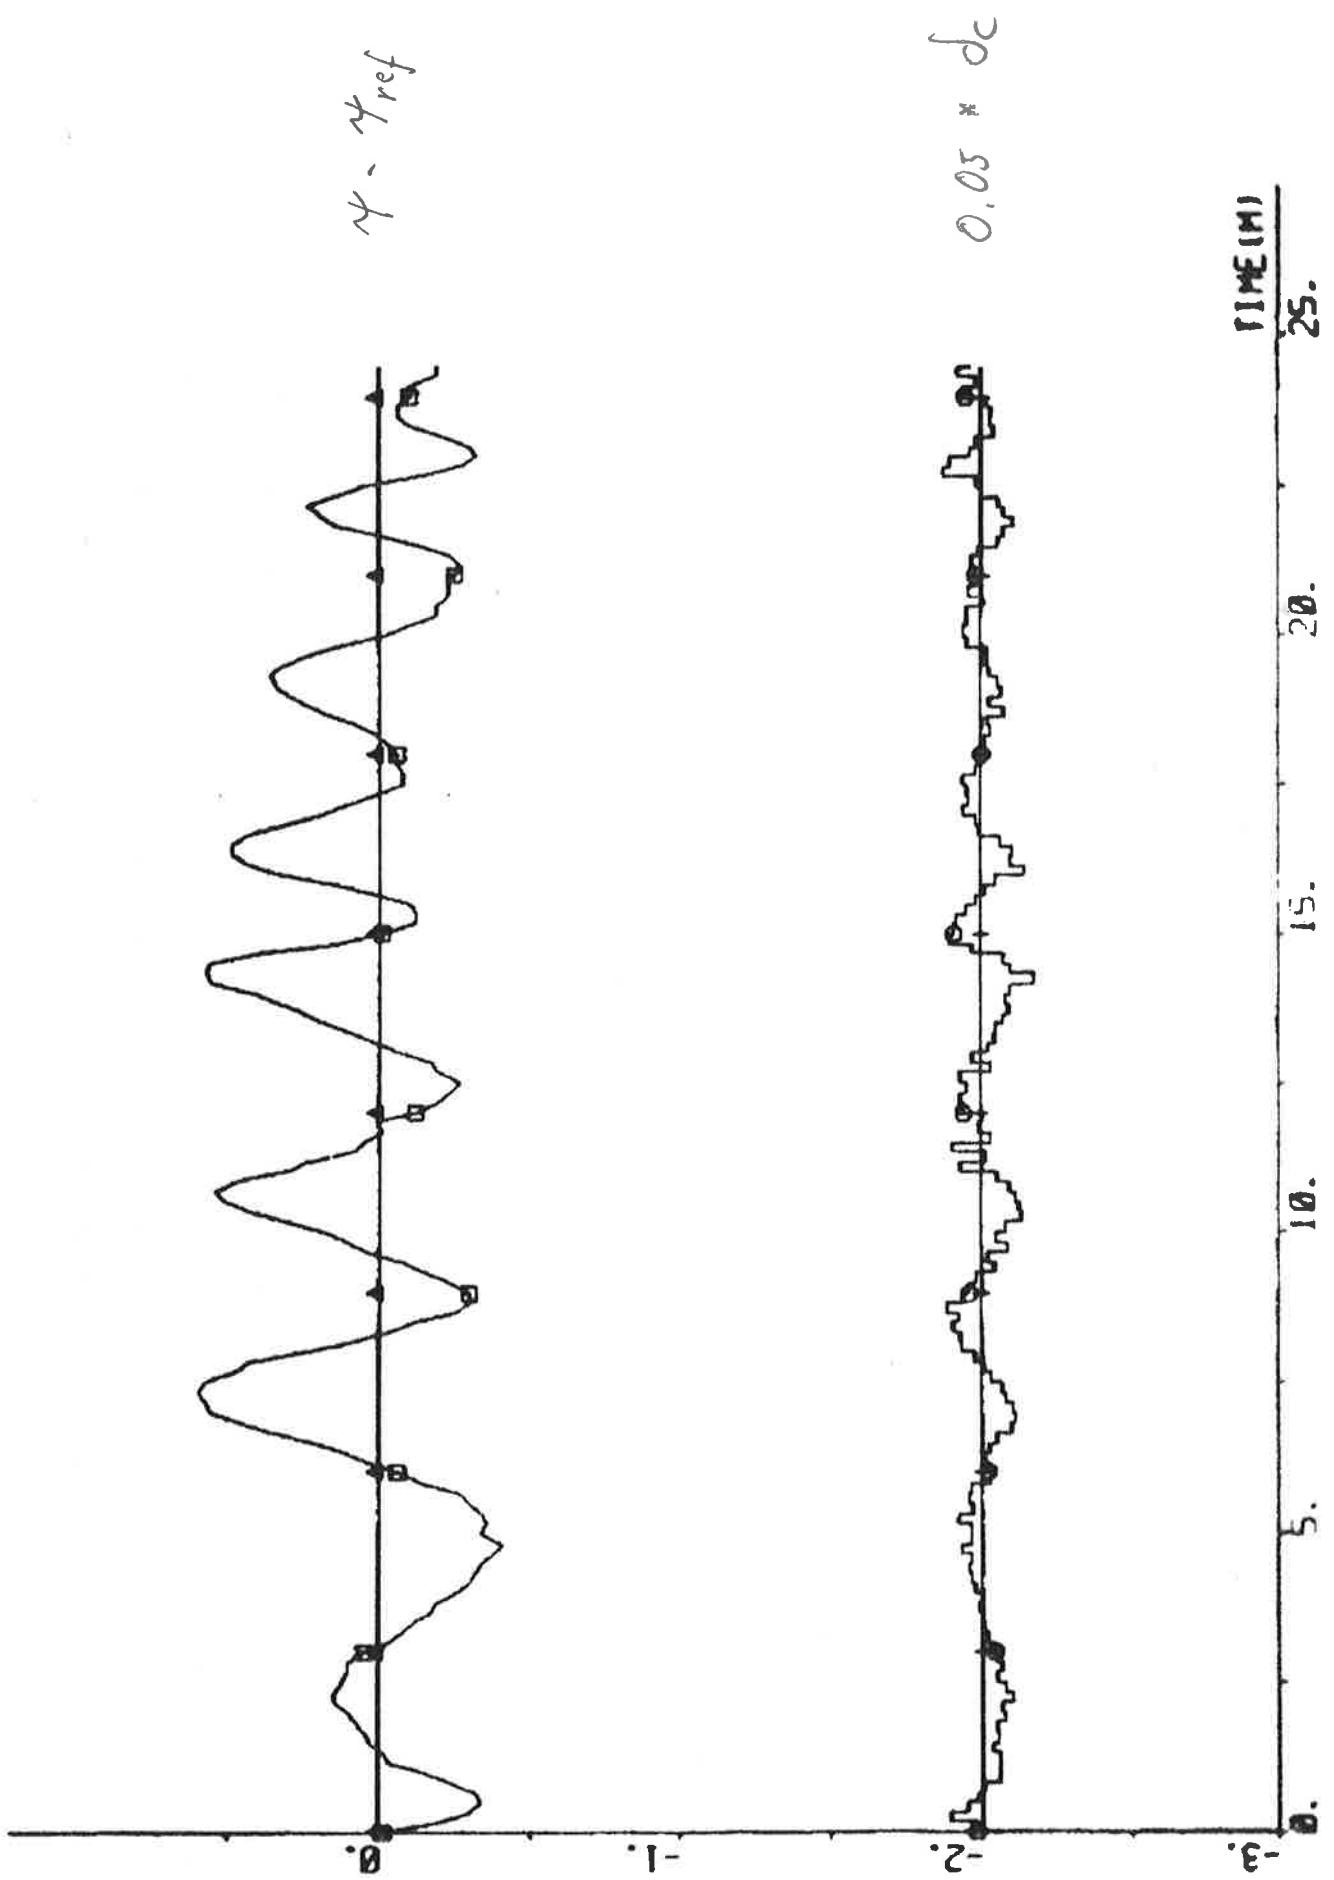


PLOT A7P1(11)-A7P1(13) A7P1(12) A7P1(14) A7P1(11) 00 - 20 59

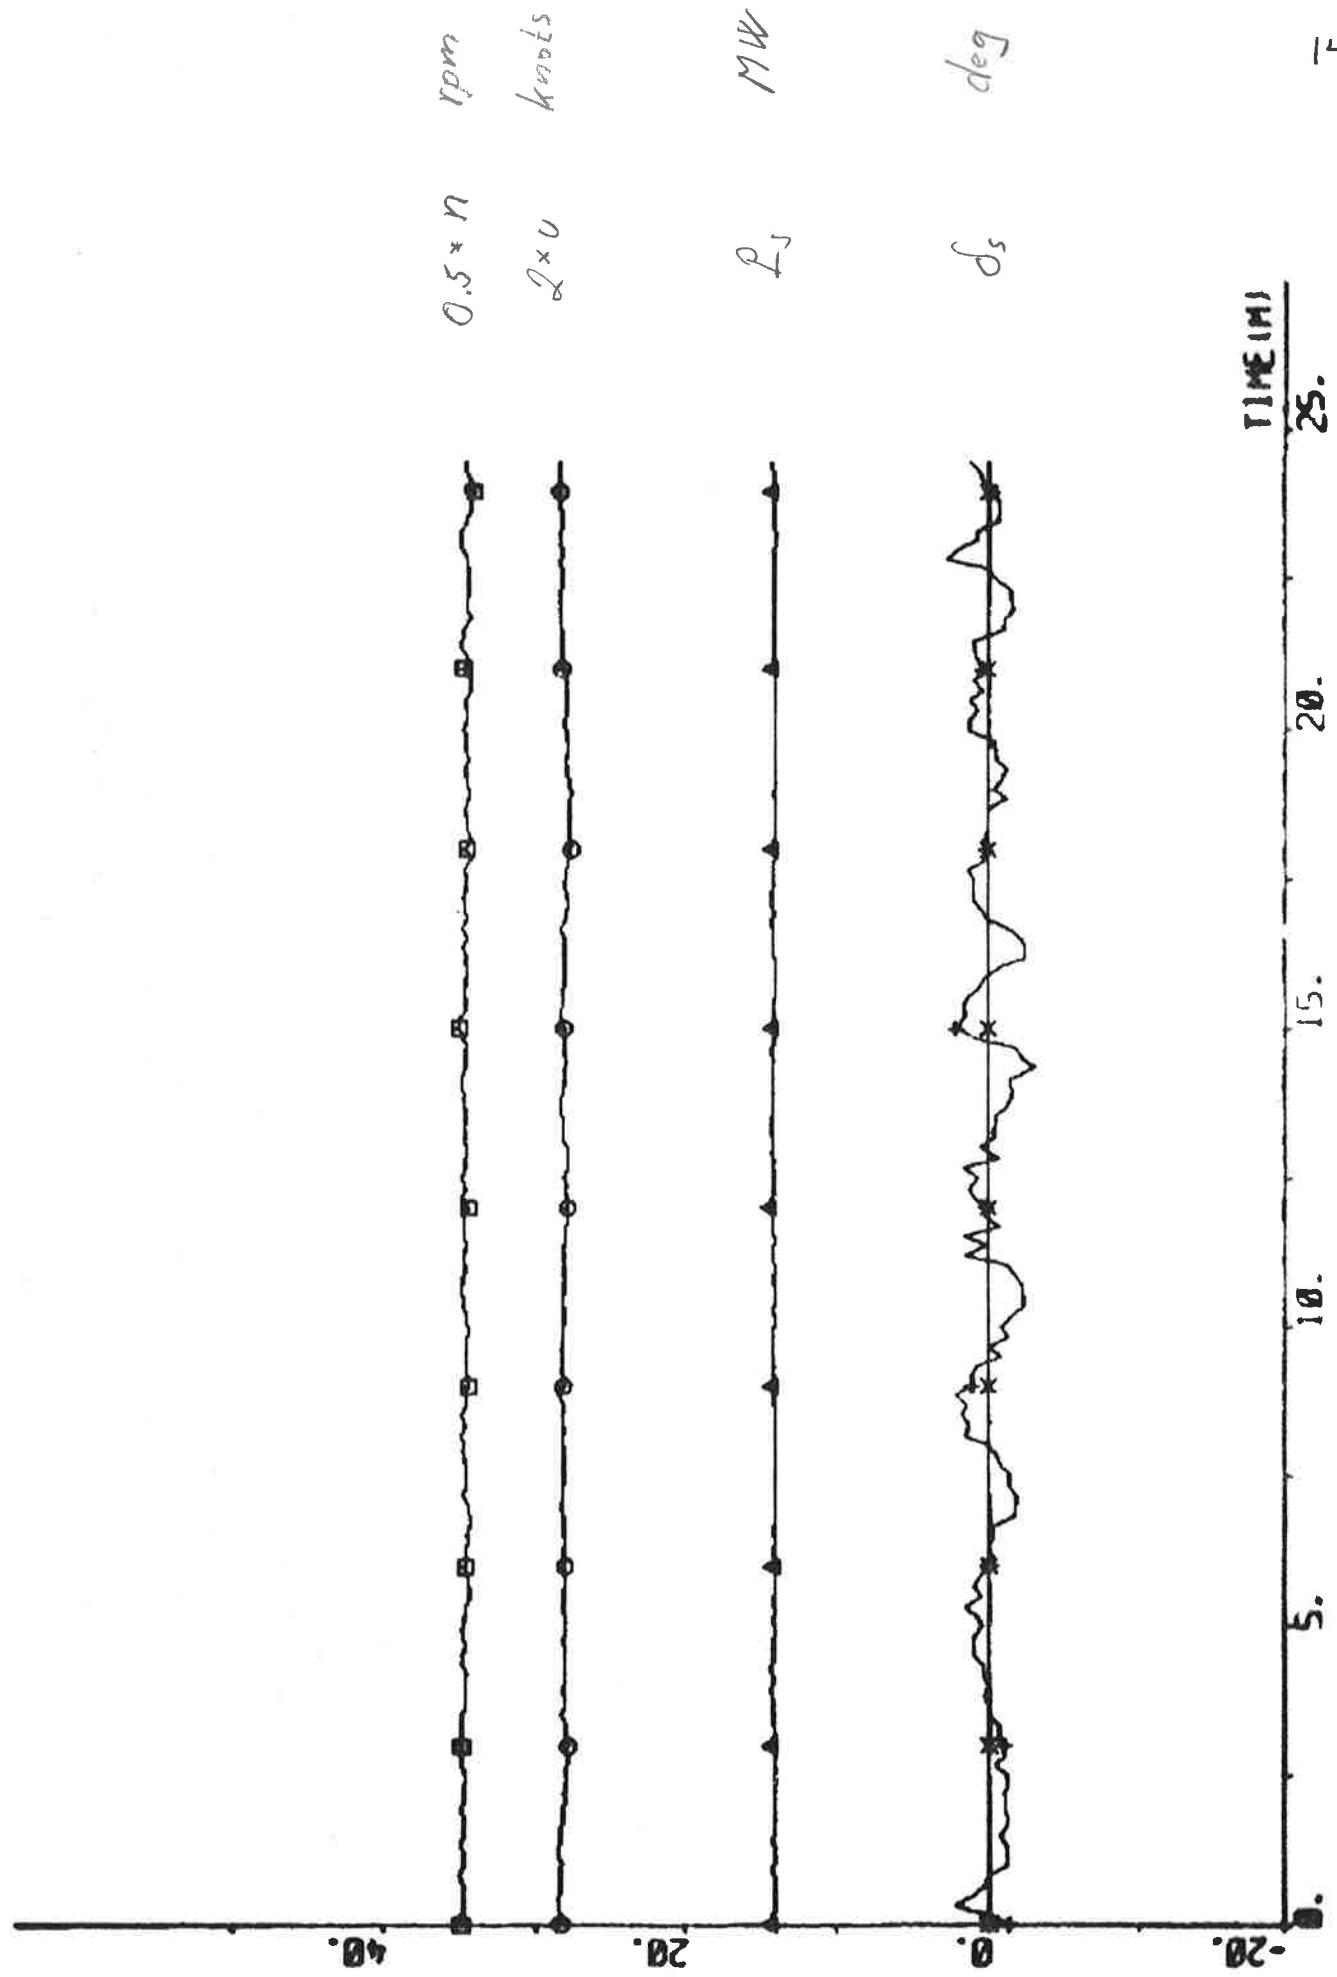


PLOT #TP1(1)-#TP2(1) #TP2(2) ERR5 00 01 02 -3.4 0.8 - KNOTS

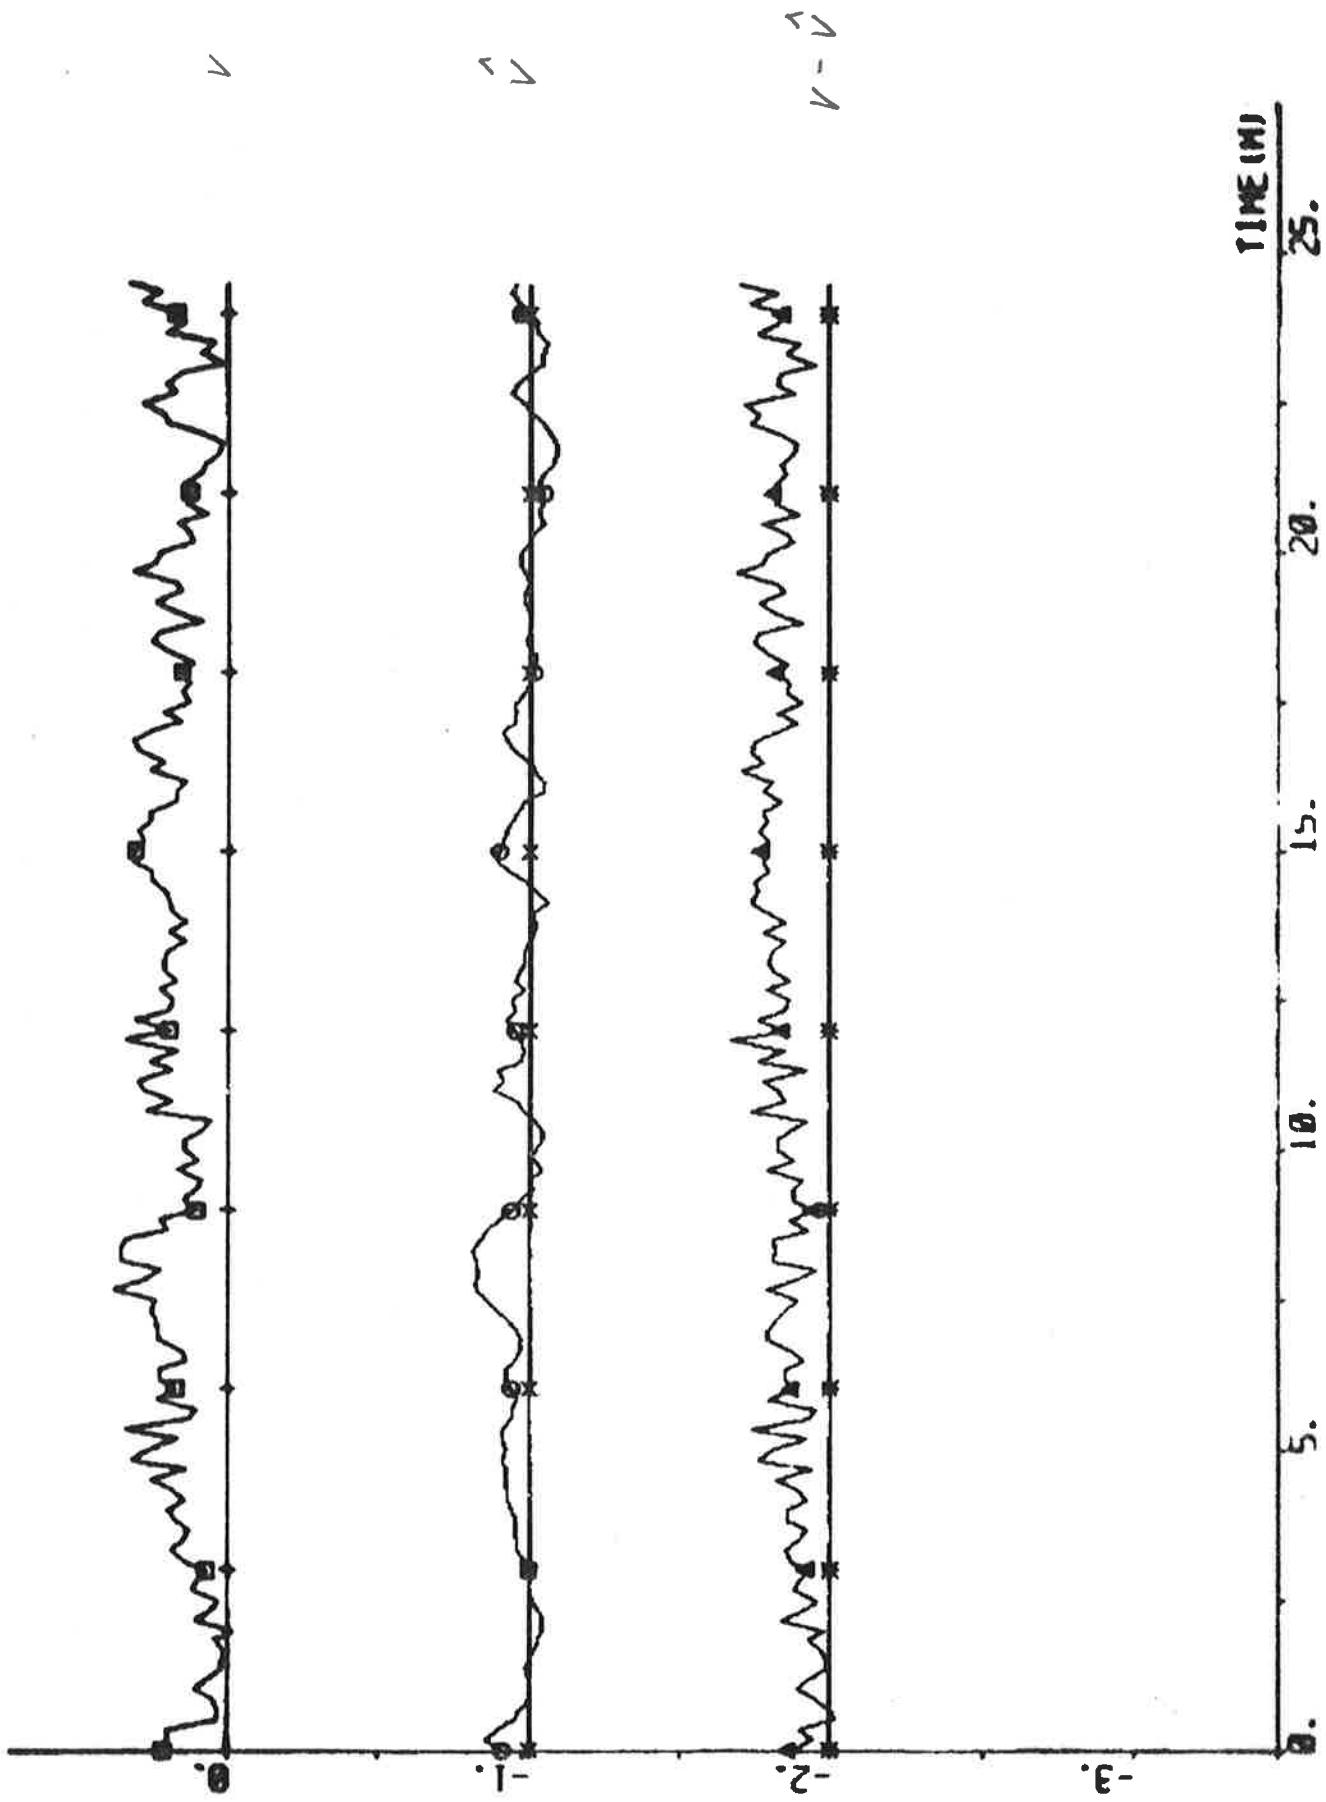


PLOT #7P1(1)-#7P1(4) #7P1(5) ER82 EP32 08 01 02 03 -3.4 0.0 . 00000

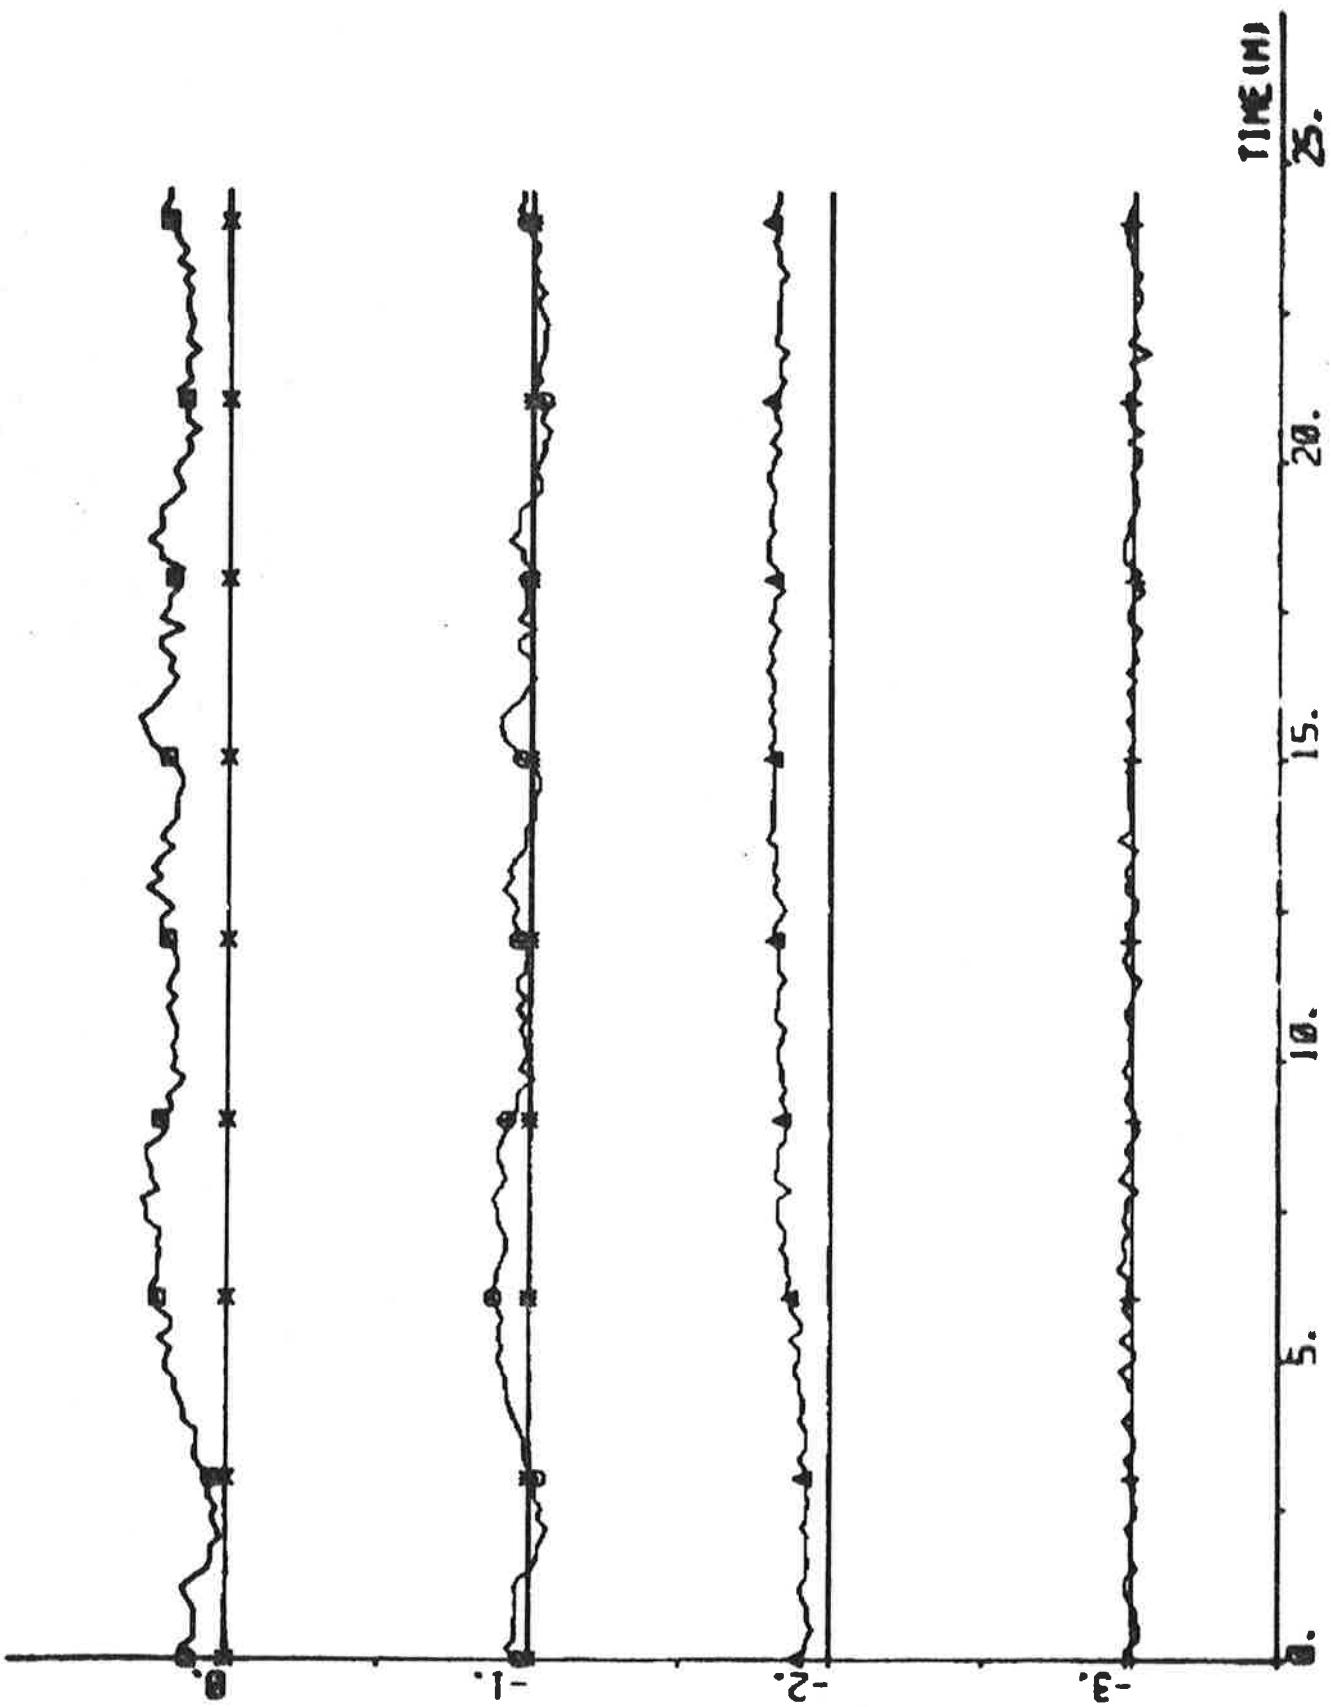


PLOT #7P1(1)-#7P1(8) #7P1(7) ER3 EP33 09 092 con 003 - 0.7 0. - deca

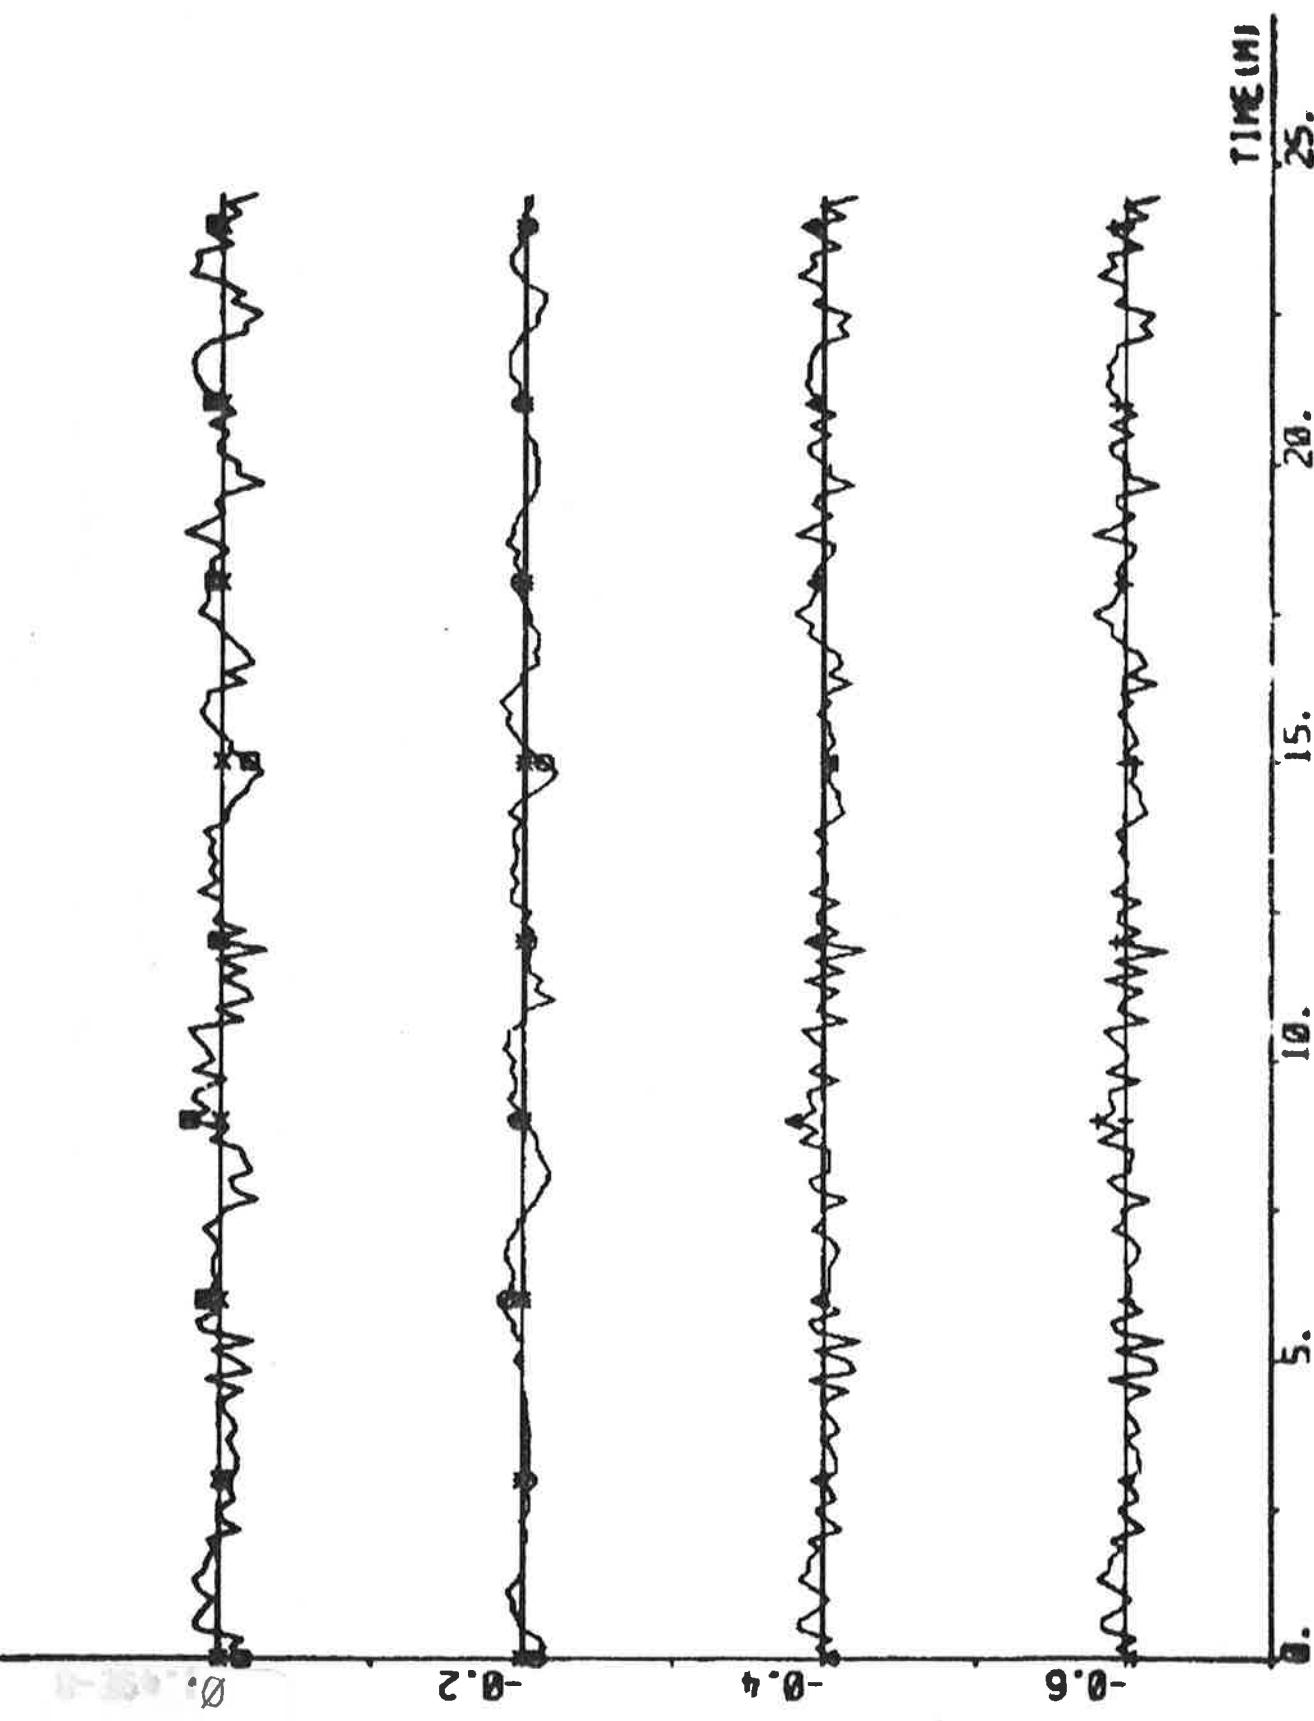


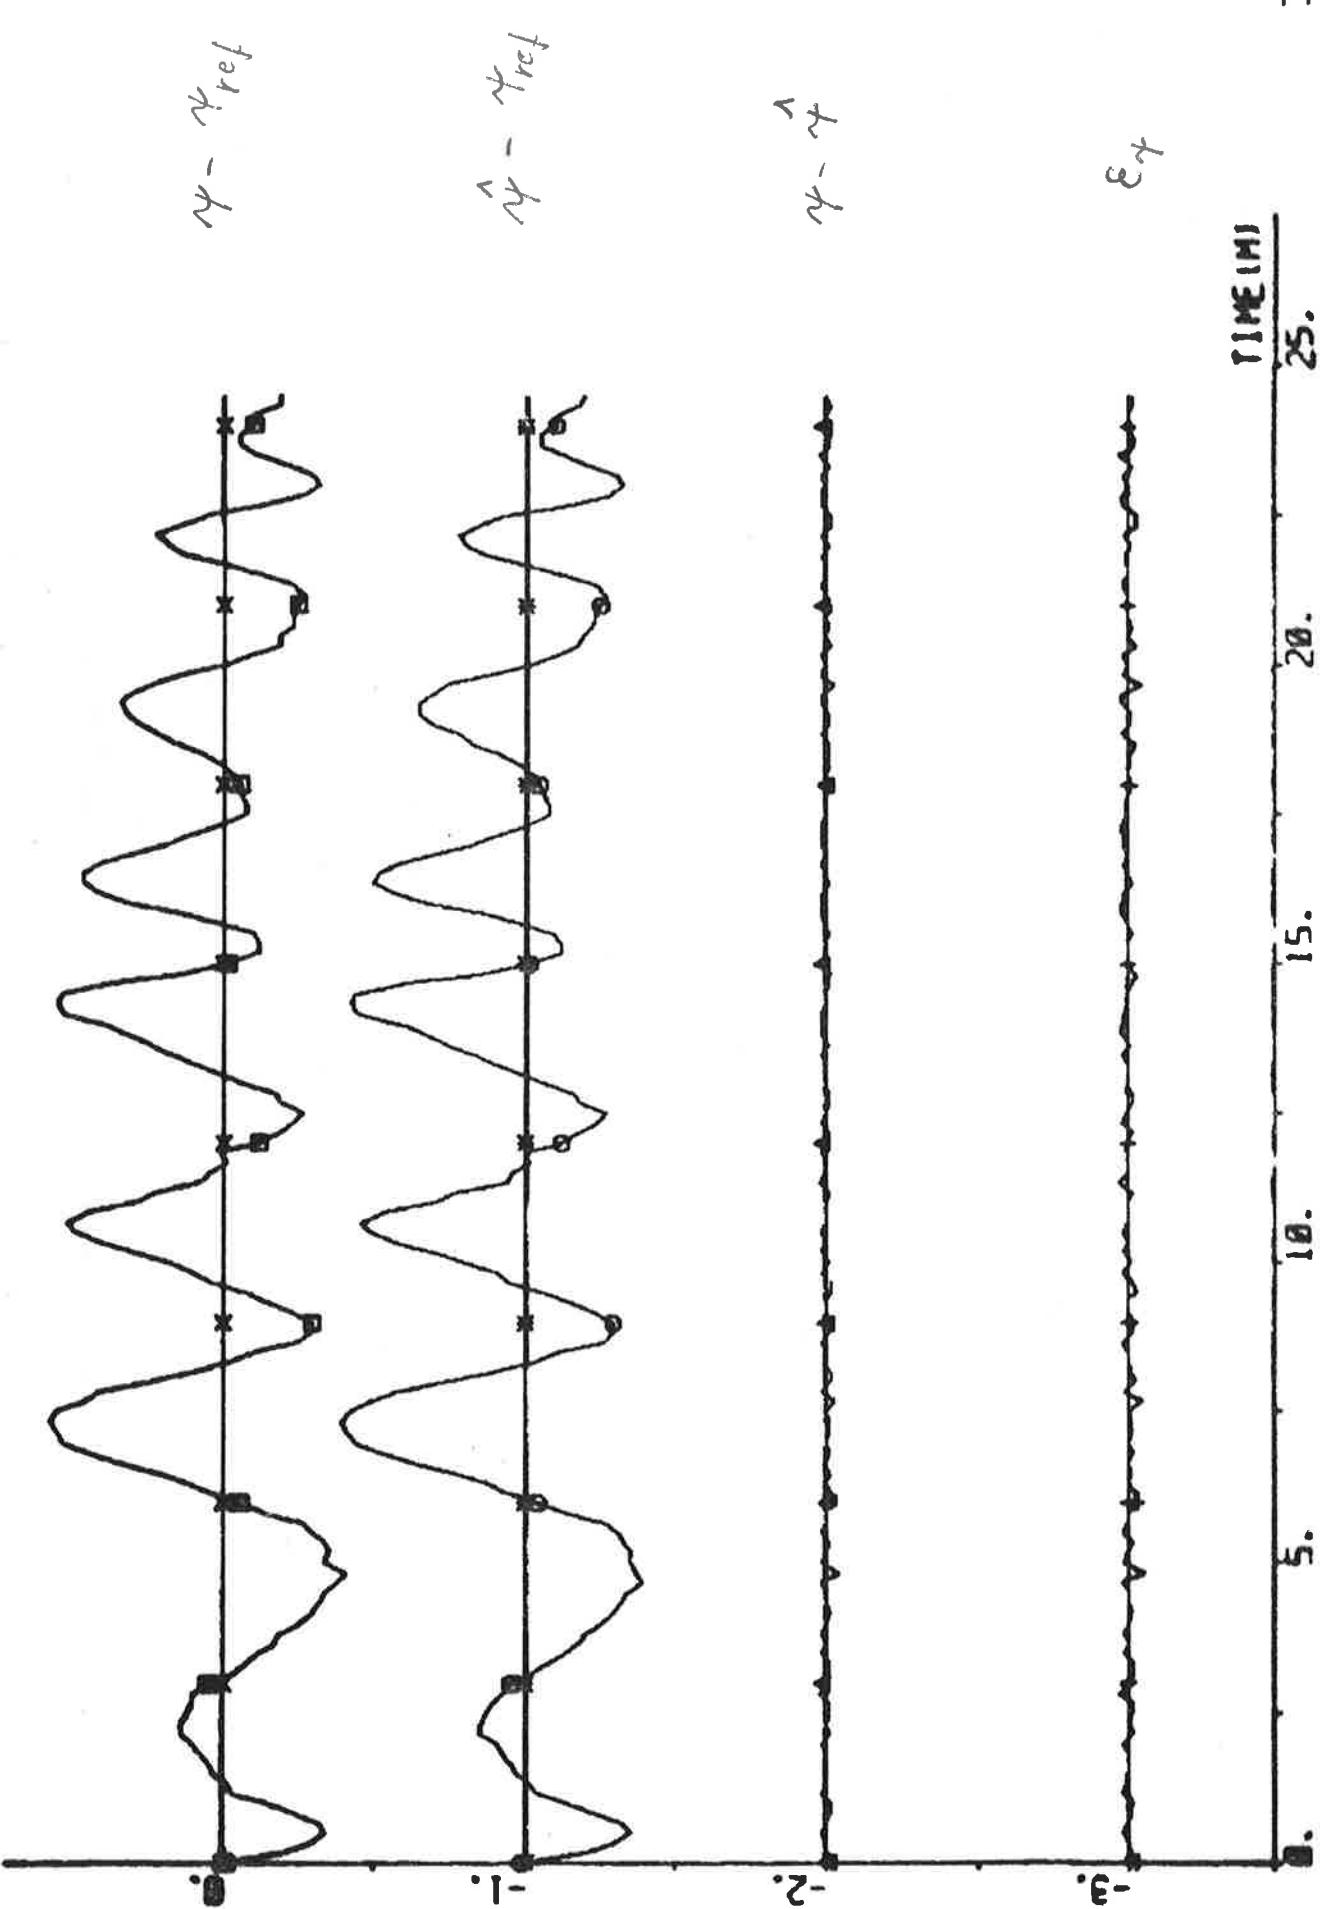


PLOT A7P1(1)-A7P1(2) A7P1(3) ENR1 EPS1 00 020 040 060 080 10 - DEC

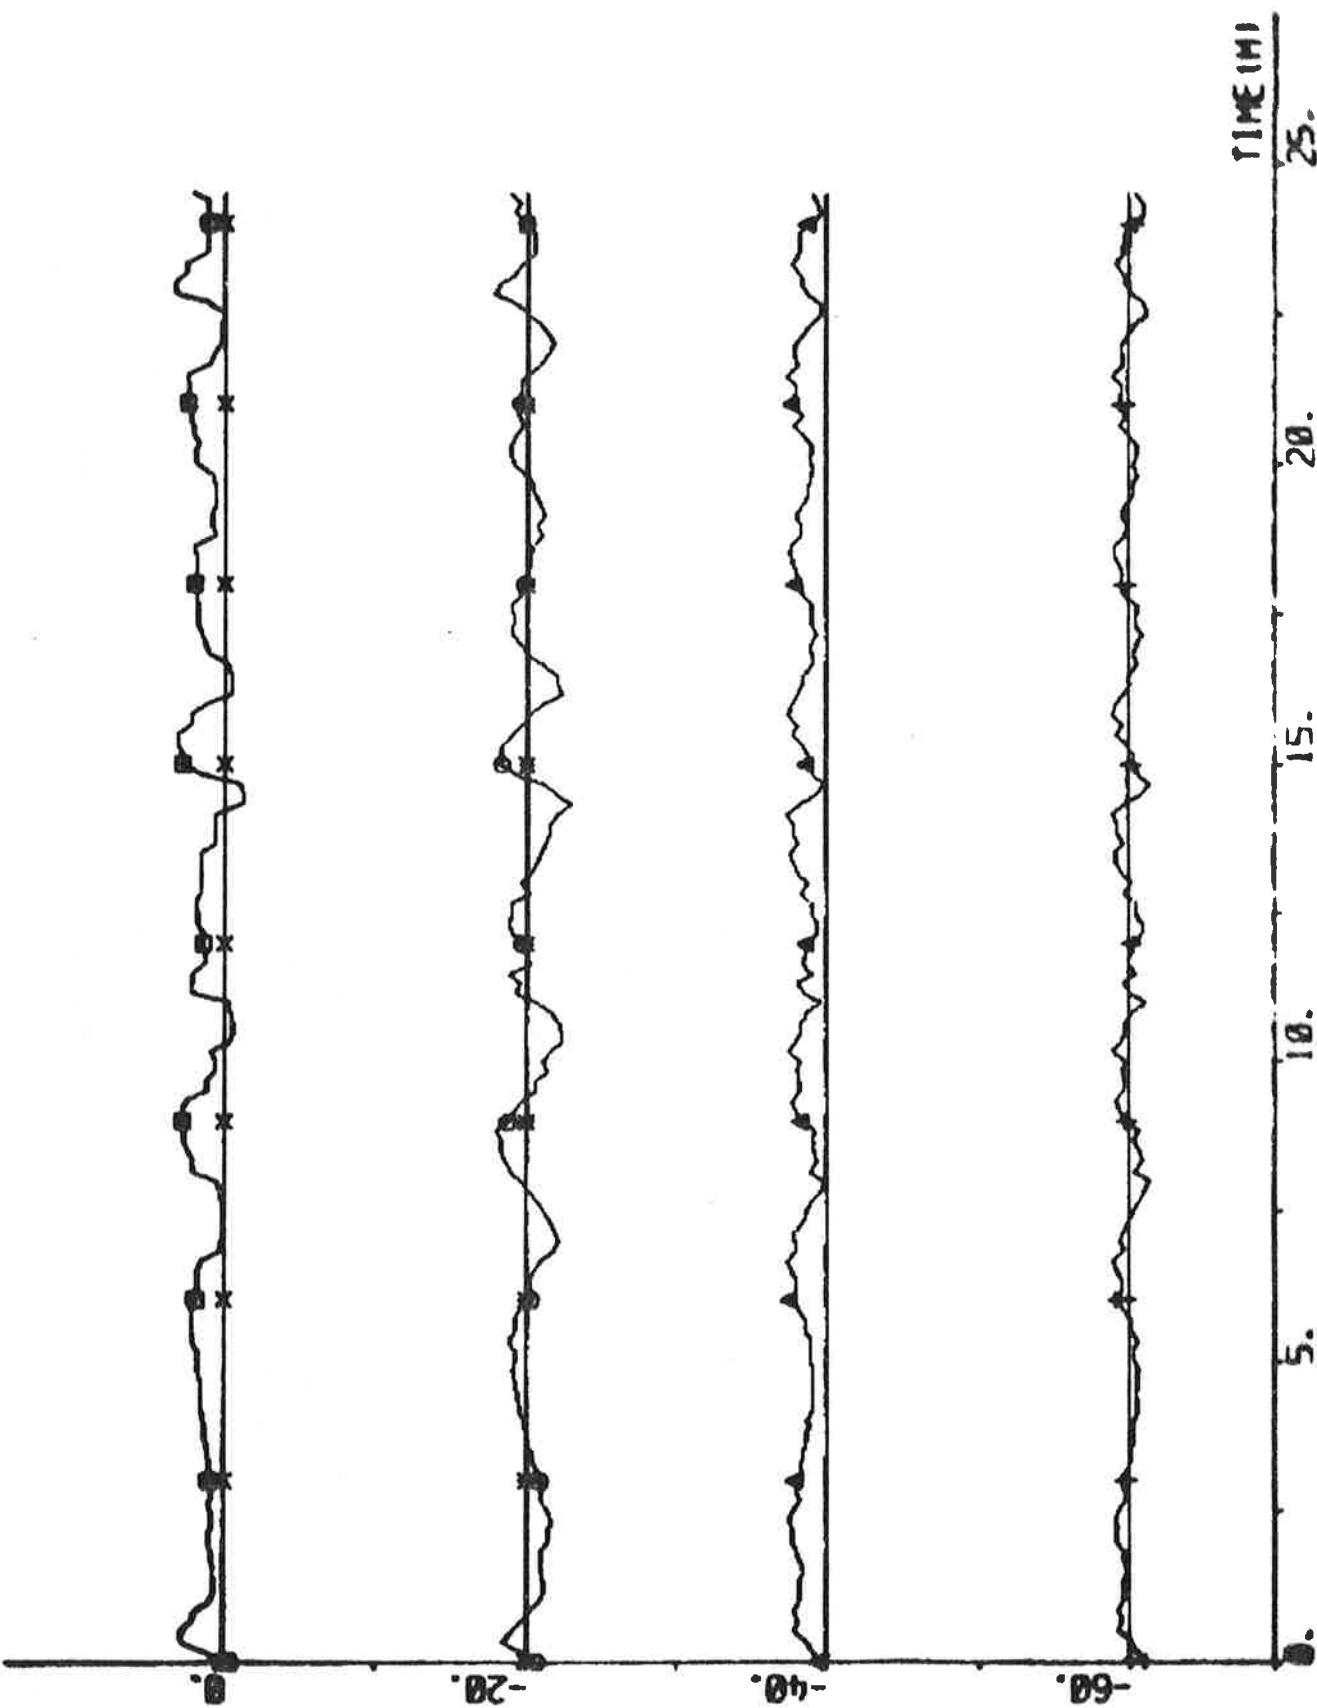

Plot A7P1(1)-A7P2(3) A7P2(4) A7P2(5) 03 02 01 00 -0.5 0.5

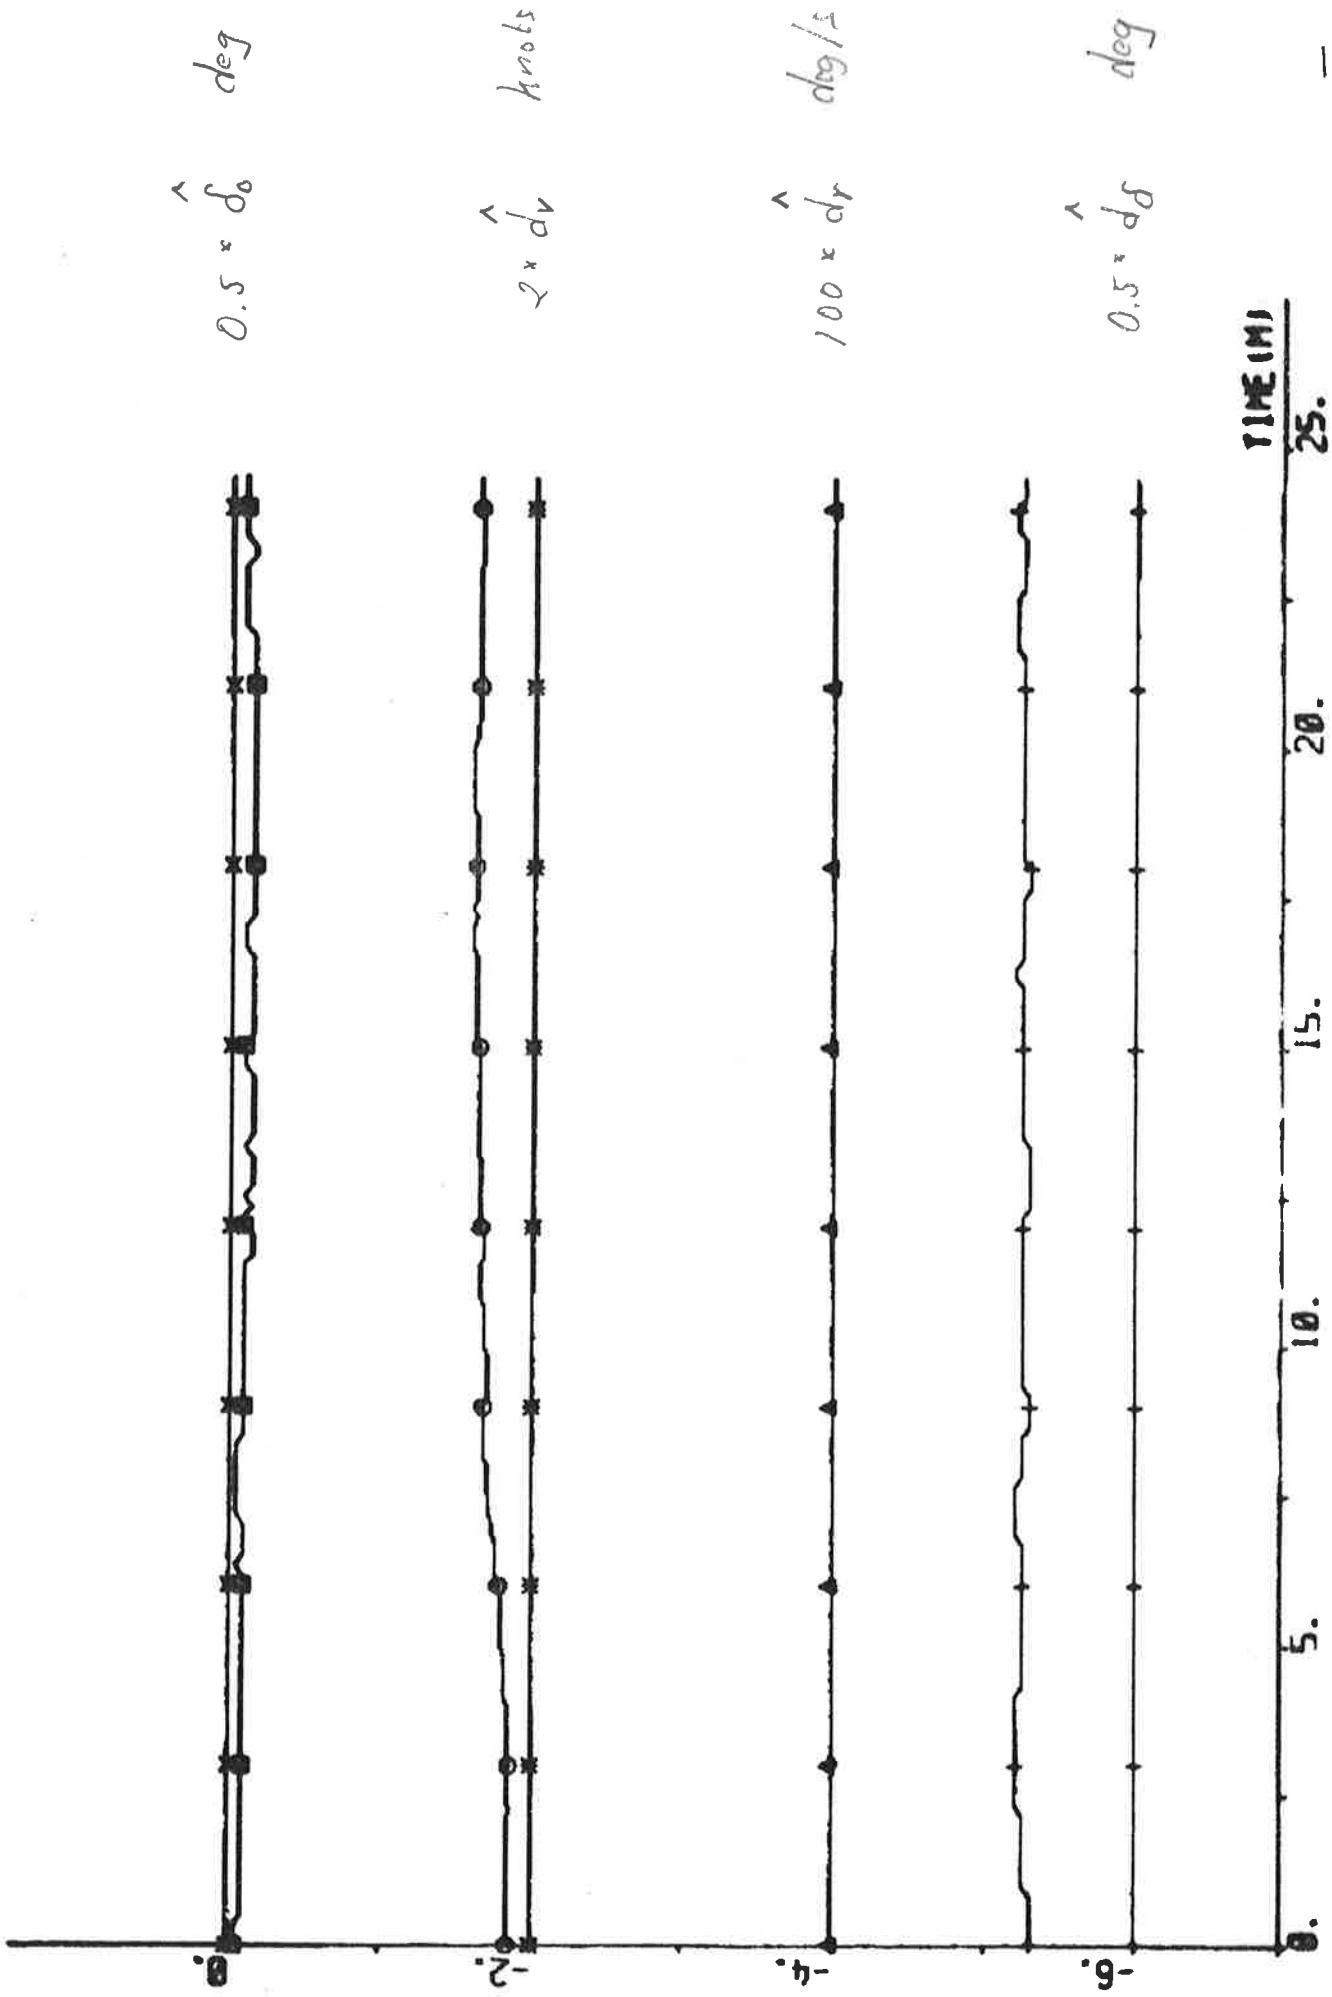

NOTE APR 1(1) - APR 2(7) APR 2(8) APR 2(9) APR 2(10) APR 2(11) APR 2(12) APR 2(13)

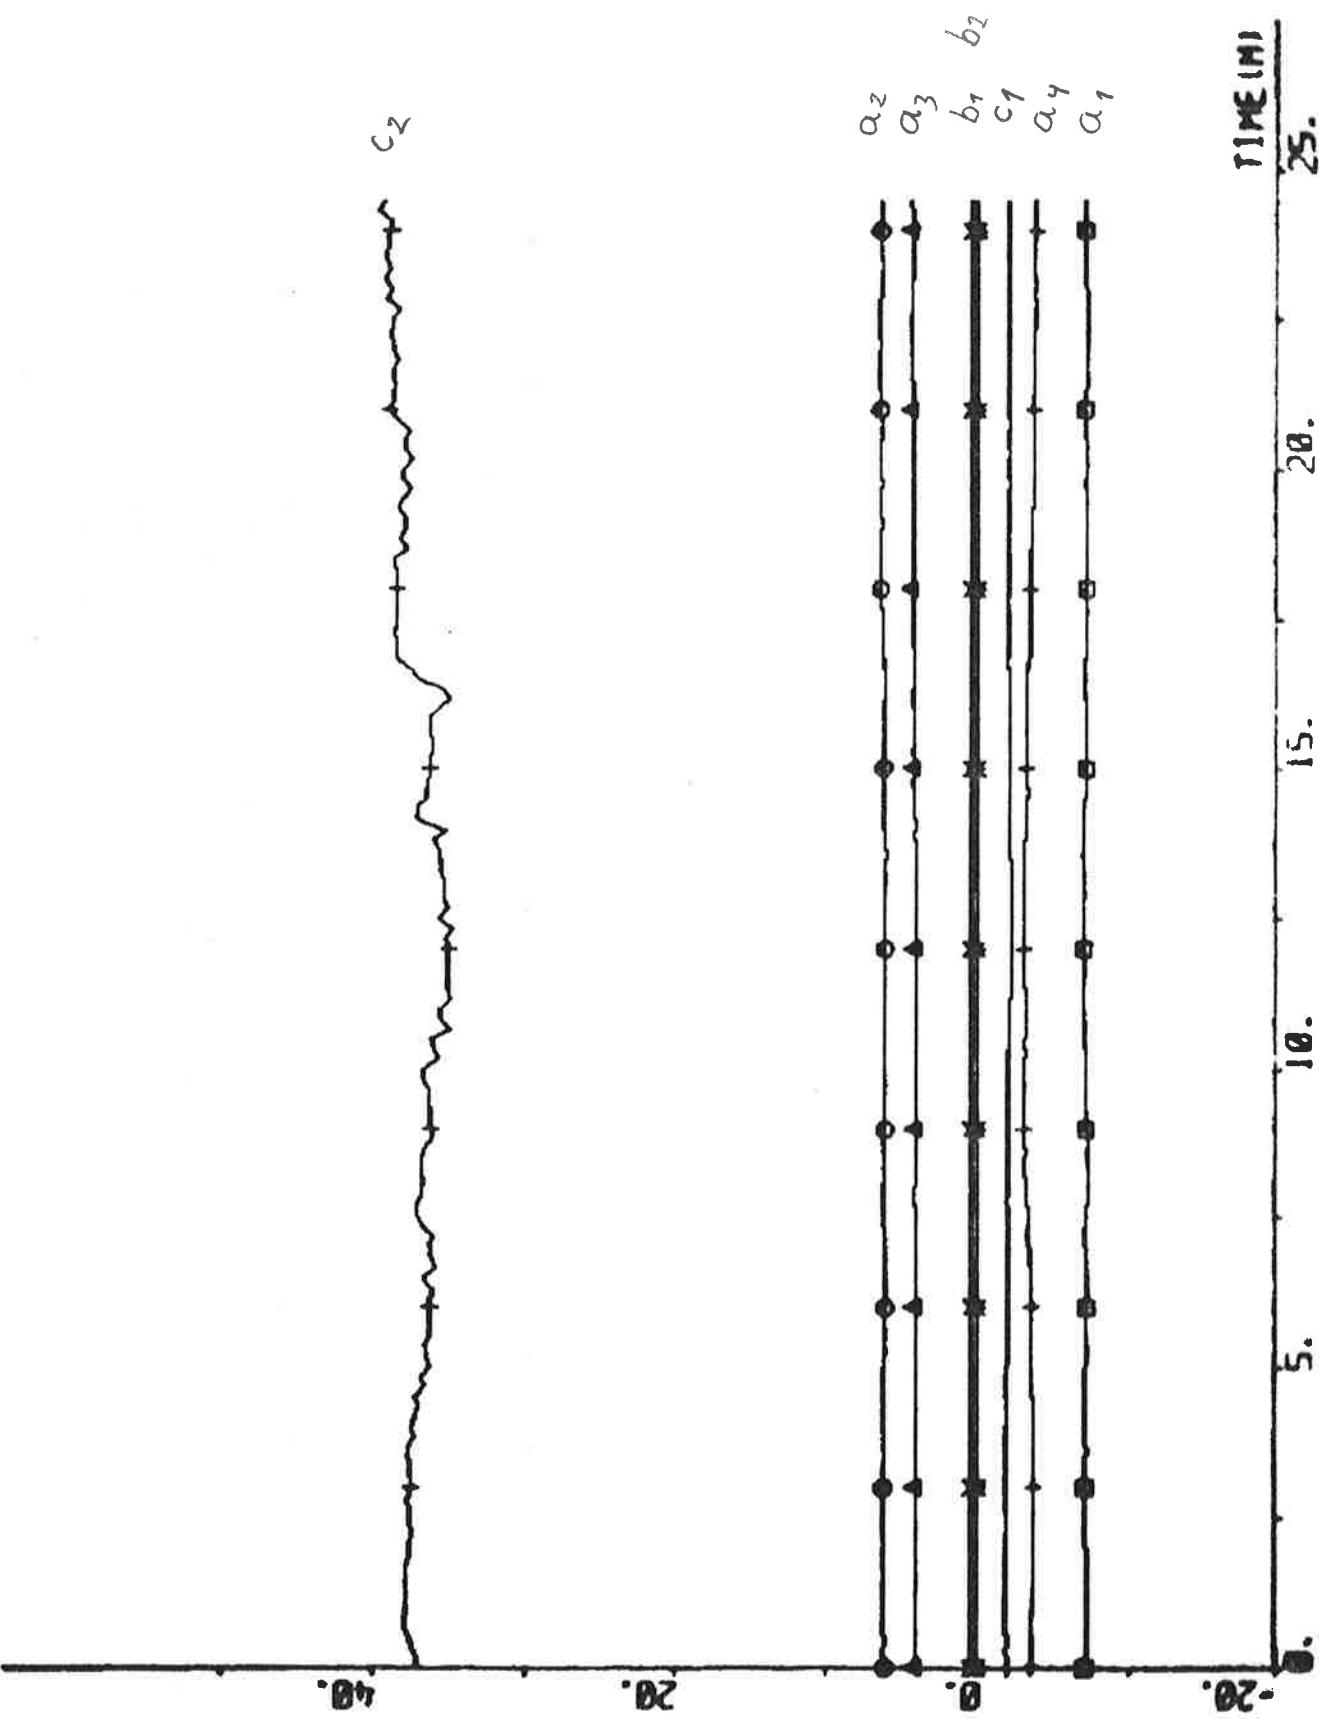

EXPERIMENT A8

Date	1976-04-23	Forward draught	8.5 m
Time	08.56	Aft draught	12.5 m
Duration	24 min	Wind direction	NW (5; see App. A)
Position	N 07°34' W 16°32'	Wind velocity	4 m/s (gentle breeze)
ψ_{ref}	144 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 4 & q = 0 \\ T_s = 15 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.29 \\ 5.98 \\ 4.34 \\ -2.58 \\ 0.50 \\ 0.18 \\ -2.32 \\ 39.92 \end{bmatrix} \quad P = \begin{bmatrix} 1.72 & & & & & & & \\ -1.87 & 3.80 & & & & & & \\ -0.31 & -1.99 & 4.23 & & & & & \\ 0.59 & 0.01 & -1.99 & 1.54 & & & & \\ -0.08 & 0.01 & 0.15 & -0.07 & 0.01 & & & \\ -0.04 & -0.01 & 0.04 & 0.01 & 0.00 & 0.01 & & \\ -0.37 & 0.48 & 0.17 & -0.29 & 0.01 & 0.00 & 0.41 & \\ 2.99 & -5.18 & -1.70 & 3.09 & -0.36 & -0.02 & 6.79 & 386.28 \end{bmatrix}$$



$$a_1 + a_2 + a_3 + a_4 = -0.55$$

$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.08 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)


δ_c	$0.17 \pm 1.46 \text{ deg}$	P_s	$14.1 \pm 0.1 \text{ MW}$
δ	$1.63 \pm 1.26 \text{ deg}$	ϵ_v	$0.00 \pm 0.02 \text{ knots}$
$\psi - \psi_{ref}$	$-0.027 \pm 0.309 \text{ deg}$	ϵ_r	$0.00 \pm 0.02 \text{ deg/s}$
n	$69.2 \pm 0.4 \text{ rpm}$	ϵ_ψ	$0.00 \pm 0.03 \text{ deg}$
u	$13.9 \pm 0.1 \text{ knots}$	ϵ_δ	$0.0 \pm 0.6 \text{ deg}$
V_1	0.274		

PLOT REP1(1)-REP1(8) REP REP1(10) REP1(15) REP1(22) -31 - DEC


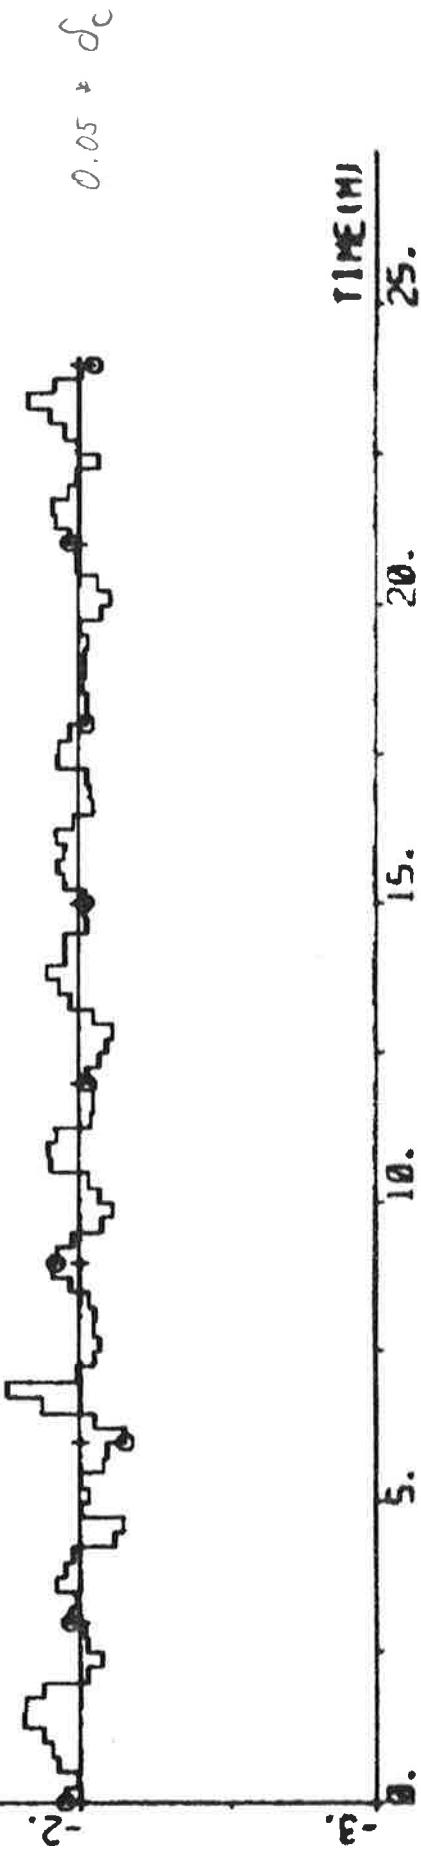
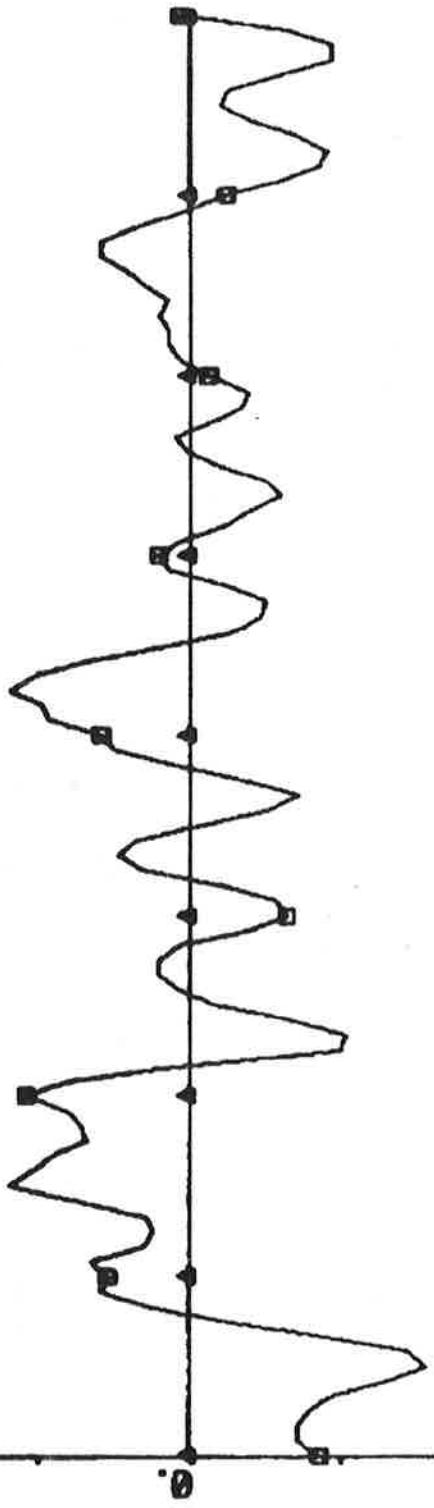


150

PLOT NO. 111 - REP 1 (12) REP 1 (14) REP 1 (11) 60 - 20 60

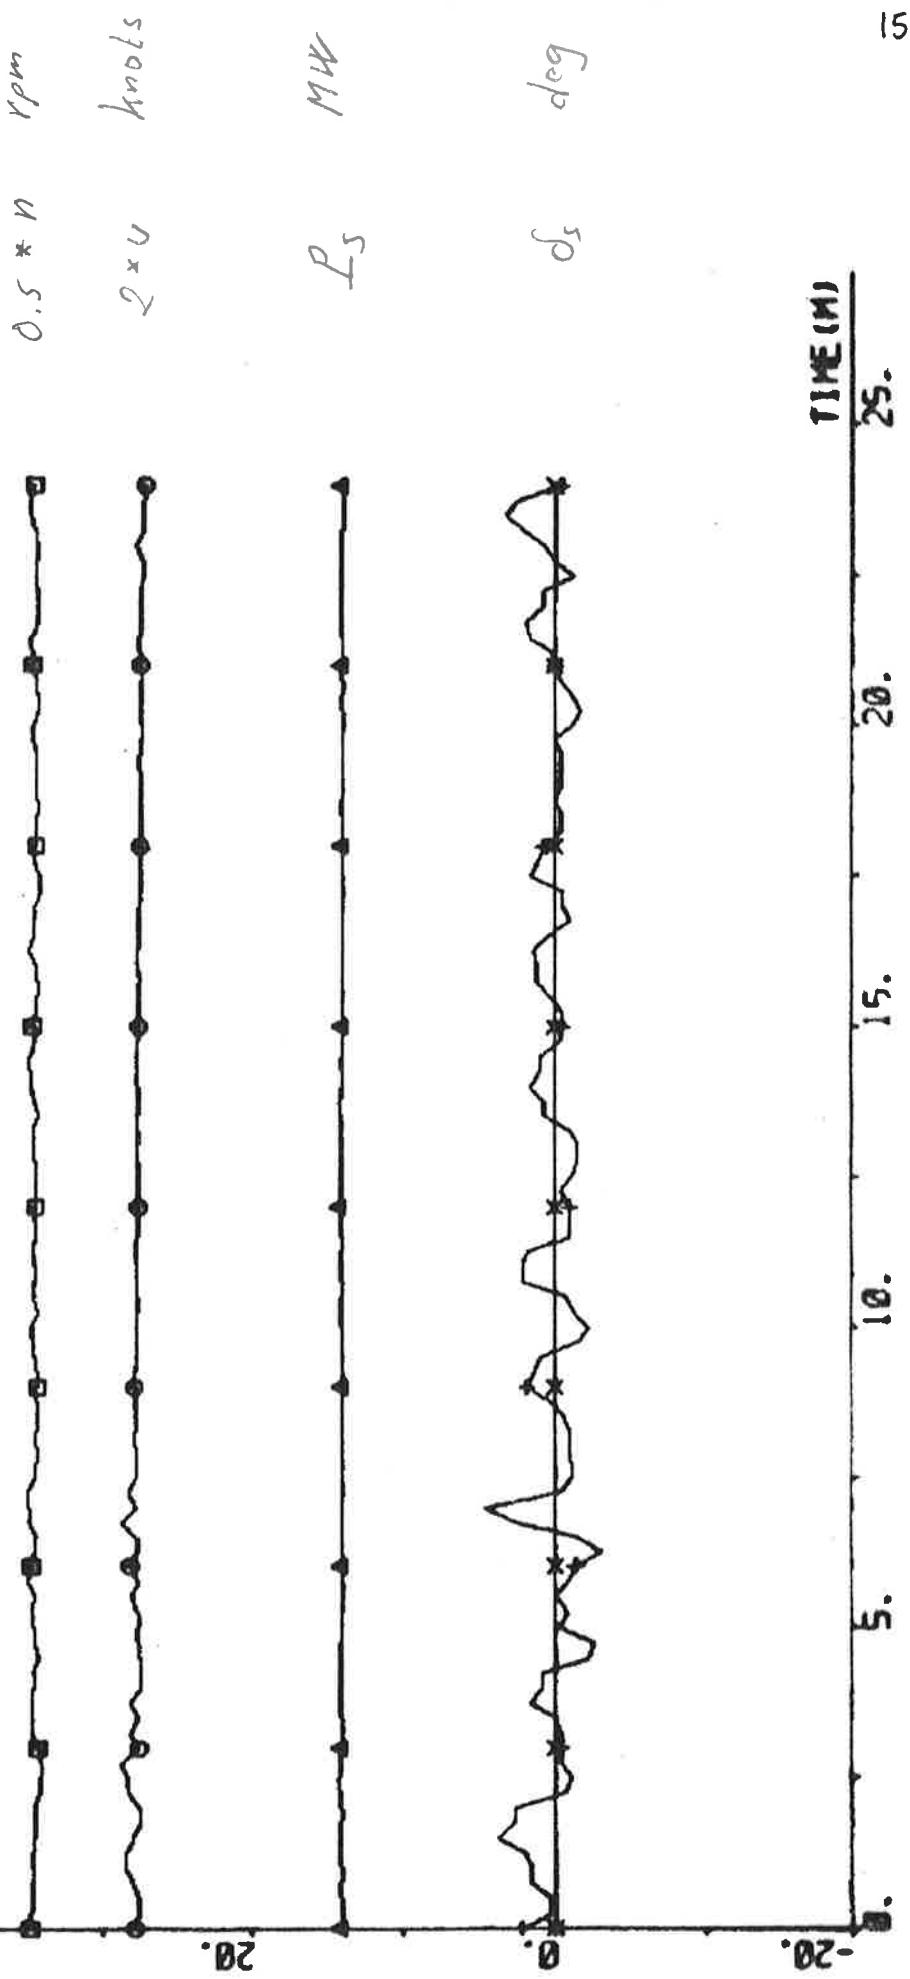


PLOT RSP1(1)-RSP2(1) RSP2(2) ERR5 00 01 02 -3.4 0.0 - KNOTS

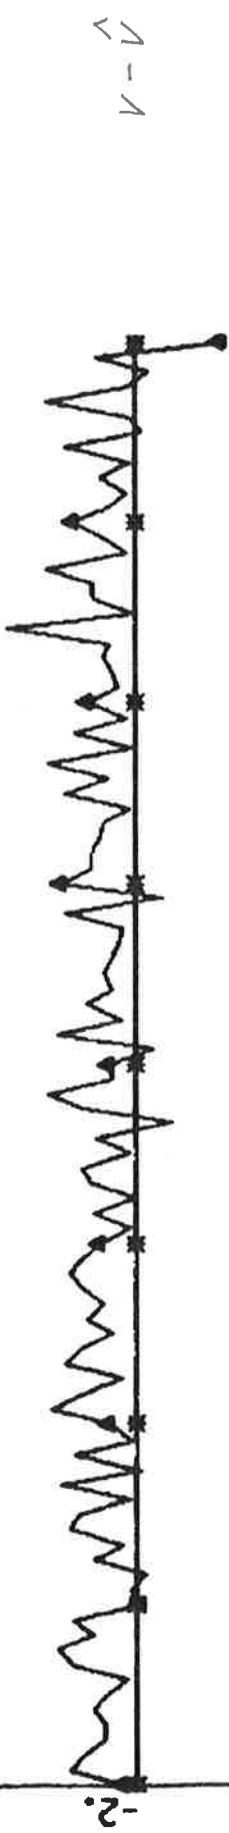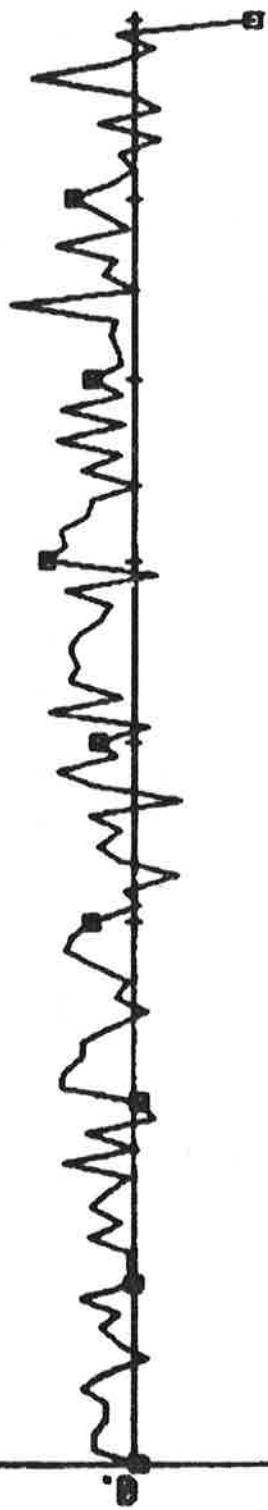


TIME (M)
25.
20.
15.
10.
5.


PLOT nsp1(1)-nsp1(4) nsp1(5) ERR2 EPS2 00 01 02 03 -3.4 0.0 -3.4 0.0 -3.4 0.0

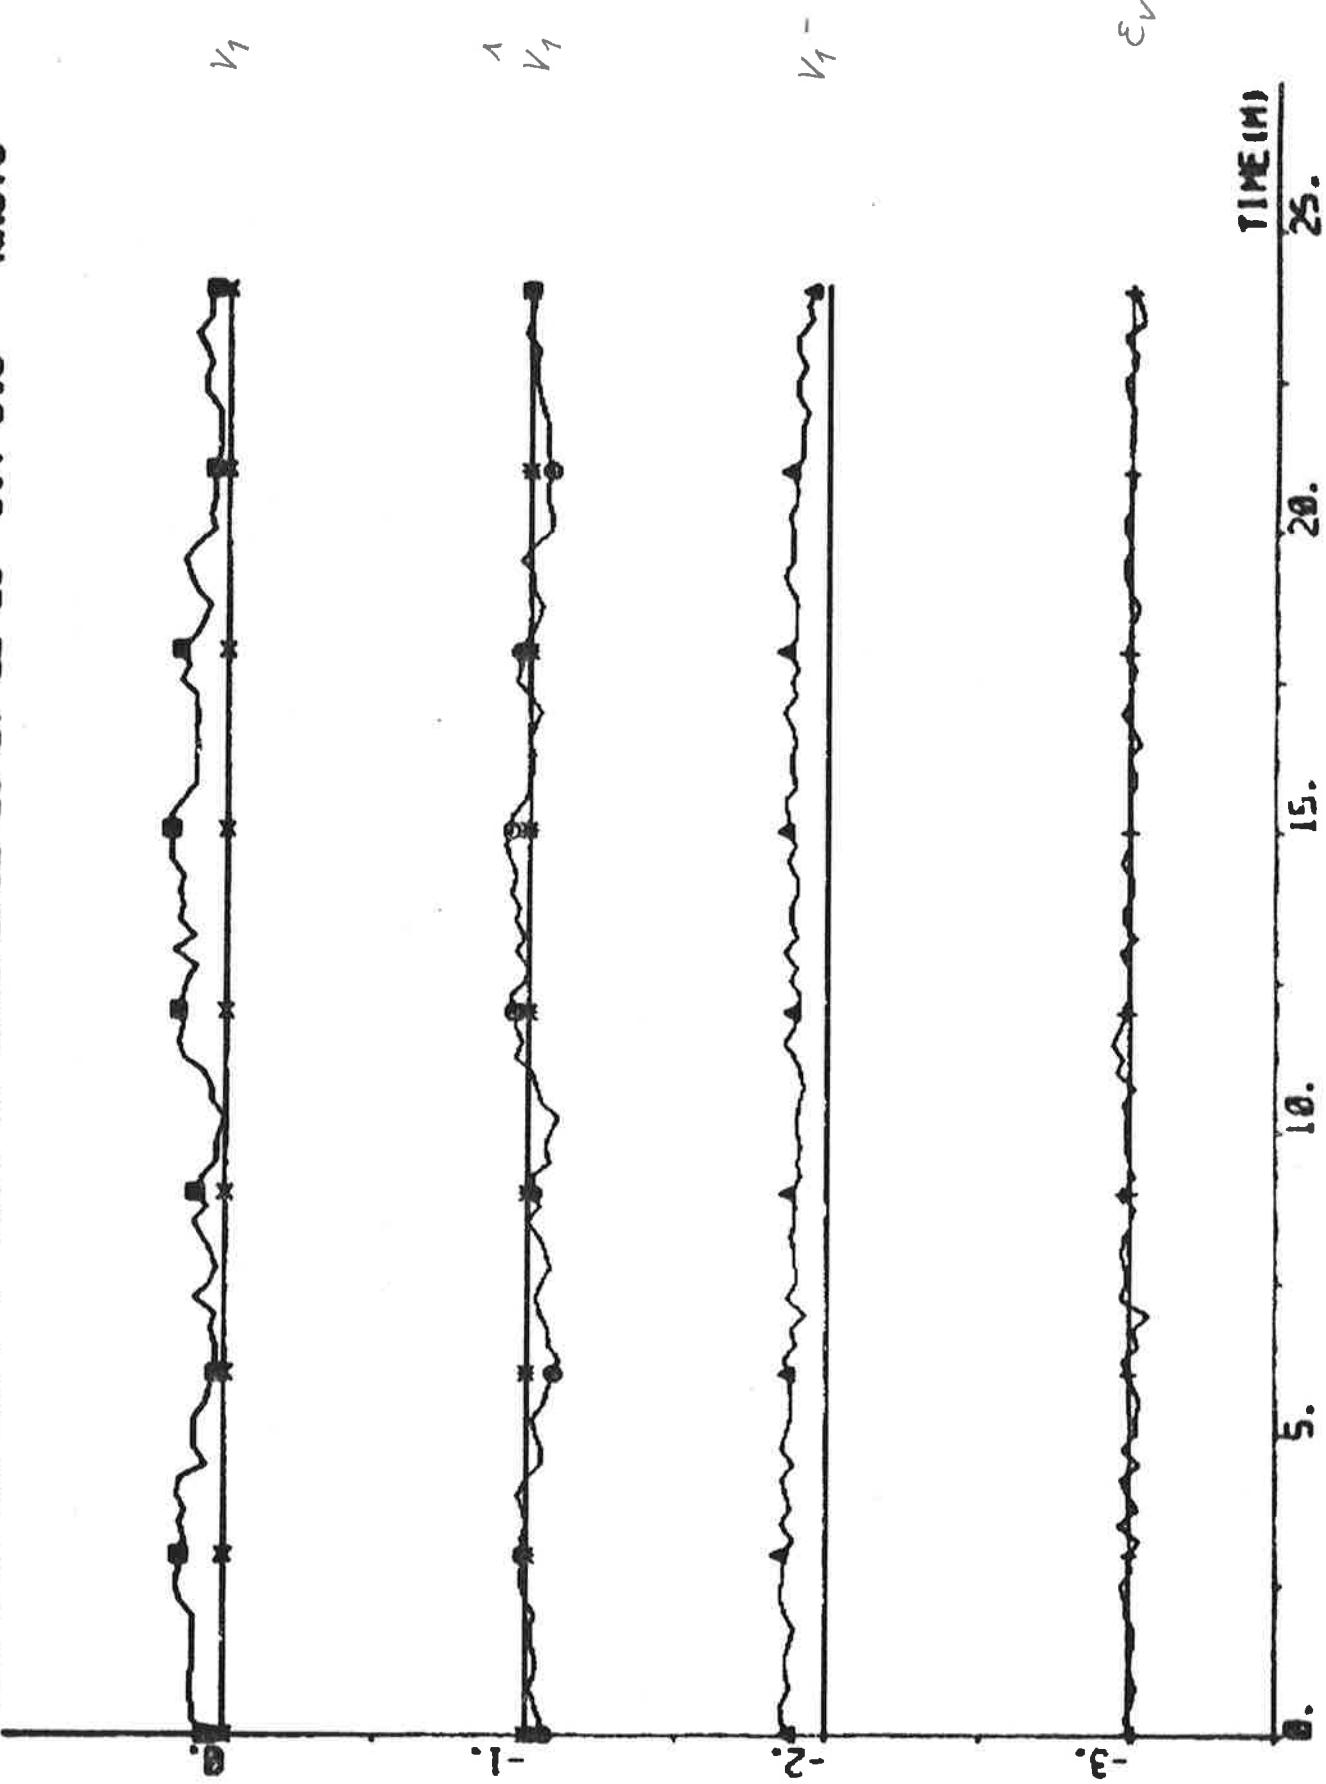


PLOT RPP1(1),RPP1(2), RPP1(7), ERRC3 EP03 00 002 001 003 -0.? 0. - 00005

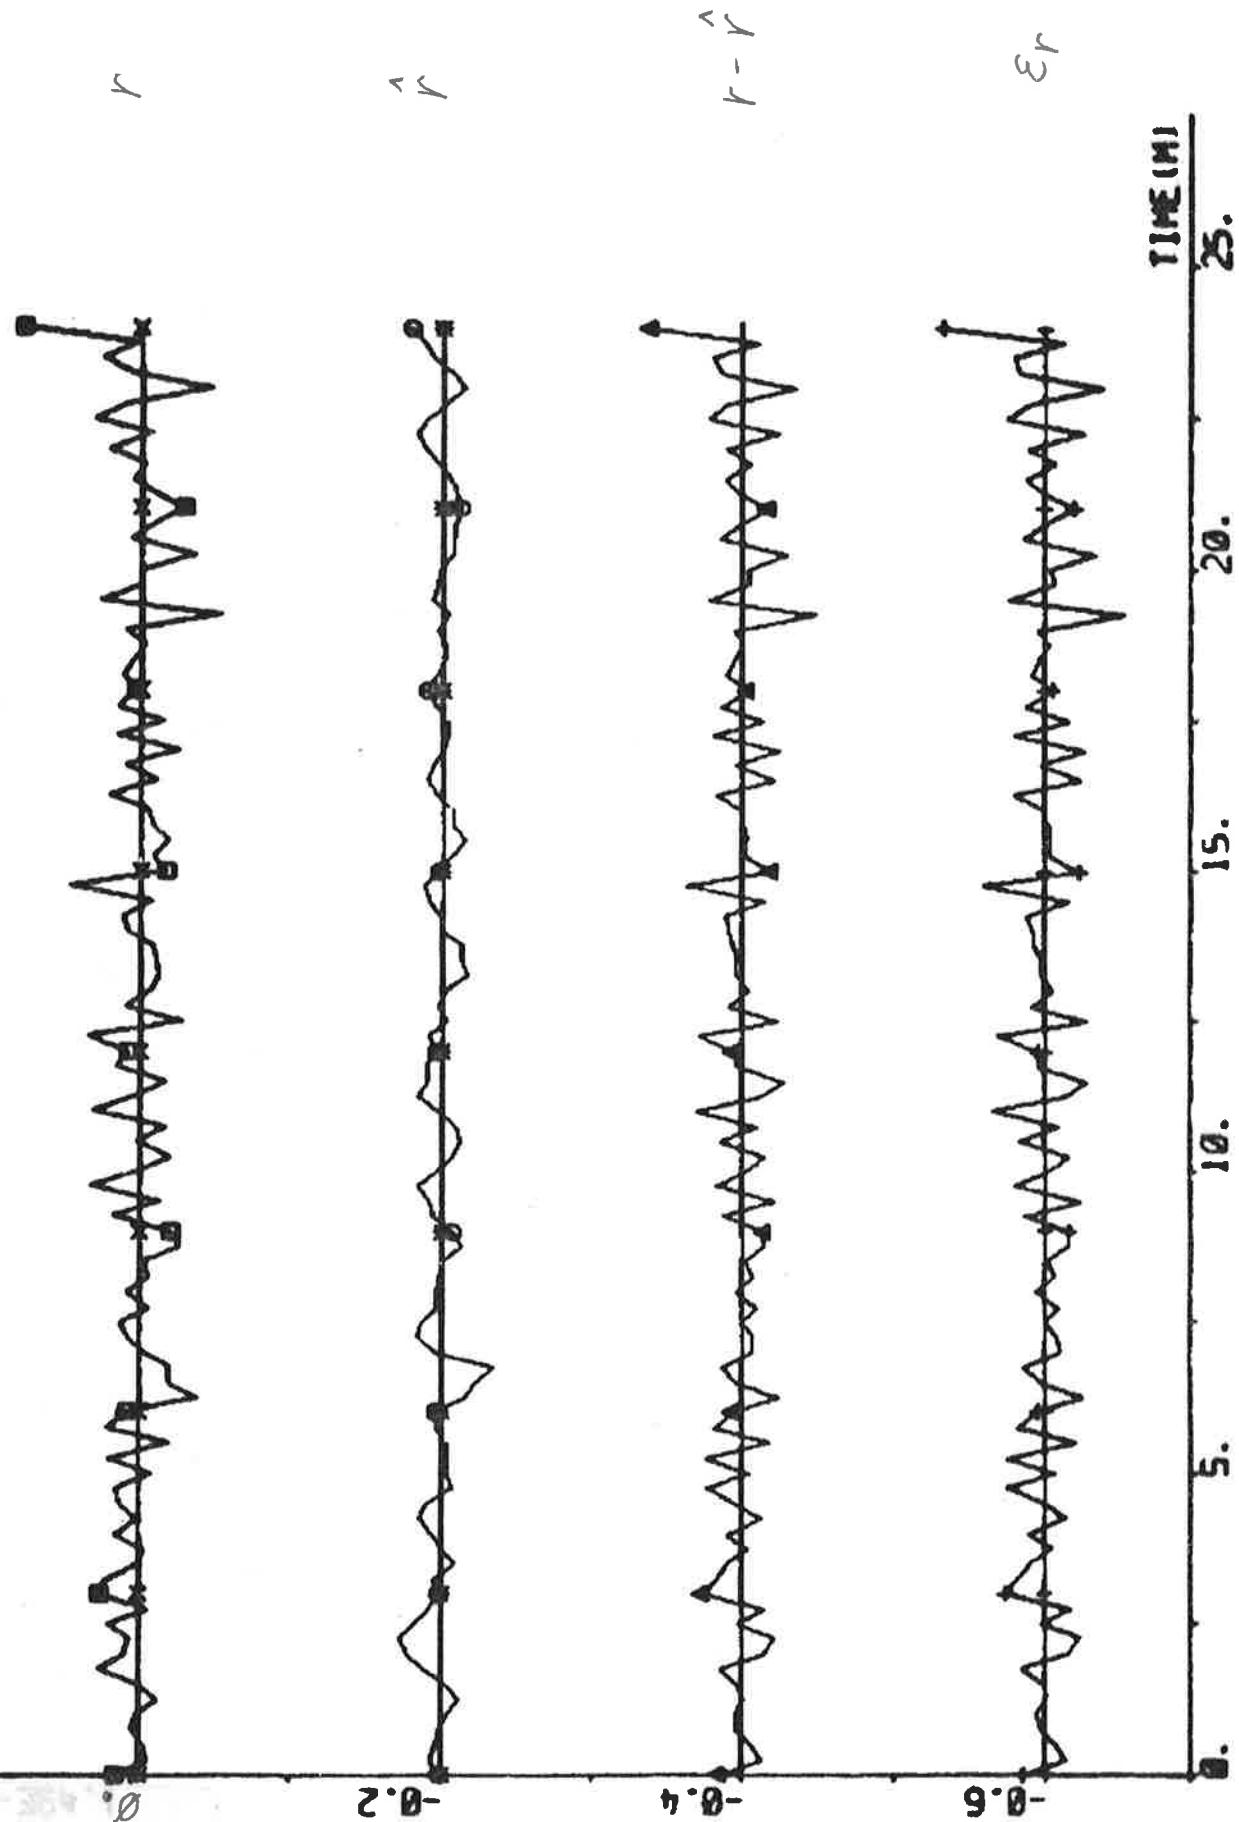


PLOT RAPI(1)-RAPI(8) ENR4 EPS4 00 01 02 03 -3.4 0.0 - DEC

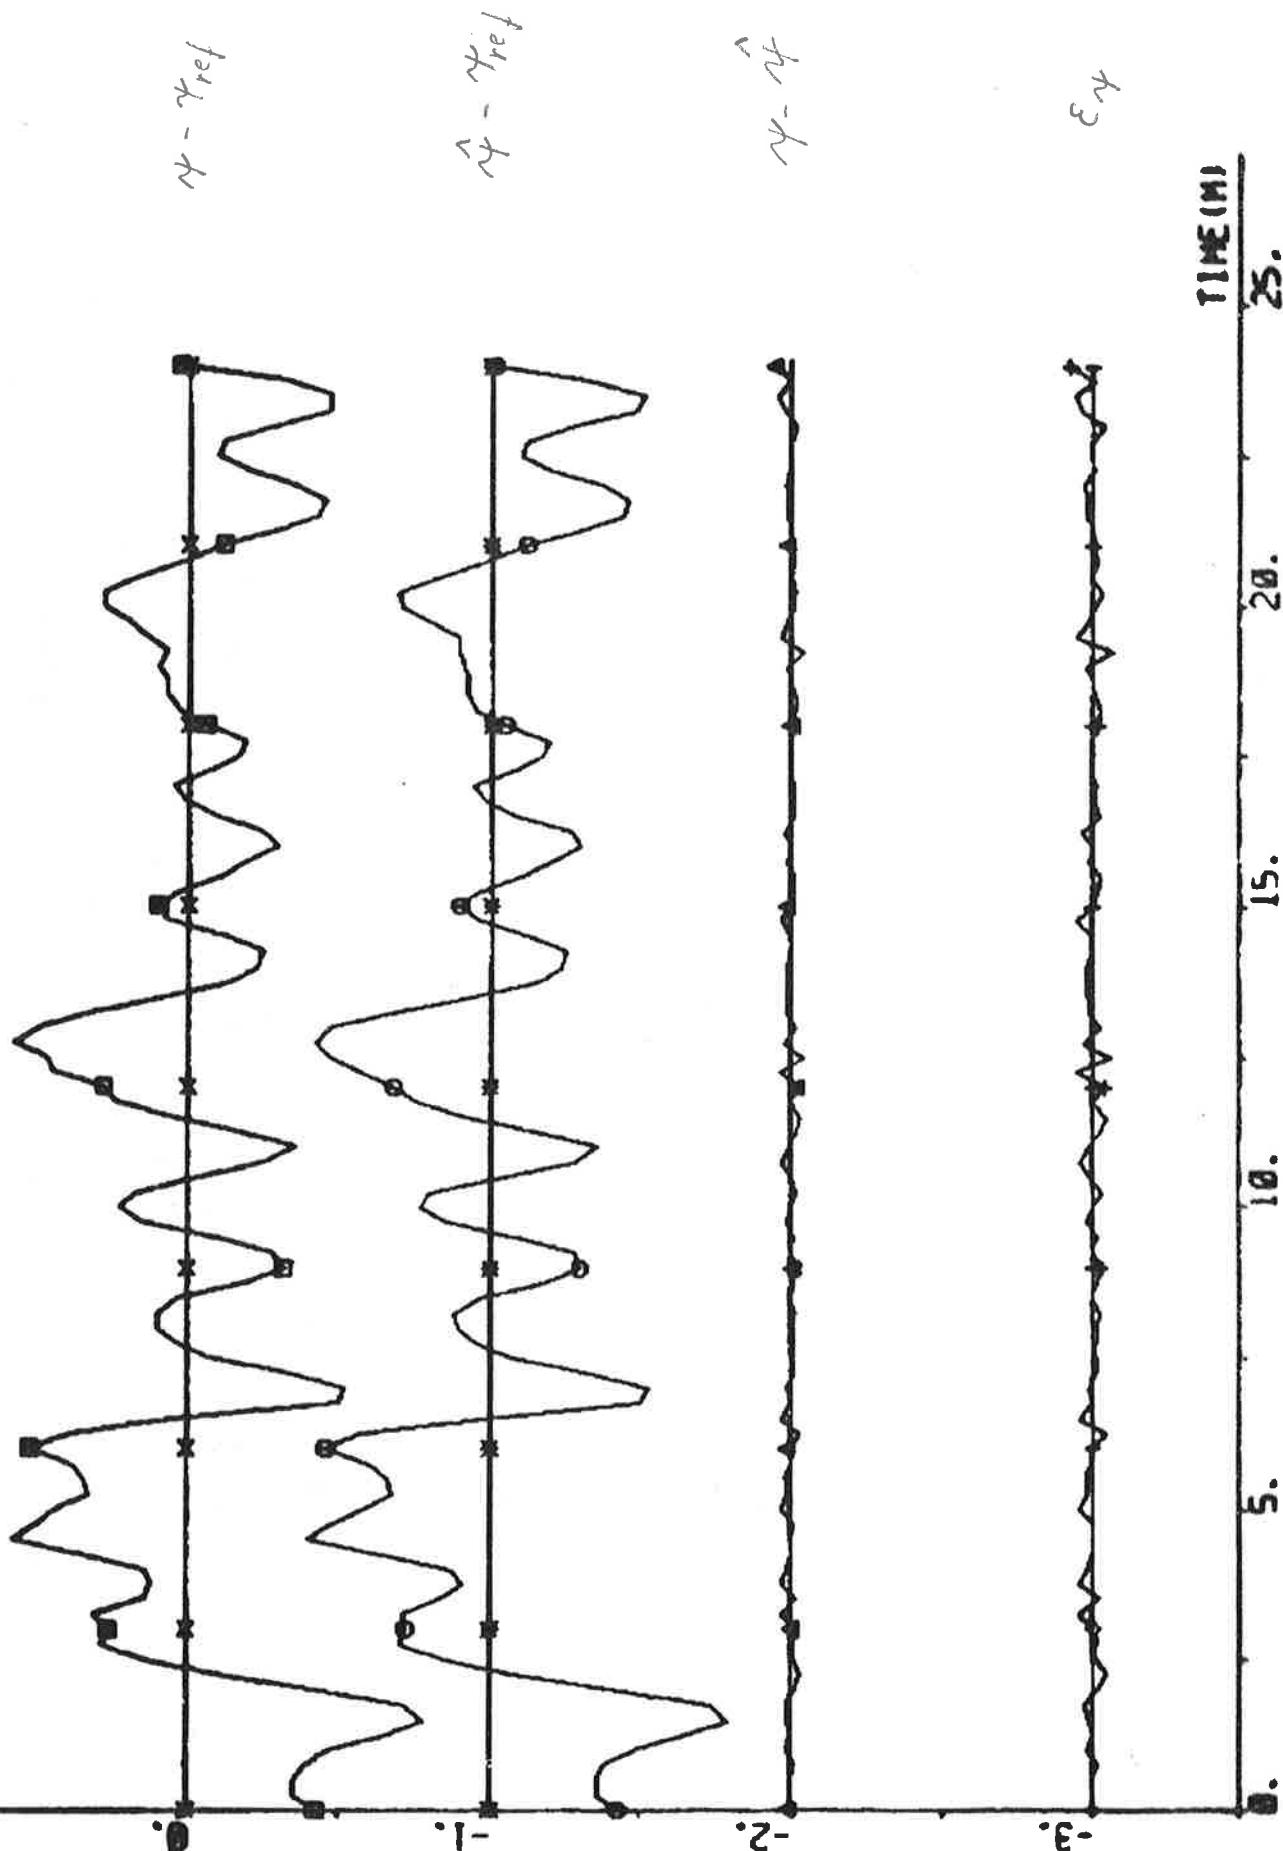

PLOT RSP1(1) RSP1(2) RSP1(3) ERR1 EPS1 00 020 040 060 -080 15 • 000

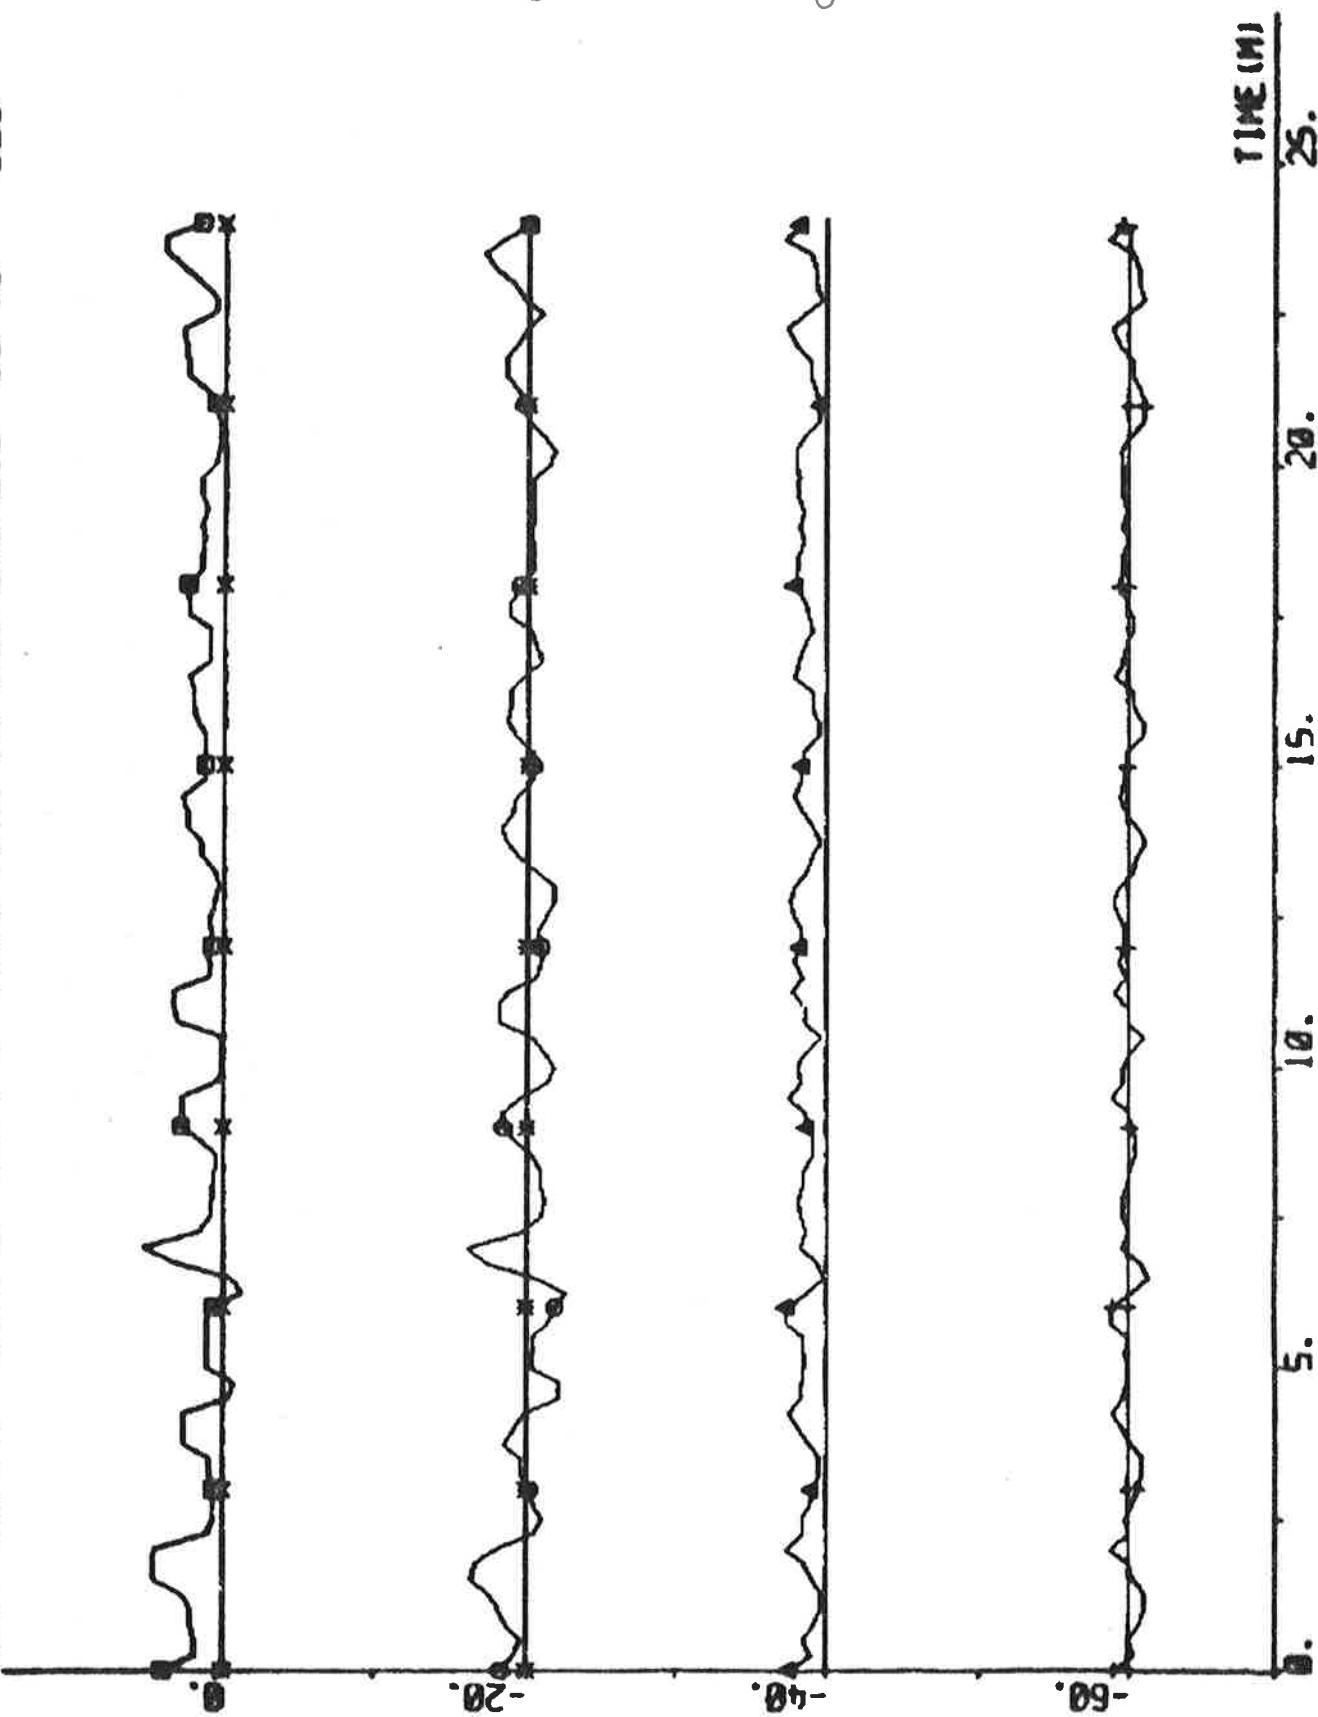


PL07 RRP1(11)-RRP2(3) RRP2(4) RRP2(5) RRP2(6) 00 02 04 06 -0.5 1.5

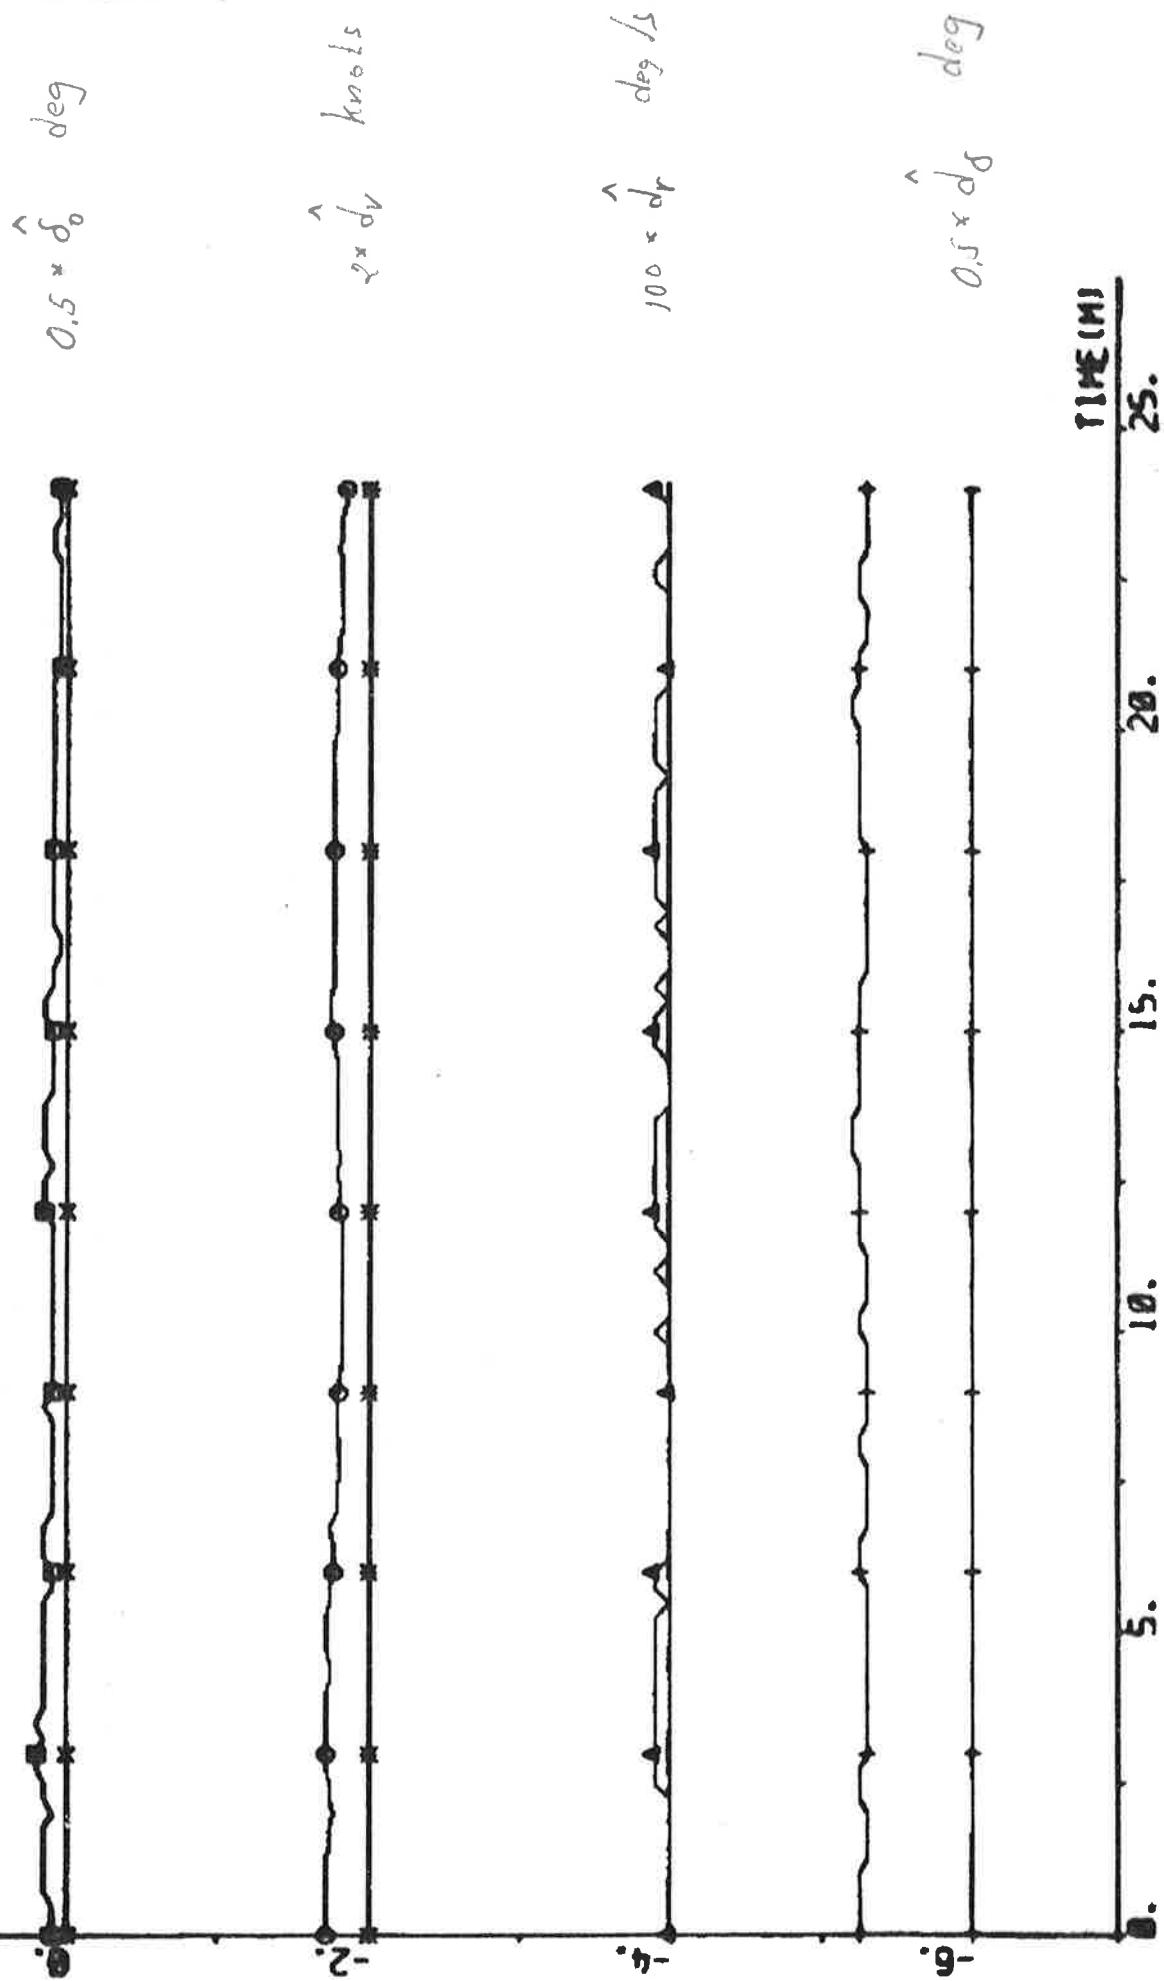

PLOT RSP2(11)-RSP2(?) RSP2(8) RSP2(9) RSP2(10) RSP2(11) RSP2(12) RSP2(13)

158

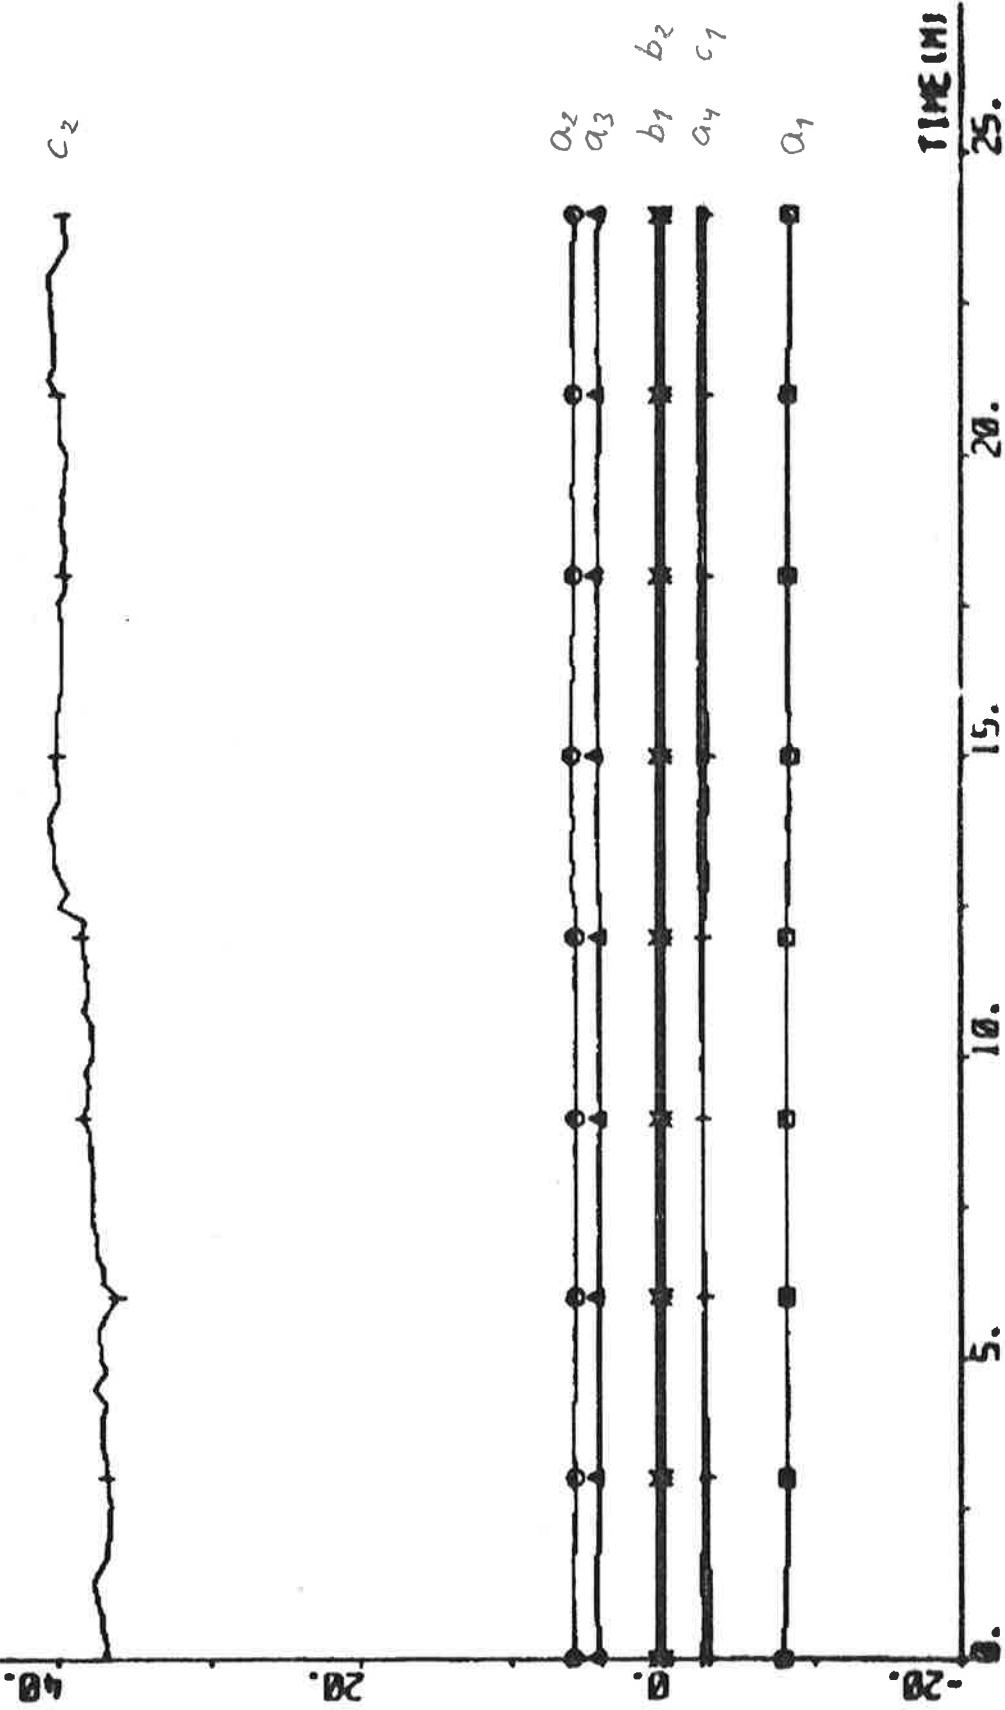

EXPERIMENT A9

Date	1976-04-23	Forward draught	8.5 m
Time	09.59	Aft draught	12.5 m
Duration	25 min	Wind direction	NW (5; see App. A)
Position	N 07°22' W 160°23'	Wind velocity	4 m/s (gentle breeze)
ψ_{ref}	144 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 5 q = 0
 T_s = 15 s V₀ = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.36 \\ 5.86 \\ 4.03 \\ -2.62 \\ 0.51 \\ 0.16 \\ -1.97 \\ 36.59 \end{bmatrix} \quad P = \begin{bmatrix} 1.94 & & & & & & & \\ -2.14 & 4.28 & & & & & & \\ -0.24 & -2.39 & 4.78 & & & & & \\ 0.61 & 0.18 & -2.19 & 1.59 & & & & \\ -0.10 & 0.01 & 0.17 & -0.08 & 0.02 & & & \\ -0.05 & -0.01 & 0.05 & 0.01 & 0.00 & 0.02 & & \\ -0.38 & 0.44 & 0.11 & -0.18 & 0.01 & 0.01 & 0.48 & \\ 3.78 & -6.25 & -3.29 & 4.98 & -0.49 & 0.04 & 7.39 & 414.76 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.09$$


$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.22 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)


PLOT REP1(1)-REP1(8) HPI REP1(15) 02-31 - DEC

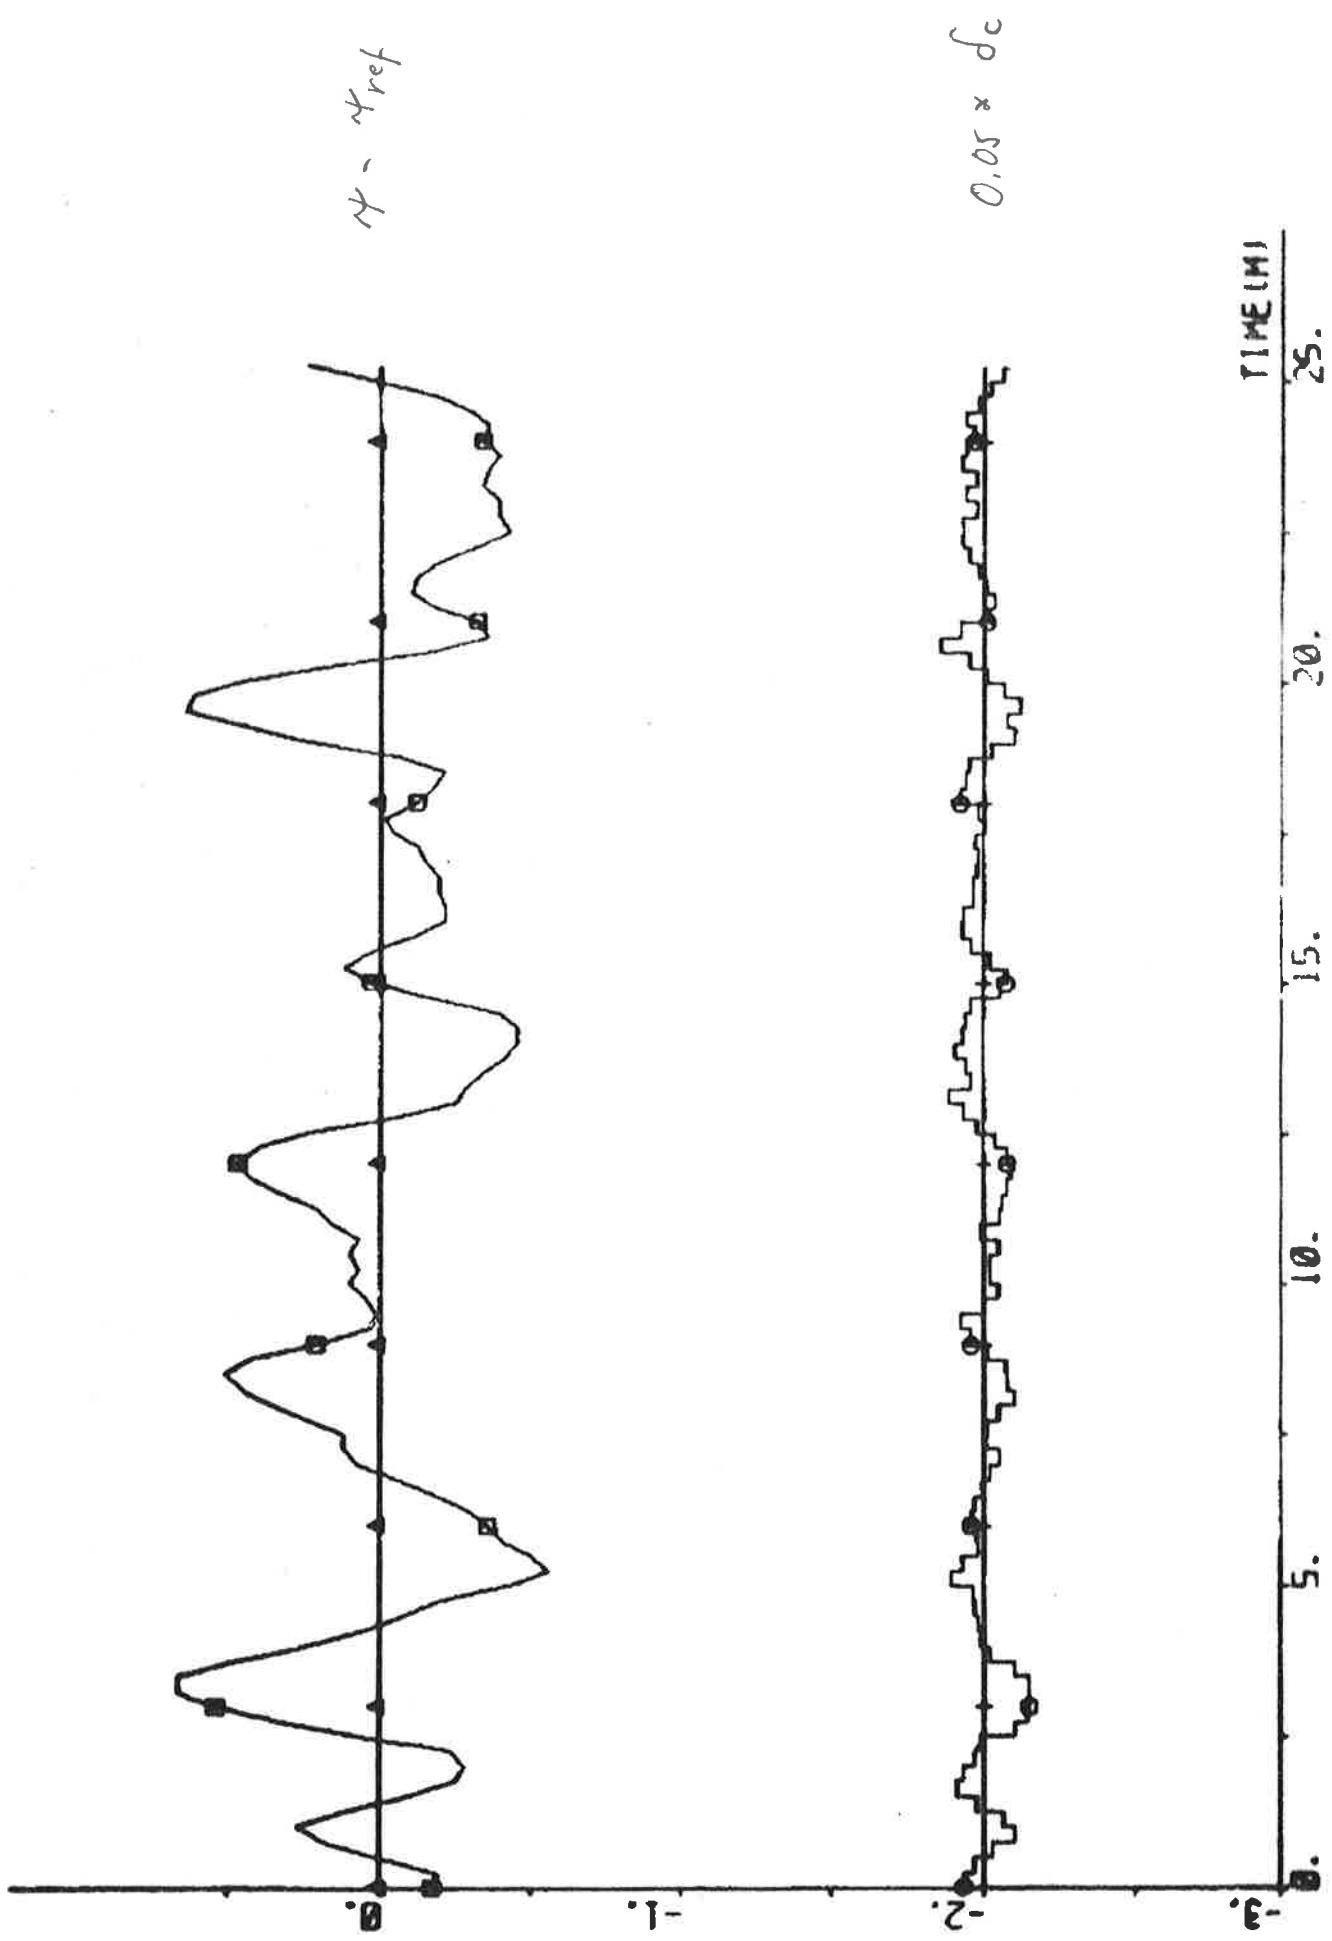


NOT SEP 1 (1) - SEP 1 (13) SEP 1 (12) SEP 1 (14)

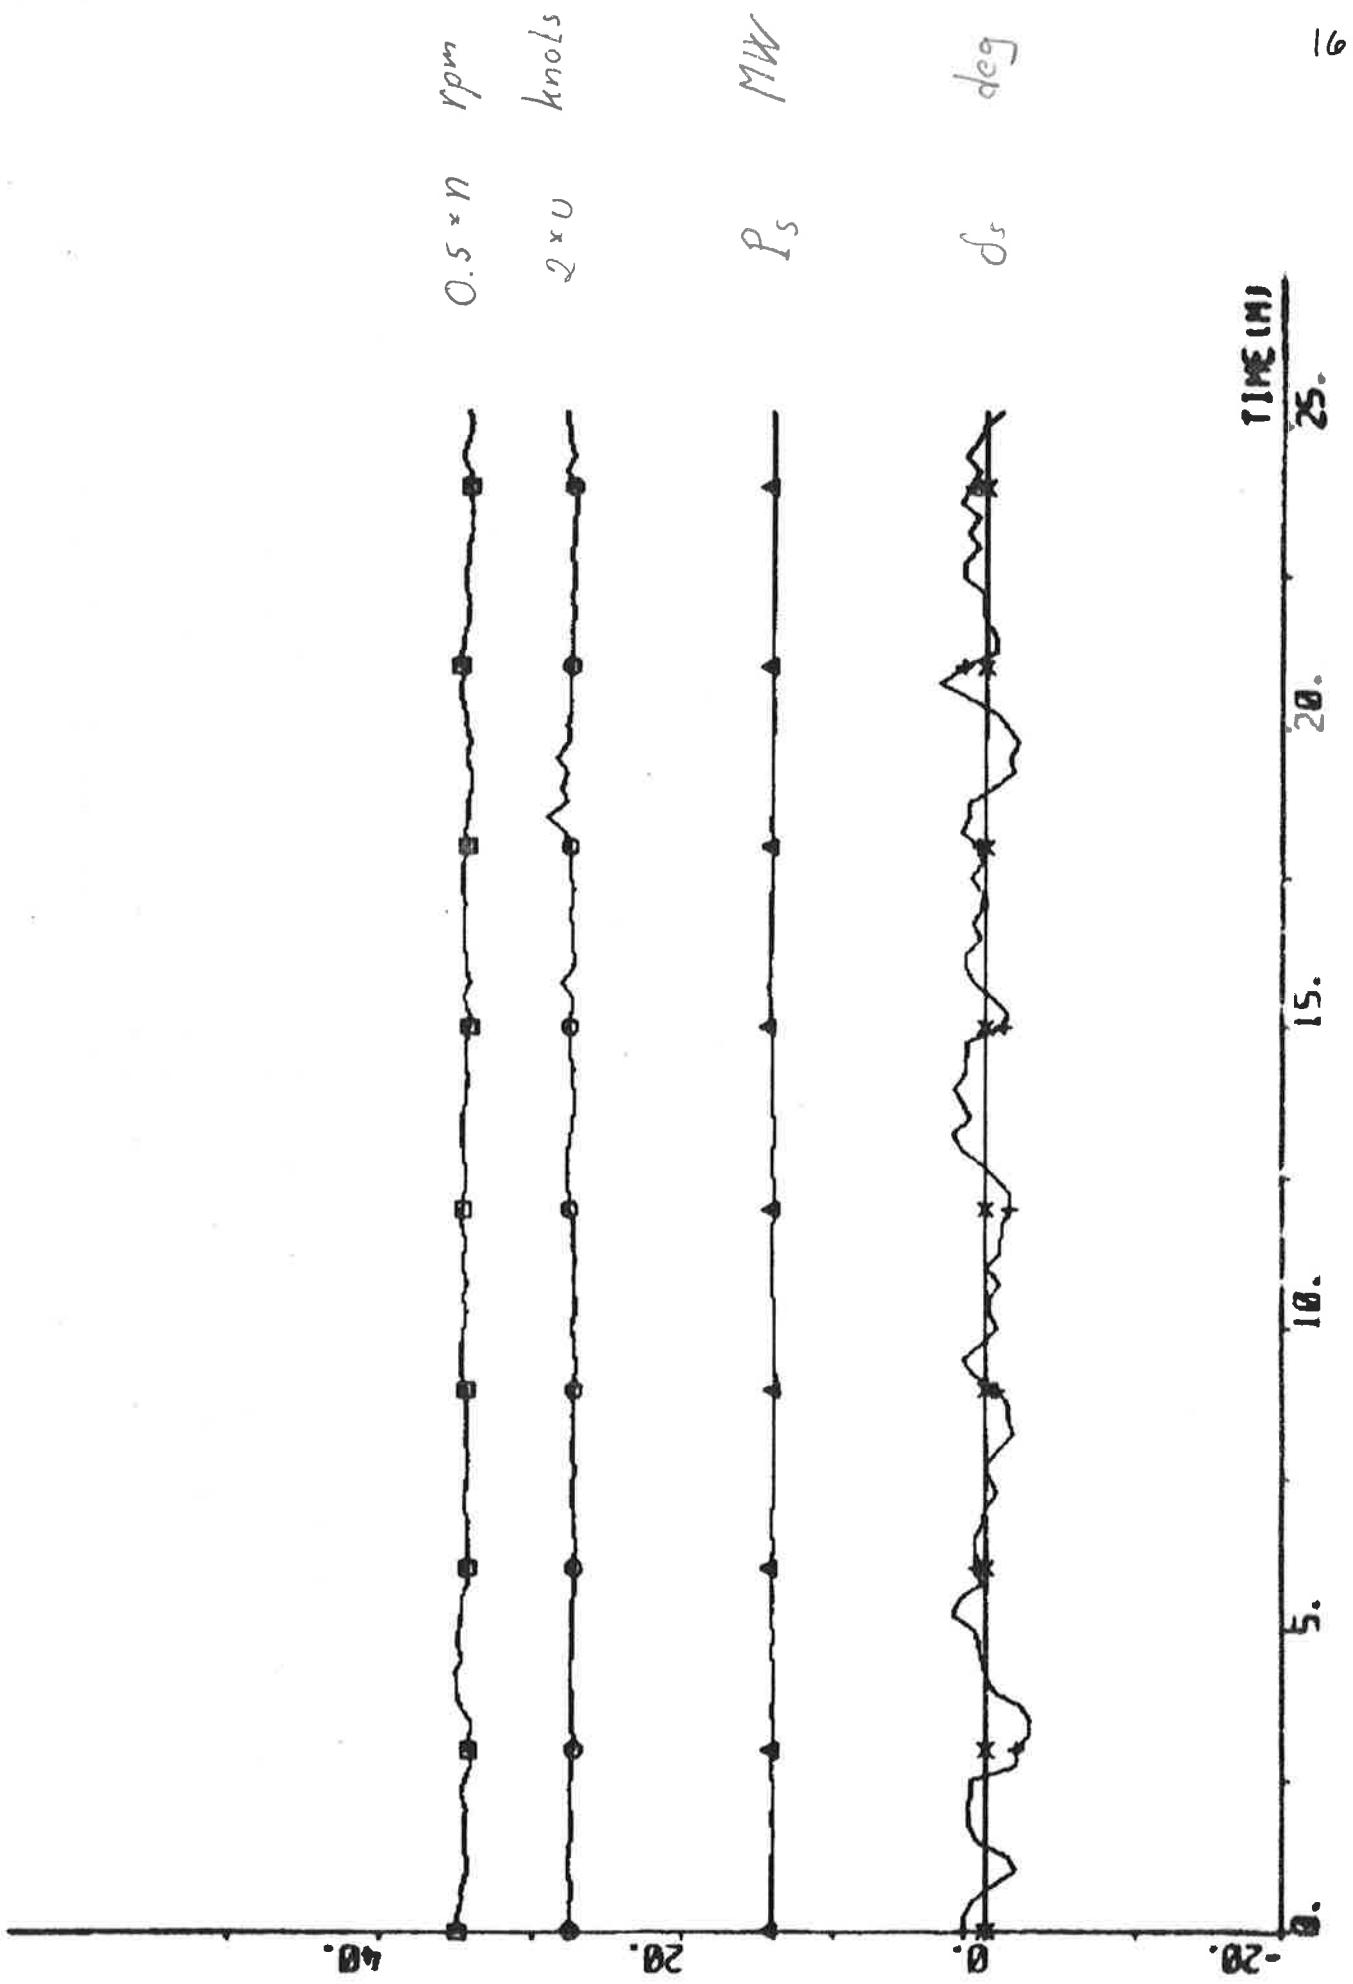


PLOT RSP1(1)-RSP2(1) RSP2(2) ERRE 00 01 02 -3.4 0.0 - 0.0

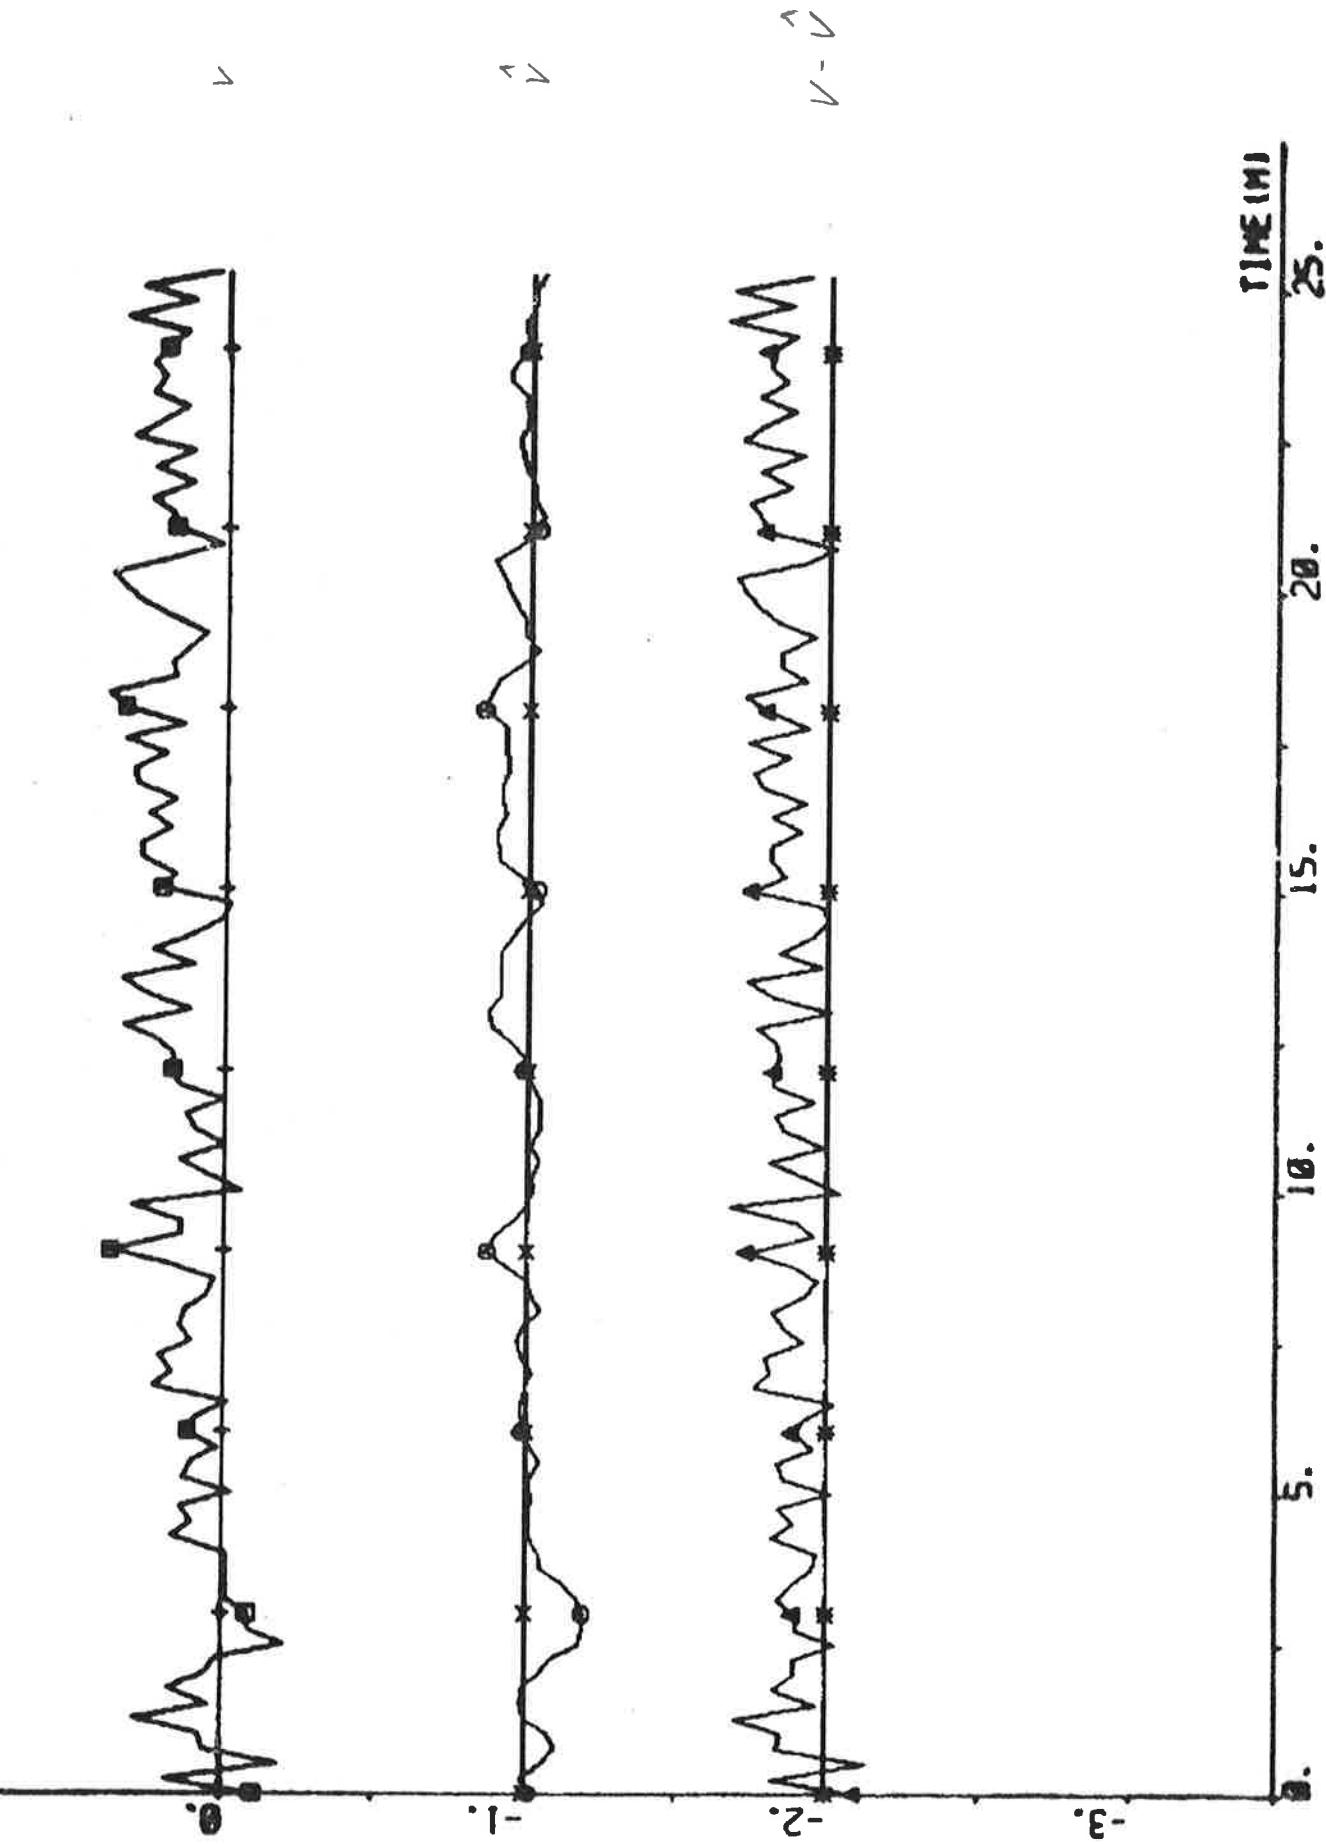


MUR MUR (1) - MUR (4) MUR (5) MUR MUR MUR MUR MUR MUR

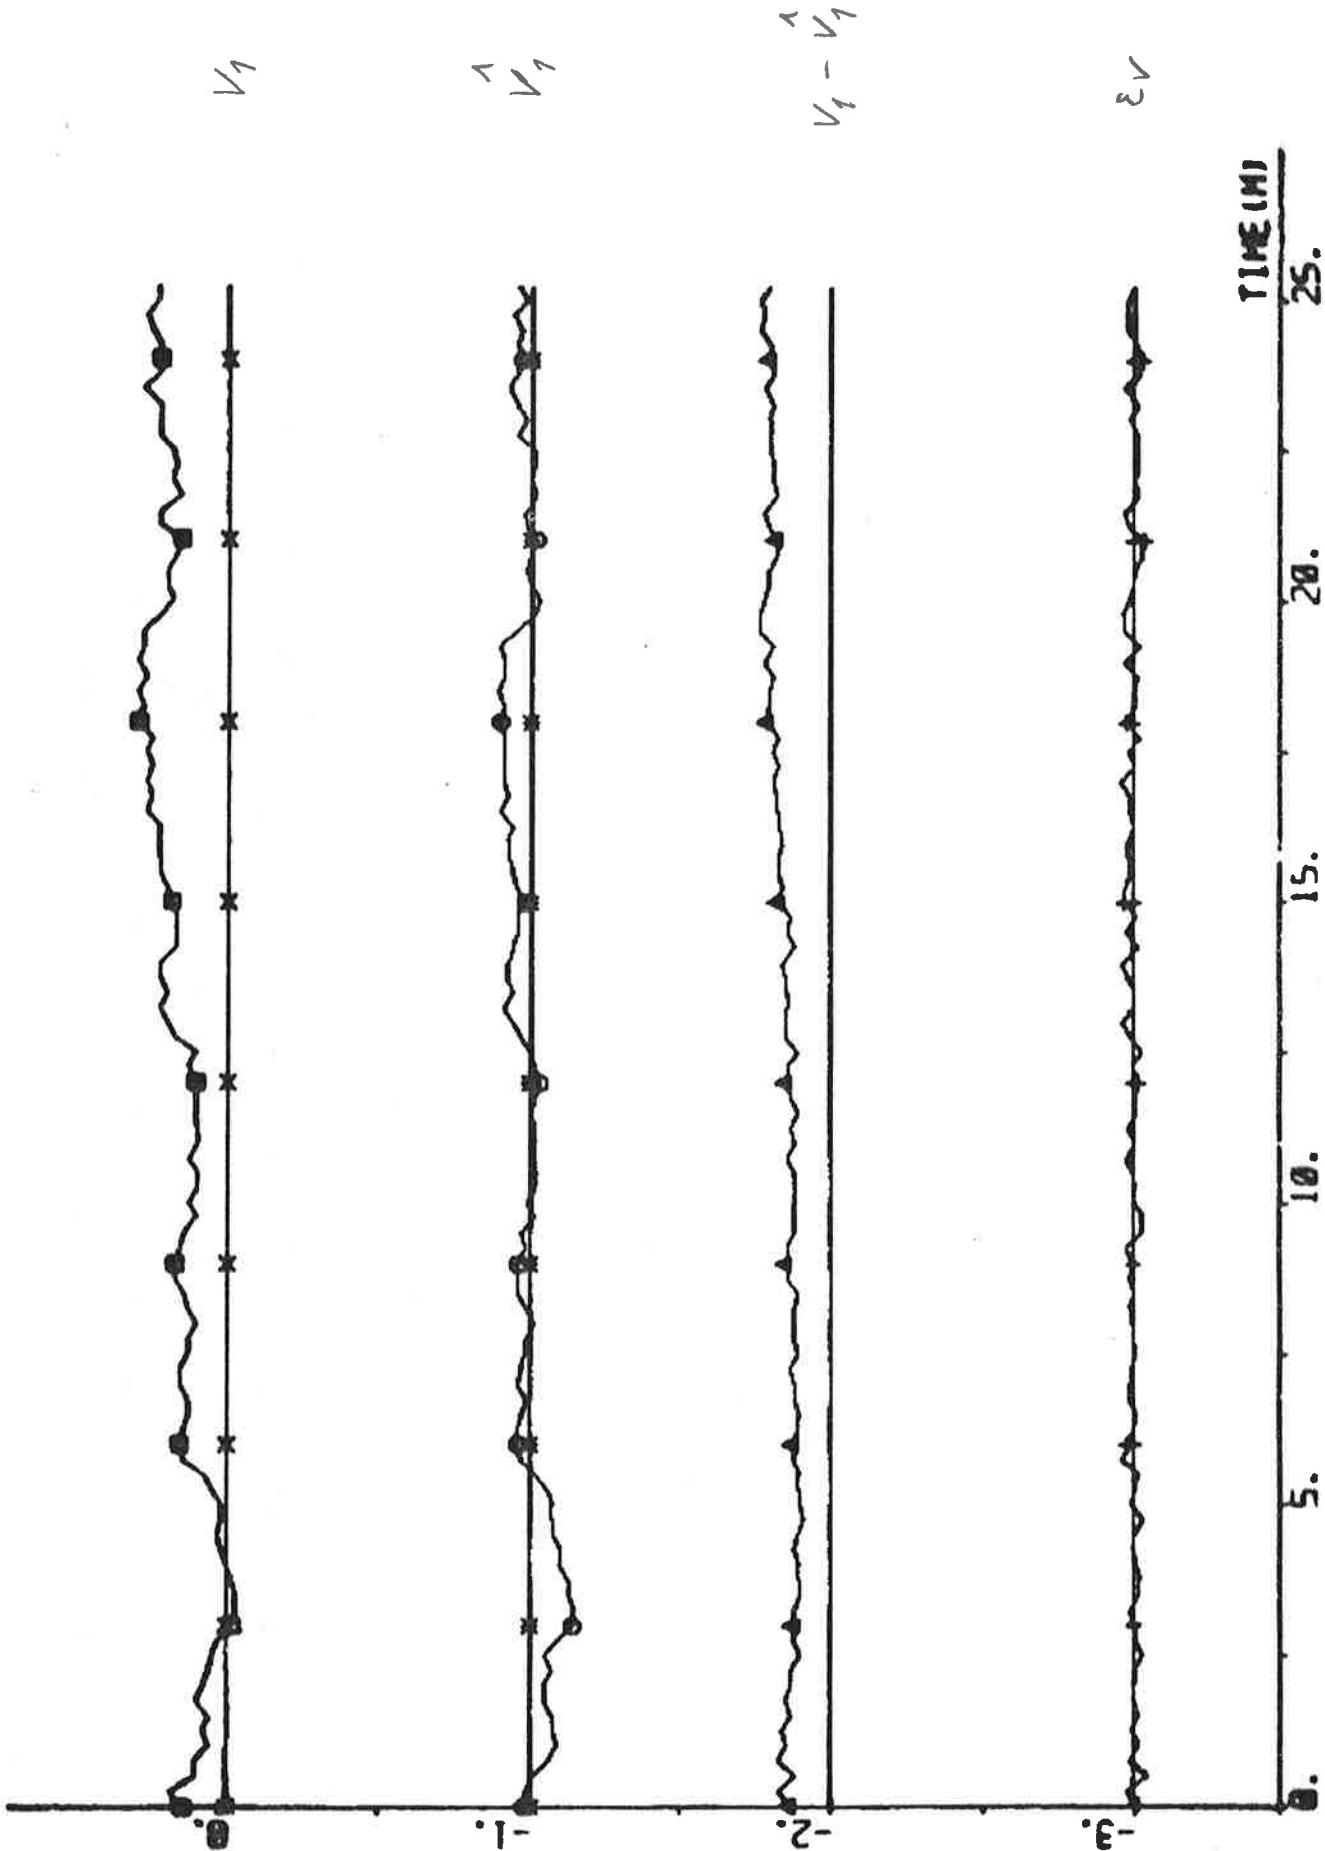



PLUT REPORT 1(1) → PLUT 1(6) → PLUT 1(7) → PLUT REPORT 3 99 002 001 008 -0.7 0. -

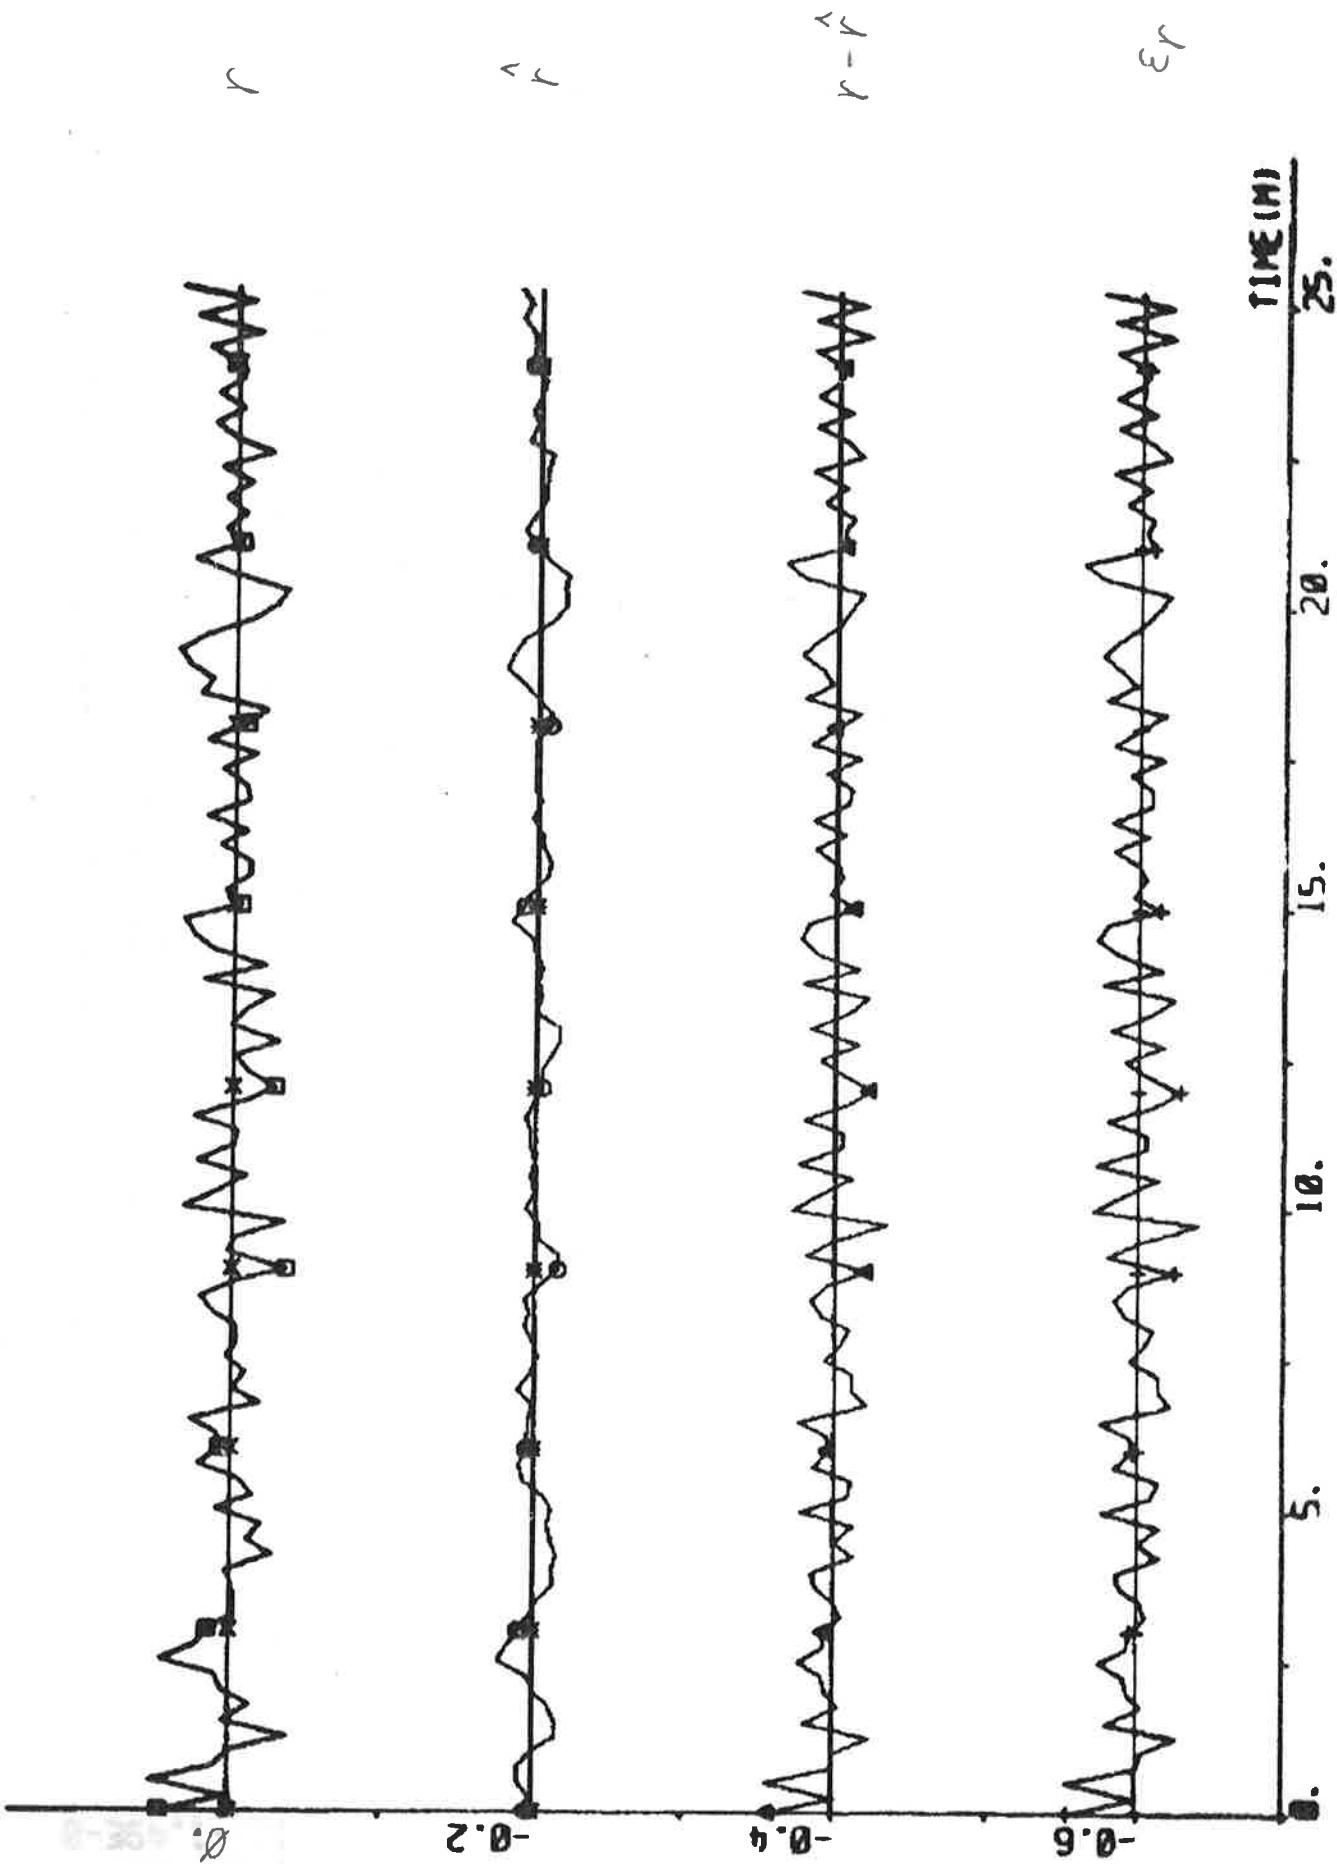

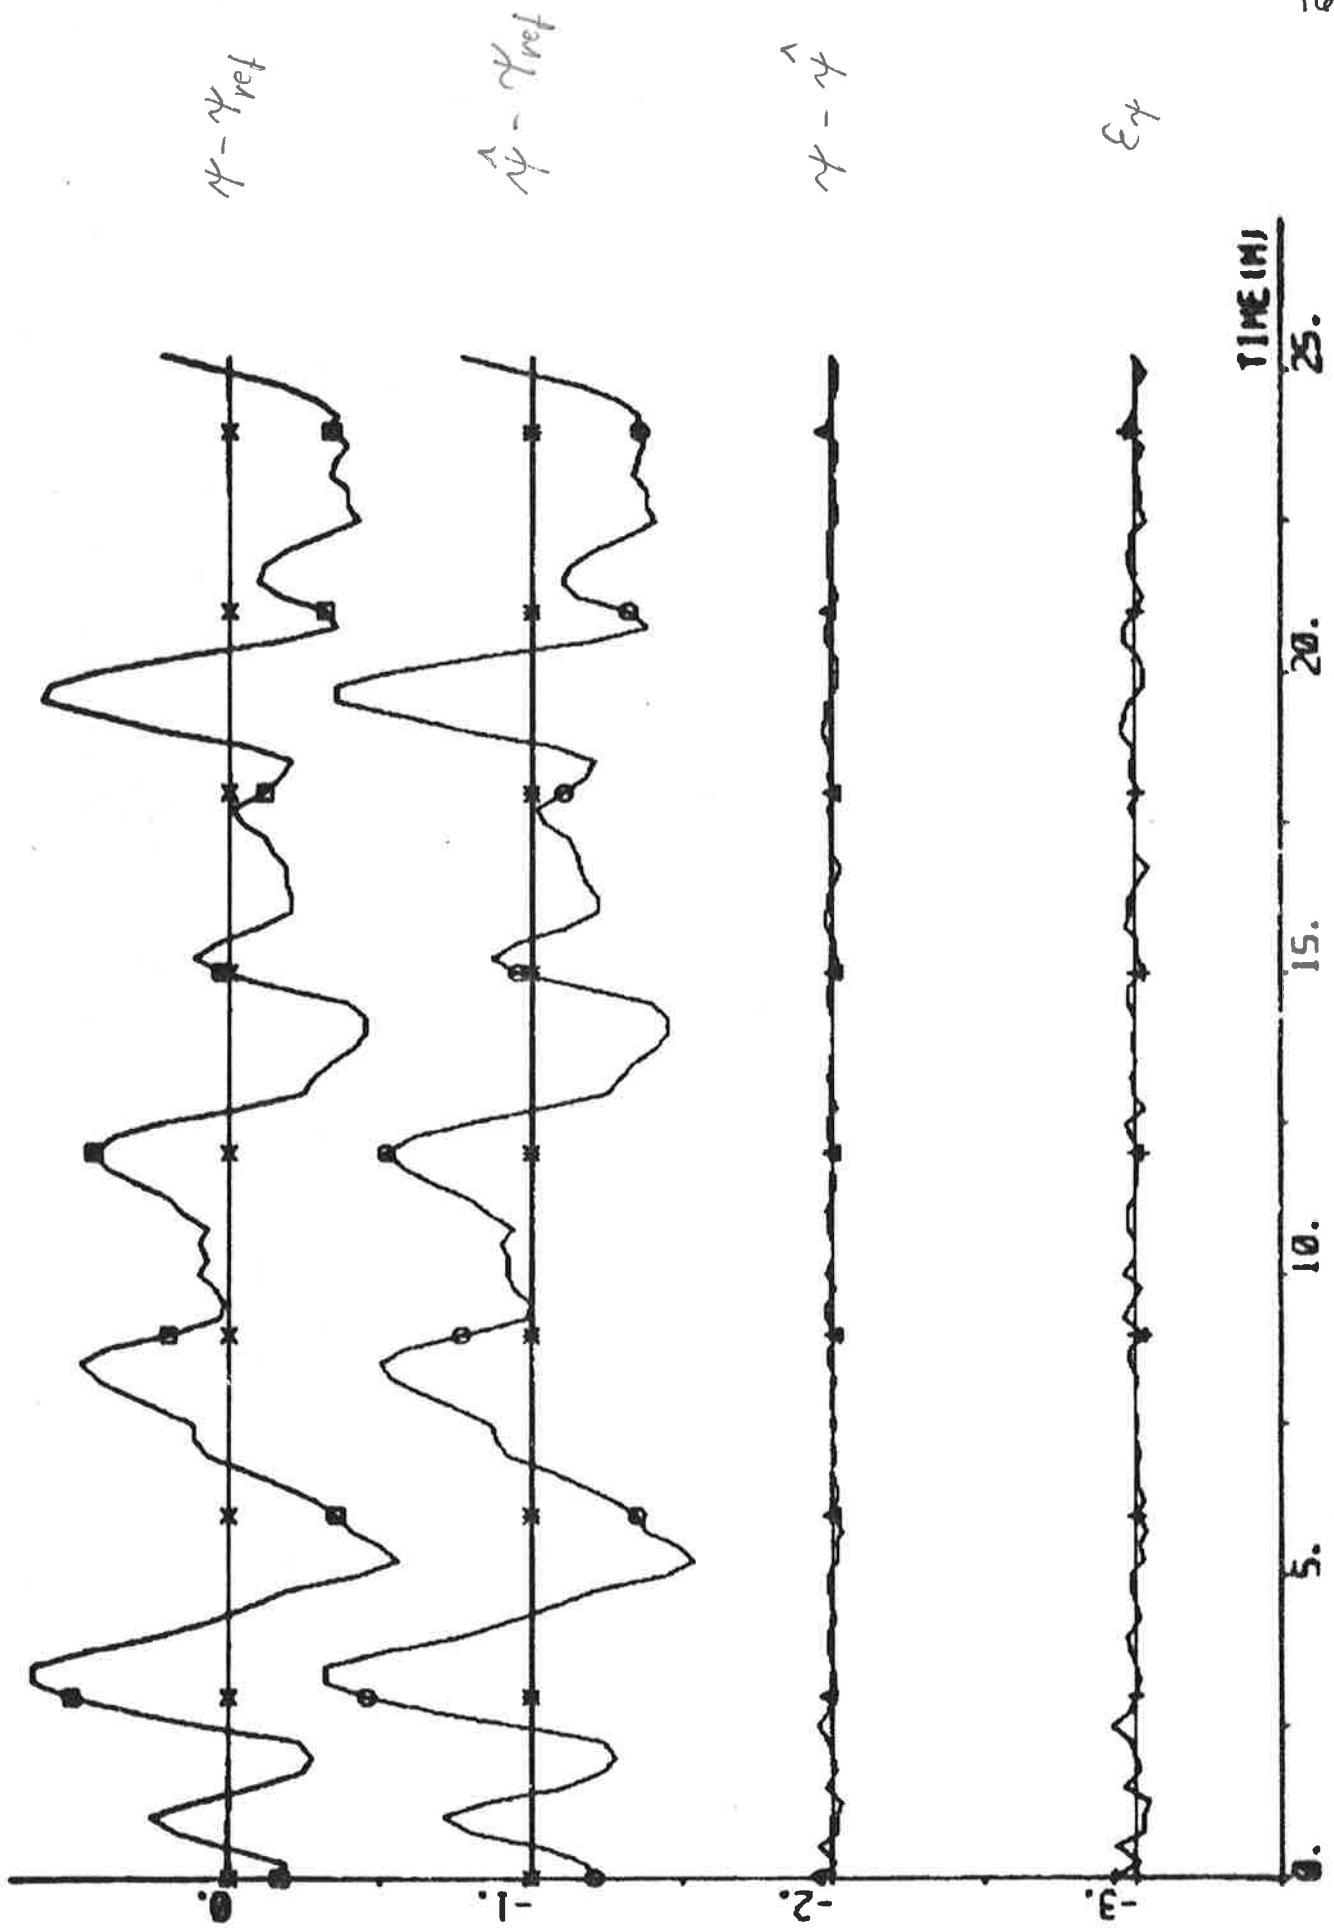


PLT1 REPI(1) - 020 020 020 020 020 020

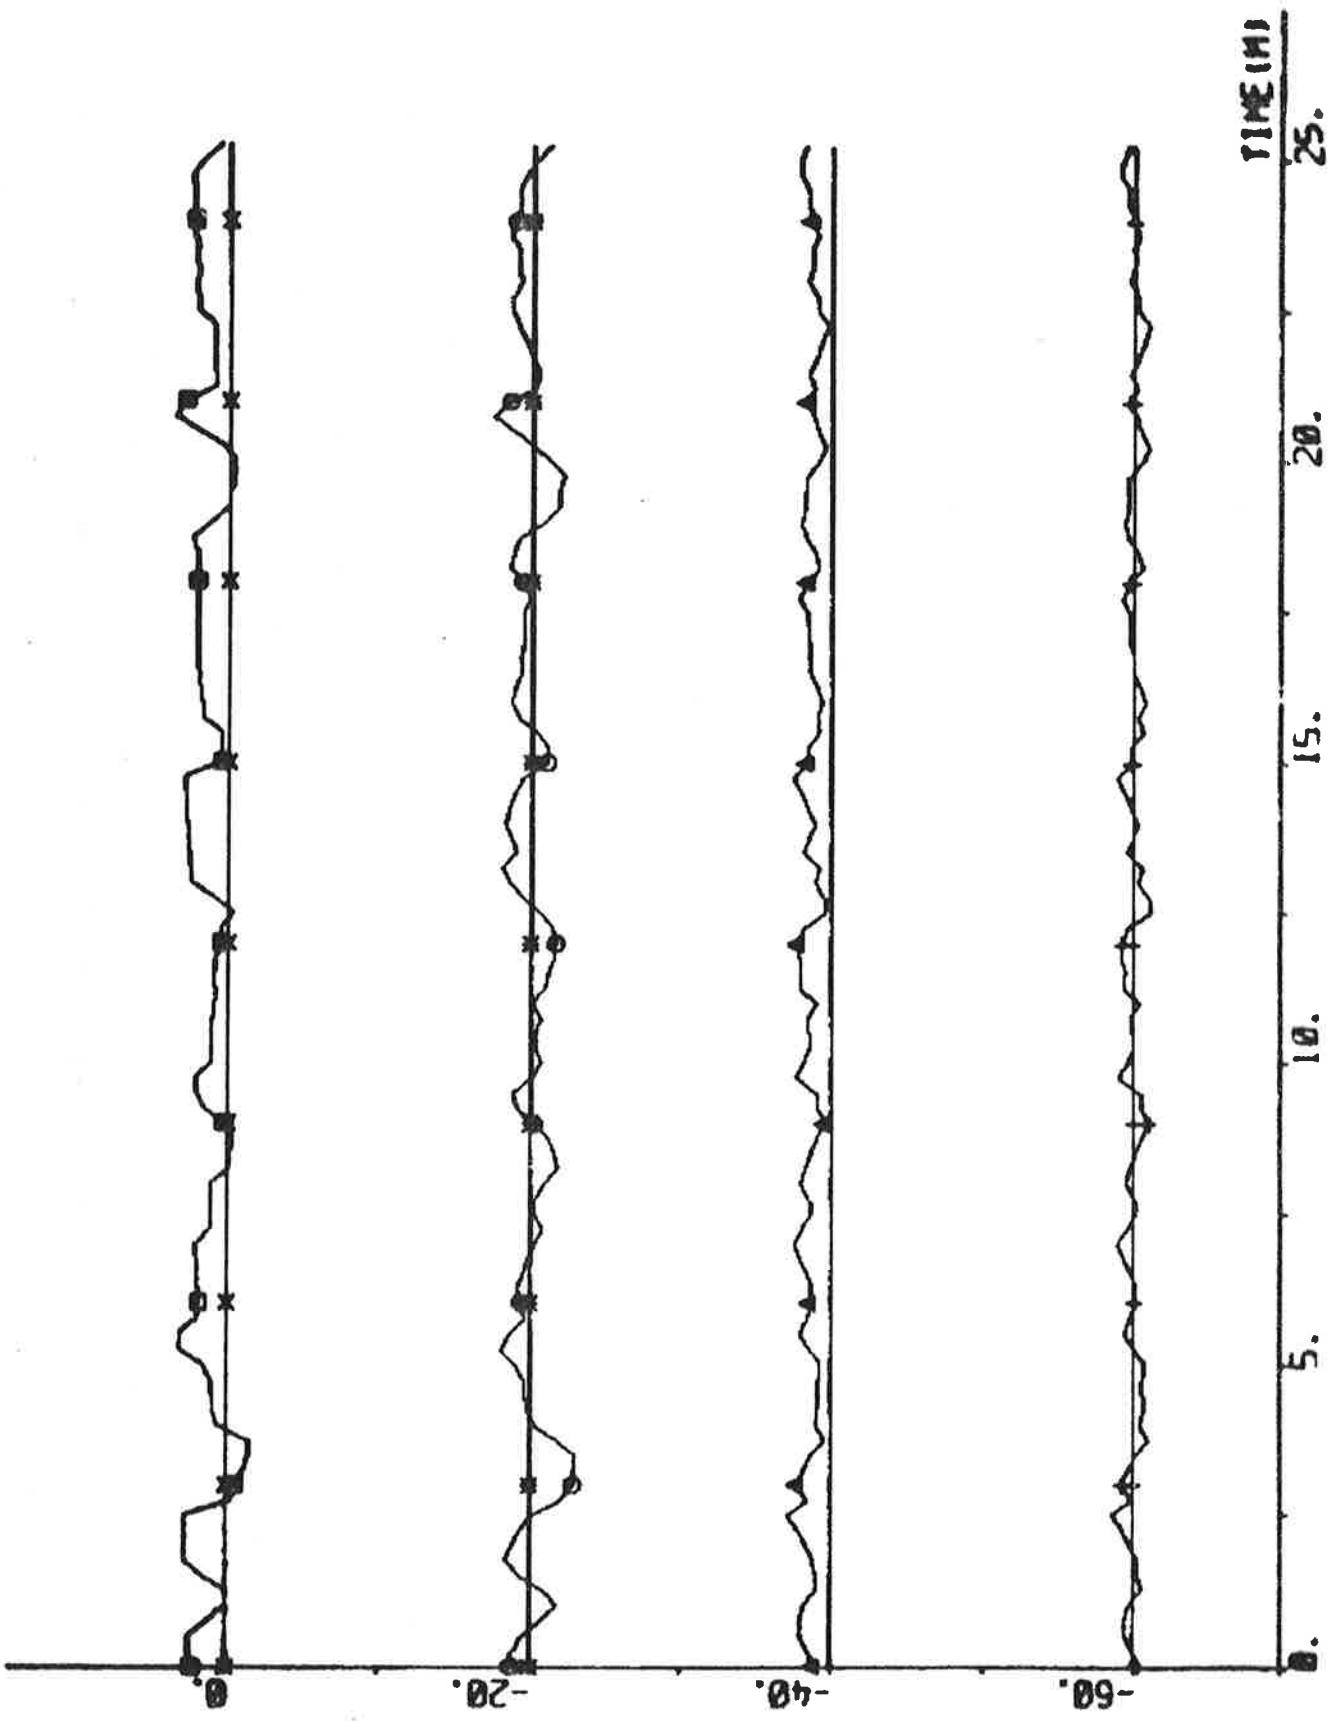

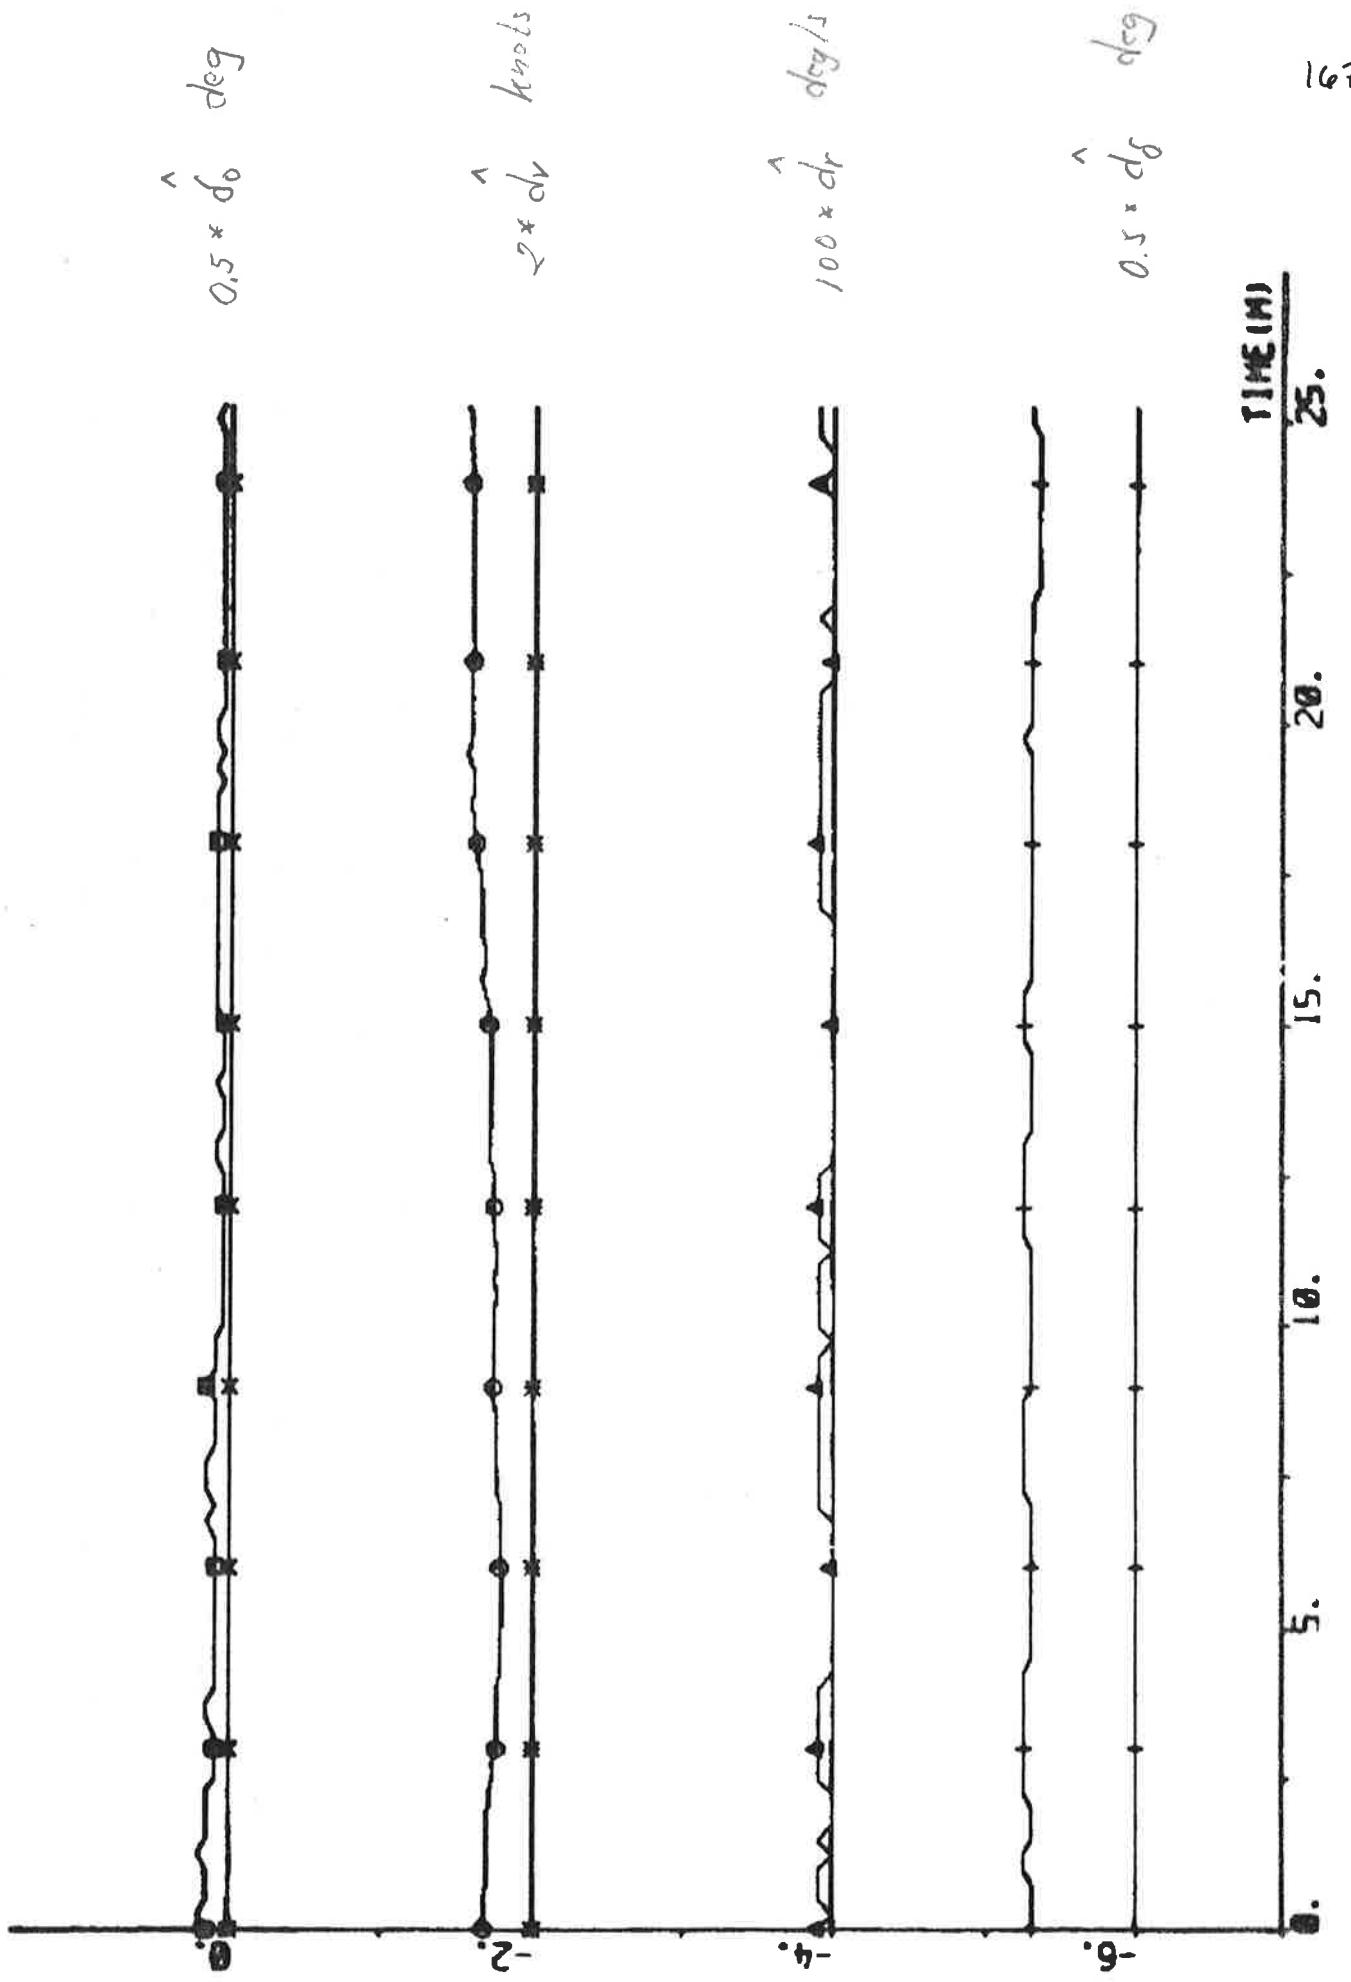

PLOT NO. 1 (1) - NO. 2 (7) NO. 2 (9) NO. 2 (10) NO. 2 (11) NO. 2 (12) NO. 2 (13)

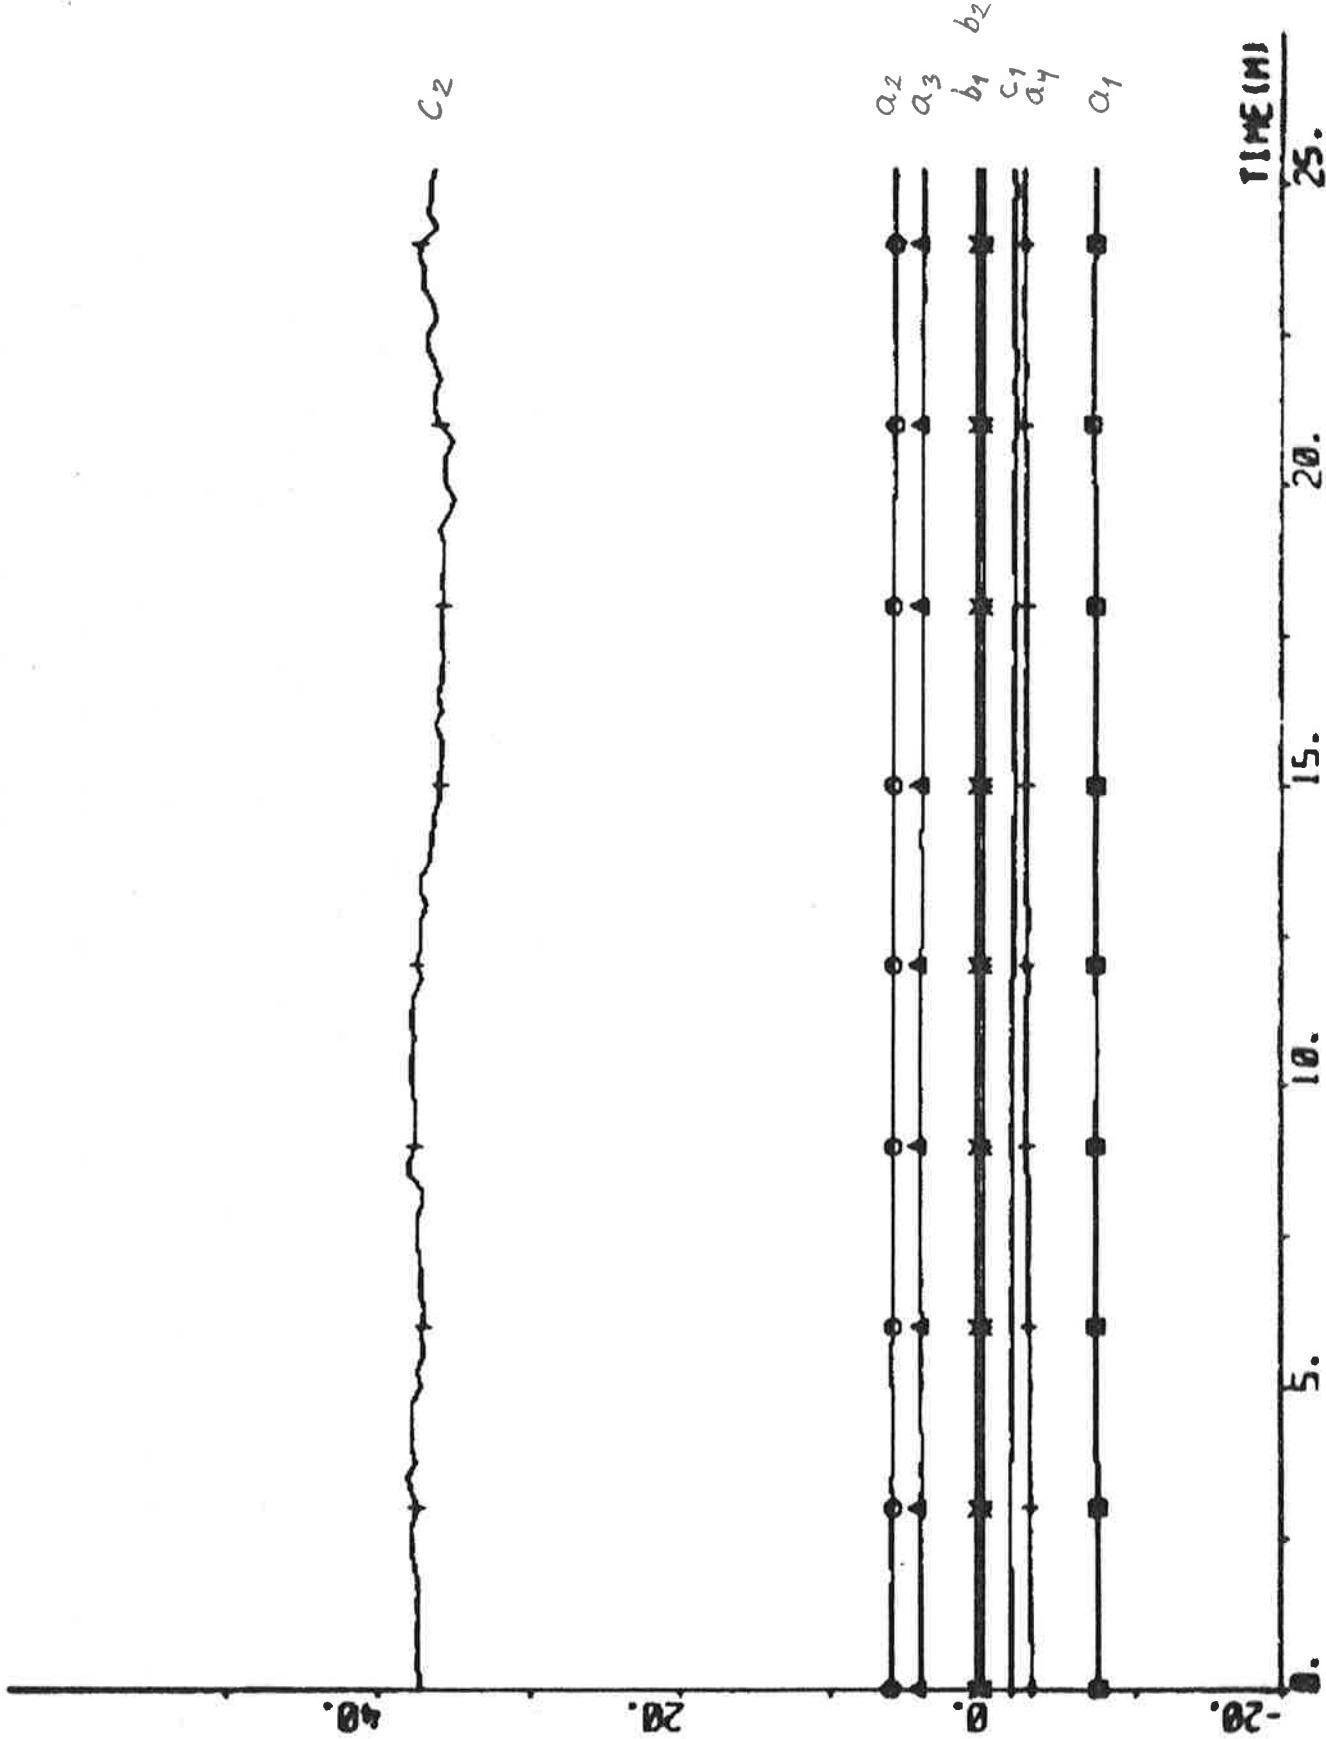

EXPERIMENT A10

Date	1976-04-23	Forward draught	8.5 m
Time	11.32	Aft draught	12.5 m
Duration	33 min	Wind direction	NW (5; see App. A),
Position	N 07°05' W 160°10'	Wind velocity	3 m/s (light breeze)
ψ_{ref}	144 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 T_s = 10 s V₀ = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -9.56 \\ 6.81 \\ 4.39 \\ -1.97 \\ 0.53 \\ 0.26 \\ -2.25 \\ 40.29 \end{bmatrix} \quad P = \begin{bmatrix} 6.46 \\ -8.35 & 17.84 \\ -0.32 & -10.89 & 20.44 \\ 2.47 & 1.20 & -9.56 & 6.24 \\ -0.14 & -0.18 & 0.54 & -0.23 & 0.03 \\ -0.13 & 0.10 & -0.04 & 0.07 & 0.01 & 0.02 \\ -1.04 & 1.30 & 0.53 & -0.83 & 0.02 & -0.01 & 0.95 \\ 24.78 & -35.21 & -8.89 & 17.37 & -0.31 & -0.44 & 13.63 & 998.99 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.33$$


$$\hat{\delta}_0 = 0.2 \text{ deg} \quad \hat{\dot{d}}_v = 0.06 \text{ knots} \quad \hat{\ddot{d}}_r = 0.000 \text{ deg/s} \quad \hat{\ddot{d}}_\delta = 1.3 \text{ deg}$$

Statistics (mean value and standard deviation)


PLOT R10P1(11)-R10P1(10) R10P1(10) R10P1(11) 02-31 - DECE

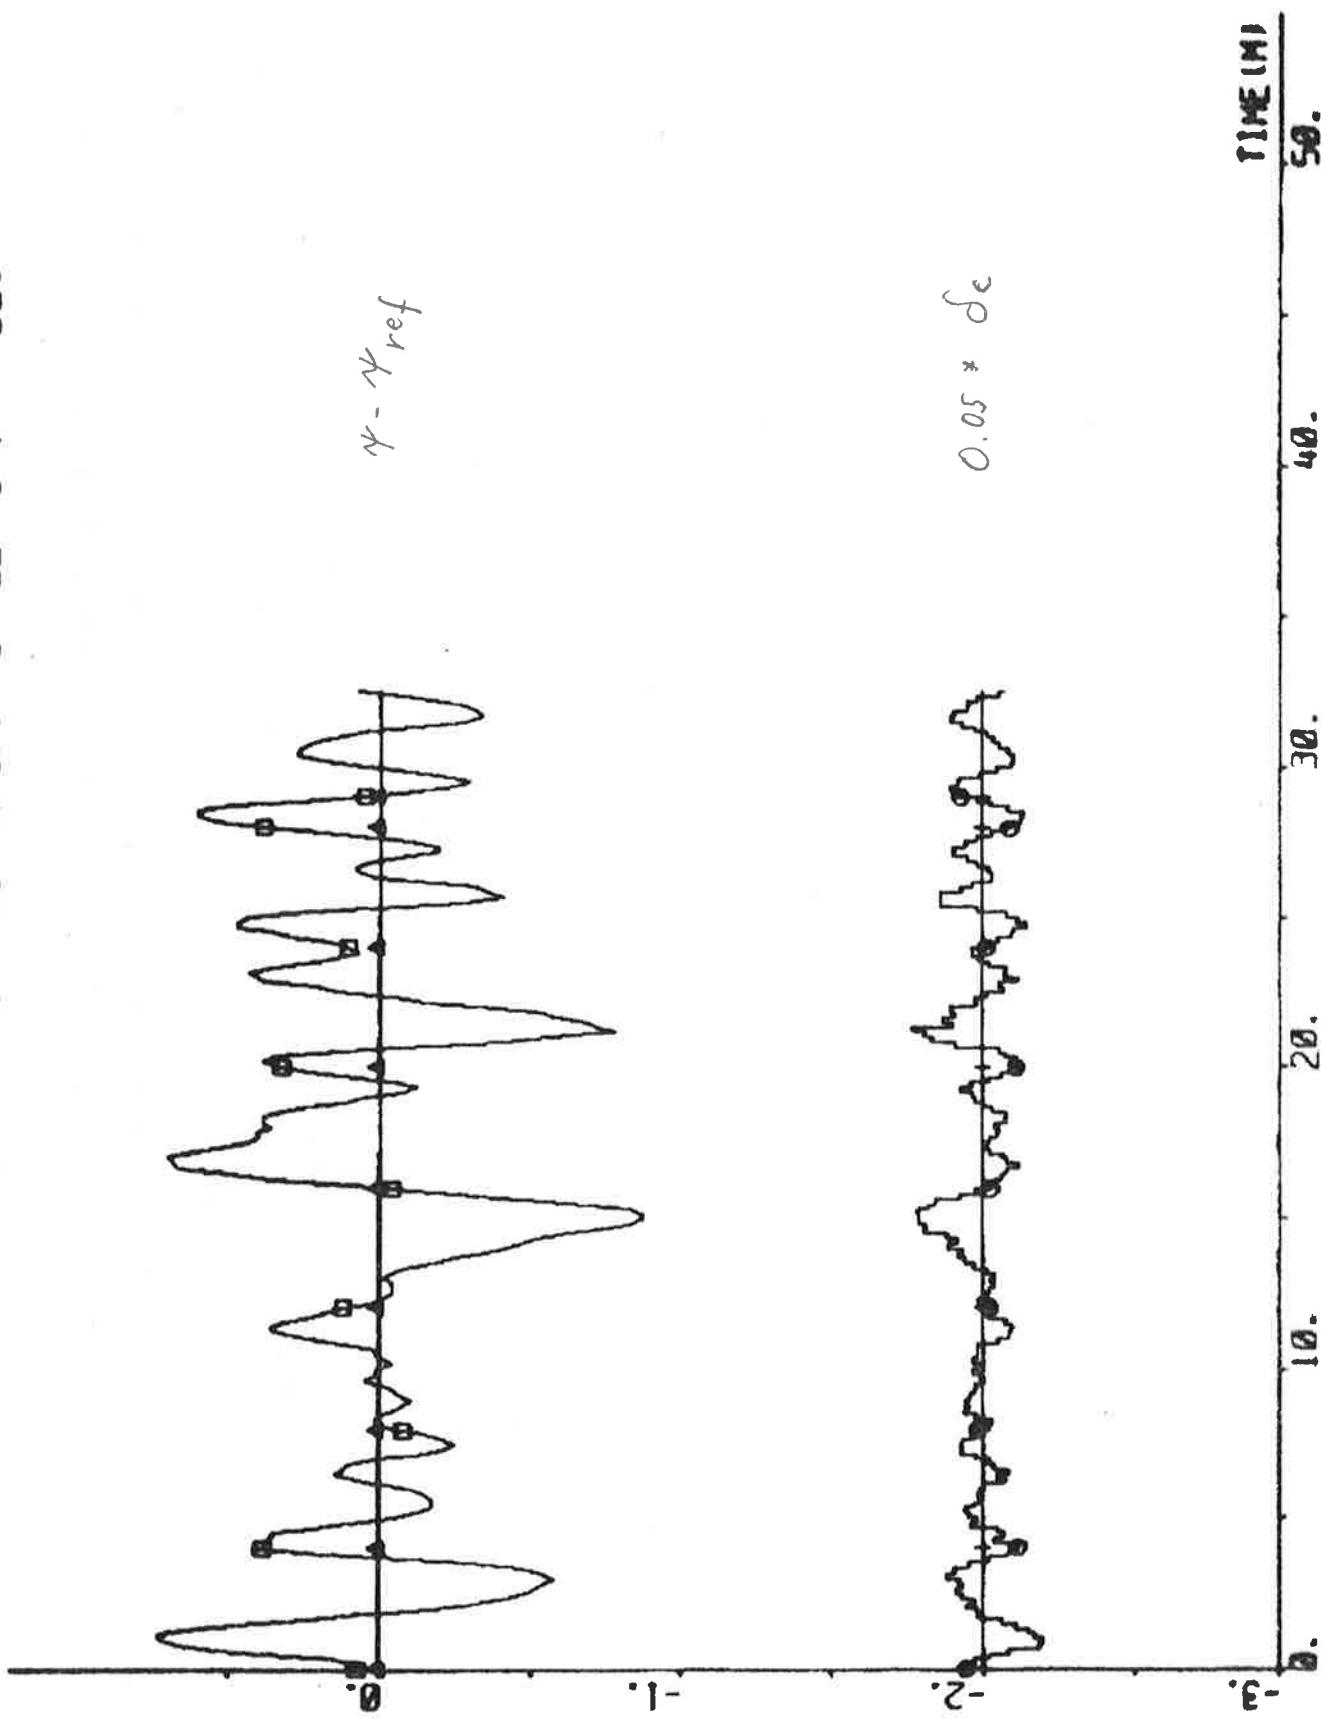

PLOT R10P1(11)-R10P1(12) R10P1(13) R10P1(14) R10P1(11) 00 -20 50

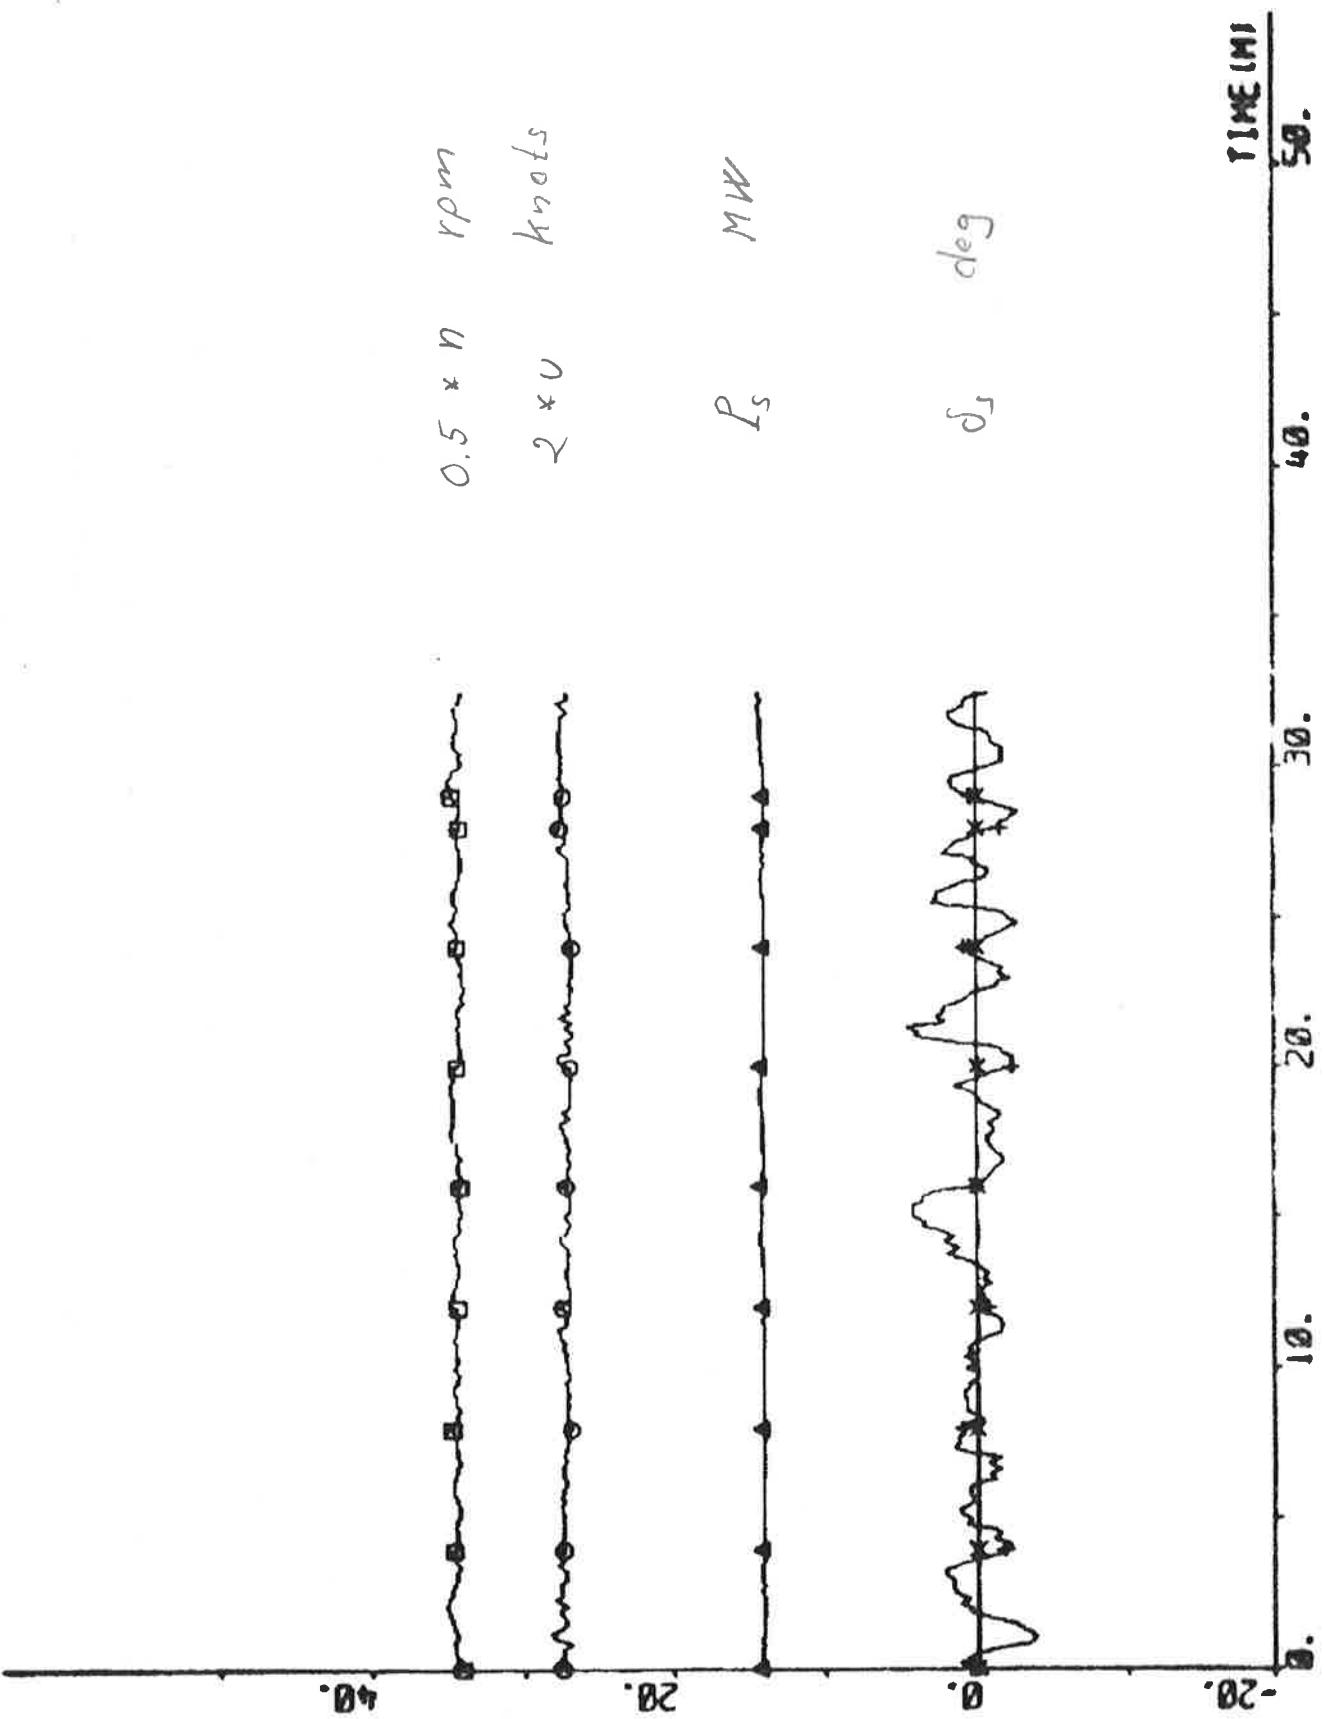

PLOT A10P1(11)-A10P2(11) A10P2(2) ERRS 00 01 02 -3.4 0.0 - KNOTS

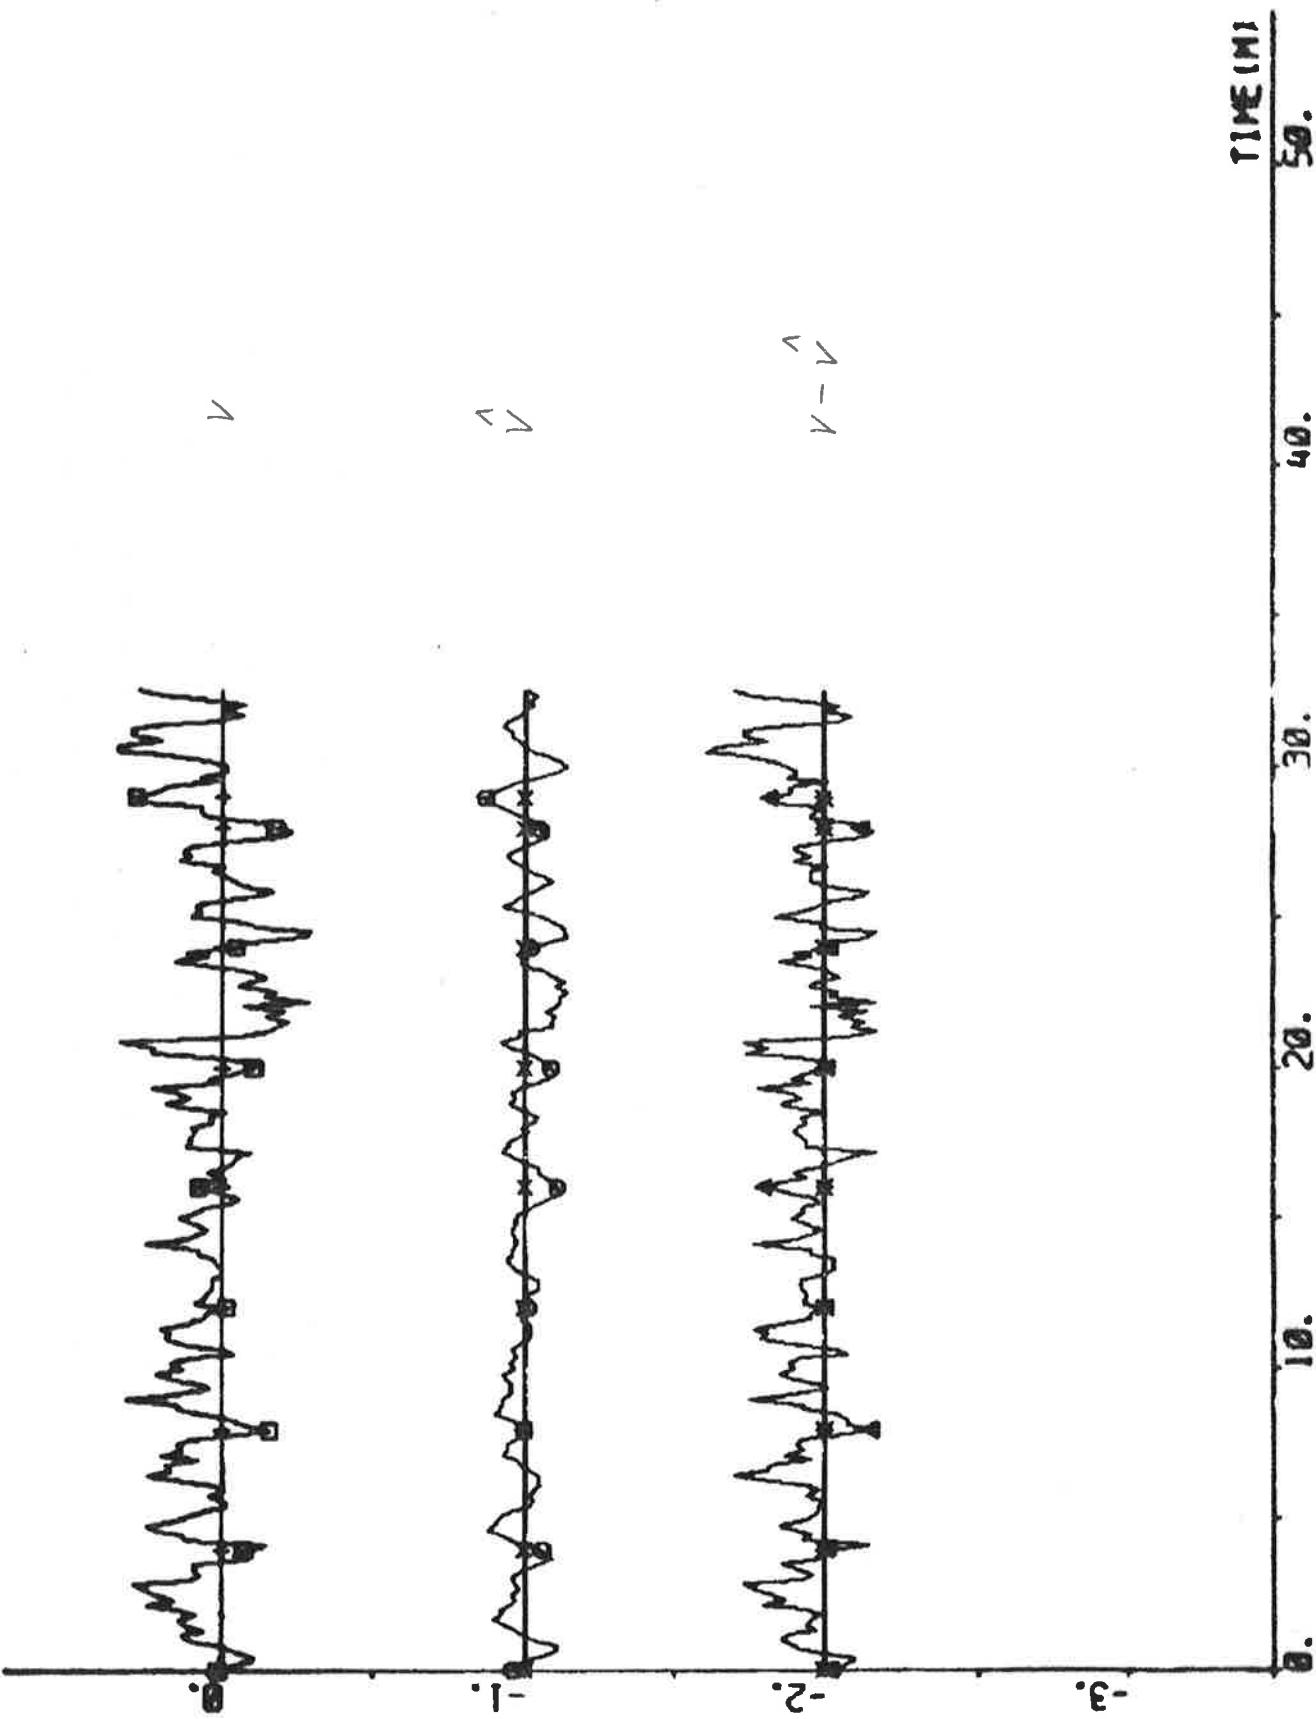

PLOT A10P1(1)-A10P1(4) A10P1(5) ERR2 EPS2 00 01 02 03 - 3.4 0.0 - 1000

173




PLOT A1EP1(1)-A1EP1(8) A1EP1(7) ER23 EPSC 00 002 004 006 -0.7 0. - 0002


174




r

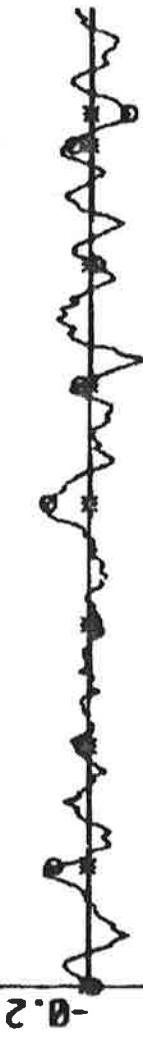

\hat{r}

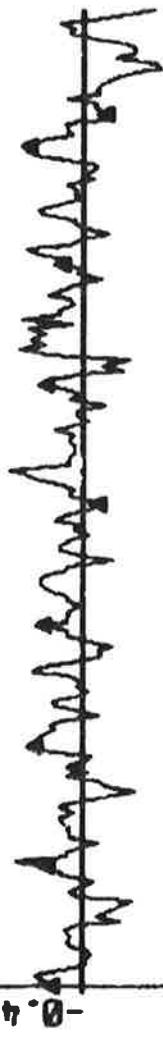


$r - \hat{r}$

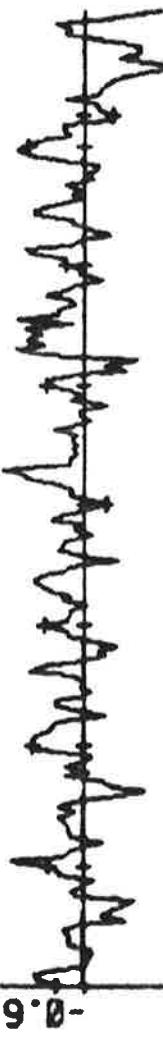


e_r



PLOT #1021(11)-#1021(8) ER24 EPS4 00 01 02 03 -3.4 0.0 - DEC

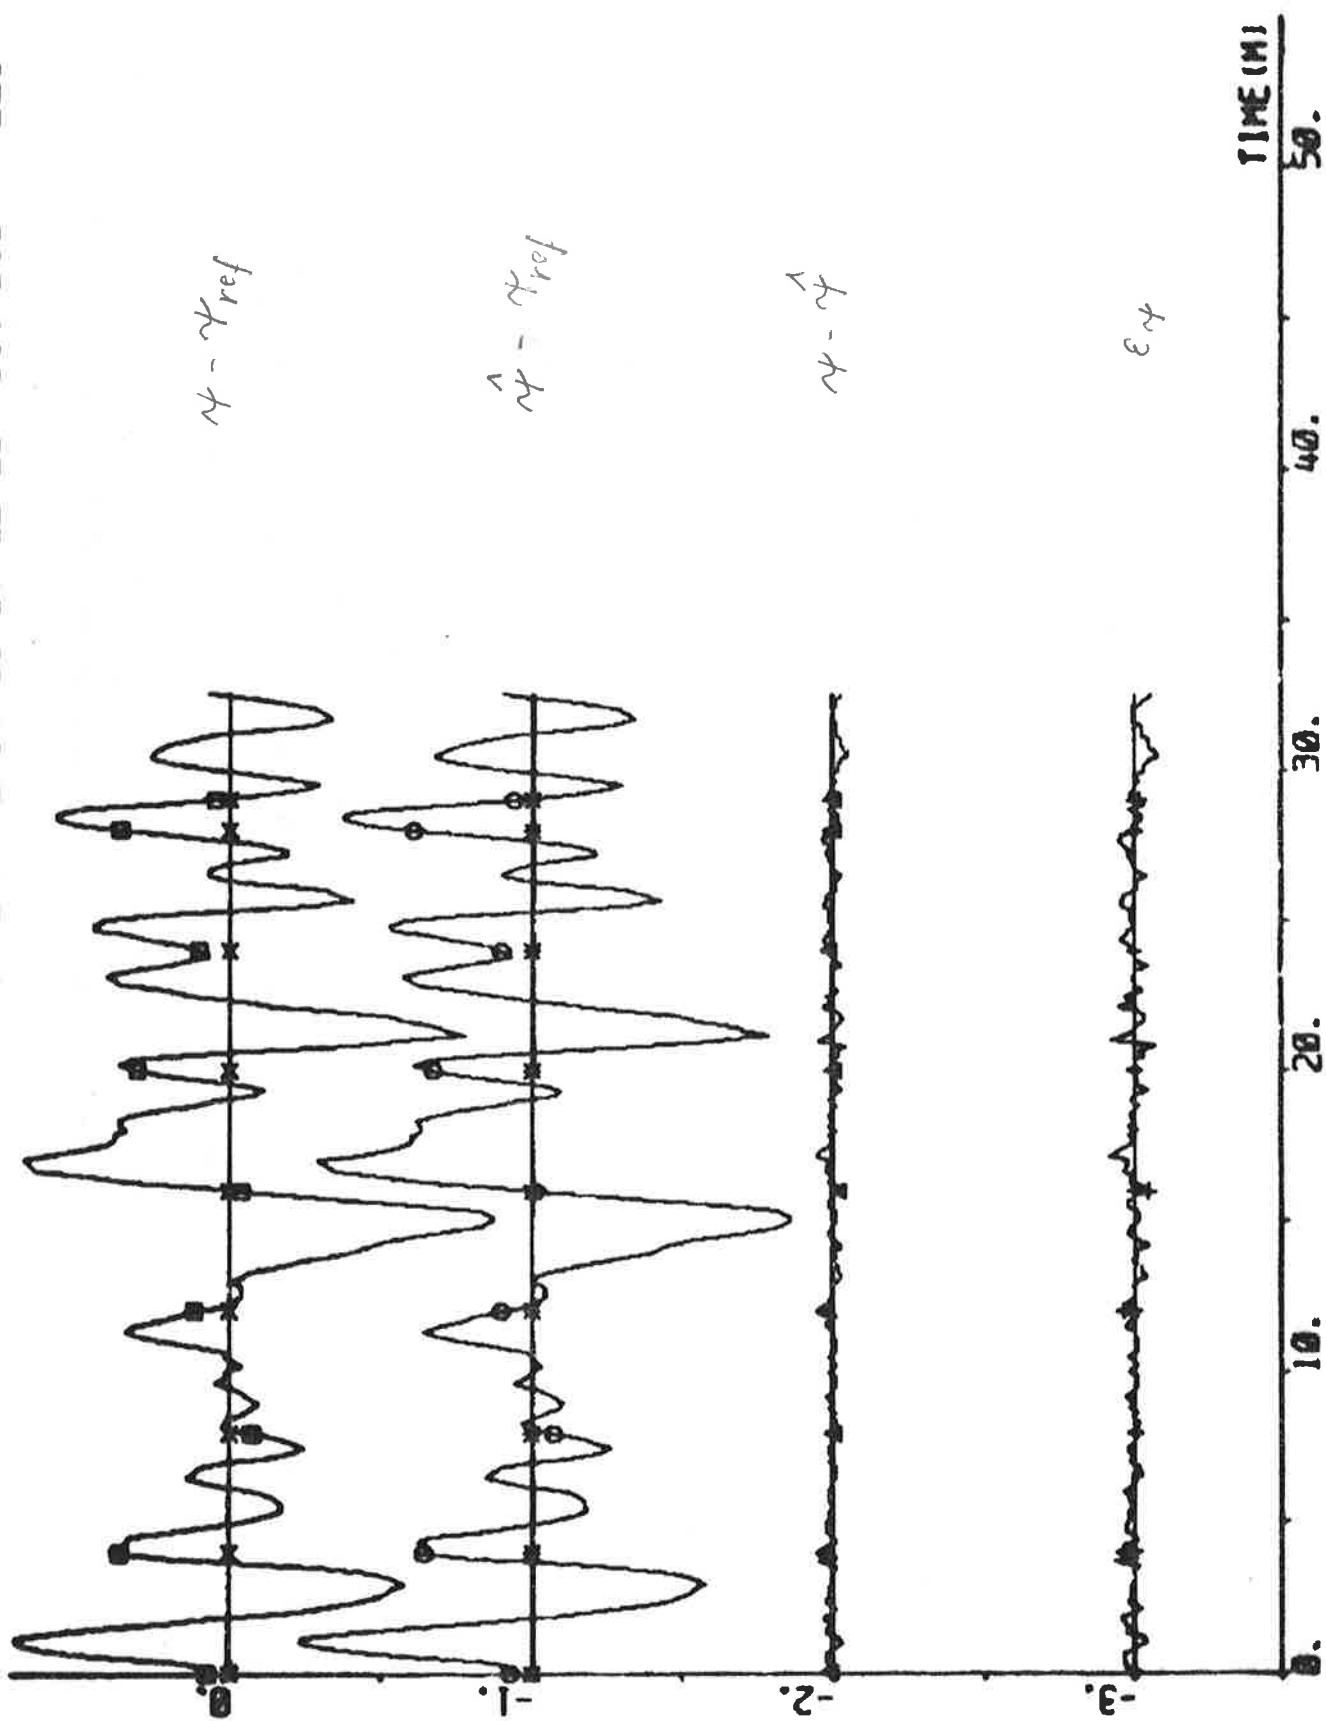

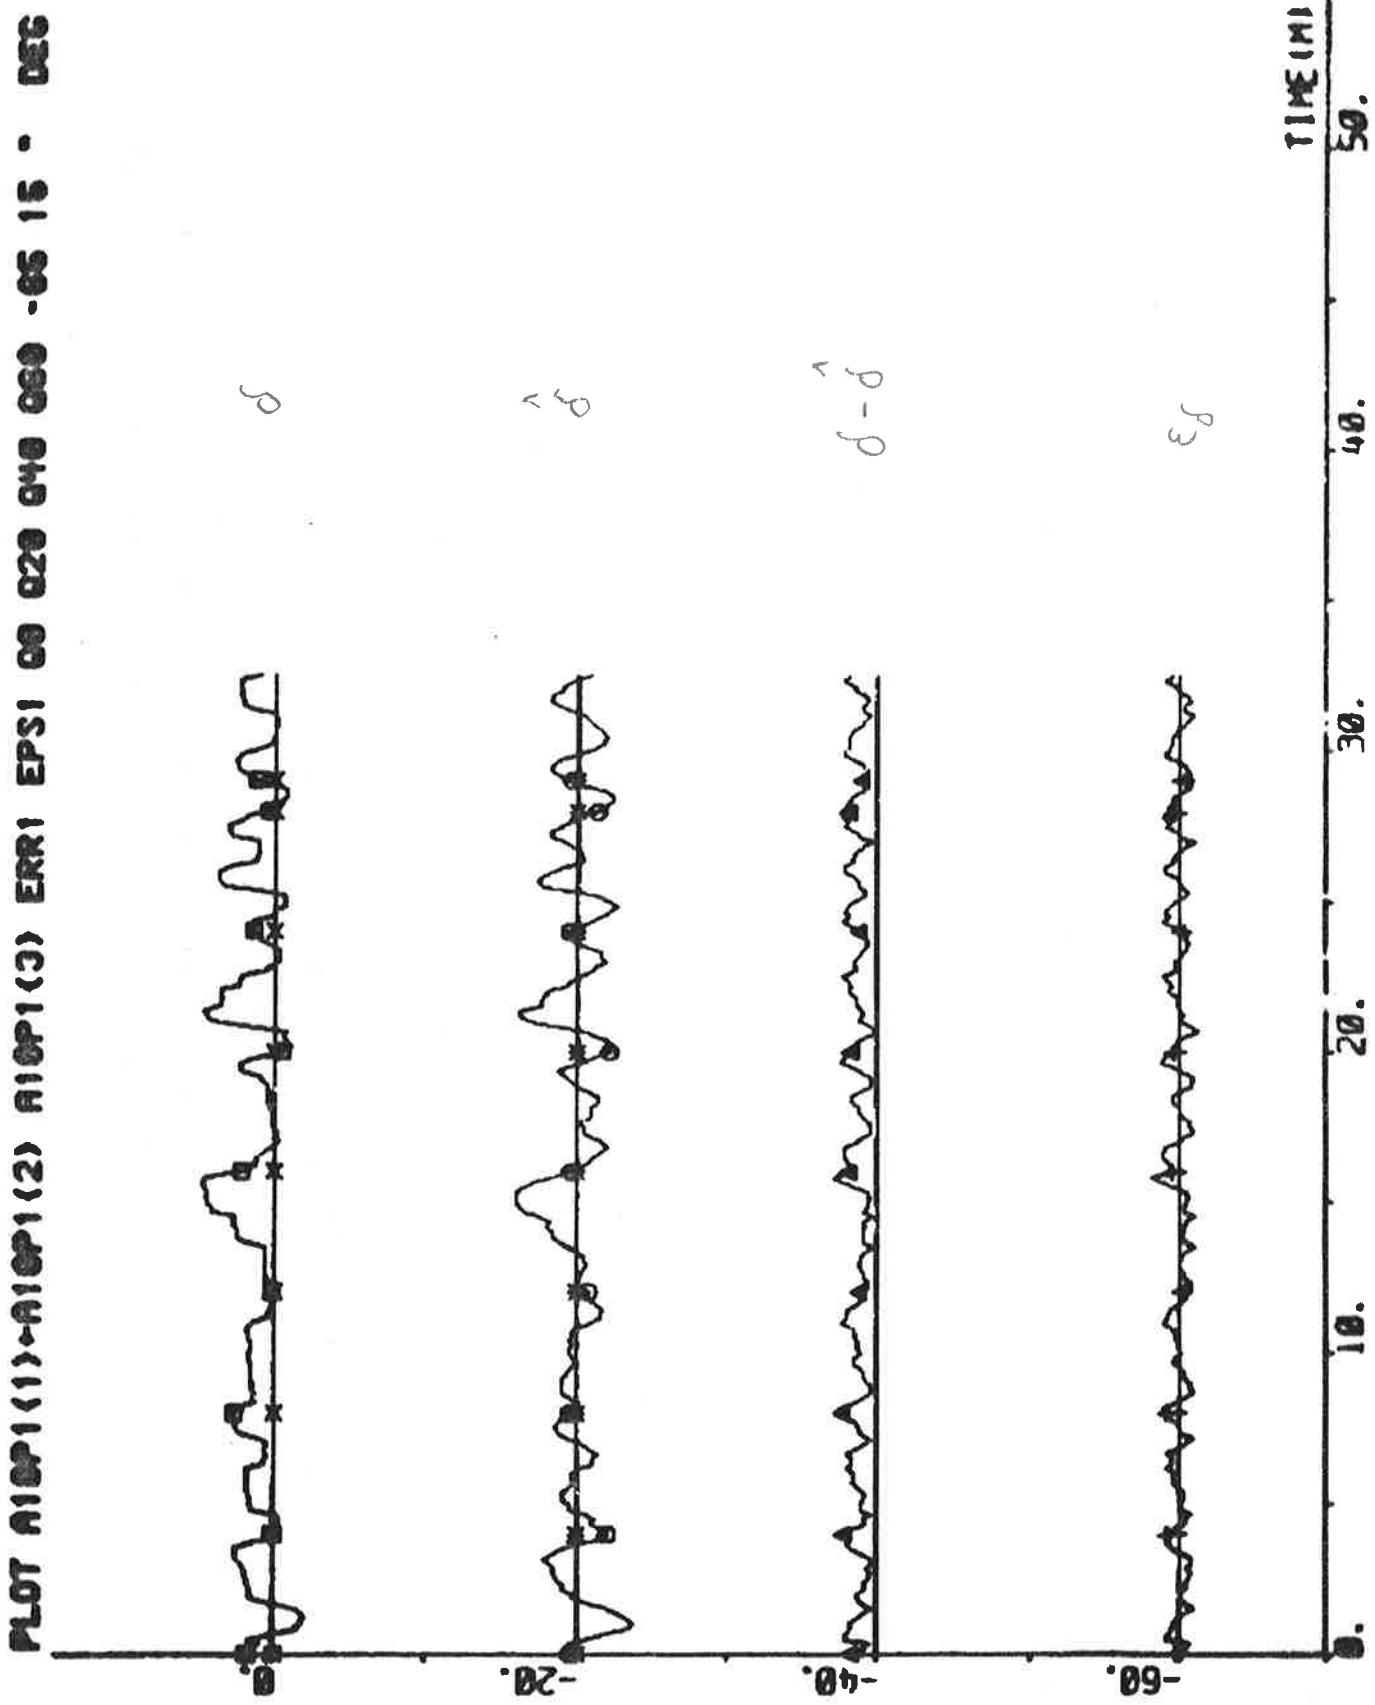


PLOT N10P1(1)-N10P2(3) N10P2(4) N10P2(5) N10P2(6) 00 02 04 06 -0.6 1.6



PL07 n10P1(1)-n10P2(7) n10P2(8) n10P2(9) n10P2(10) n10P2(11) n10P2(12) M

178

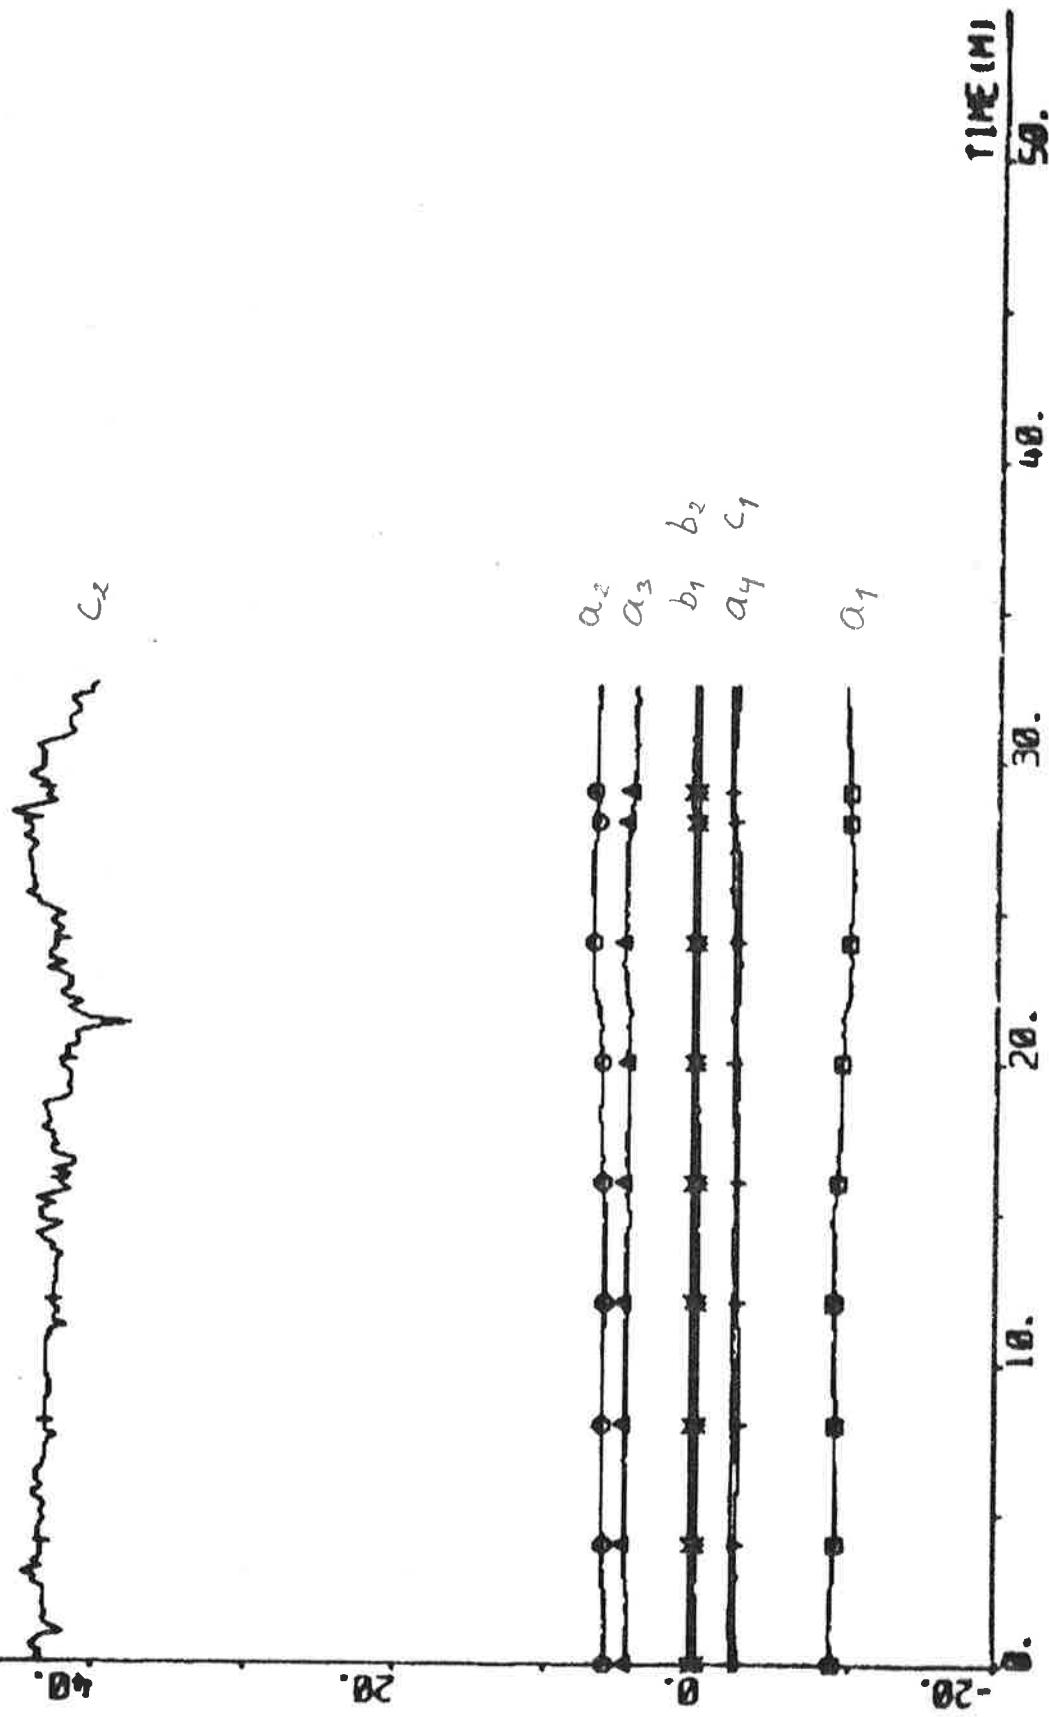

EXPERIMENT ALL

Date	1976-04-23	Forward draught	8.5 m
Time	13.06	Aft draught	12.5 m
Duration	24 min	Wind direction	NW (5; see App. A)
Position	N 06°48' W 15057'	Wind velocity	3 m/s (light breeze)
ψ_{ref}	145 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 6 q = 0.05
 T_s = 10 s V₀ = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -9.16 \\ 6.39 \\ 4.29 \\ -1.86 \\ 0.46 \\ 0.22 \\ -2.60 \\ 37.18 \end{bmatrix} \quad P = \begin{bmatrix} 5.17 & & & & & & & \\ -6.49 & 13.13 & & & & & & \\ -0.84 & -6.88 & 14.72 & & & & & \\ 2.41 & 0.01 & -7.29 & 5.08 & & & & \\ -0.11 & -0.12 & 0.39 & -0.16 & 0.03 & & & \\ -0.07 & 0.04 & -0.04 & 0.08 & 0.00 & 0.02 & & \\ -0.95 & 1.32 & 0.35 & -0.75 & 0.00 & -0.02 & 0.83 & \\ 15.49 & -16.91 & -15.74 & 15.85 & -0.33 & -0.51 & 12.37 & 860.40 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.34$$

$$\hat{d}_0 = 0.2 \text{ deg} \quad \hat{d}_v = 0.06 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$


Statistics (mean value and standard deviation)

PLOT #11P1(1) #11P1(2) #P #11P1(10) #11P1(15) #11P1(20) - C1 - DEG

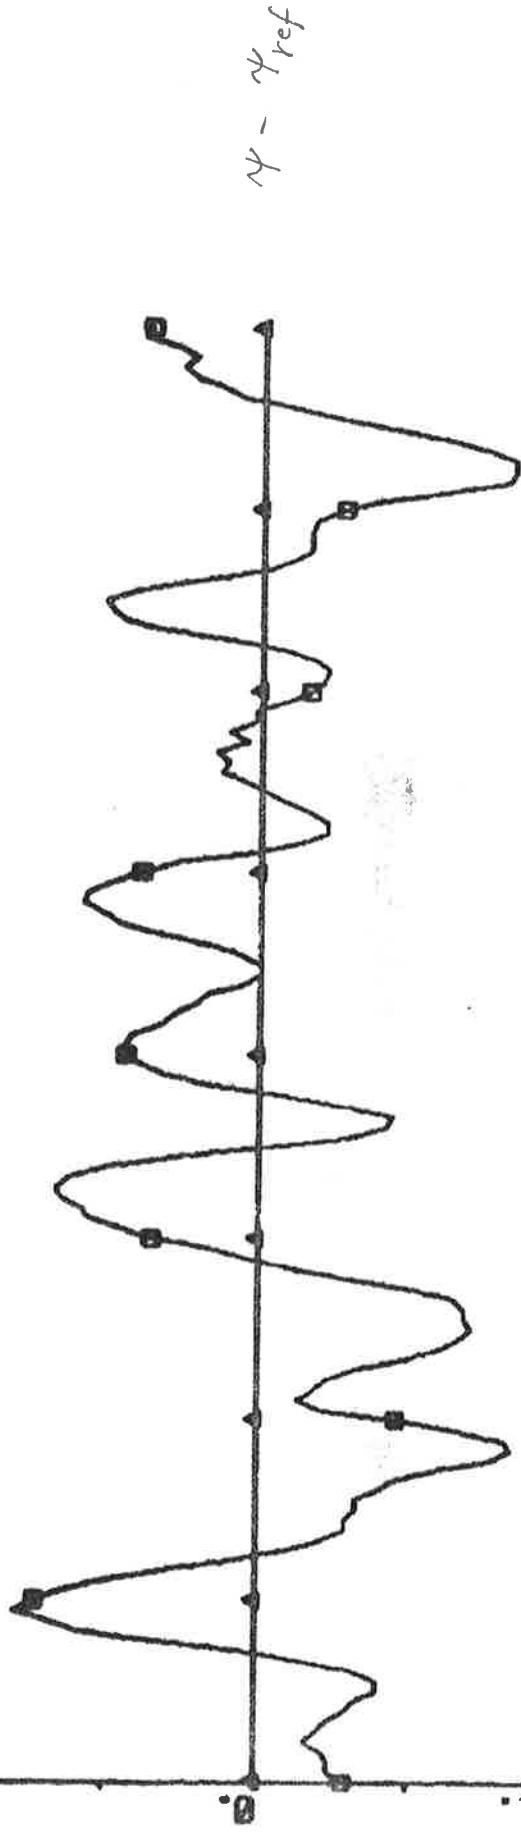


180


PLOT #11P1(1)-#11P1(13) #11P1(14) #11P1(12) #11P1(11)

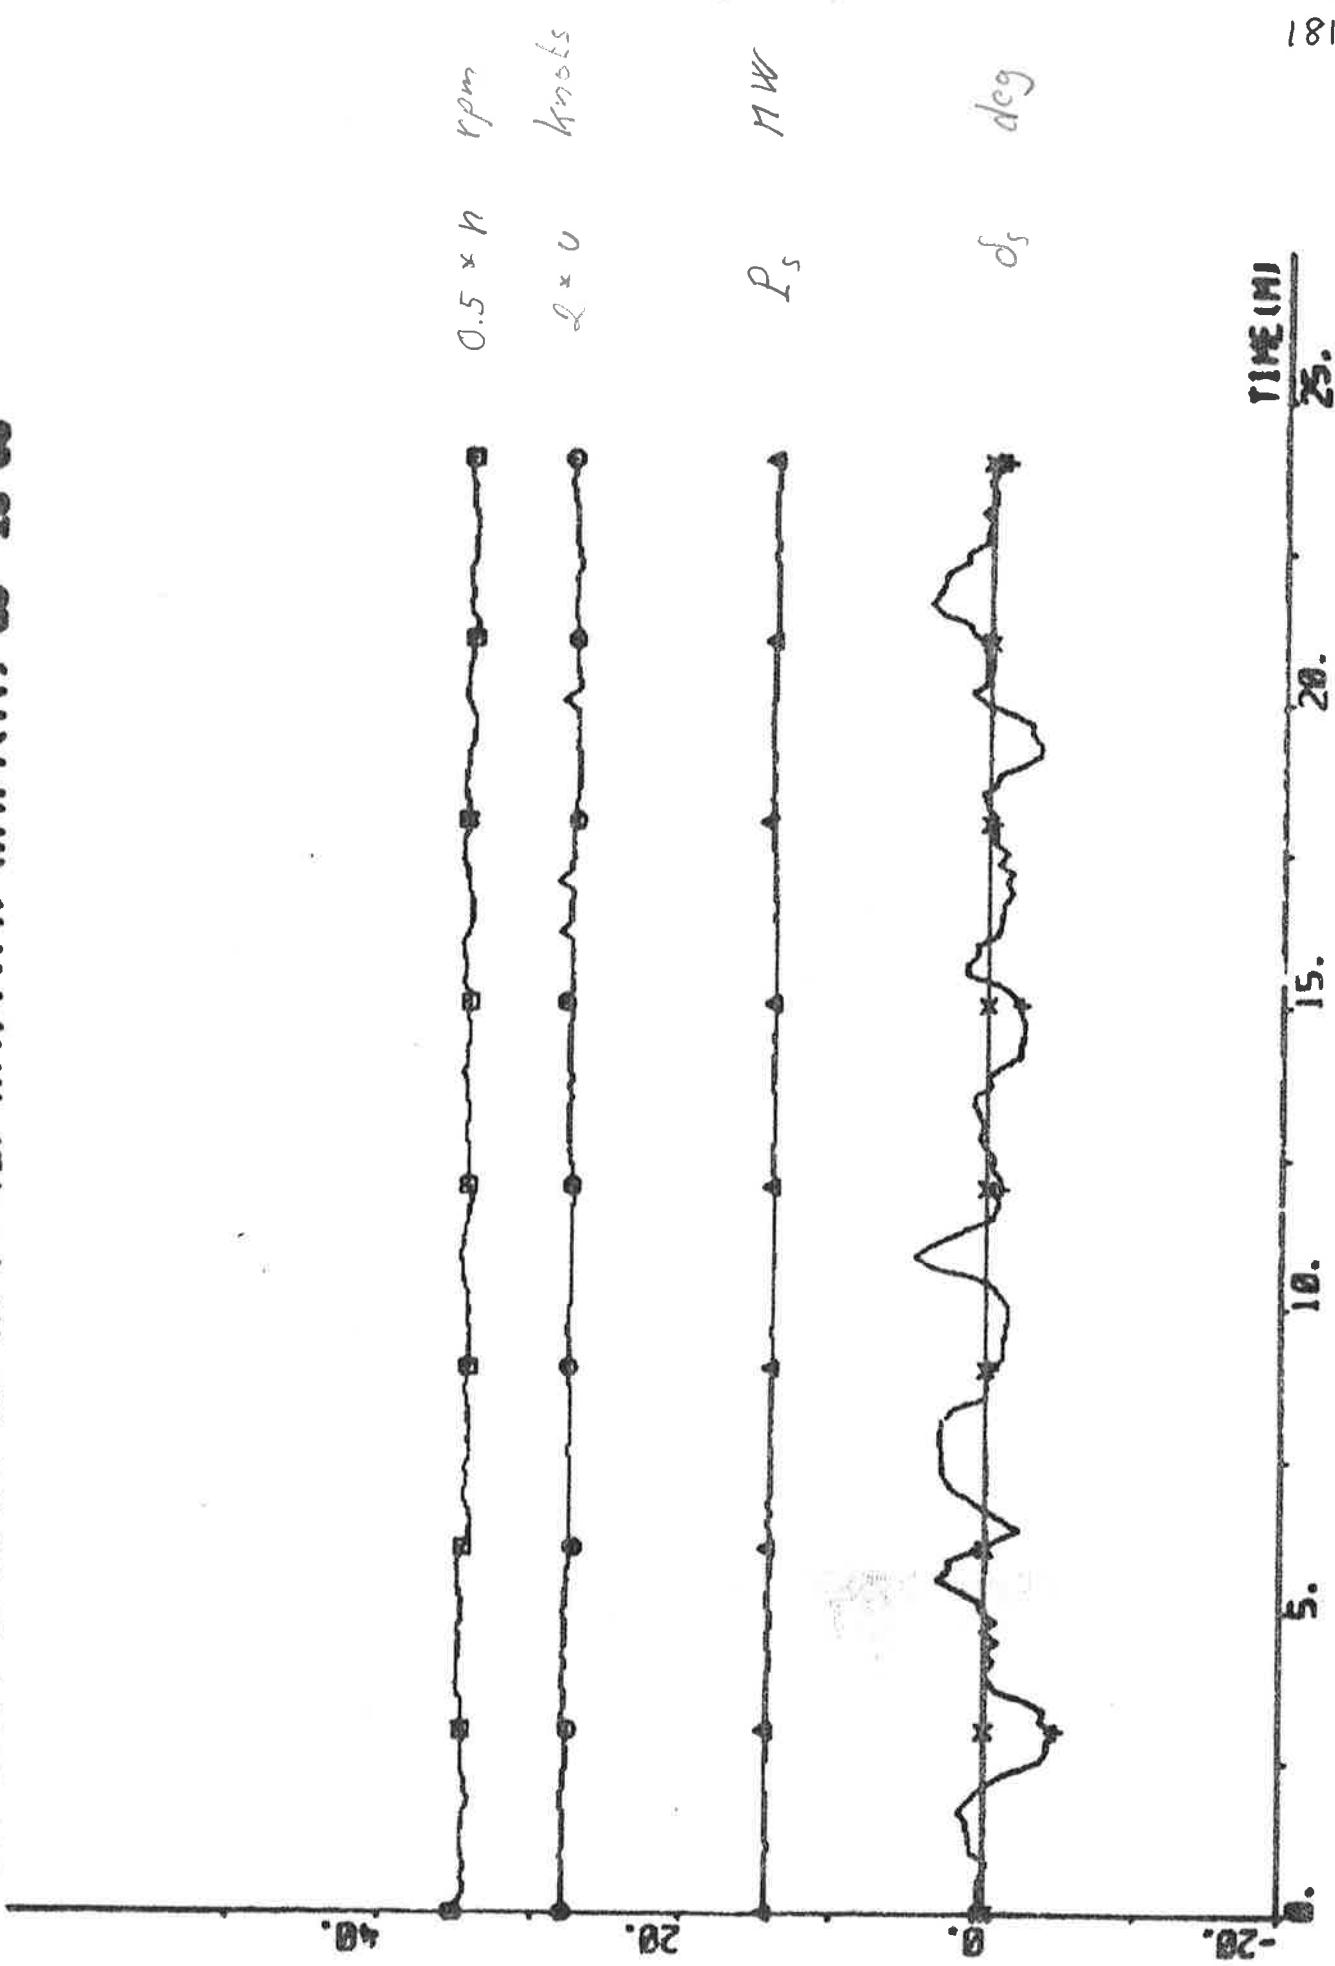



PLT A1IP1(1)-B1IP2(2) ERRE 39 01 02 -3.4 0.0 -0.0

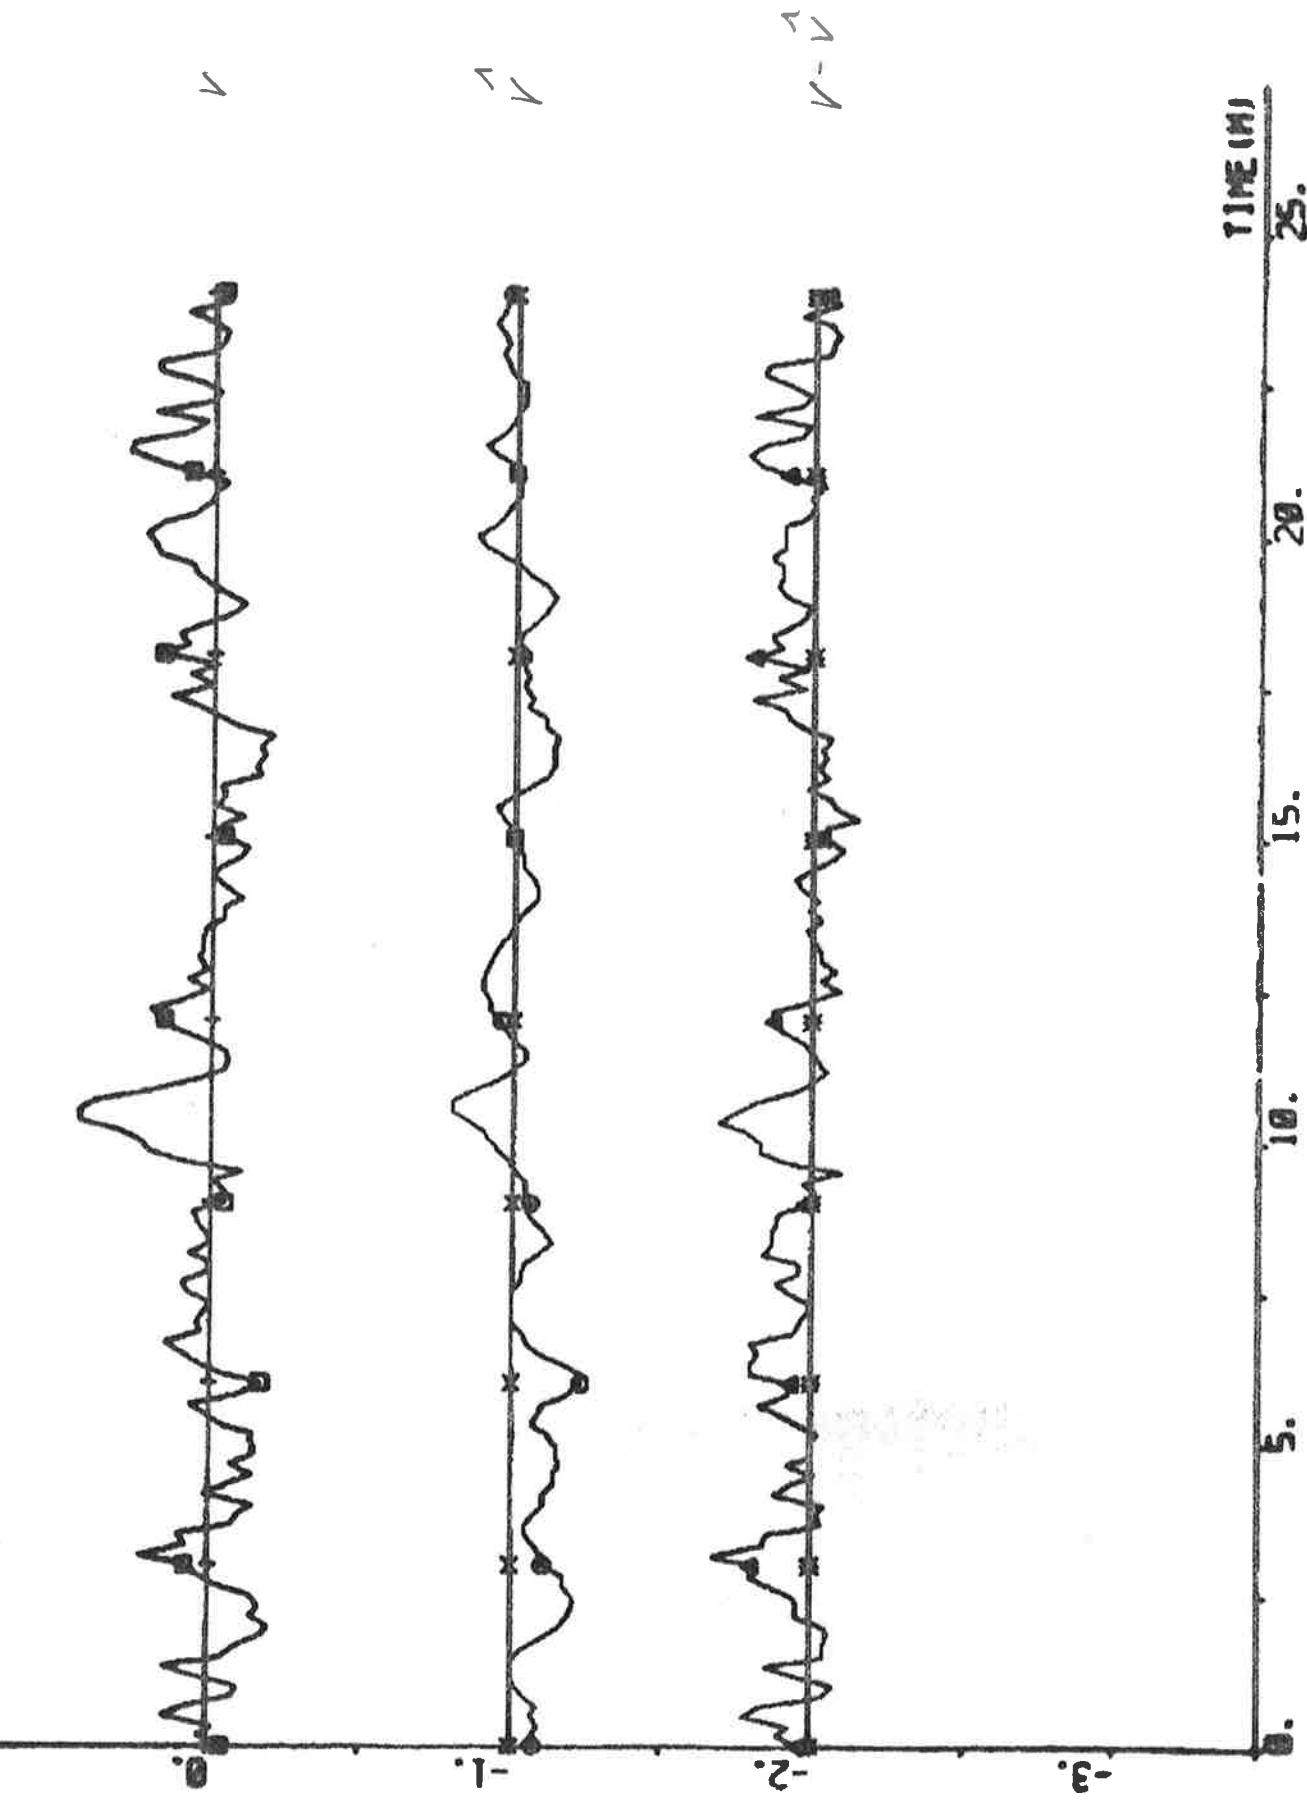

PLAT A11P1(1)-A11P1(4) 011P1(5) ERR2 EPS2 00 01 02 03 -3.4 0.0 - 00013

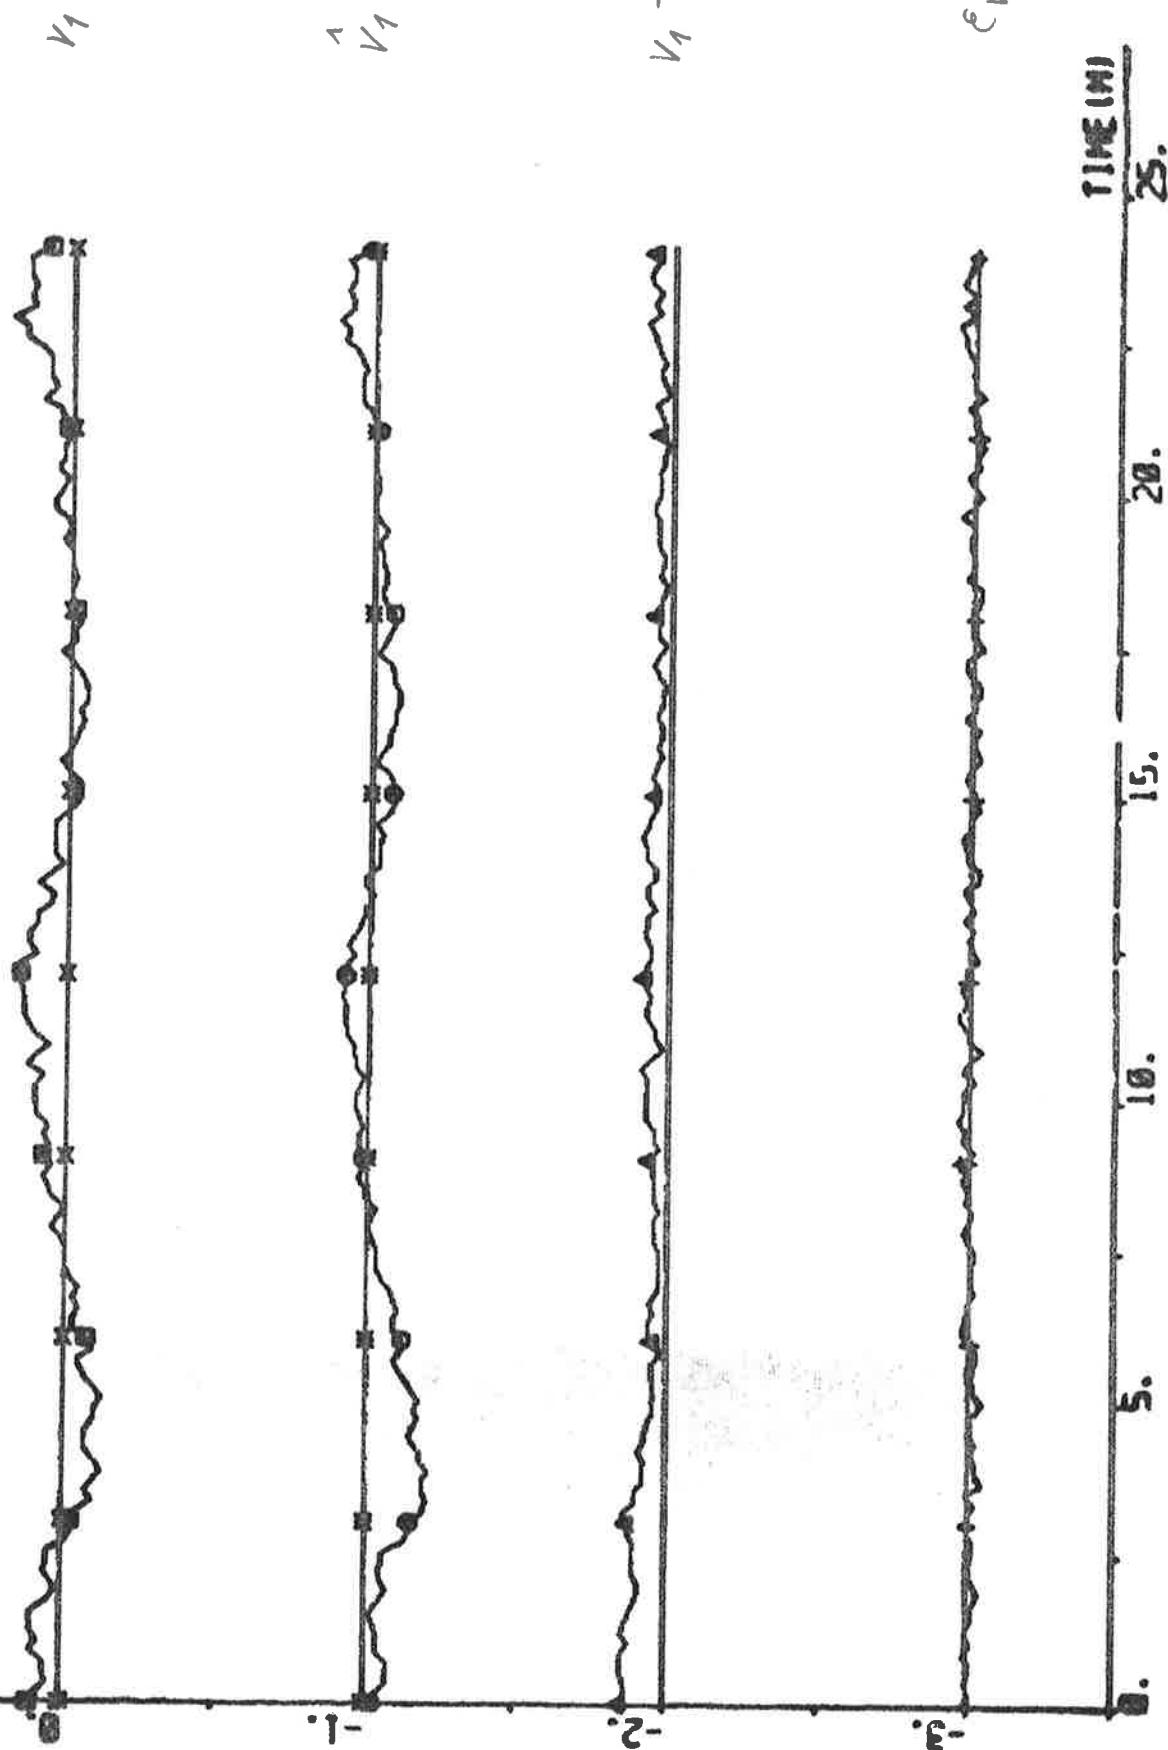

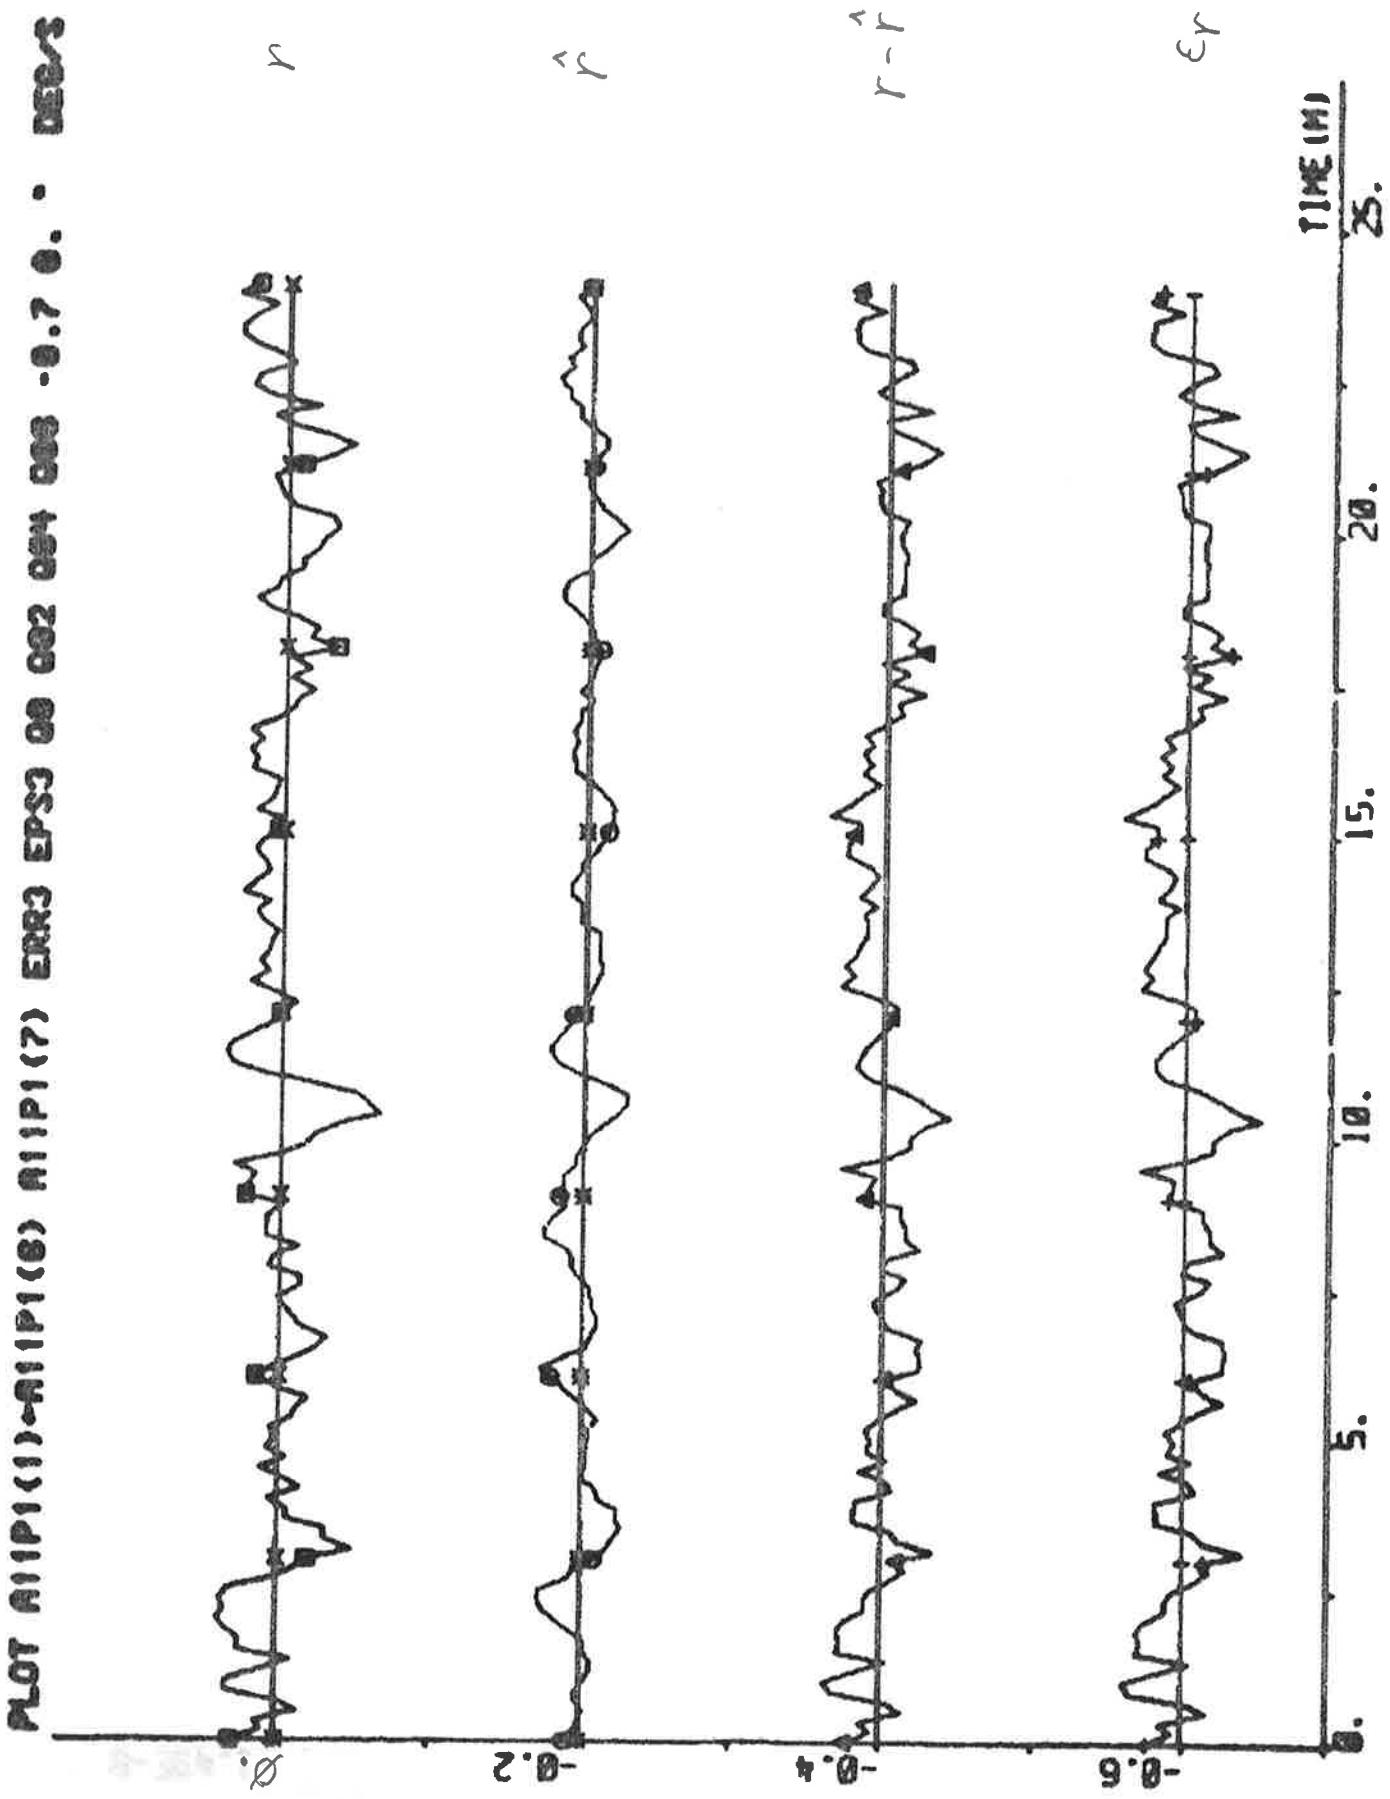

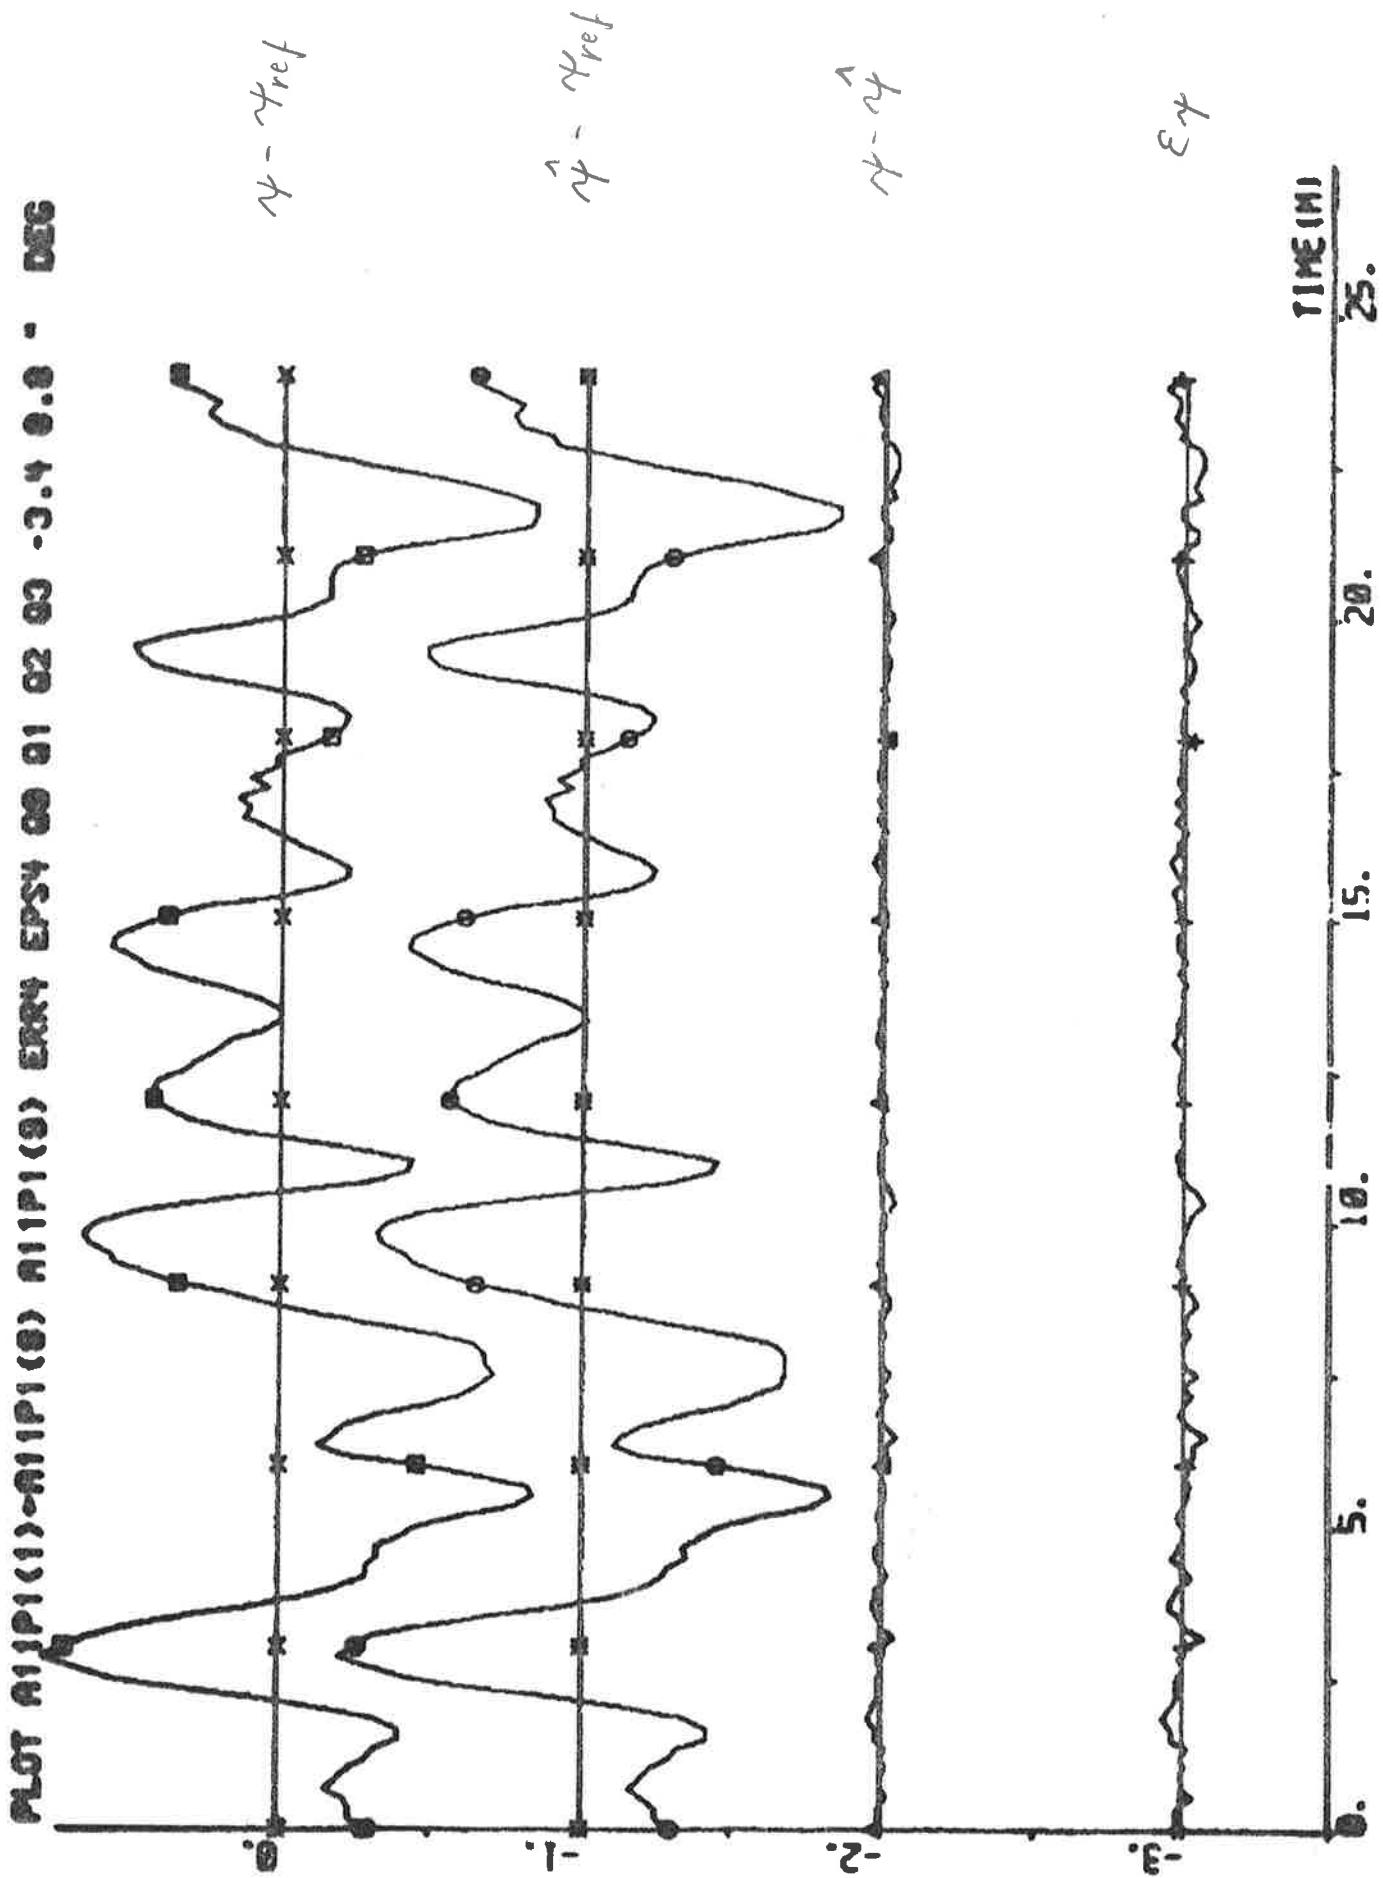




$\delta - \delta'$


δ'

δ

PLT R1IP1(1) R1IP2(3) R1IP2(4) R1IP2(5) R1IP2(6) 00 02 04 06 -0.5 1.6

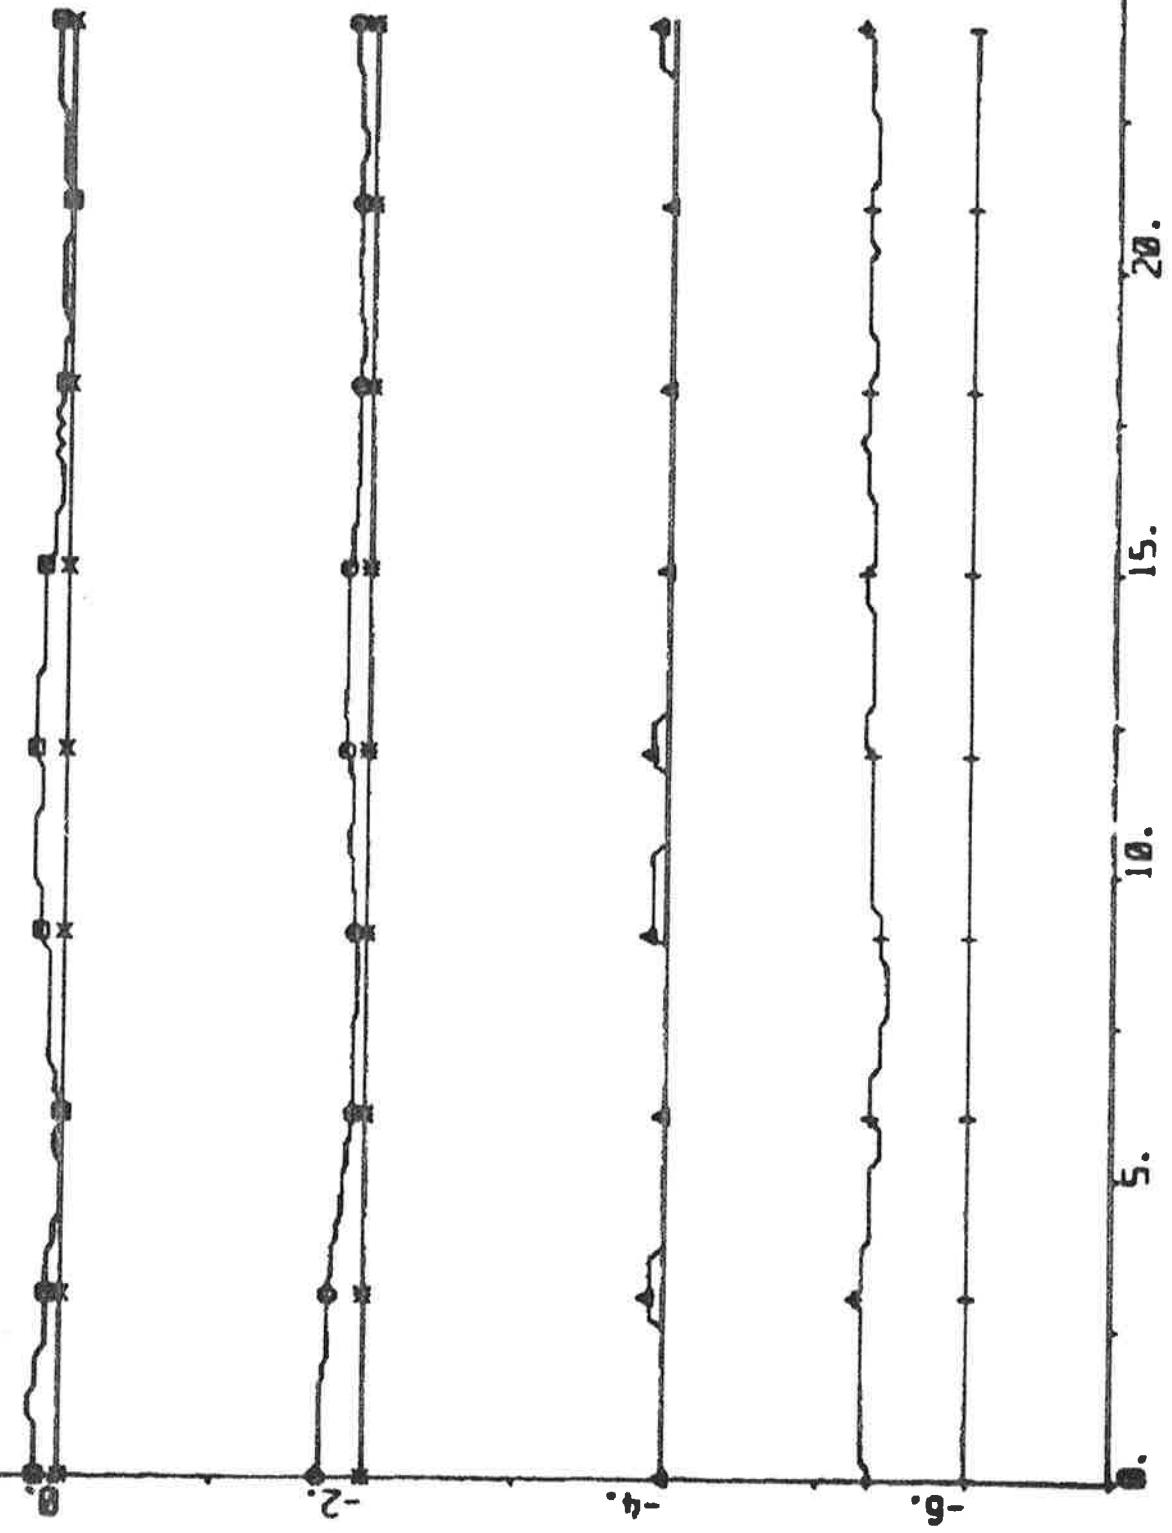

PLOT A11P1(1)-A11P2(7) A11P2(9) A11P2(10) A11P2(11) A11P2(12) A1

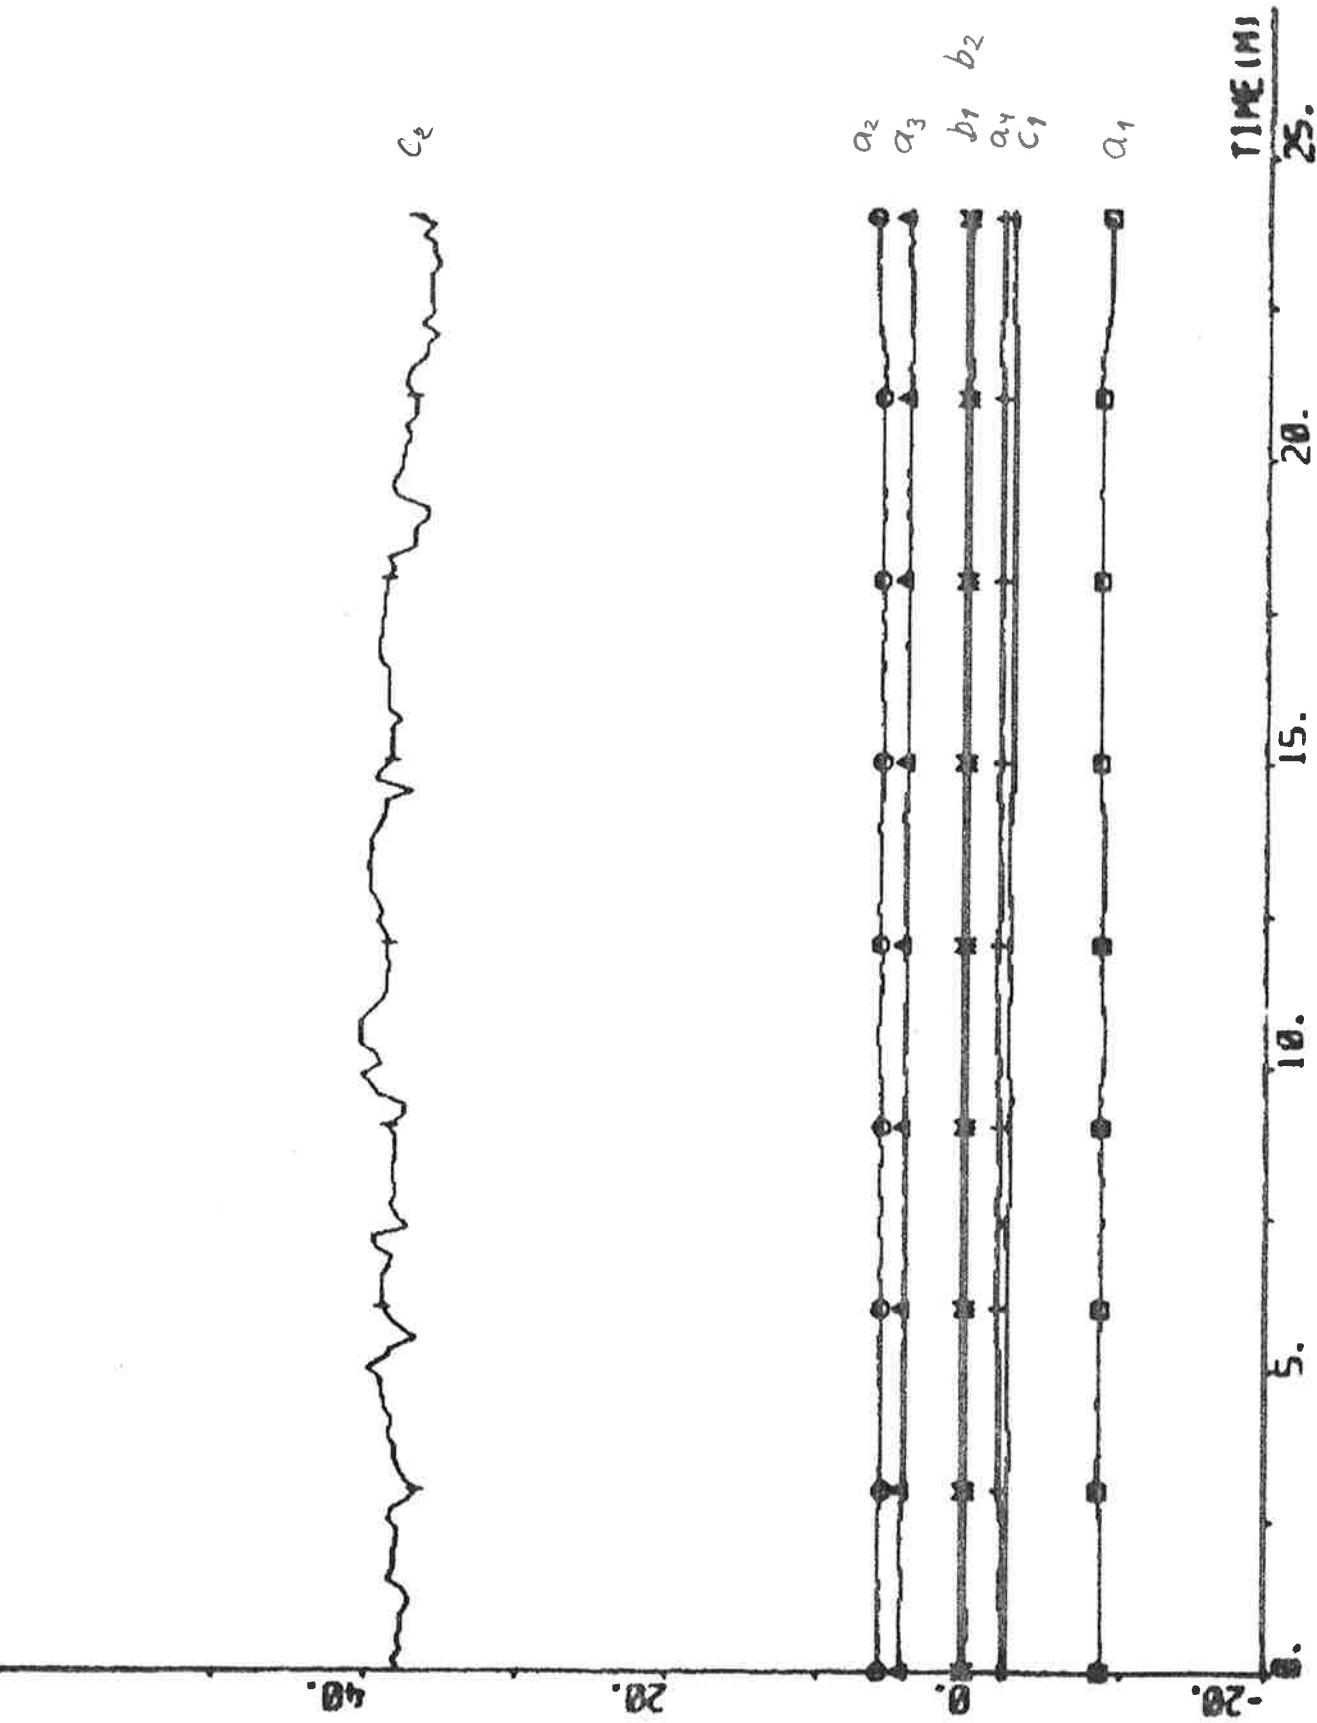

EXPERIMENT A12

Date	1976-04-23	Forward draught	8.5 m
Time	14.09	Aft draught	12.5 m
Duration	26 min	Wind direction	N (5; see App. A)
Position	N 06°35' W 150°48'	Wind velocity	3 m/s (light breeze)
ψ_{ref}	145 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 6 q = 0.1
 T_s = 10 s V_0 = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.73 \\ 7.02 \\ 4.66 \\ -3.33 \\ 0.29 \\ 0.08 \\ -2.89 \\ 44.49 \end{bmatrix} \quad P = \begin{bmatrix} 5.36 \\ -6.80 & 13.38 \\ -0.84 & -6.55 & 14.33 \\ 2.47 & -0.08 & -7.15 & 4.95 \\ -0.10 & -0.10 & 0.37 & -0.16 & 0.03 \\ -0.10 & 0.09 & -0.05 & 0.06 & 0.00 & 0.03 \\ -1.01 & 1.34 & 0.26 & -0.58 & -0.01 & 0.01 & 0.92 \\ 18.54 & -24.21 & -13.08 & 17.88 & -0.34 & -0.27 & 12.52 & 915.41 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.38$$

$$\hat{\delta}_0 = 0.3 \text{ deg} \quad \hat{d}_v = 0.07 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_{\delta} = 1.3 \text{ deg}$$

Statistics (mean value and standard deviation)

PLOT #12P1(1) #12P1(0) HP #12P1(15) #12P1(10) #12P1(5) #12P1(3) 1 - DEG

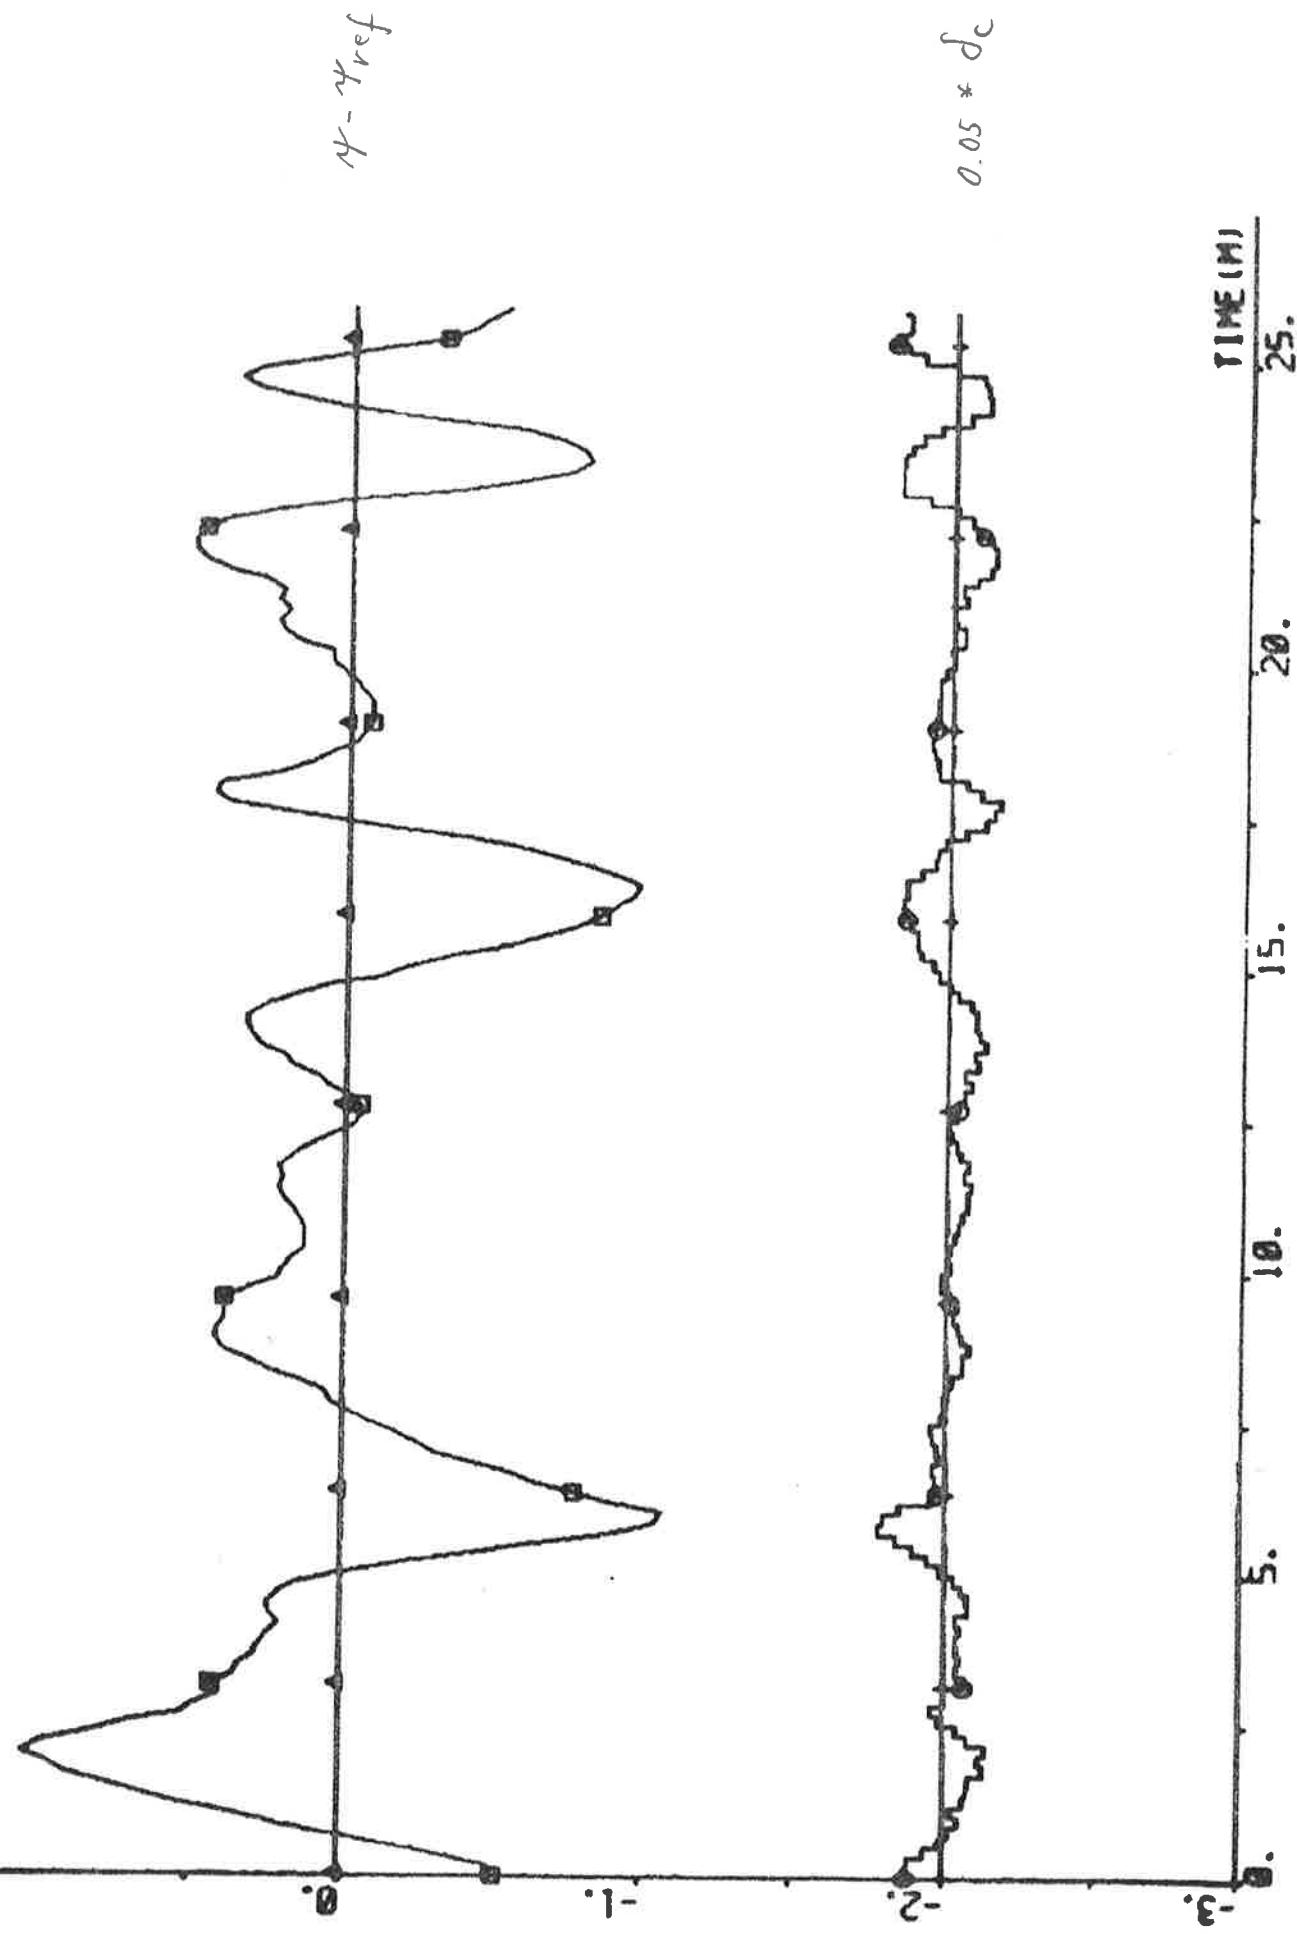

PLOT A12P1(11)-A12P1(13) A12P1(14) A12P1(11) 00 -20 00

0.5 ± n rpm

2 x 0 knols

11.16
Ls

deg
d₁




191





MOT #1221(1) - #1222(1) #1222(2) ERKS 00 01 02 - 3.4 0.8 - MOTS

PLOT A12P1(1),A12P1(4), A12P1(5) ERR2 EPS2 00 01 02 03 -3.4 0.0 - 10013

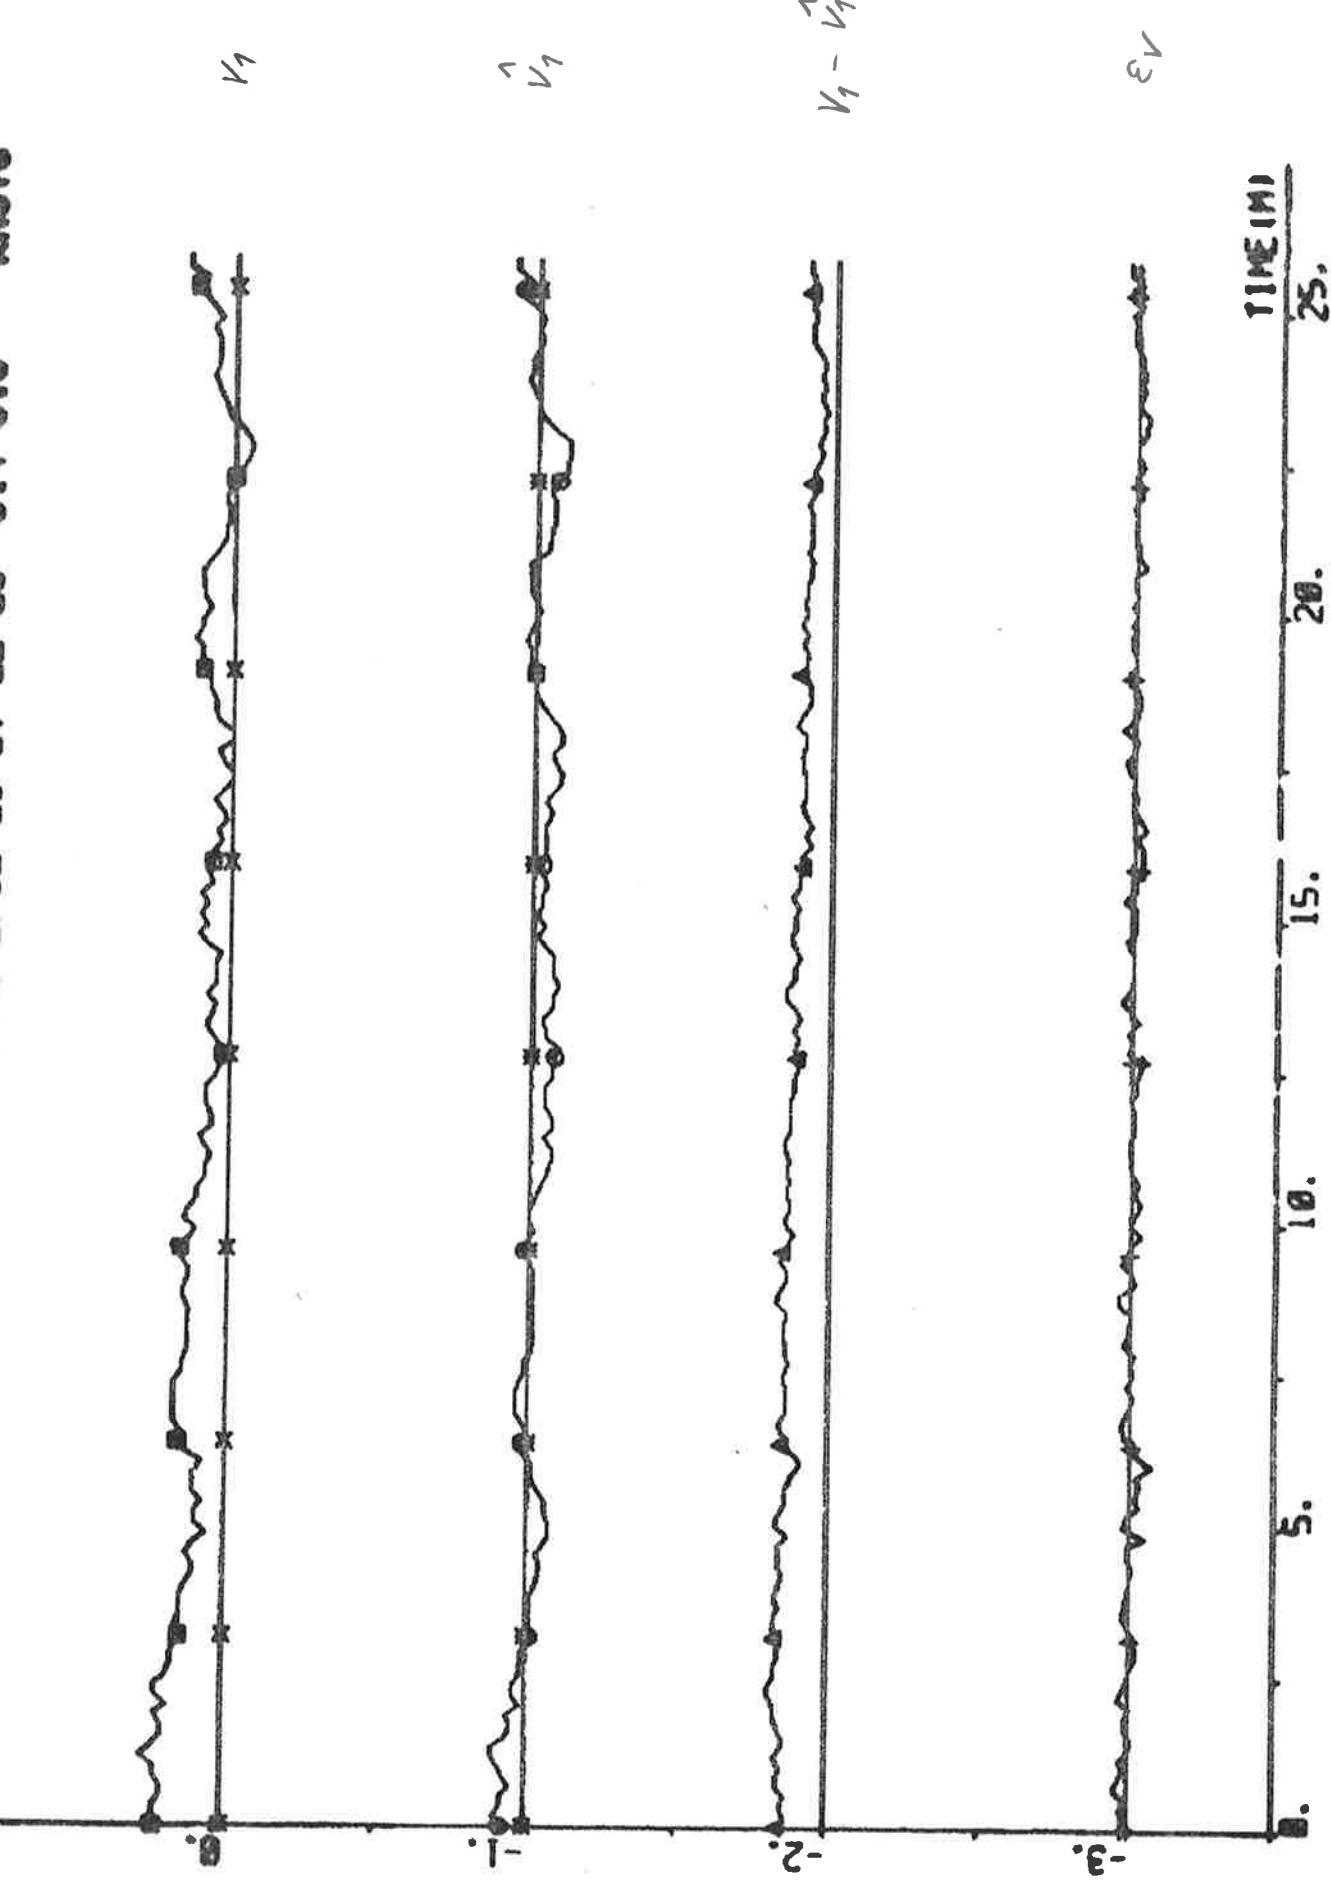


PLOT #12P1(1)-#12P1(8) #12P1(7) ER93 EP3 00 002 004 006 -0.7 0. . 0036

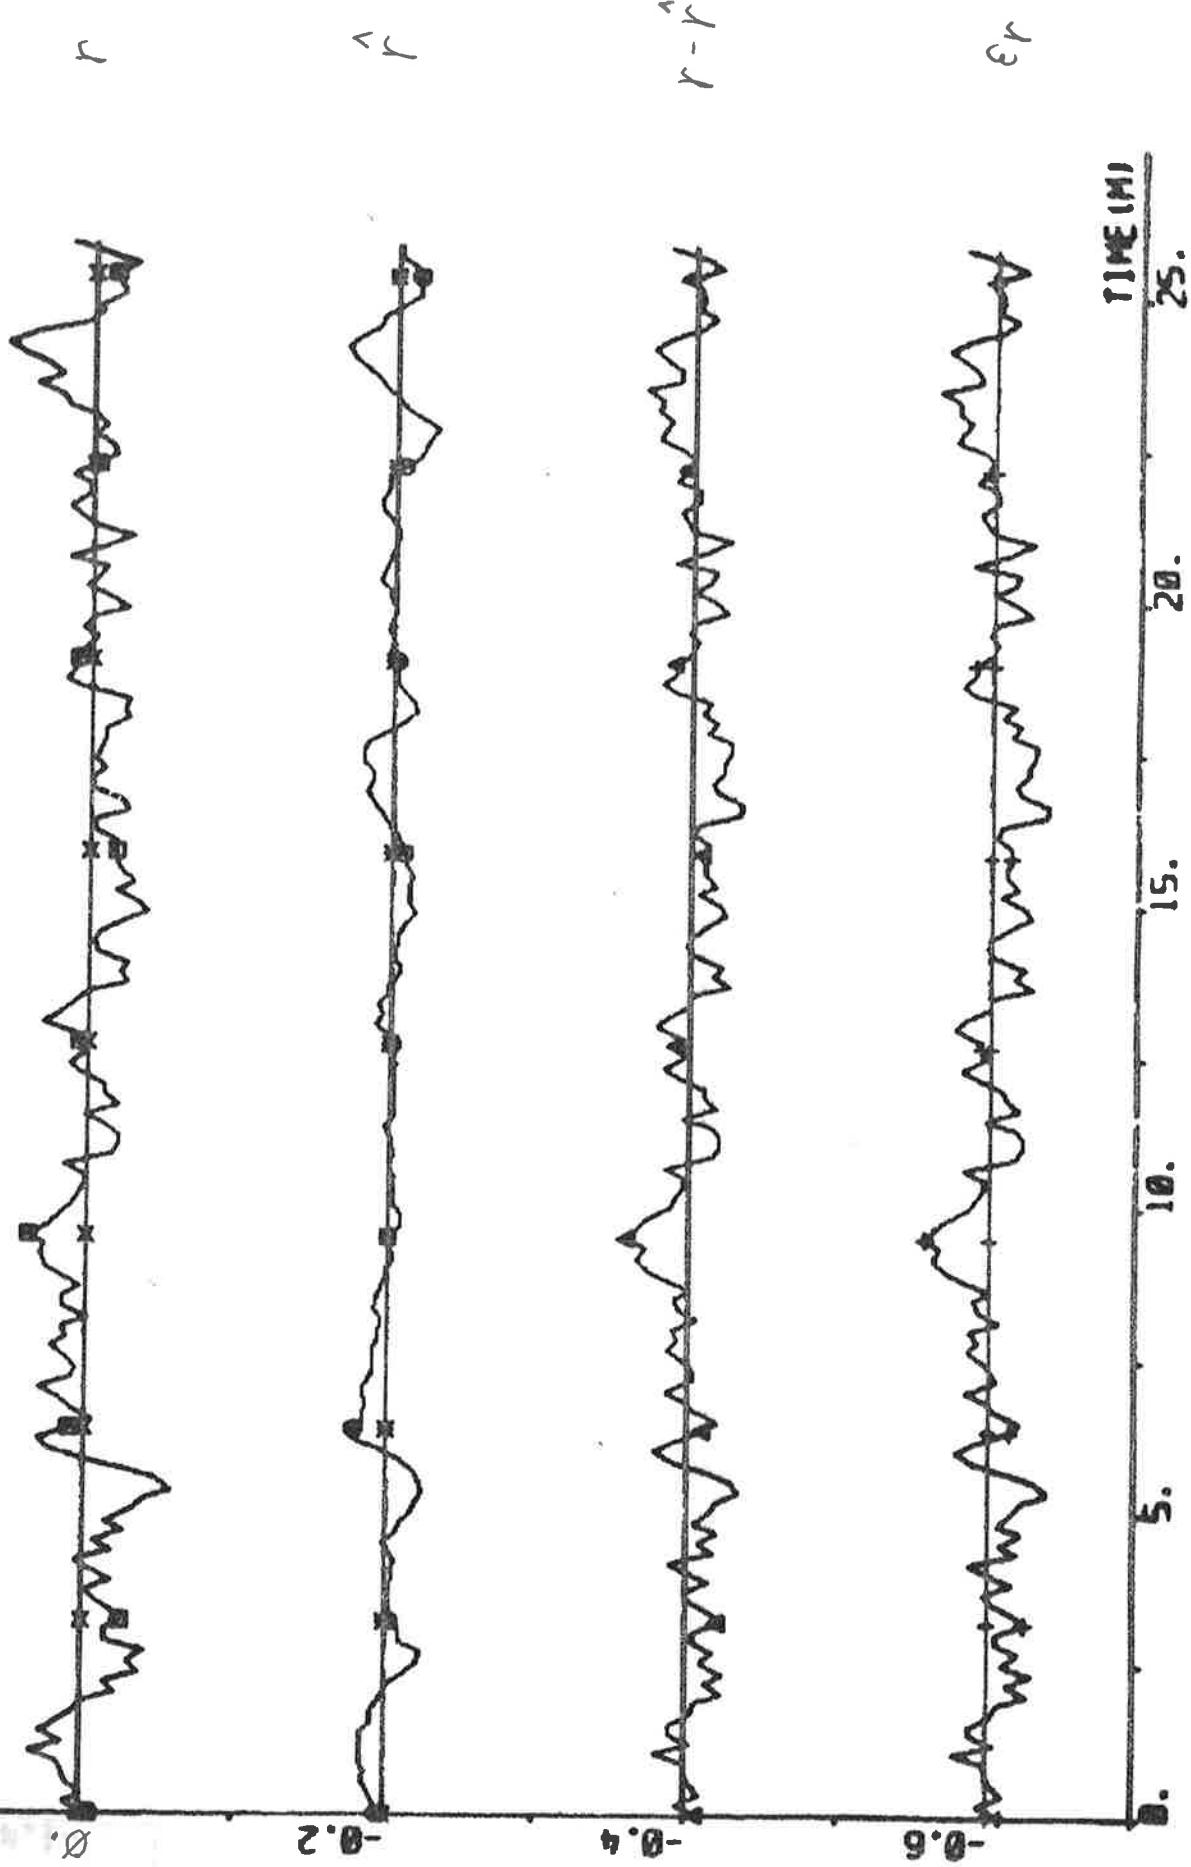


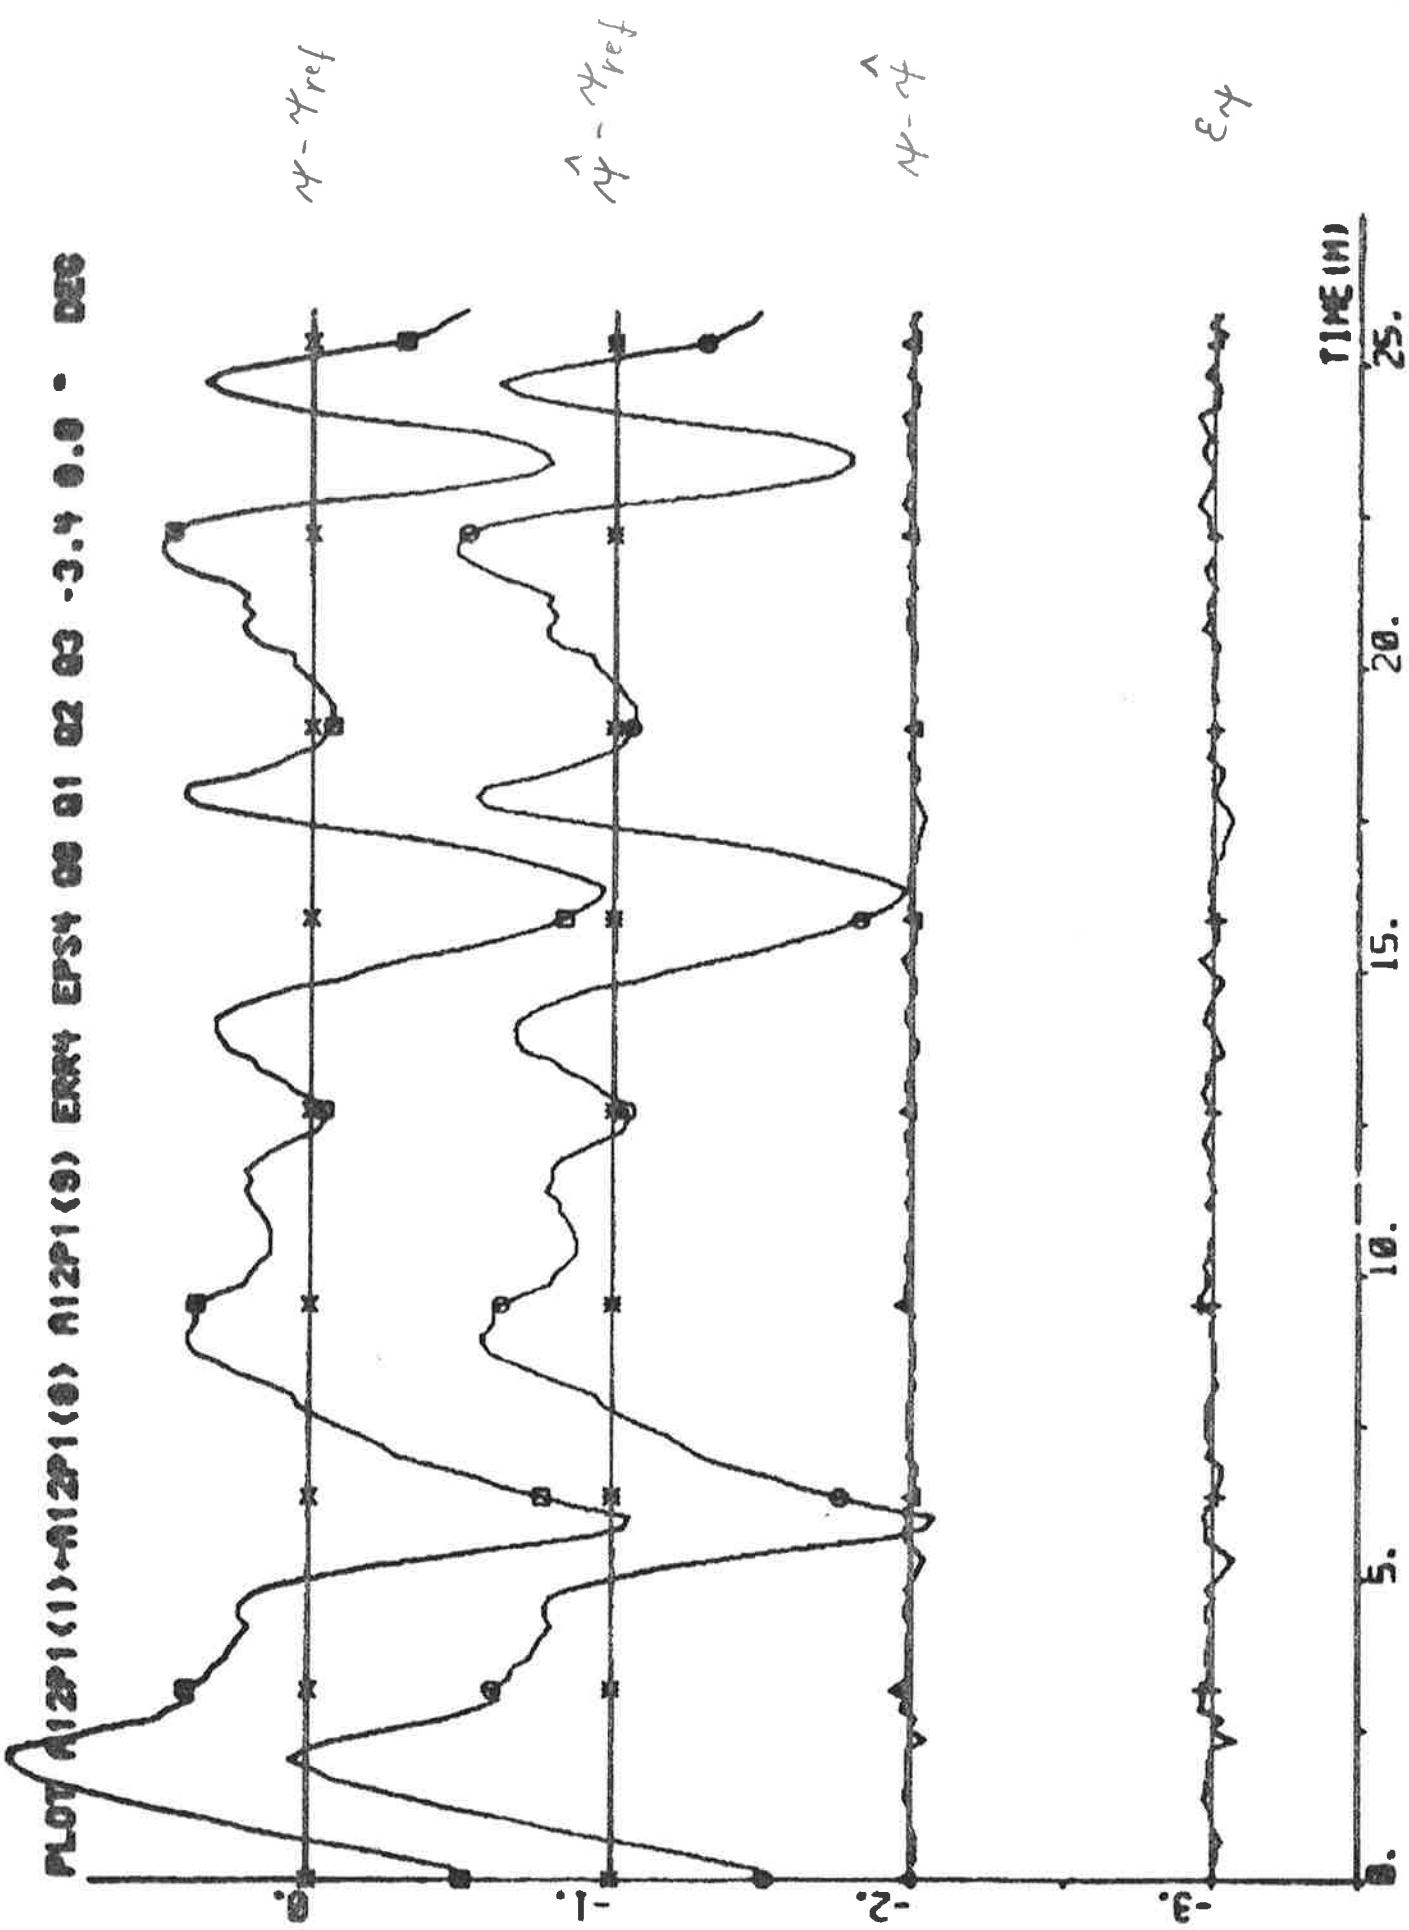


PLOT #12P1(1)-#12P1(2) #12P1(3) EPS1 00 020 040 060 -35 - 035

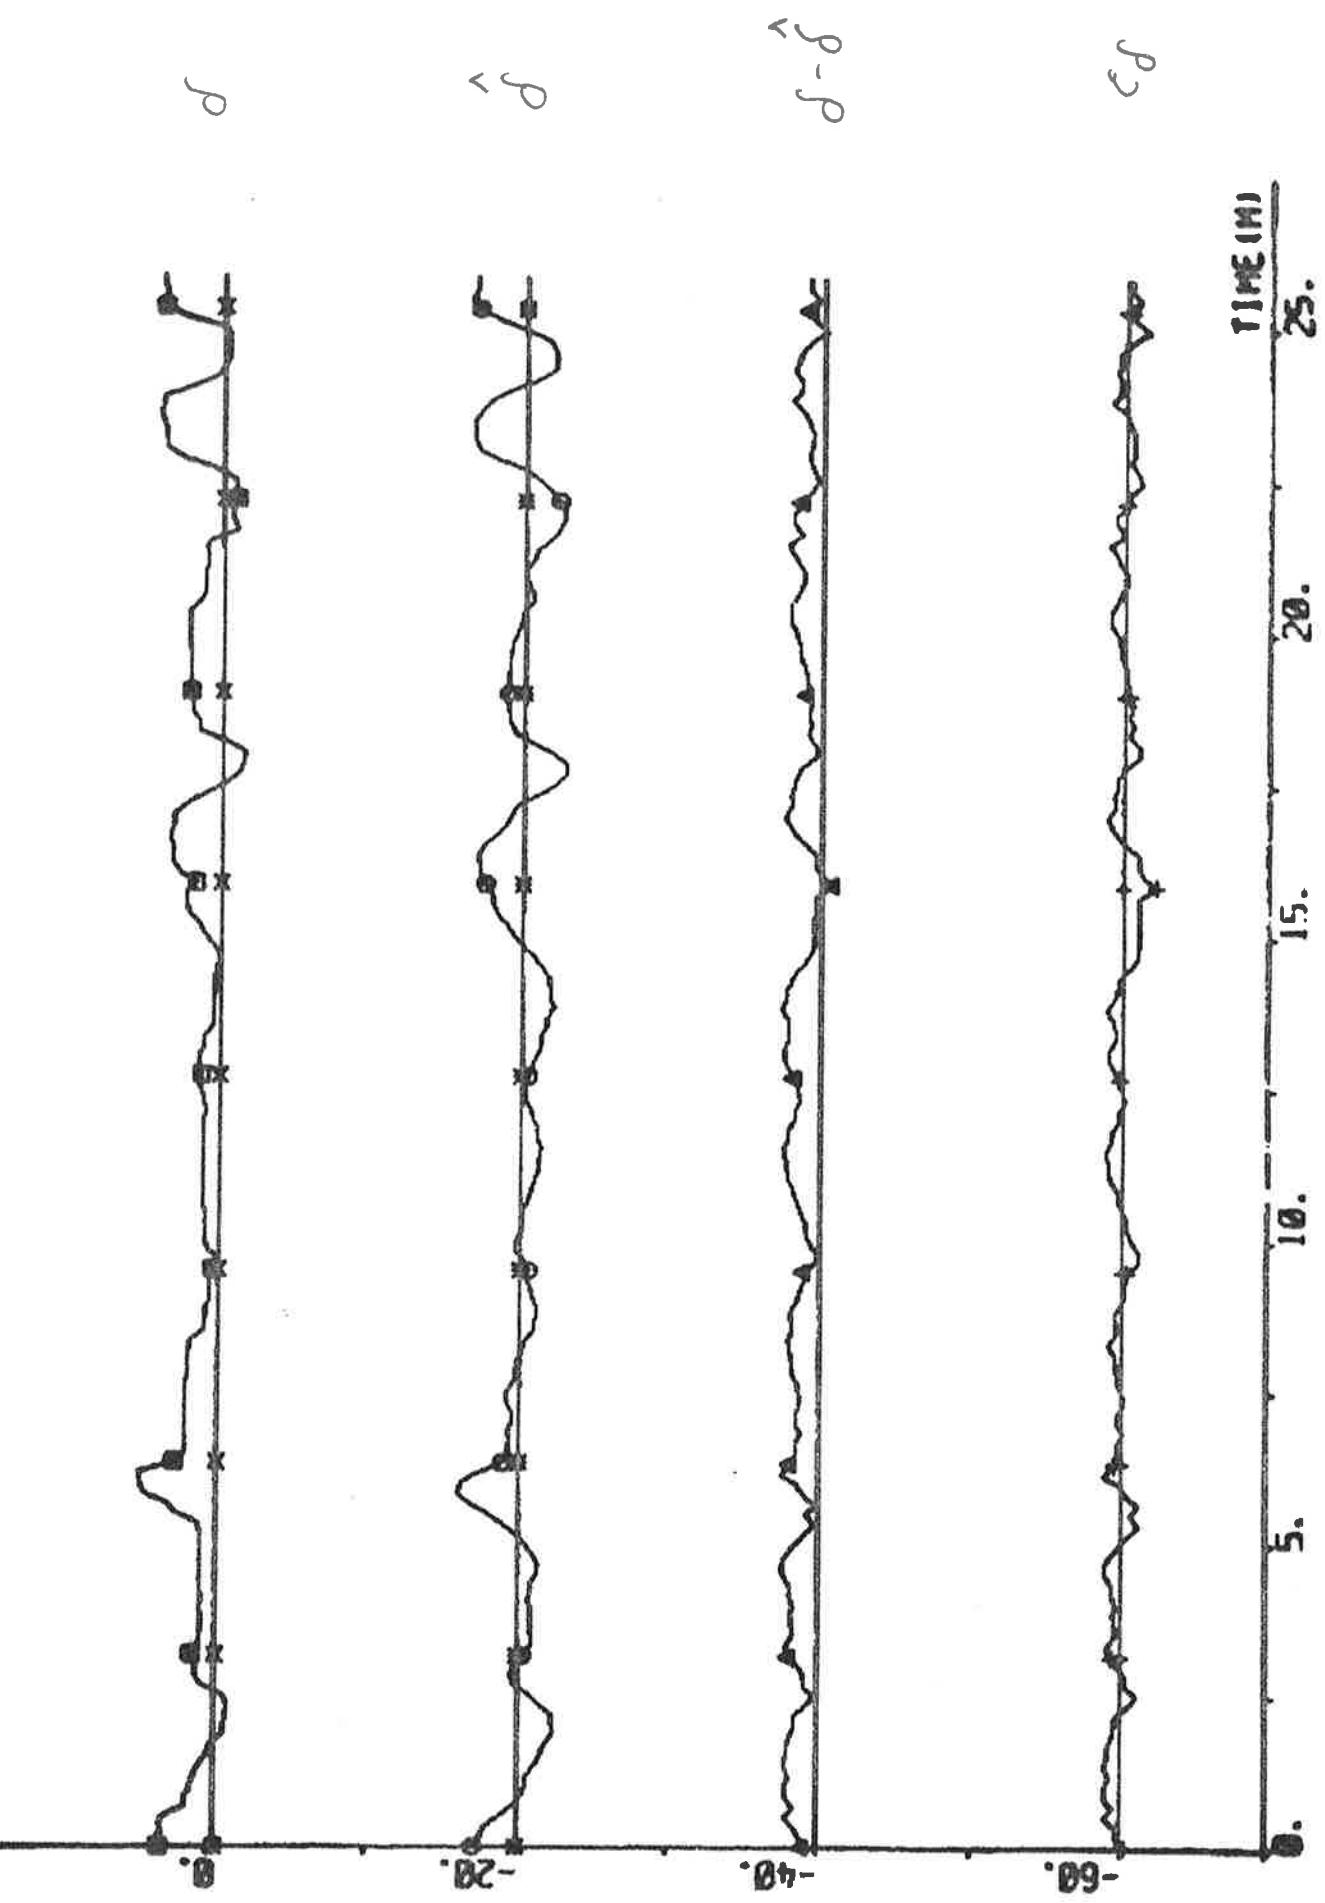

PLOT N12P2(11)-N12P2(3) N12P2(4) N12P2(5) N12P2(6) 00 02 04 08 -0.5 1.5

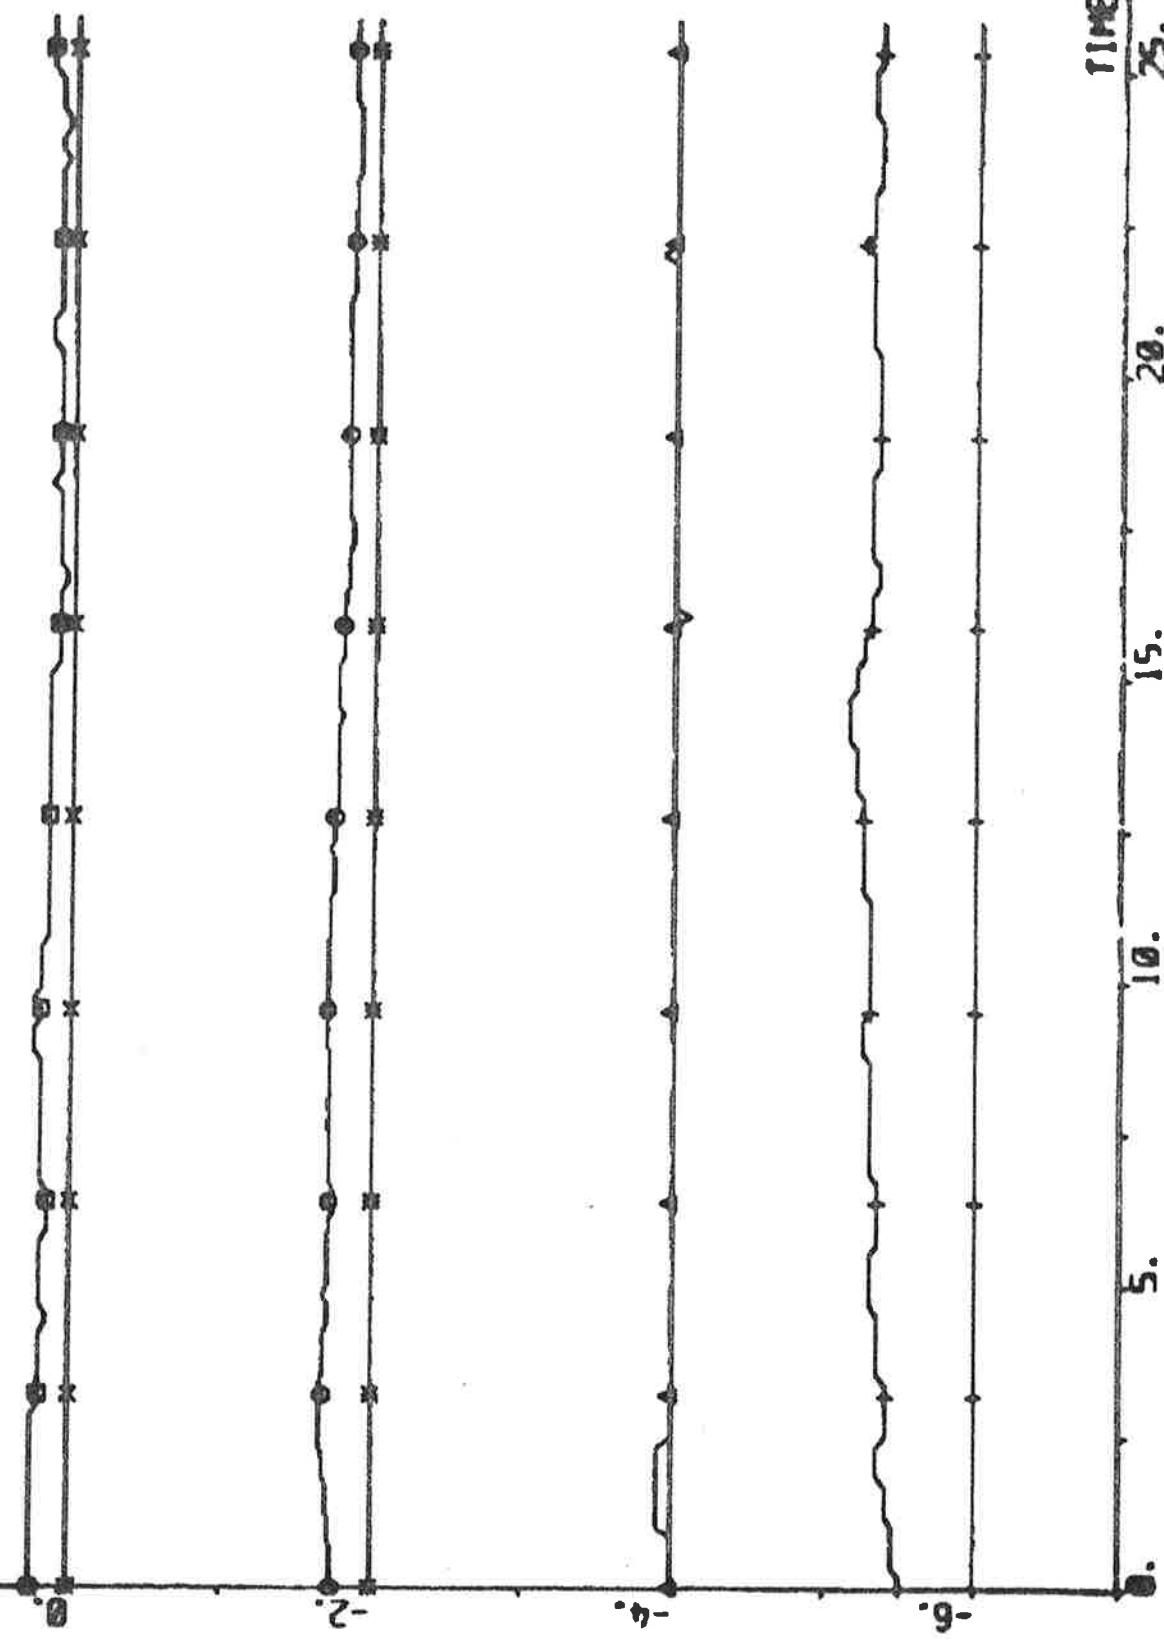

PL07 A12P1(1) A12P2(7) A12P2(0) A12P2(9) A12P2(10) A12P2(11) A12P2(12) 01

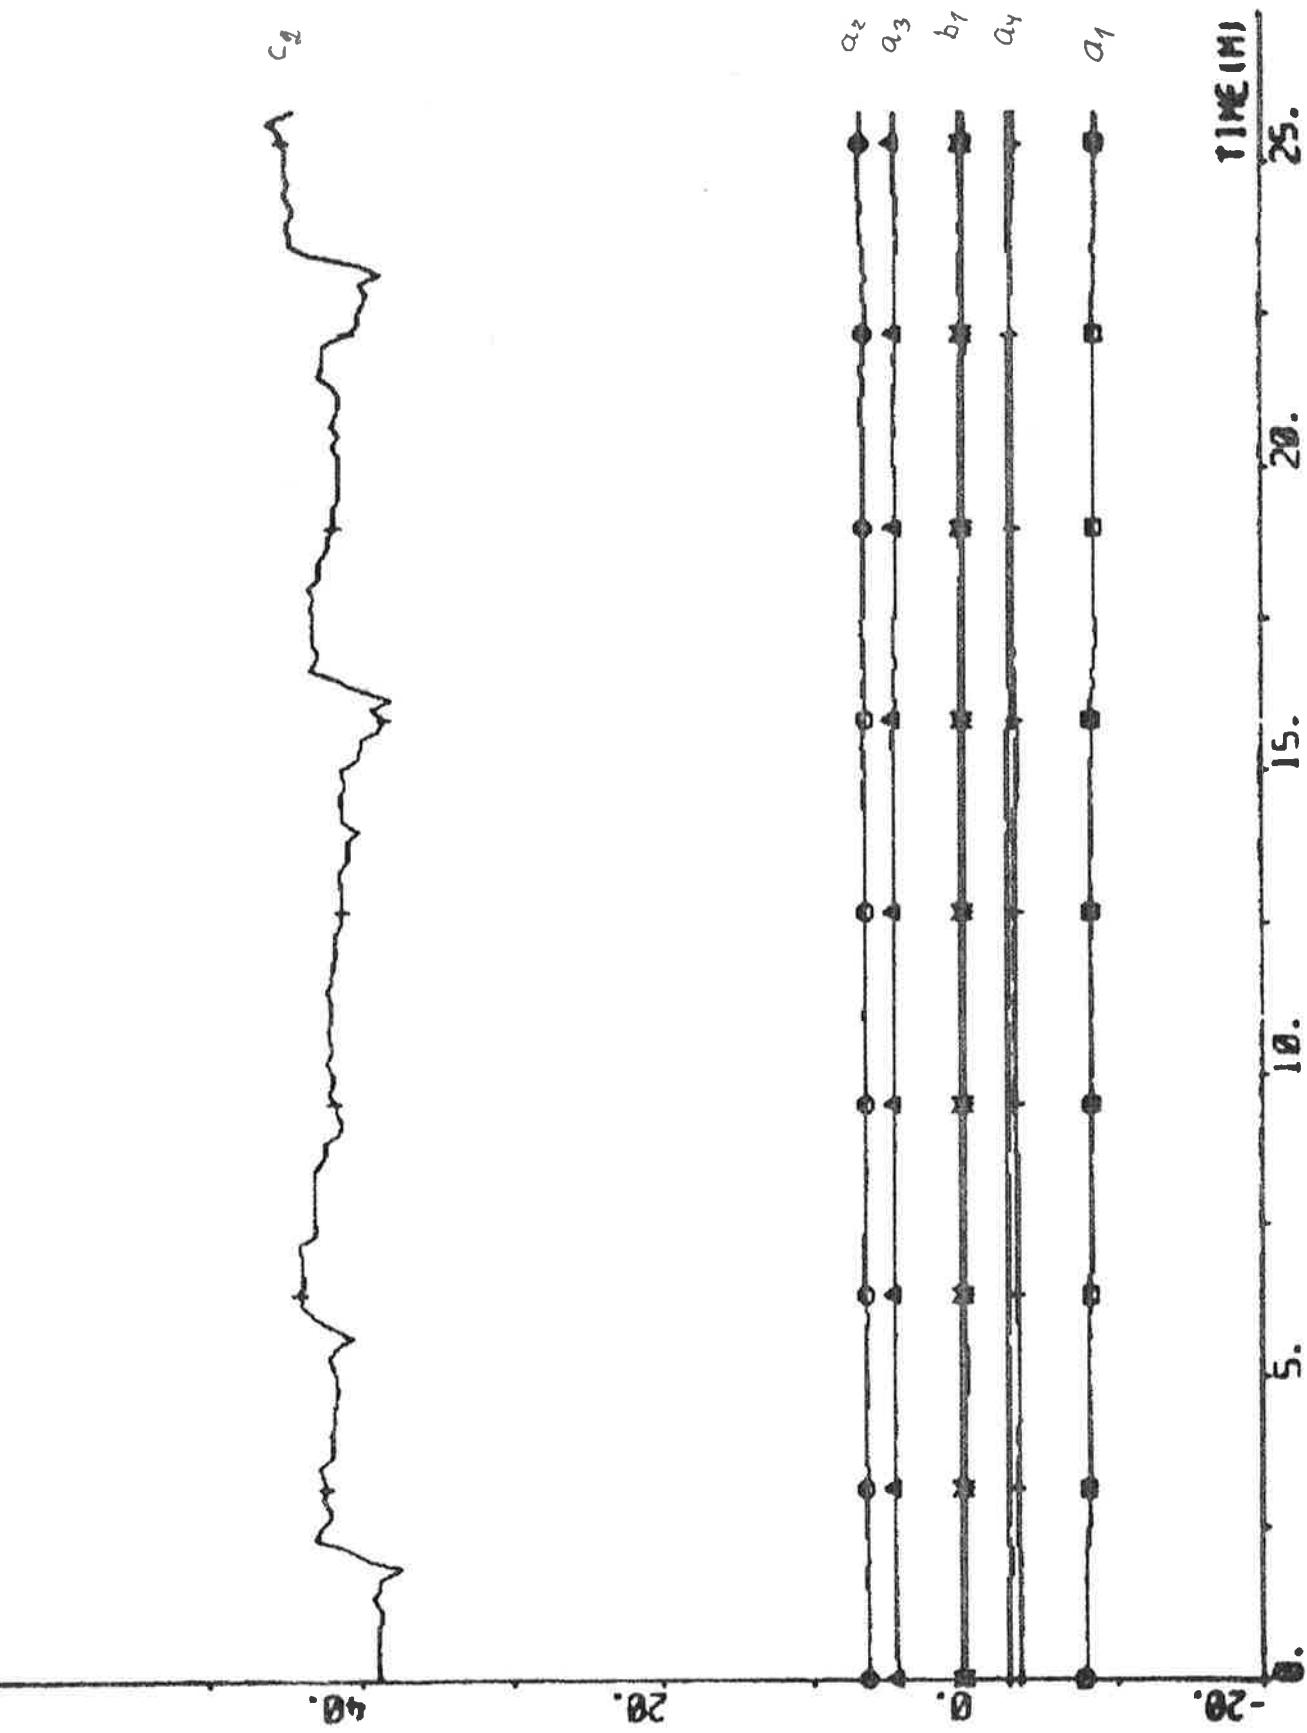

EXPERIMENT A13

Date	1976-04-23	Forward draught	8.5 m
Time	15.16	Aft draught	12.5 m
Duration	24 min	Wind direction	N (6; see App. A)
Position	N 06°23' W 150°39'	Wind velocity	3 m/s (light breeze)
ψ_{ref}	145 deg	Wave height	-

The speed was reduced during the experiment.

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min

NC1 = 1 NC2 = 1 k = 6 q = 0.2
 T_s = 10 s V_0 = 6 m/s IVVC = 1

Final values:



$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -9.65 \\ 6.81 \\ 5.19 \\ -2.67 \\ 0.36 \\ 0.20 \\ -1.29 \\ 44.29 \end{bmatrix} \quad P = \begin{bmatrix} 7.06 \\ -8.75 & 17.57 \\ -1.40 & -8.71 & 19.02 \\ 3.37 & -0.36 & -9.28 & 6.54 \\ -0.21 & -0.20 & 0.70 & -0.30 & 0.06 \\ -0.11 & 0.08 & -0.17 & 0.20 & 0.00 & 0.05 \\ -1.21 & 1.57 & 0.52 & -0.89 & 0.00 & -0.01 & 1.01 \\ 28.62 & -39.14 & -13.65 & 22.95 & -0.80 & 0.14 & 11.93 & 1037.62 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.32$$

$$\hat{d}_0 = 0.3 \text{ deg} \quad \hat{d}_v = 0.18 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.3 \text{ deg}$$


Statistics (mean value and standard deviation)

PLOT A13P1(1)-A13P1(8) M# A13P1(15) Q2 -3 1 - DEG

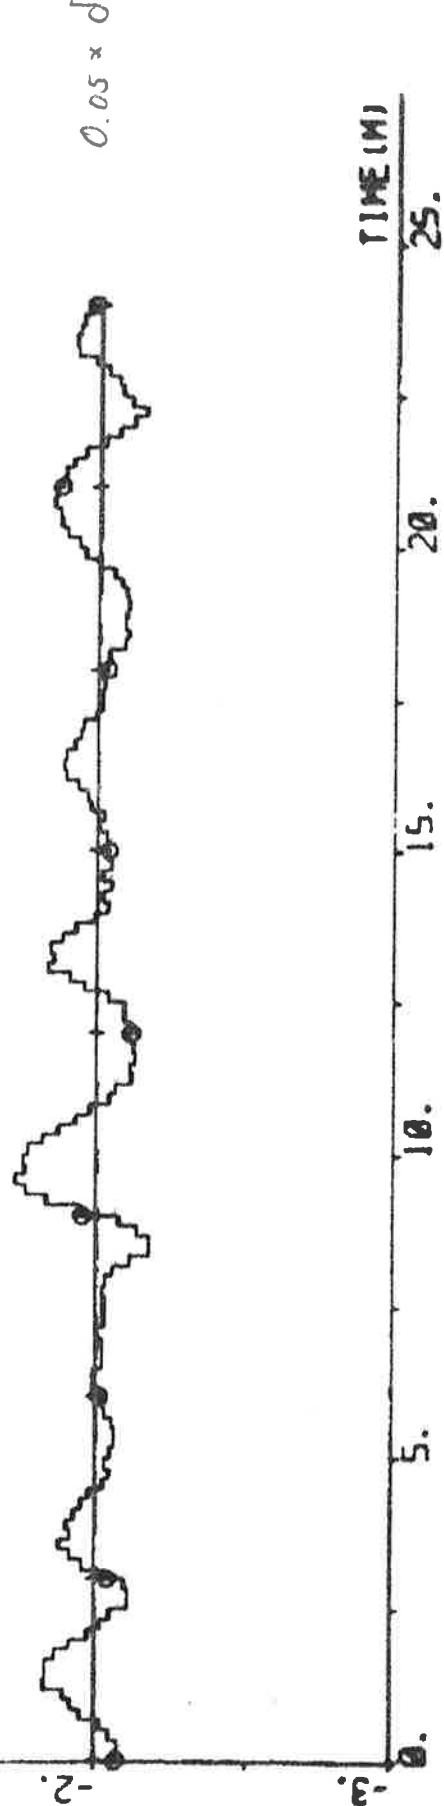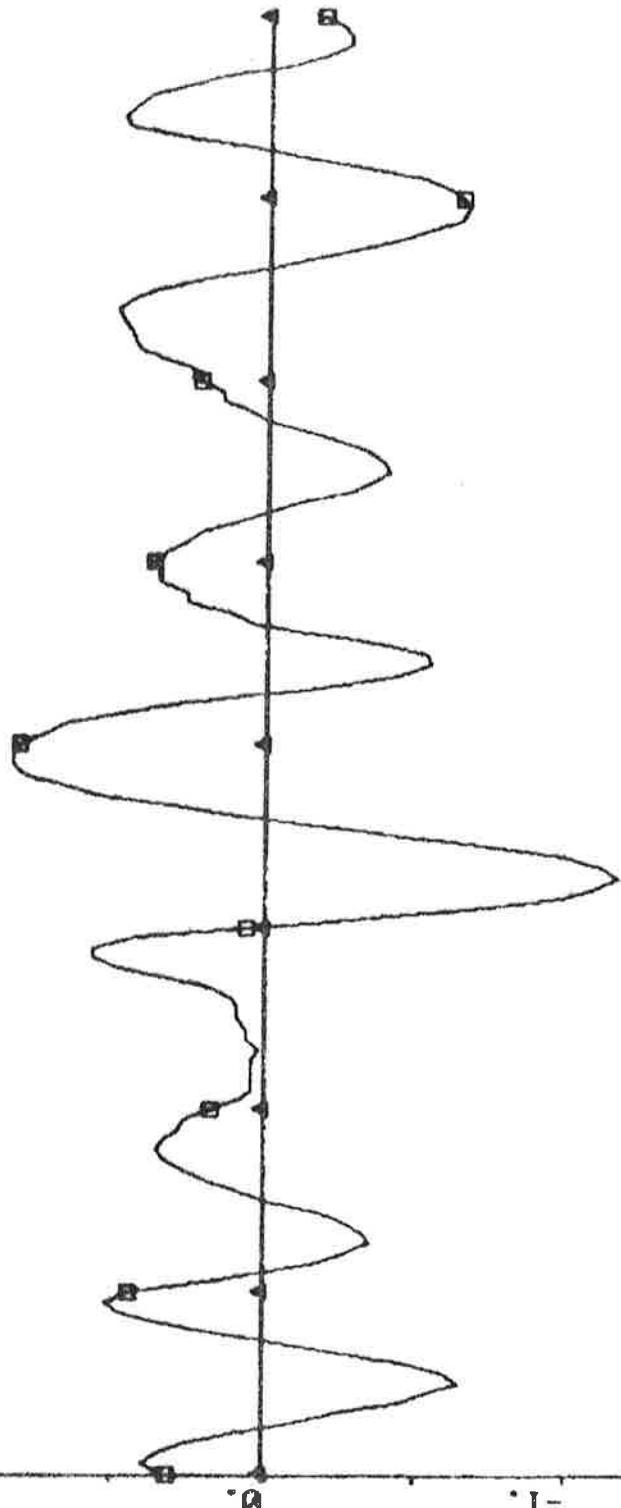


200


PLOT A13P1(11)-A13P1(12) A13P1(14) A13P1(11) 06 - 20 59

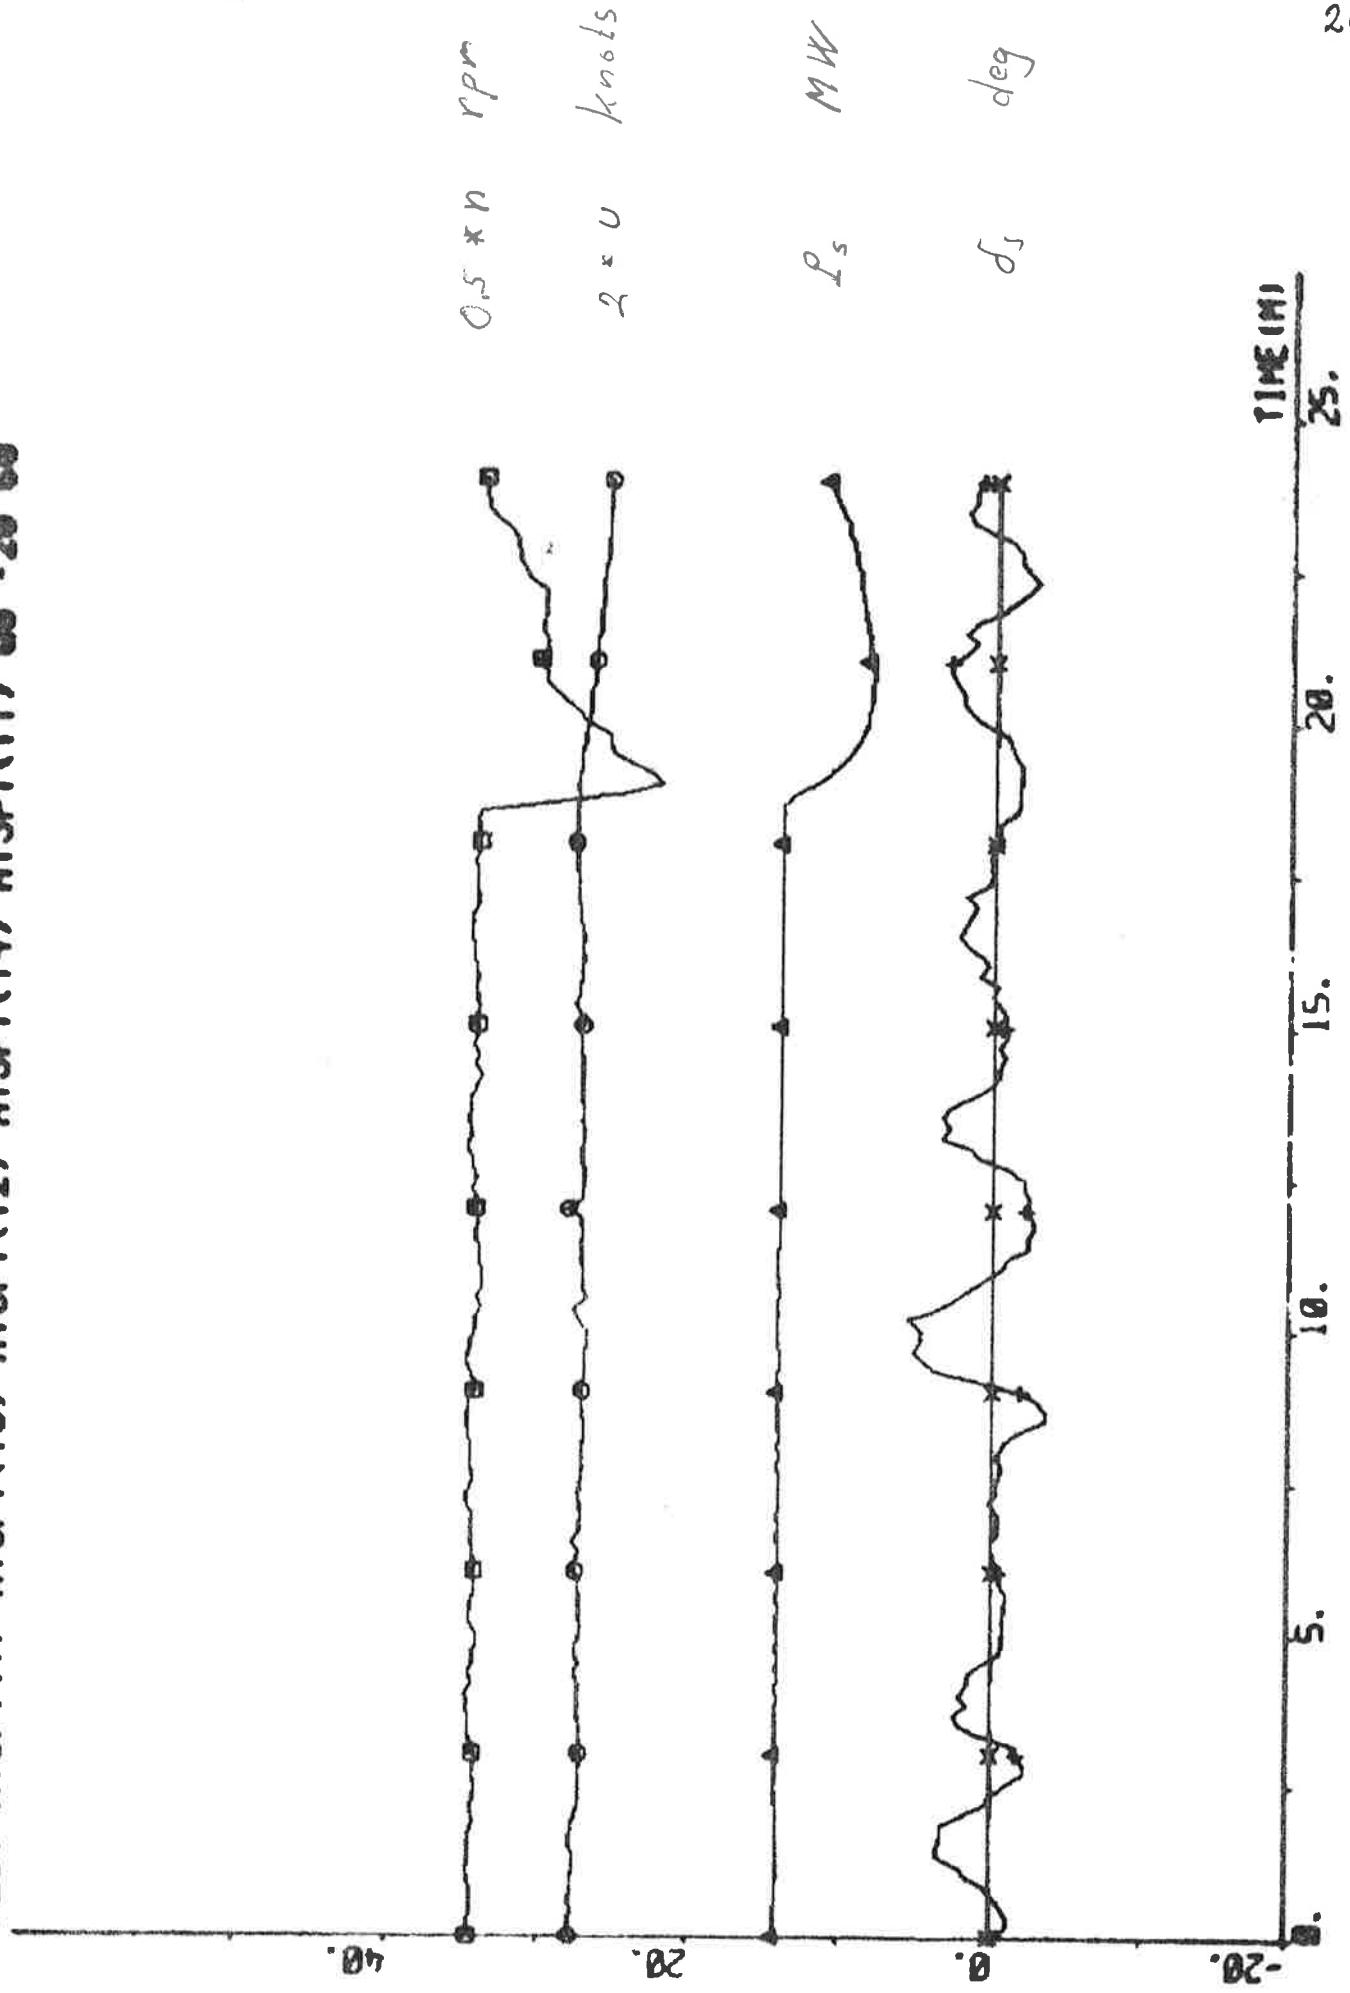



PLOT A13P2(1) A13P2(2) ERRS 00 01 02 -3.4 0.9 - knots

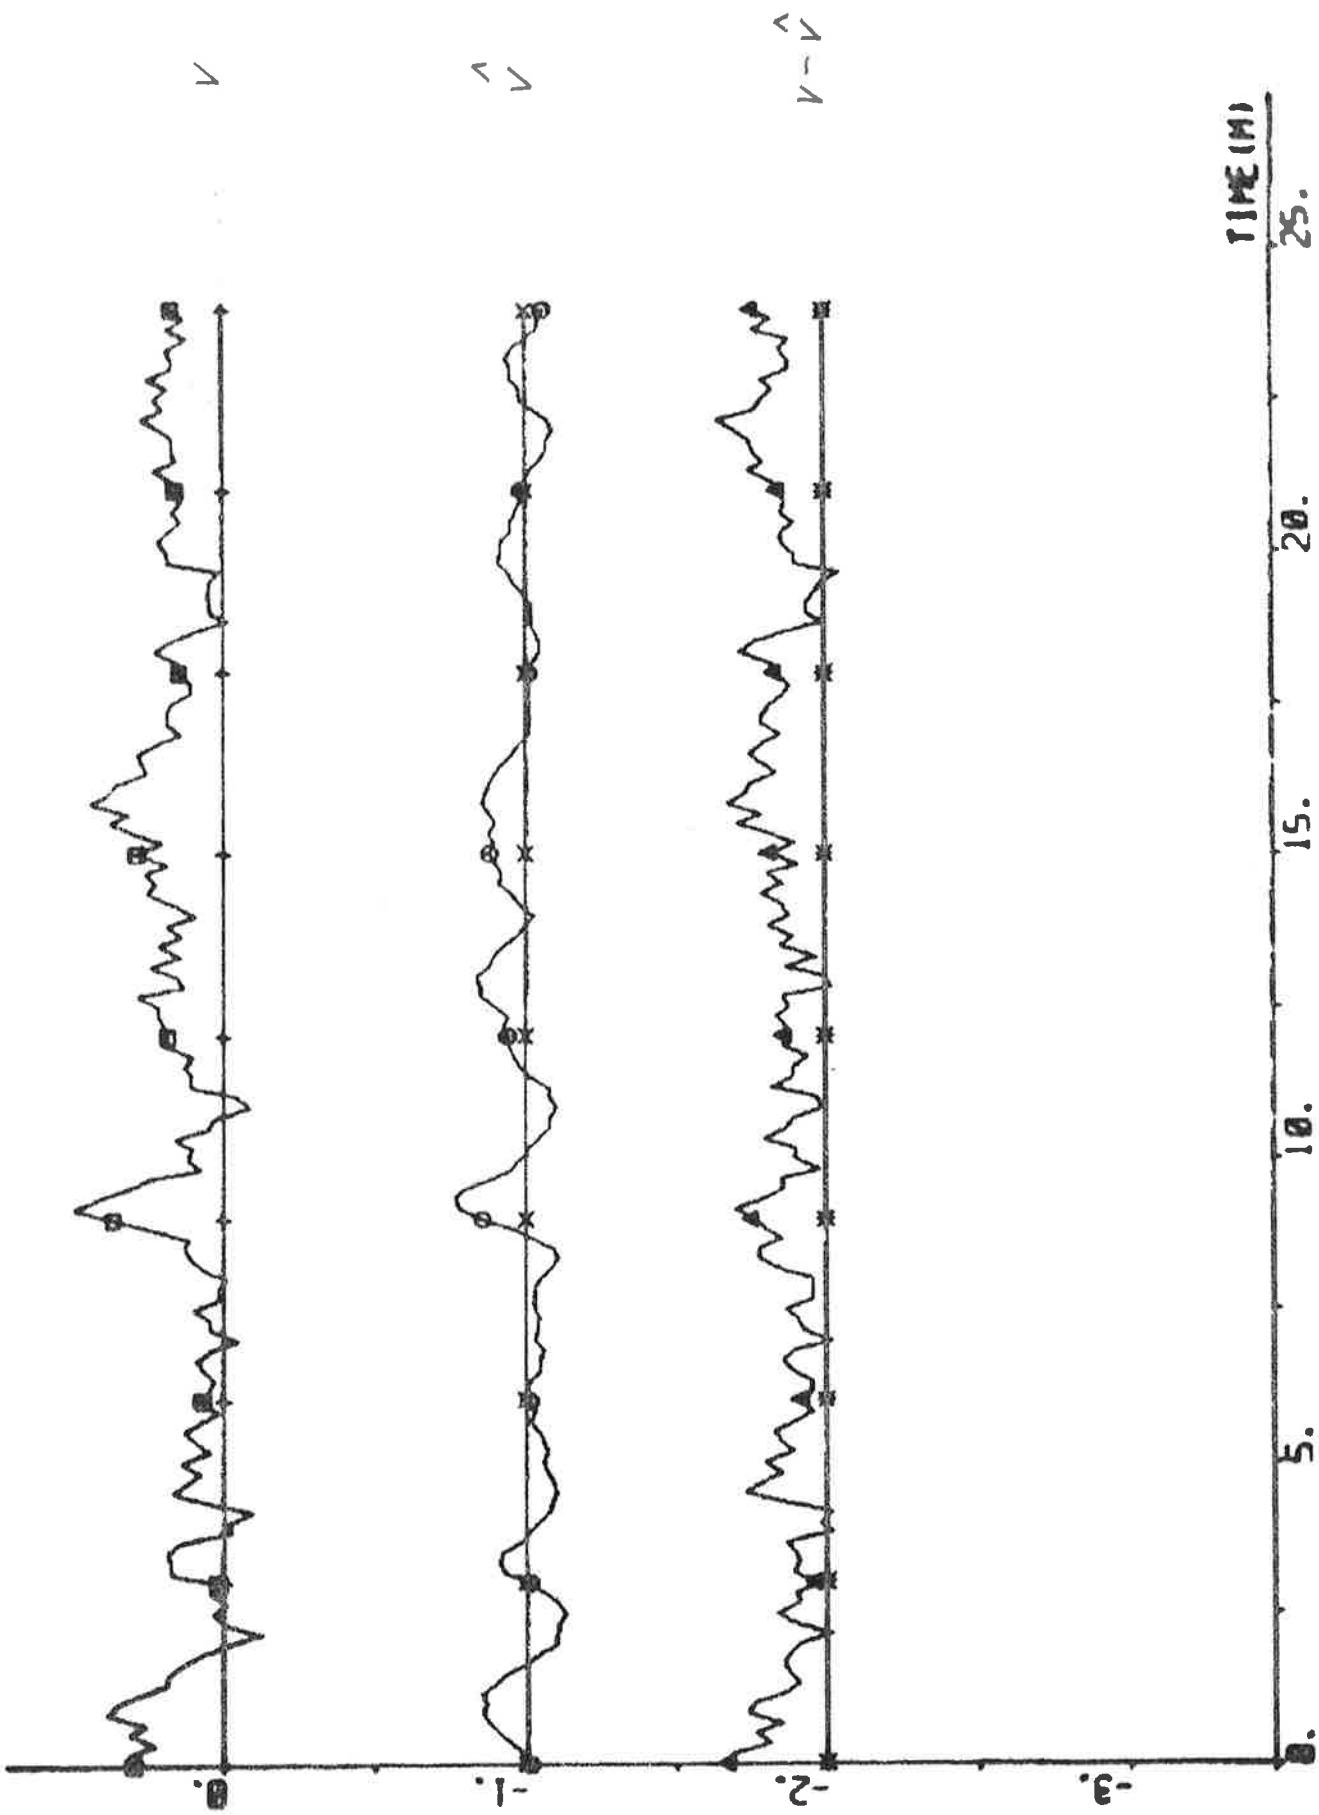


101 13P1(1) - 13P1(4) 13P1(5) 13P2(1) 13P2(2) 13P2(3) 13P2(4) 13P2(5)

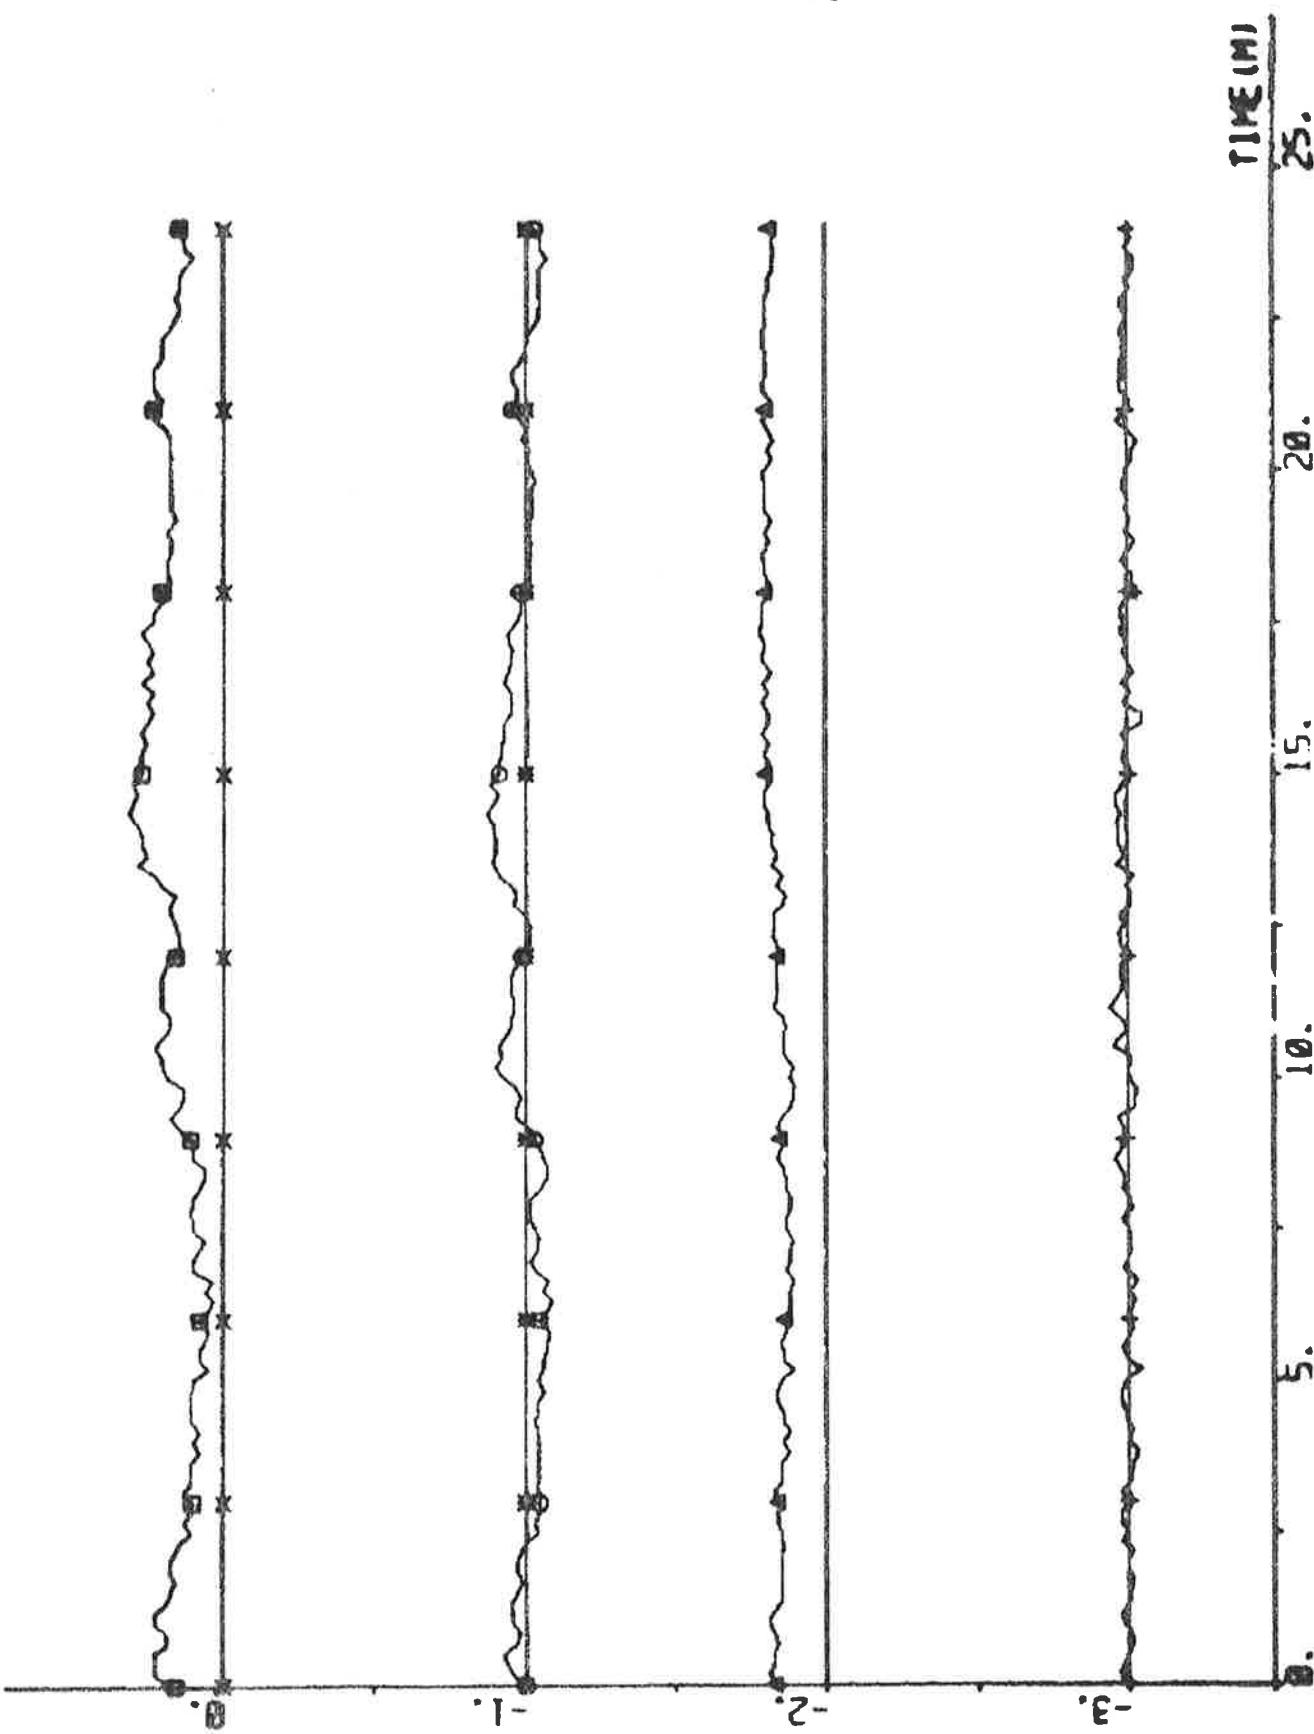


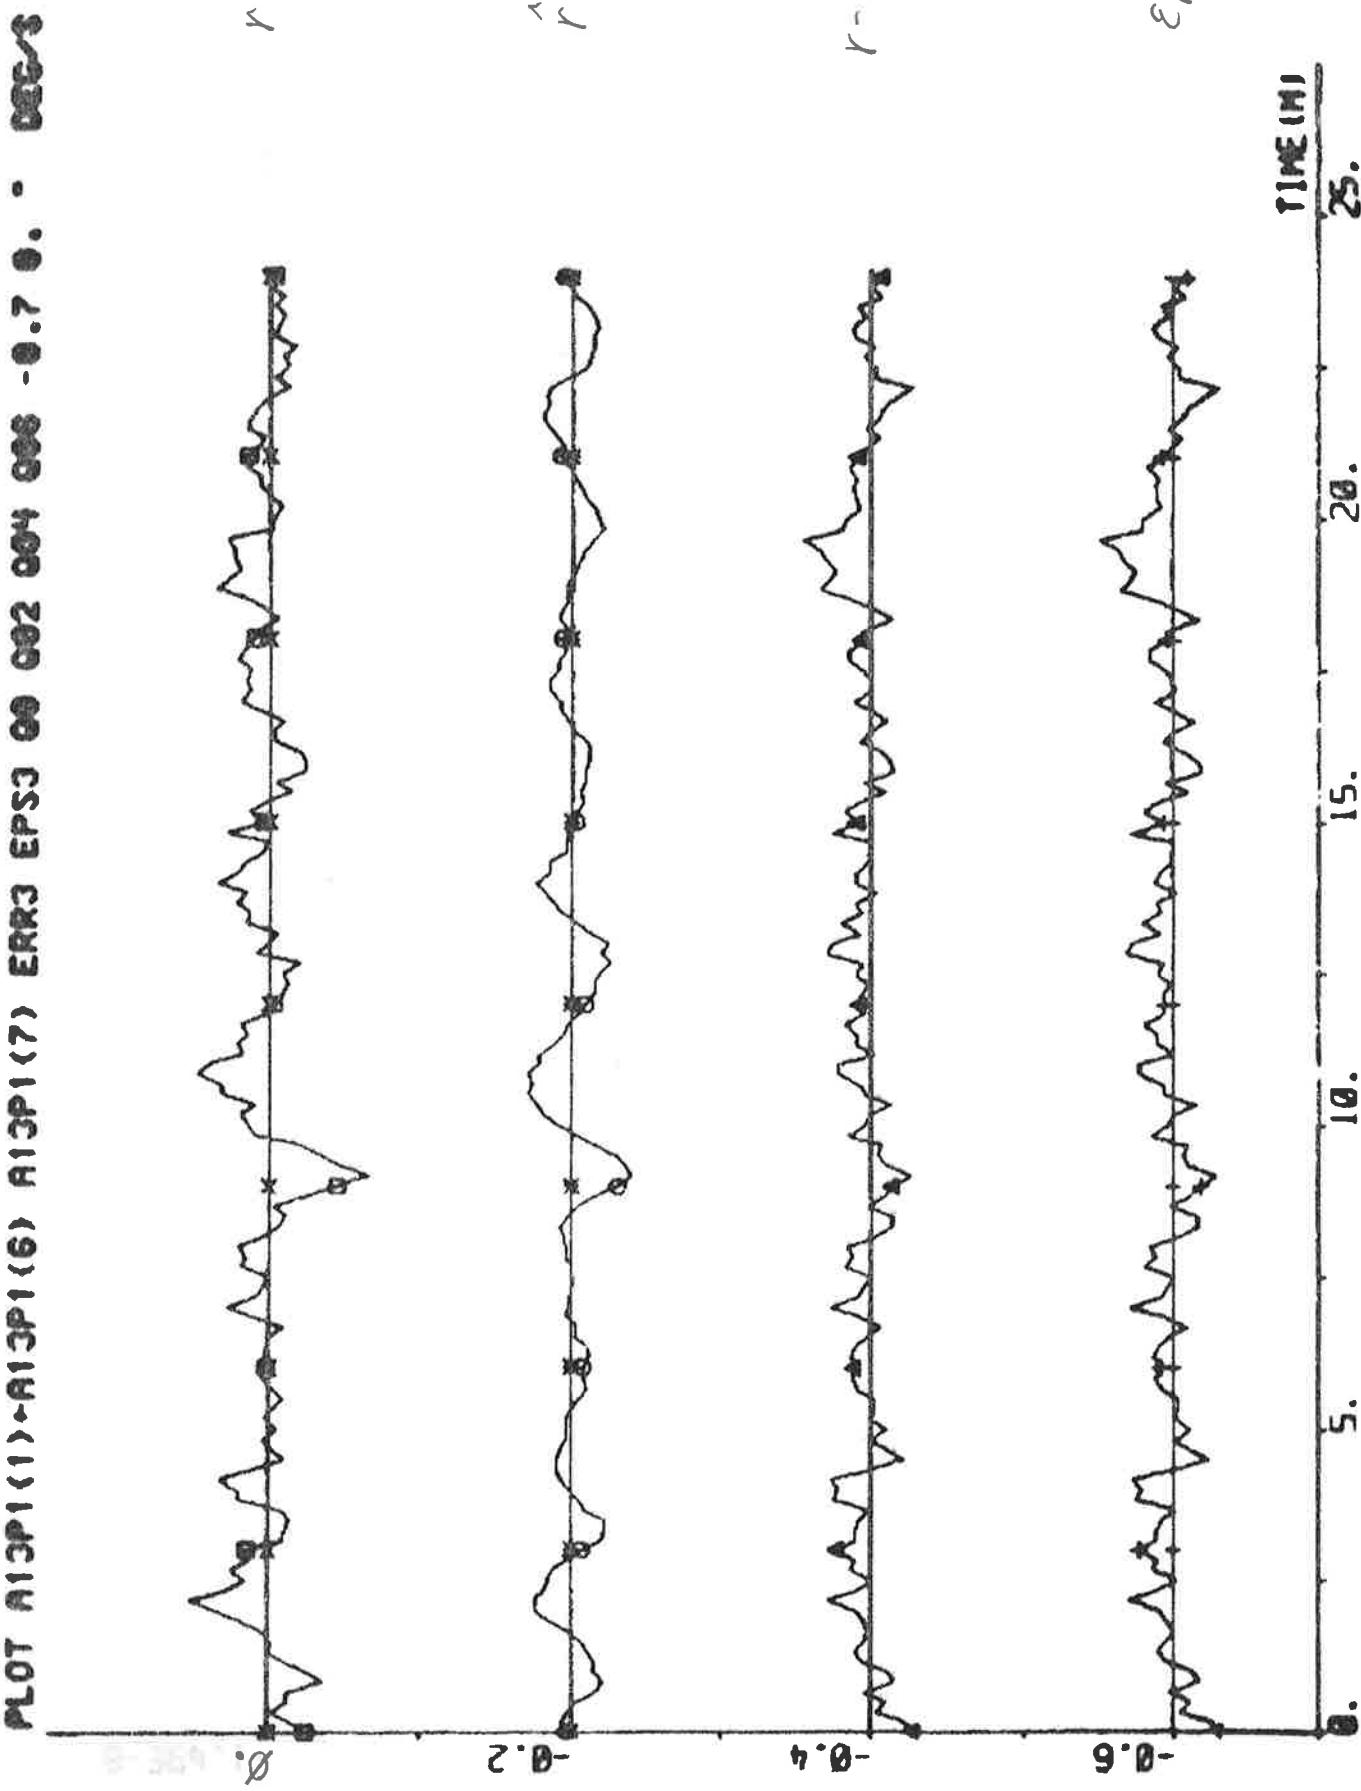

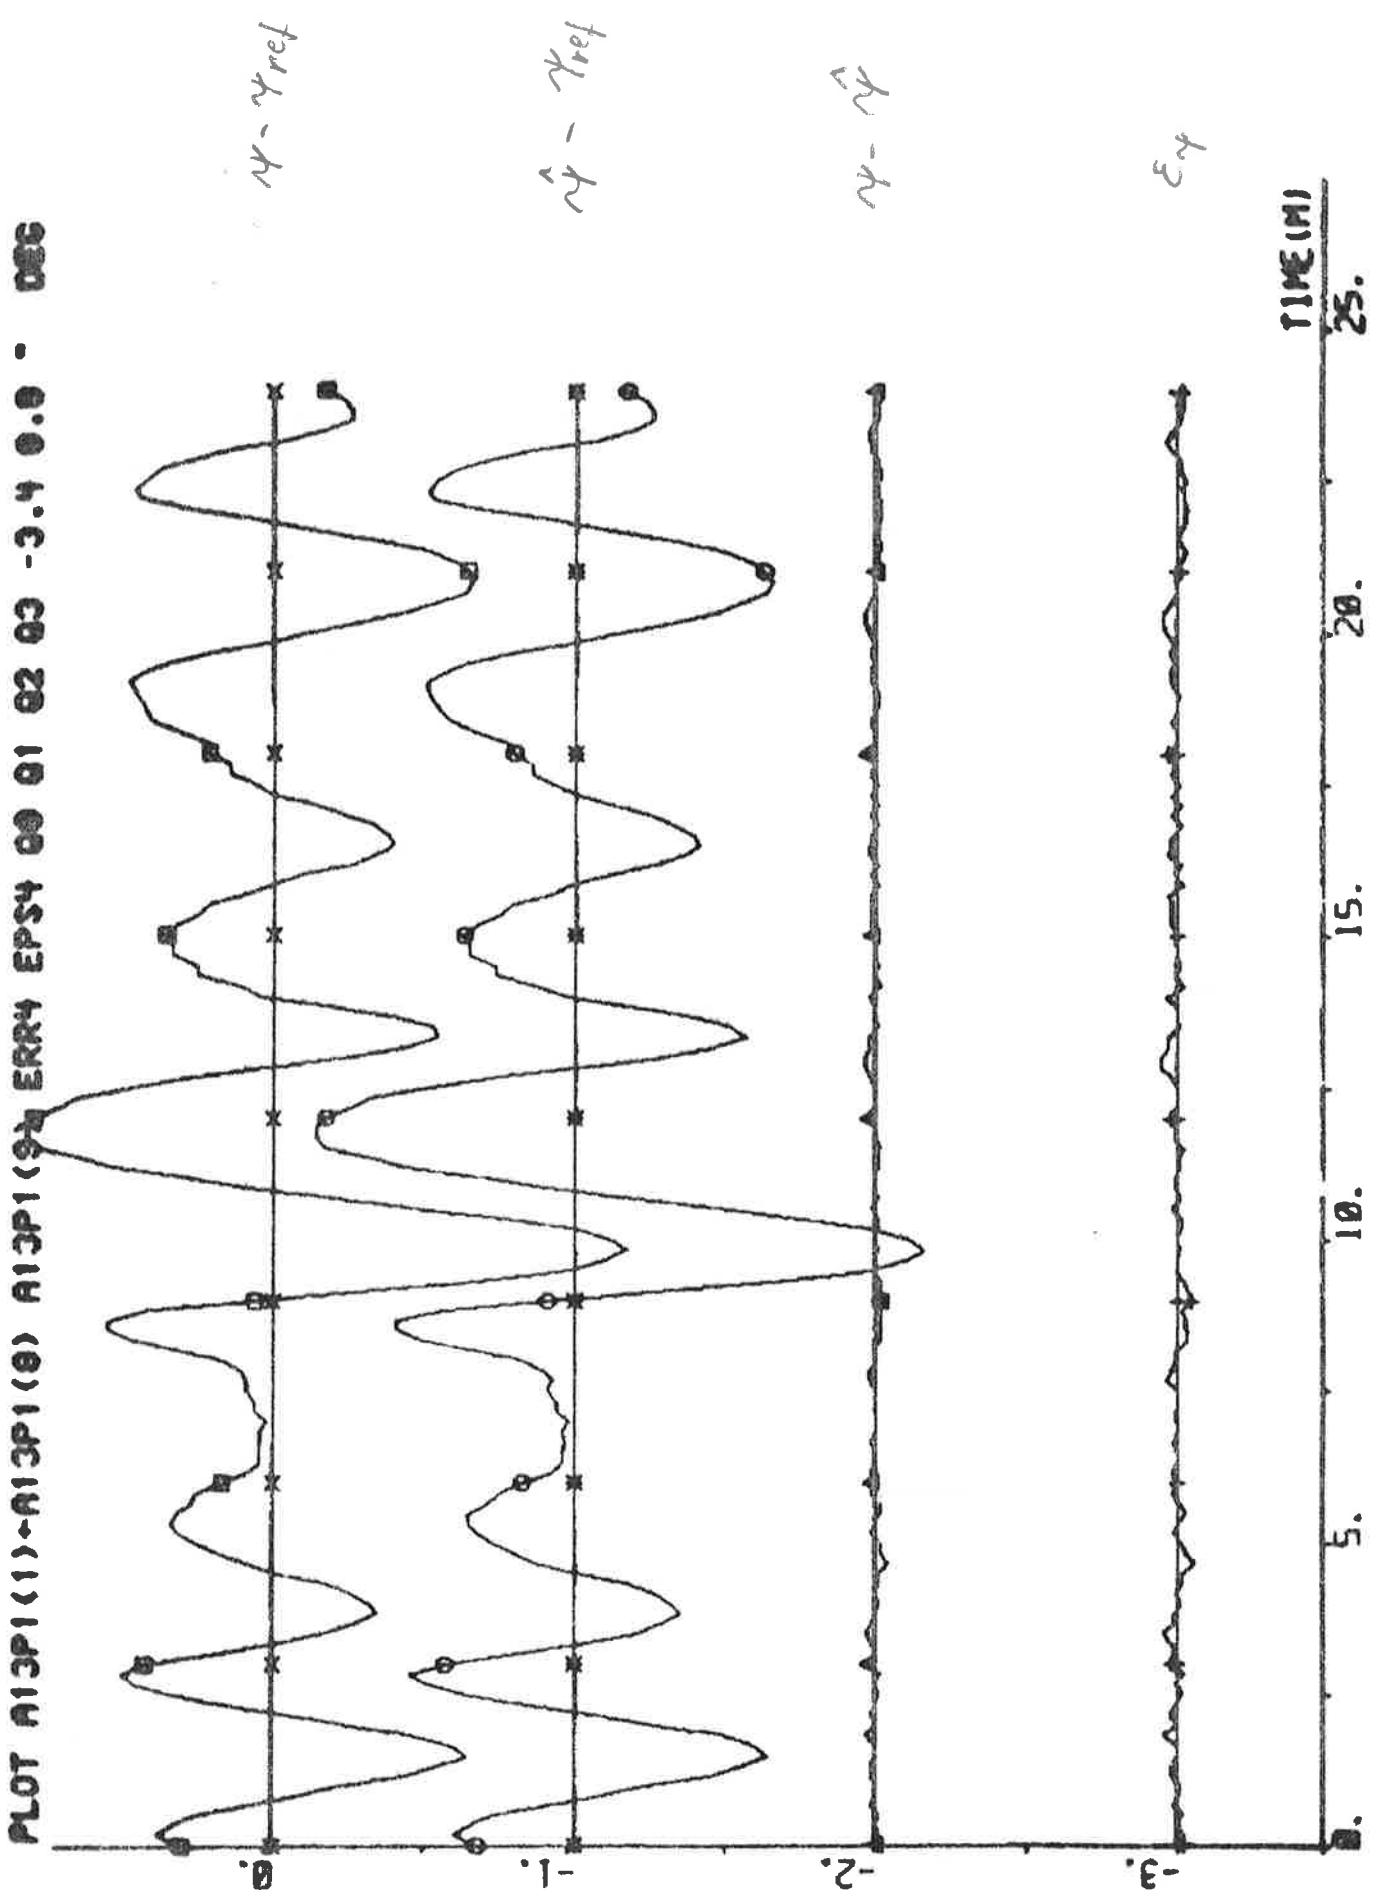

PLOT 113211-H13P11(2) H13P11(3) EPS1 ER1

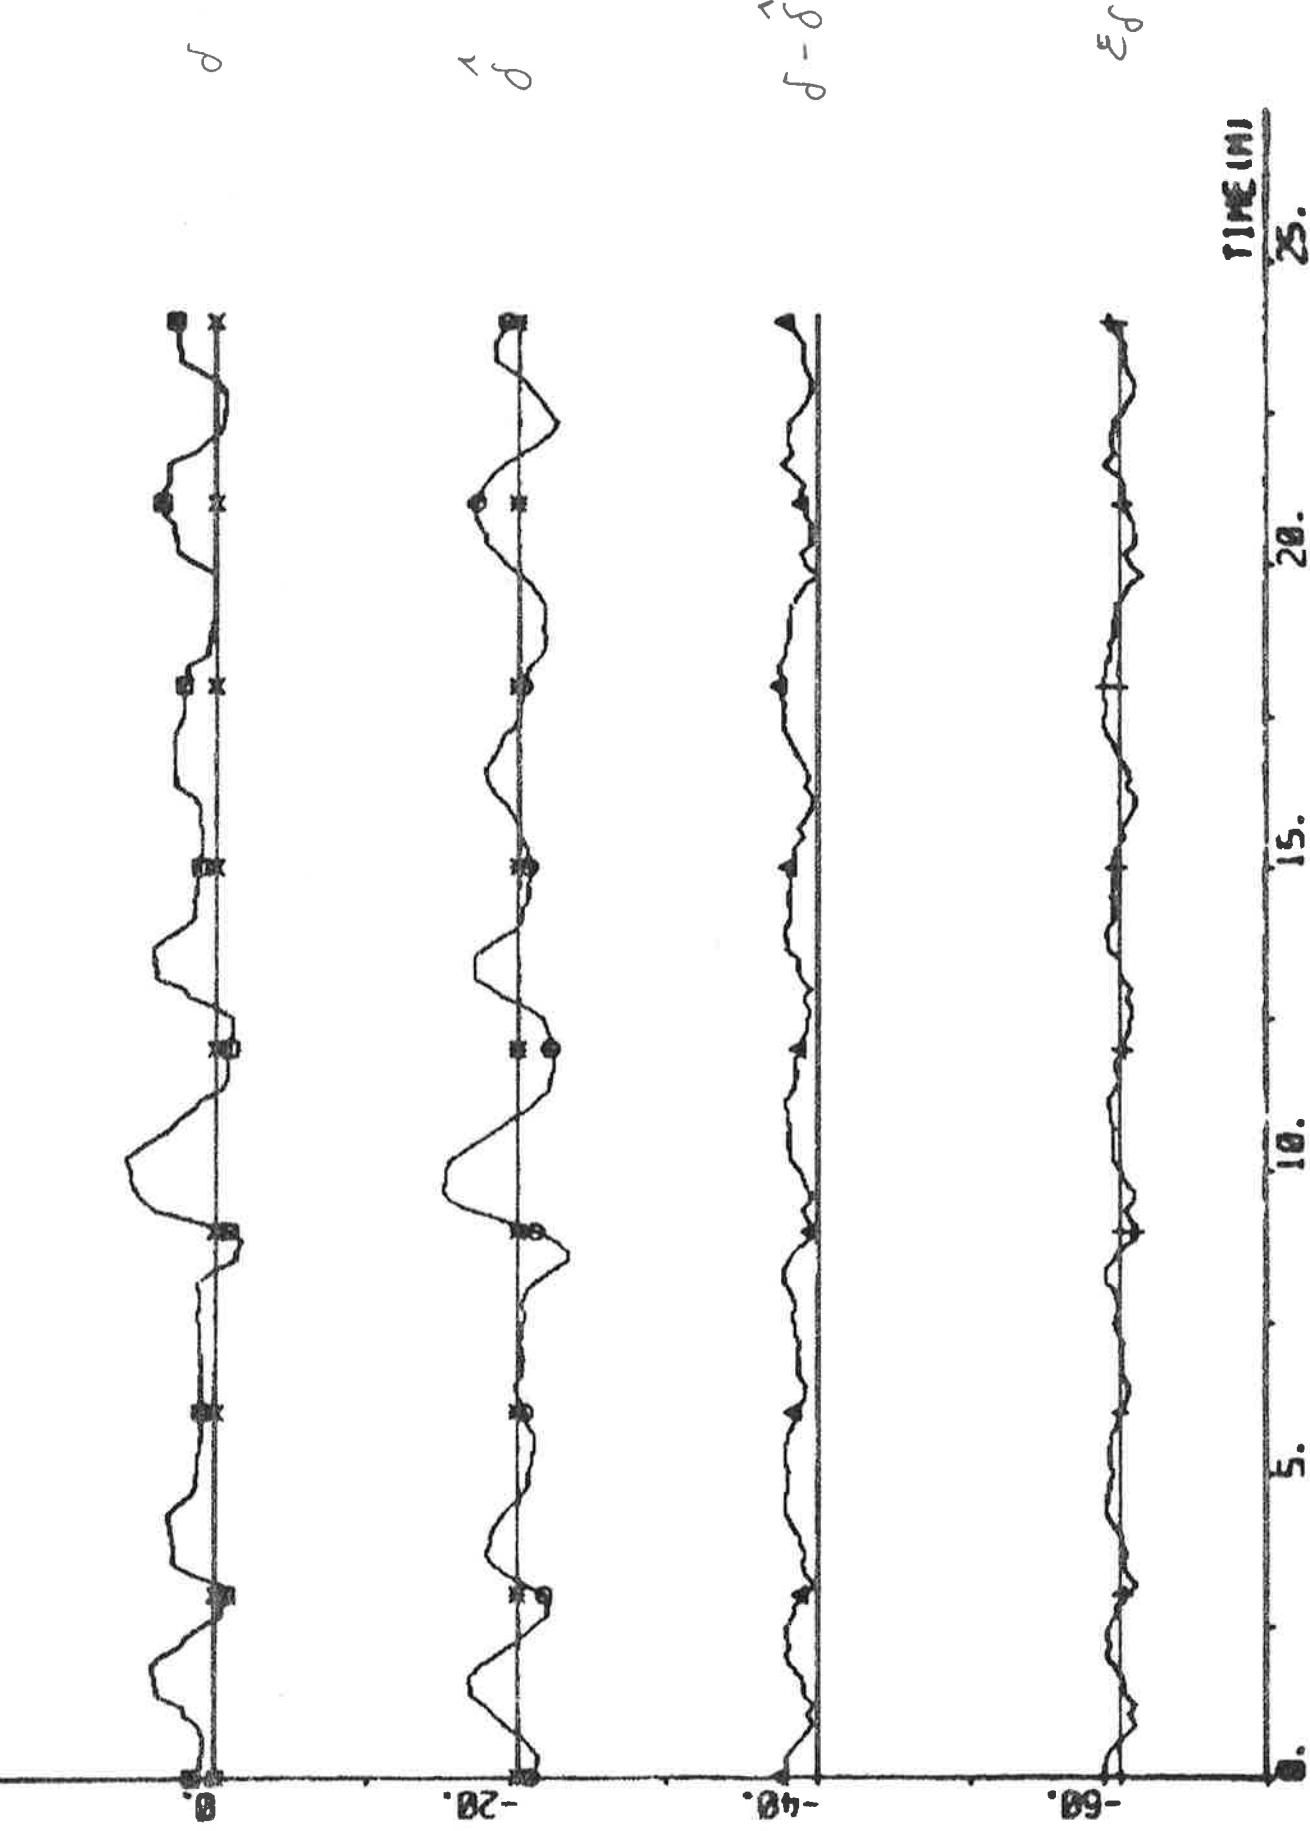

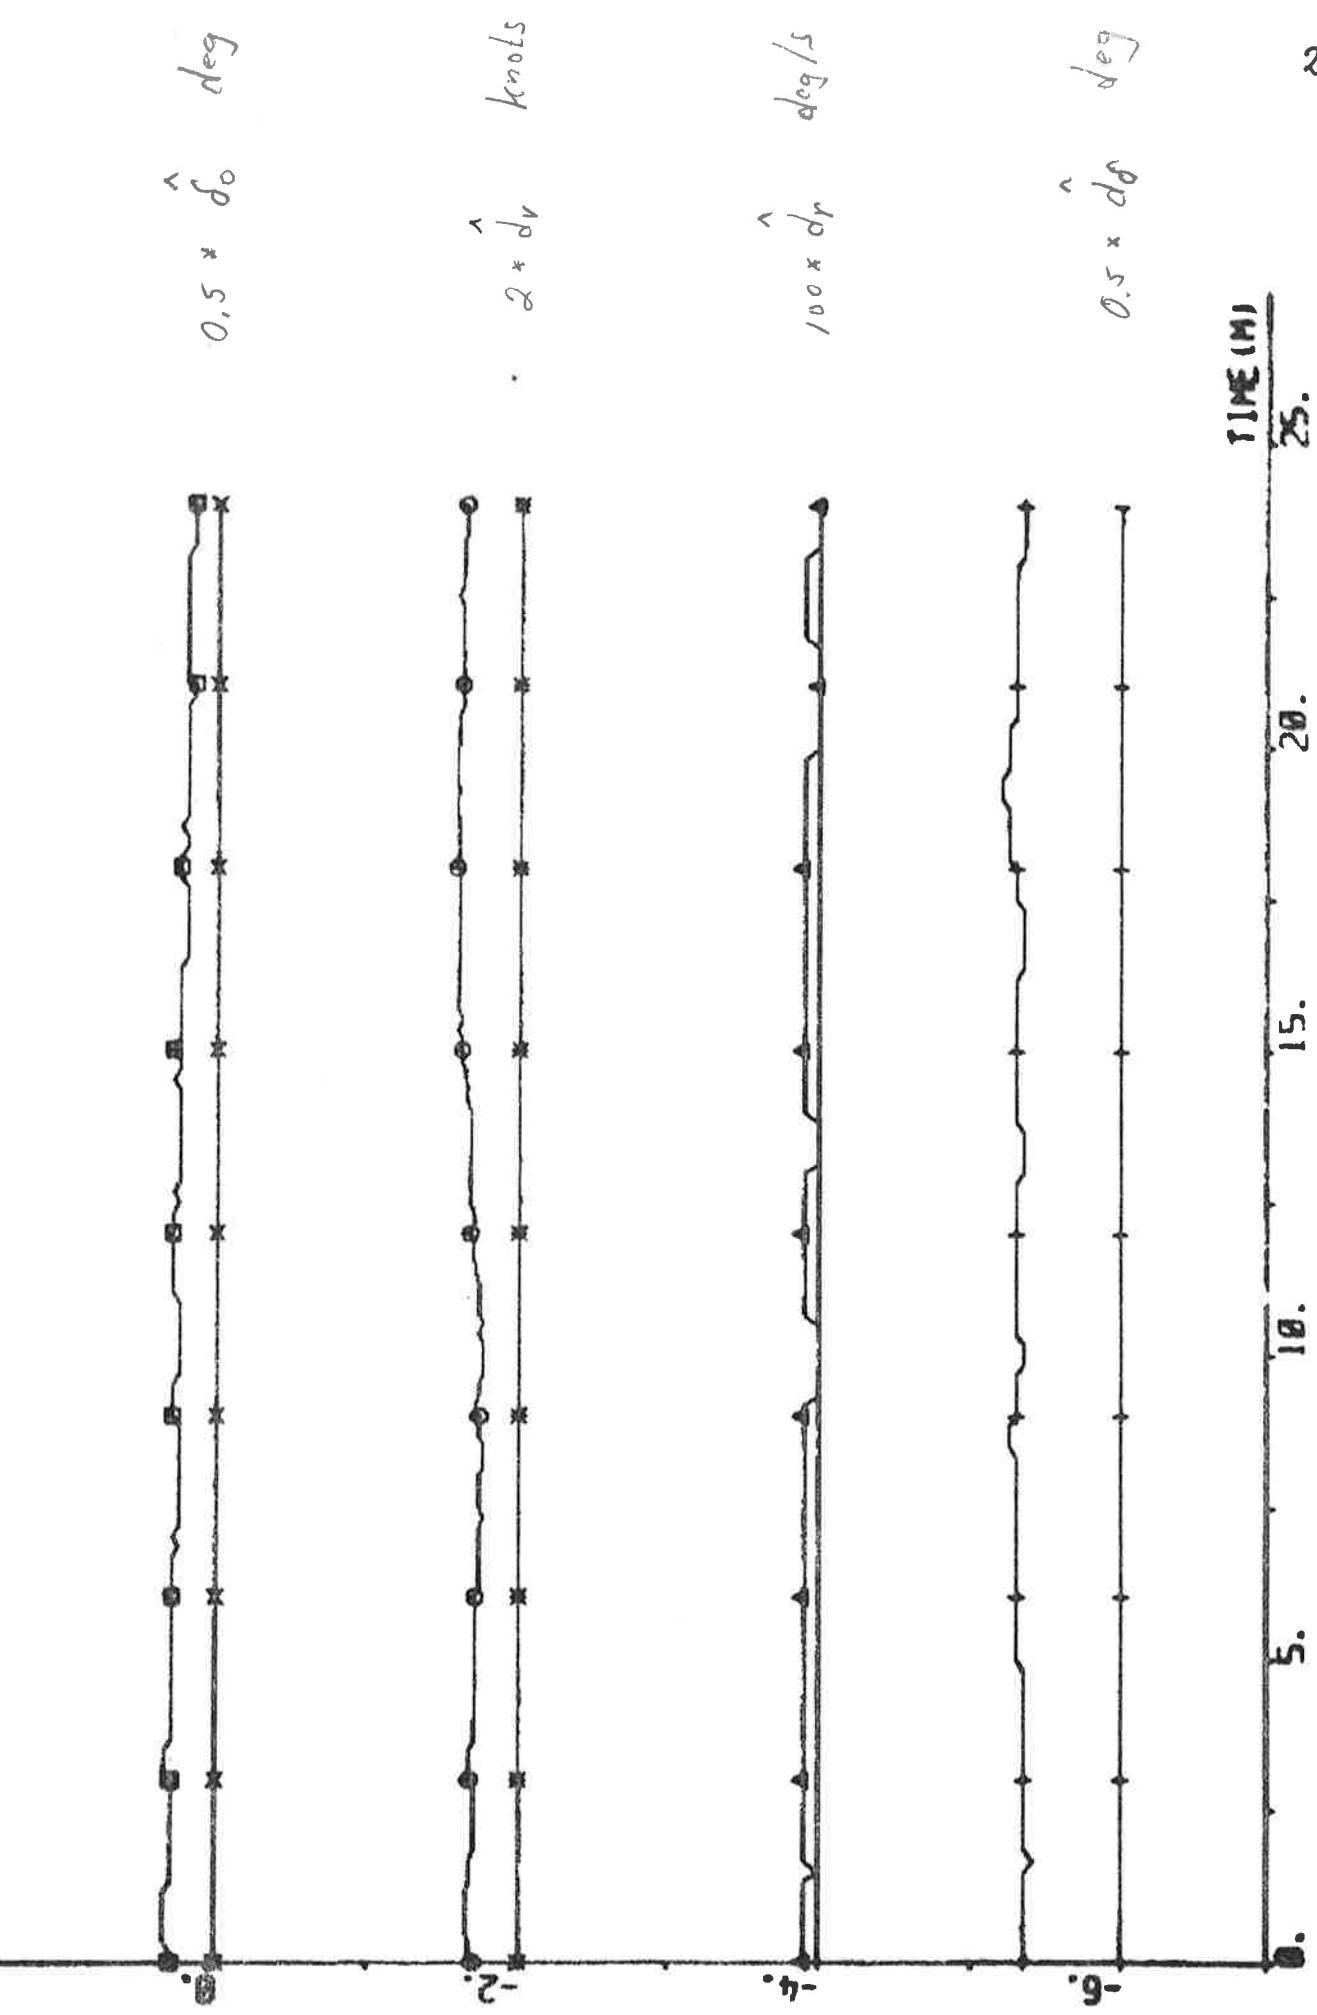



PLOT A1321(1) > A132(7) A132(3) A132(10) A132(11) A132(12) A1

EXPERIMENT A14

Date	1976-04-24	Forward draught	8.5 m
Time	09.00	Aft draught	12.5 m
Duration	24 min	Wind direction	-
Position	N 02°57' W 13°06'	Wind velocity	0 m/s (calm)
ψ_{ref}	149 deg	Wave height	Swell

The number of propeller revolutions n was temporarily reduced immediately before the experiment started.

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: > 120 min

$NC1 = 1$ $NC2 = 1$ $k = 7$ $q = 0$

$T_s = 10$ s $V_0 = 6$ m/s IVVC = 1

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -21.78 \\ 26.83 \\ -2.30 \\ -3.17 \\ 0.50 \\ 0.44 \\ -0.54 \\ 74.46 \end{bmatrix} \quad P = \begin{bmatrix} 9.74 \\ -13.35 & 27.01 \\ 6.72 & -23.68 & 32.92 \\ -0.71 & 8.66 & -16.41 & 10.76 \\ 0.06 & -0.29 & 0.41 & -0.19 & 0.01 \\ -0.09 & 0.11 & -0.07 & 0.05 & 0.00 & 0.004 \\ -2.04 & 2.77 & -0.52 & -0.50 & 0.00 & 0.01 & 1.32 \\ -0.41 & 12.41 & -12.94 & 5.35 & 0.09 & -0.21 & 22.80 & 866.35 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.42$$


$$\hat{\delta}_0 = -0.6 \text{ deg} \quad \hat{d}_v = -0.01 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)

δ_c	-0.61	\pm	1.66	deg	P_s	14.6	\pm	0.1	MW
δ	0.90	\pm	1.43	deg	ϵ_v	-0.01	\pm	0.02	knots
$\psi - \psi_{ref}$	-0.017	\pm	0.111	deg	ϵ_r	0.00	\pm	0.03	deg/s
n	69.7	\pm	0.4	rpm	ϵ_ψ	0.00	\pm	0.03	deg
u	13.5	\pm	0.1	knots	ϵ_δ	0.0	\pm	0.5	deg


$$V_1 = 0.242$$

PLOT A14P1(1) - A14P1(2) MP A14P1(15) A14P1(16) DEC

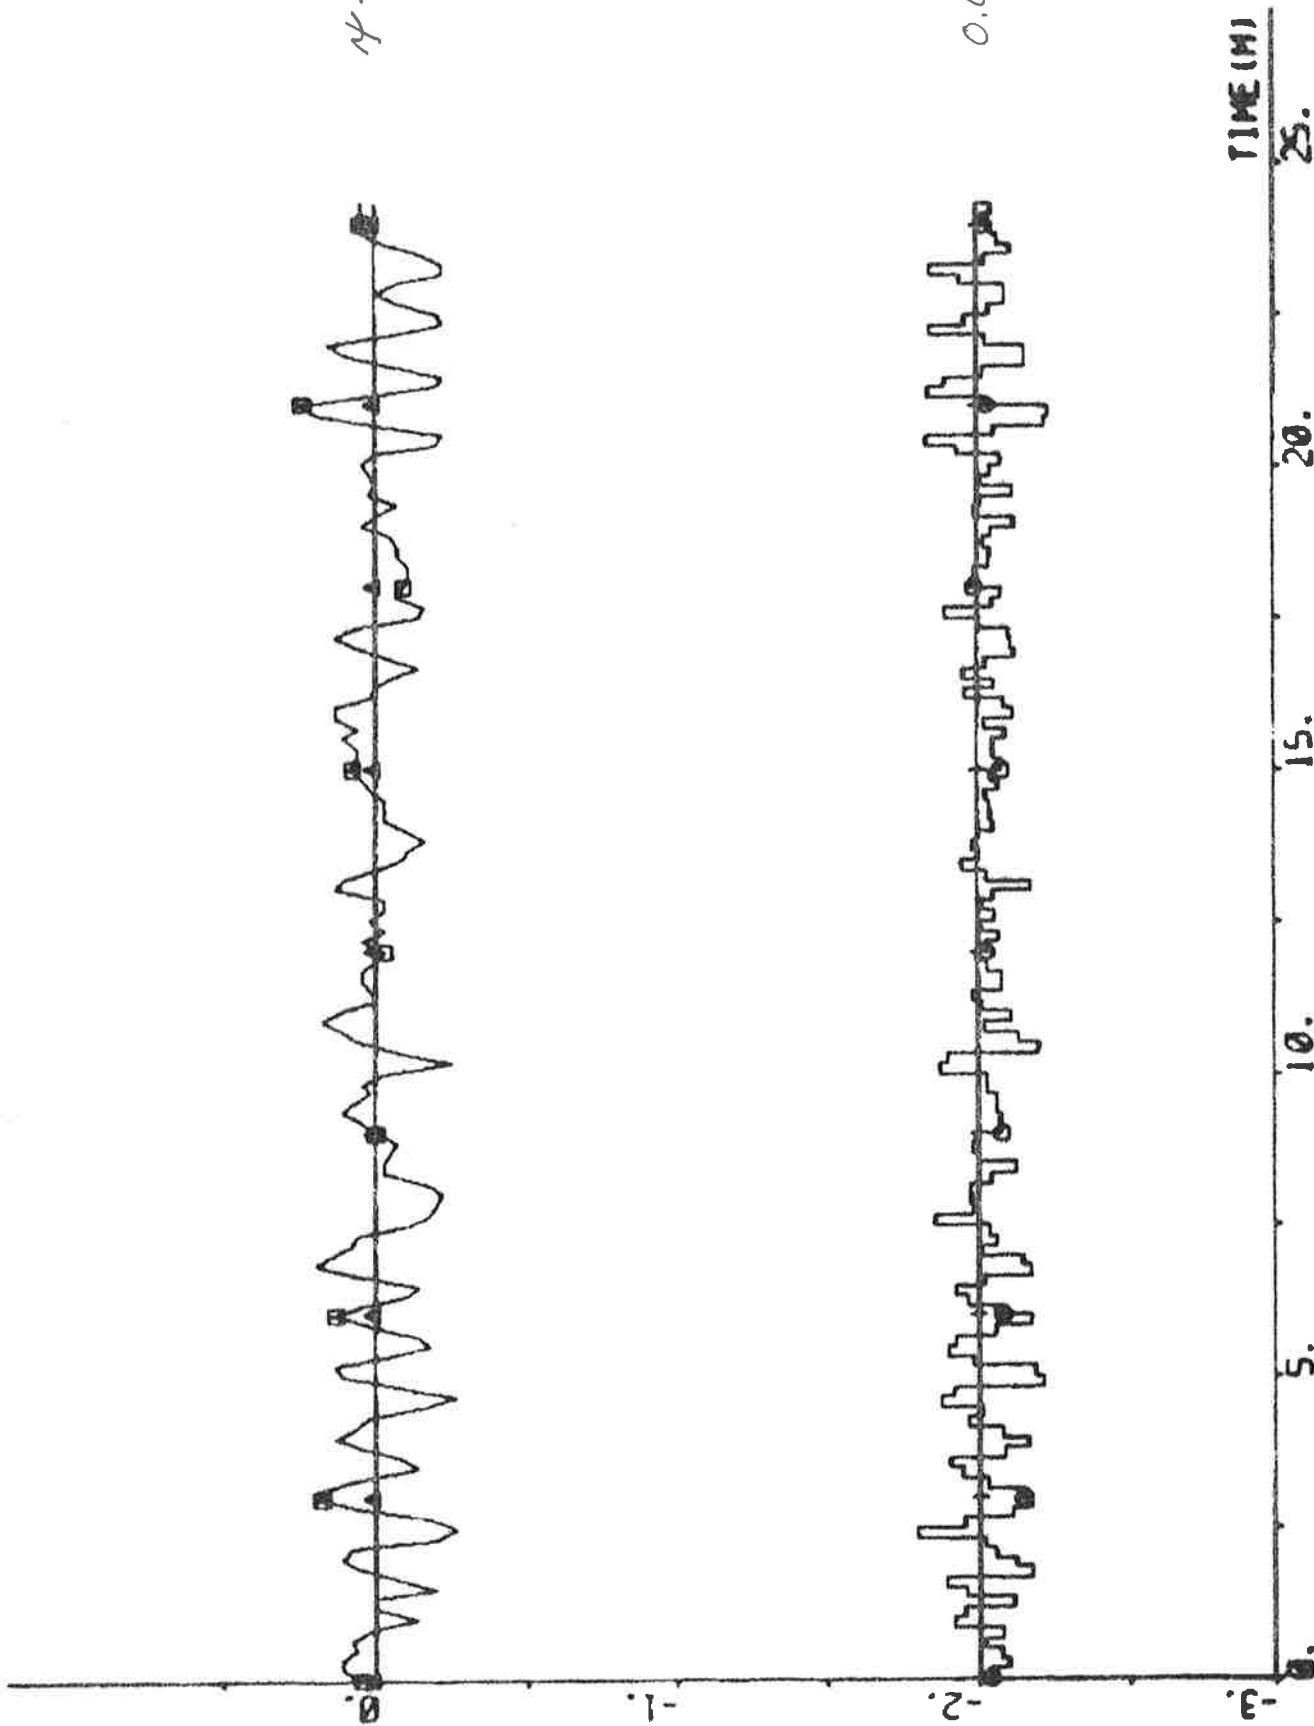


210


PLOT H14P1(11) - H14P1(14) H14P1(11) - H14P1(13) H14P1(12)

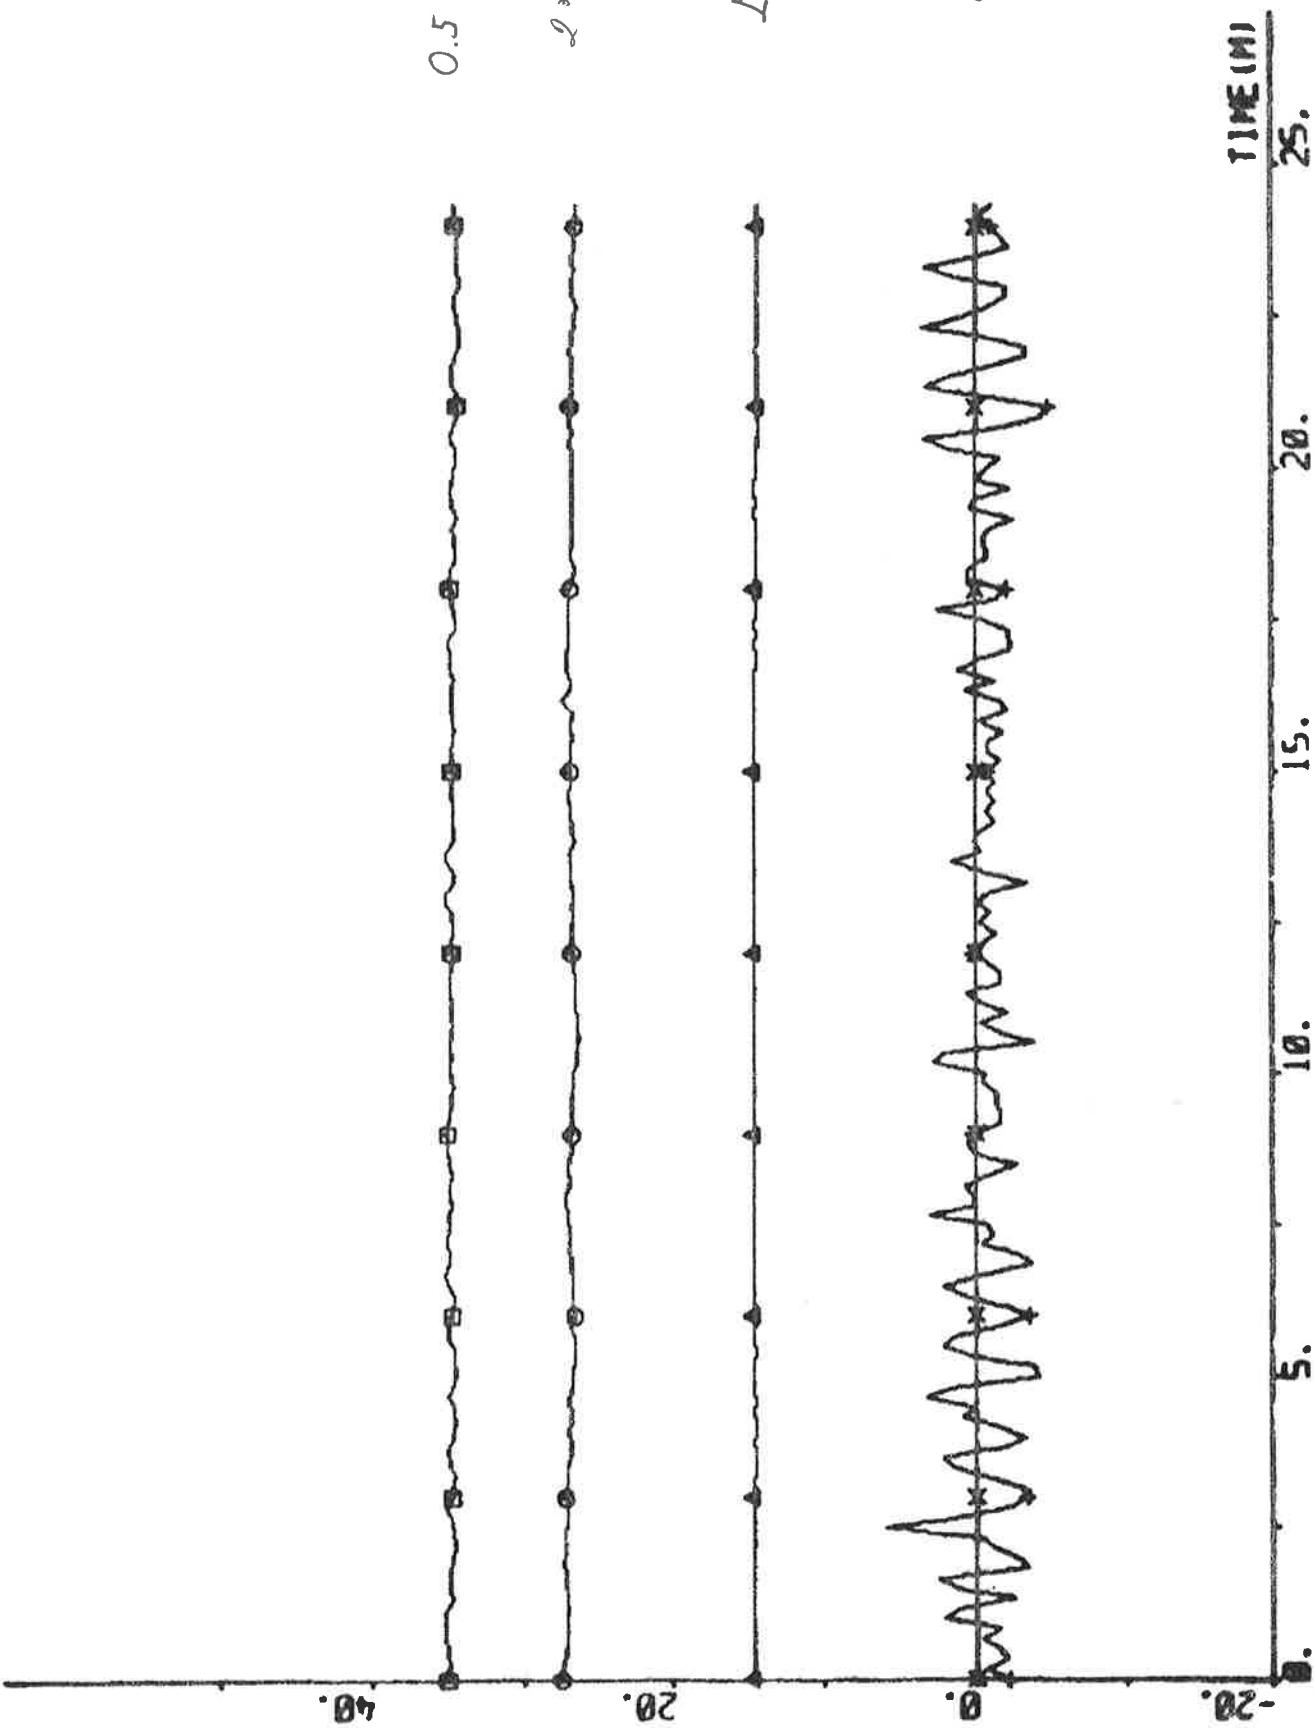

PL07 A14P1(1)-A14P2(1) A14P2(2) ERR5 08 01 02 -3.4 0.0 - KNOTS

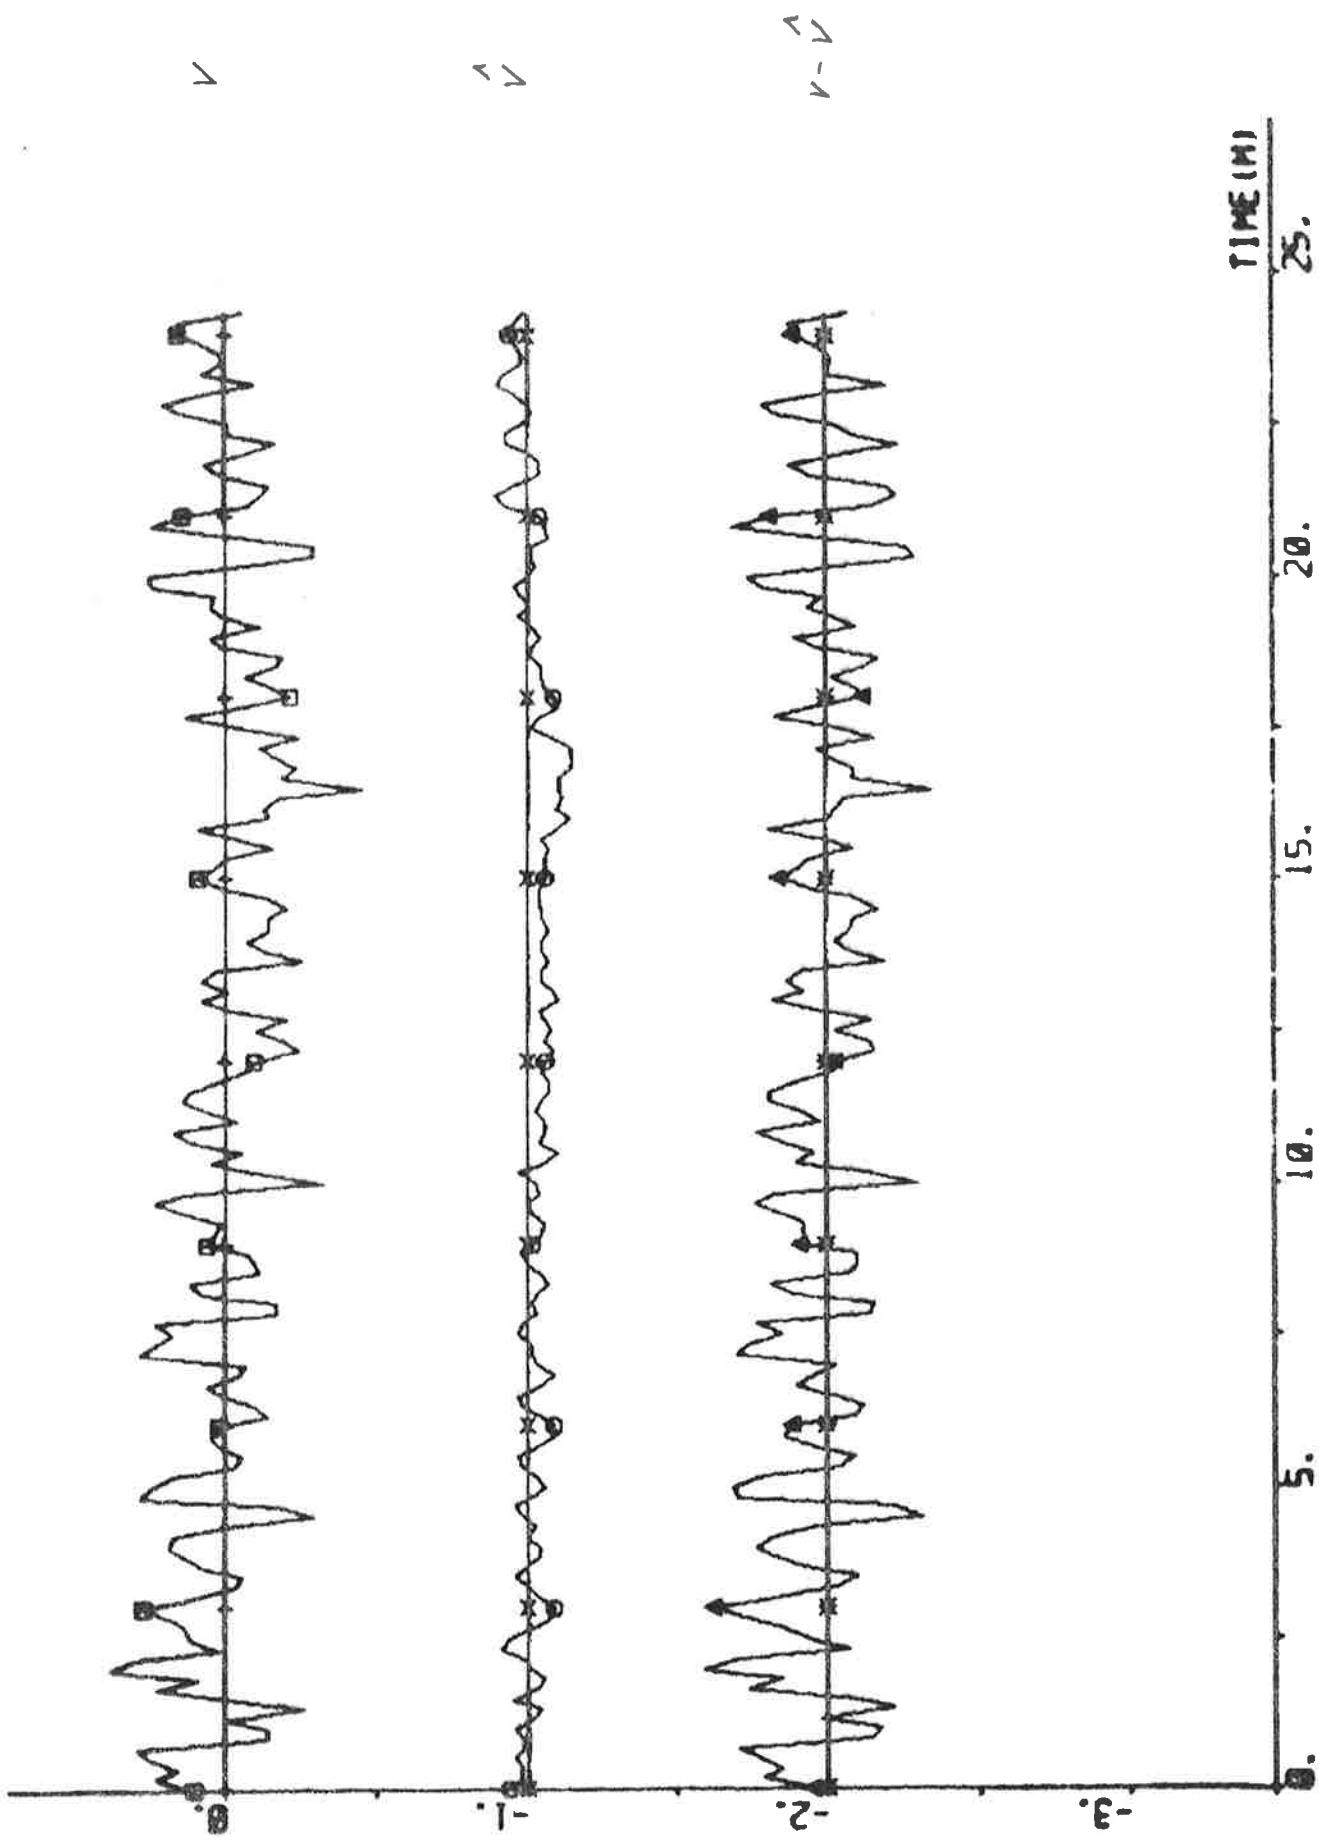


PLOT A14P1(1)-A14P1(4) A14P1(5) ER2 EP22 00 01 02 03 -3.4 0.0 -

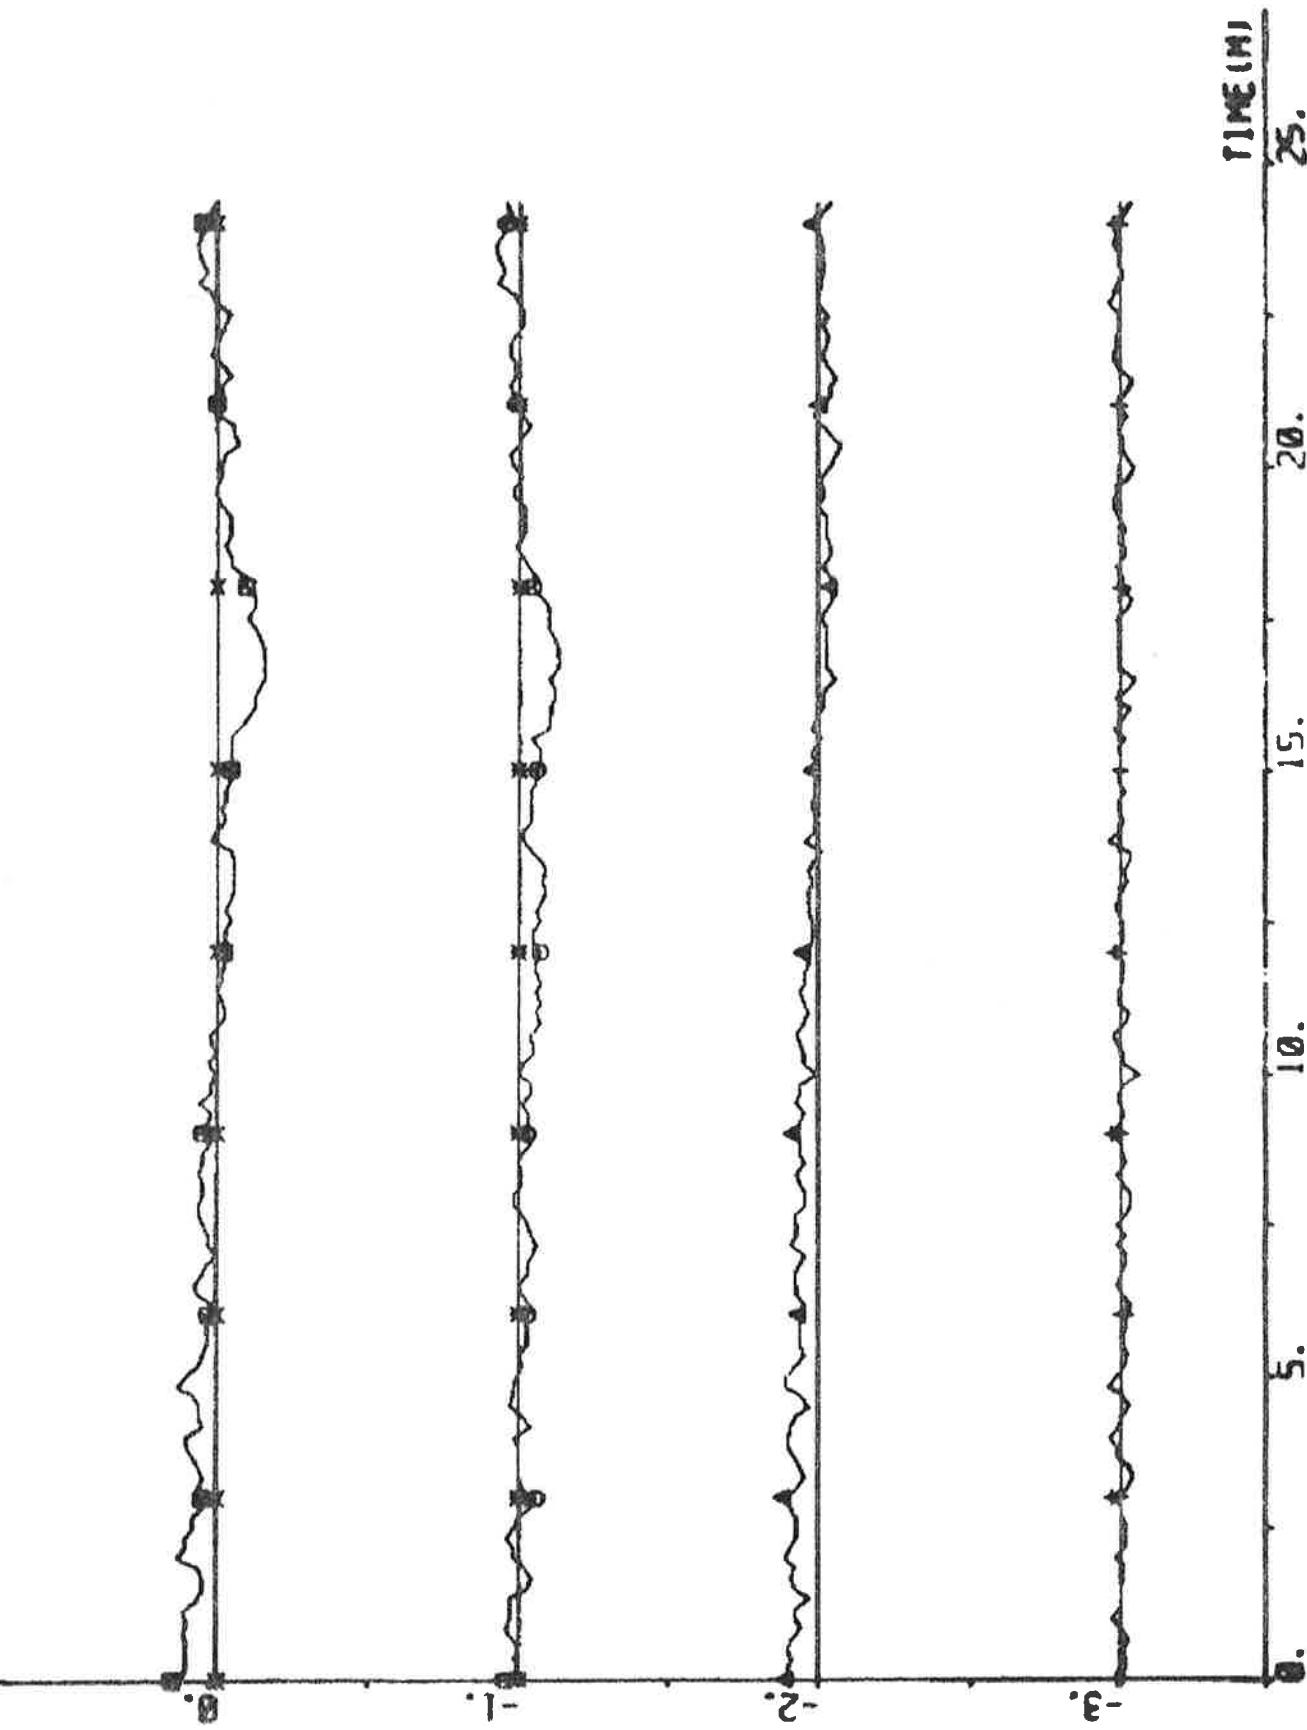


NOTE: R14P1(1), R14P1(2), ER62 ERS3 ea 002 004 006 -0.70. - 0003


214

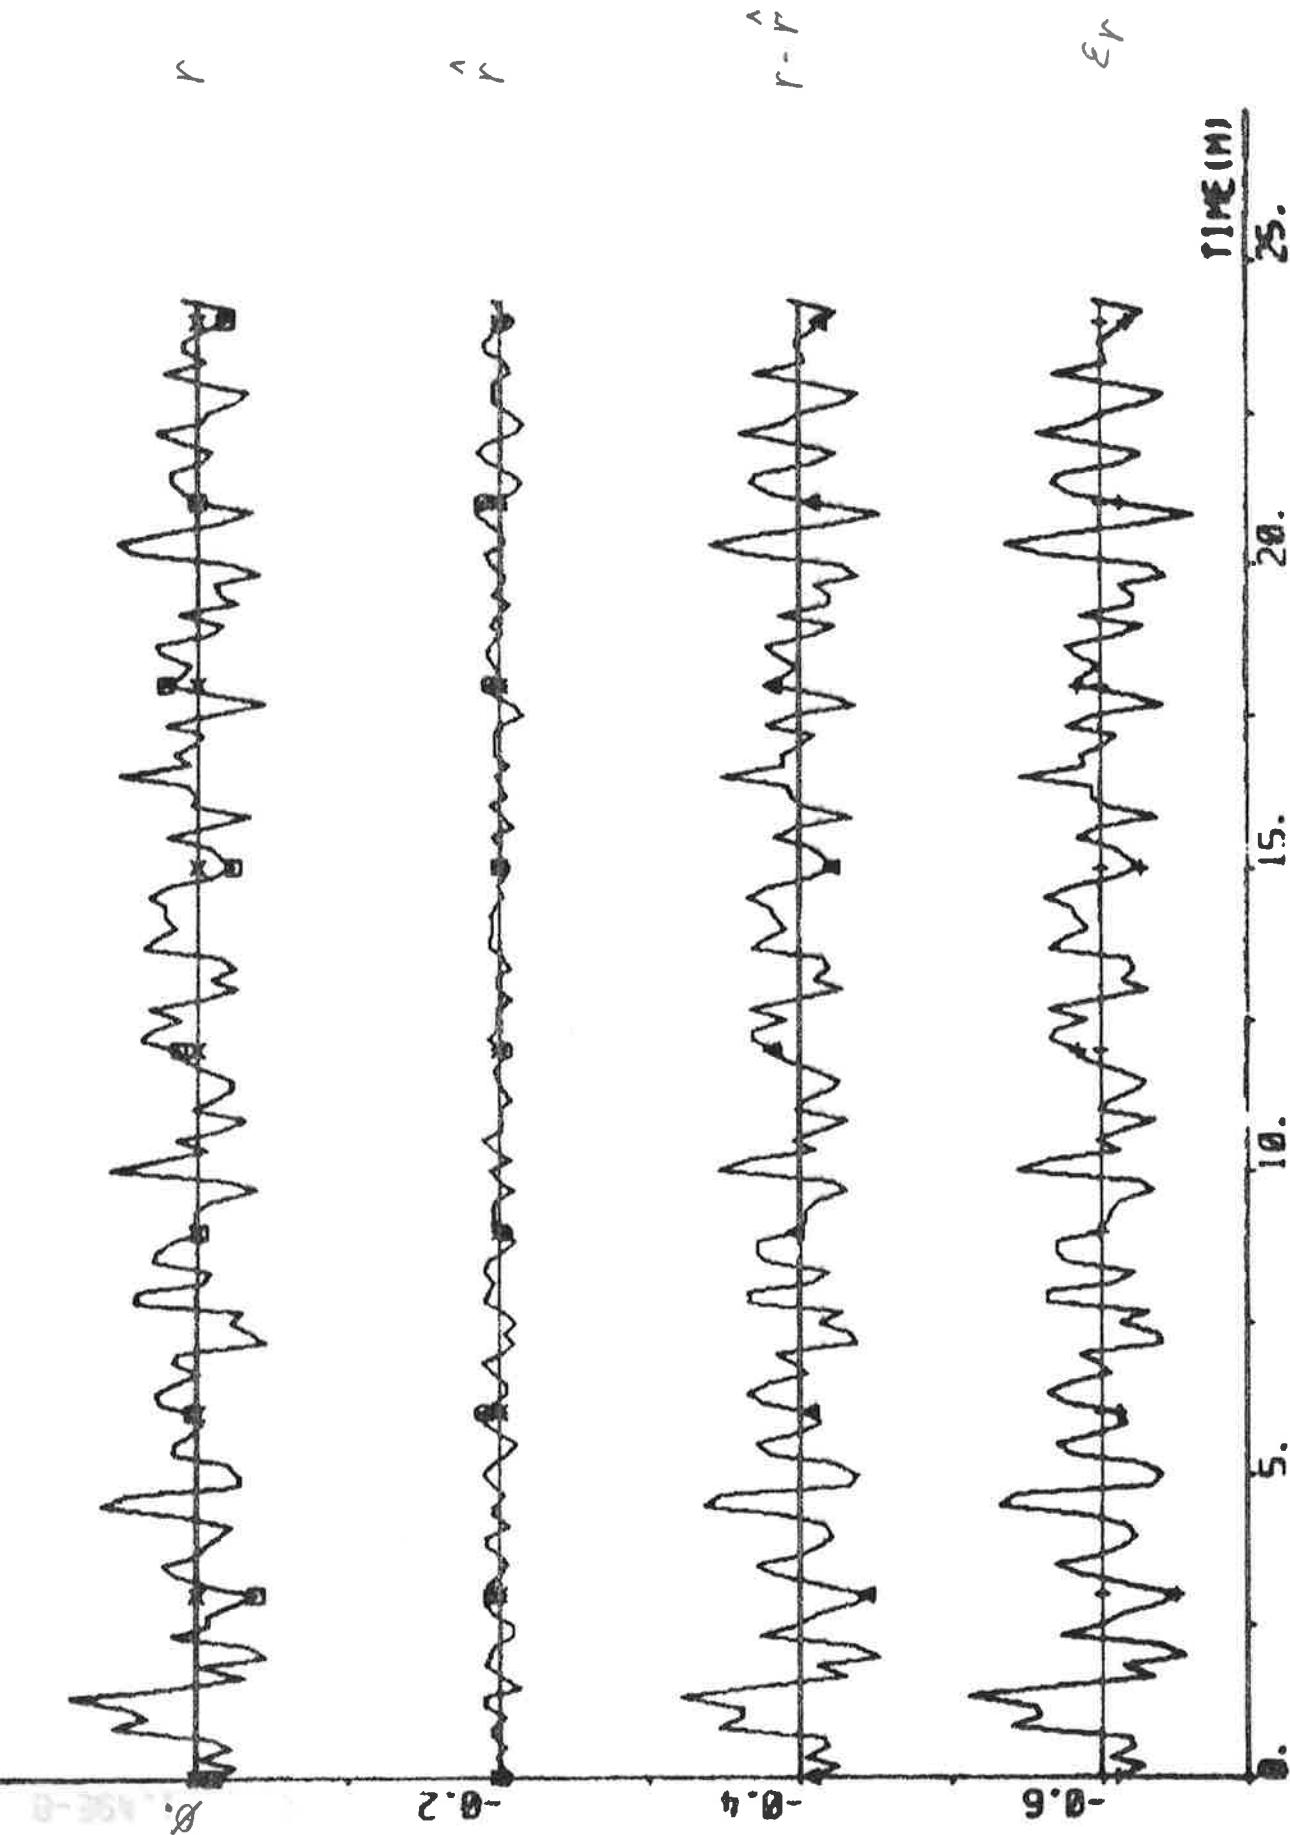

PILOT M1441(1) ERS4 EPS4 03 01 02 03 -3.4 0.0 - sec

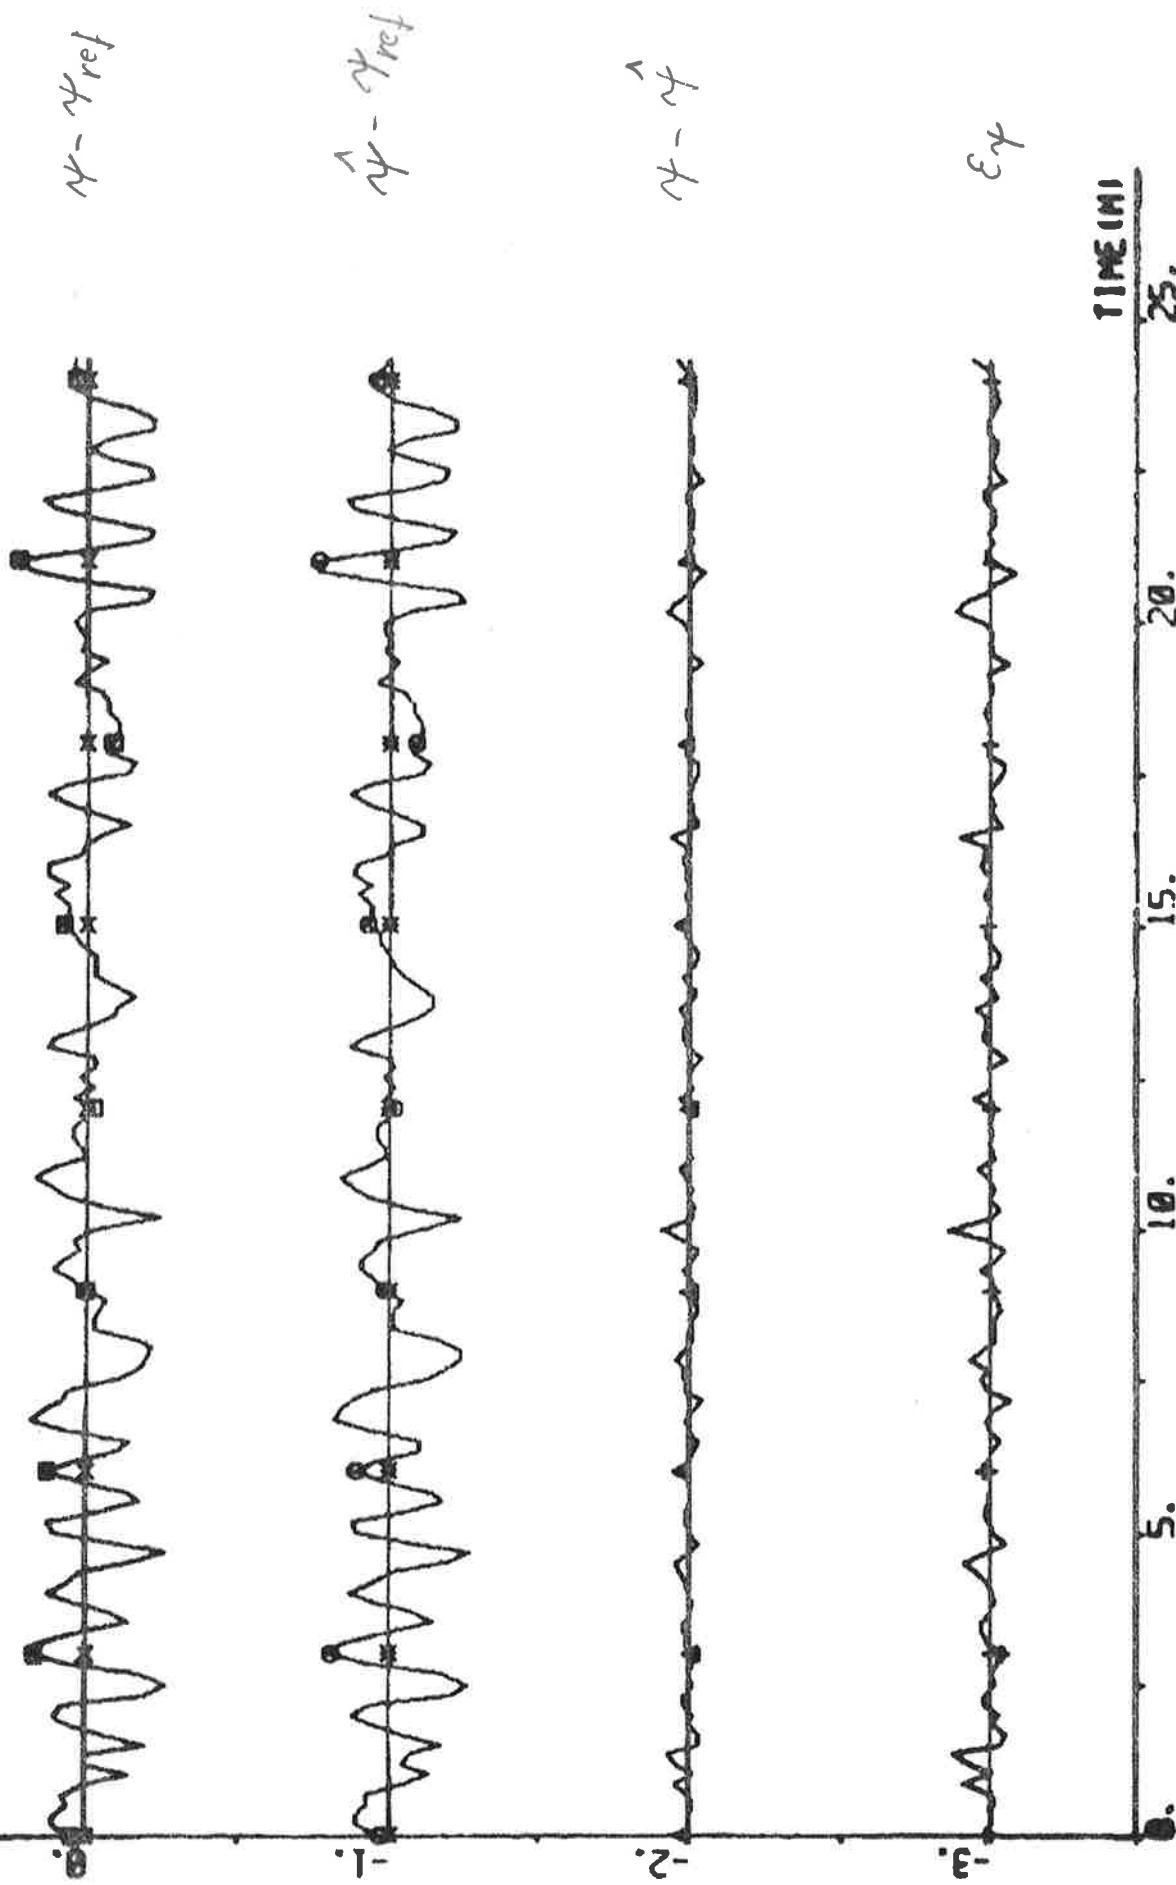

PL07 A14P1(1)-A14P1(2) ERRI EPS1 00 020 040 060 -08 -065

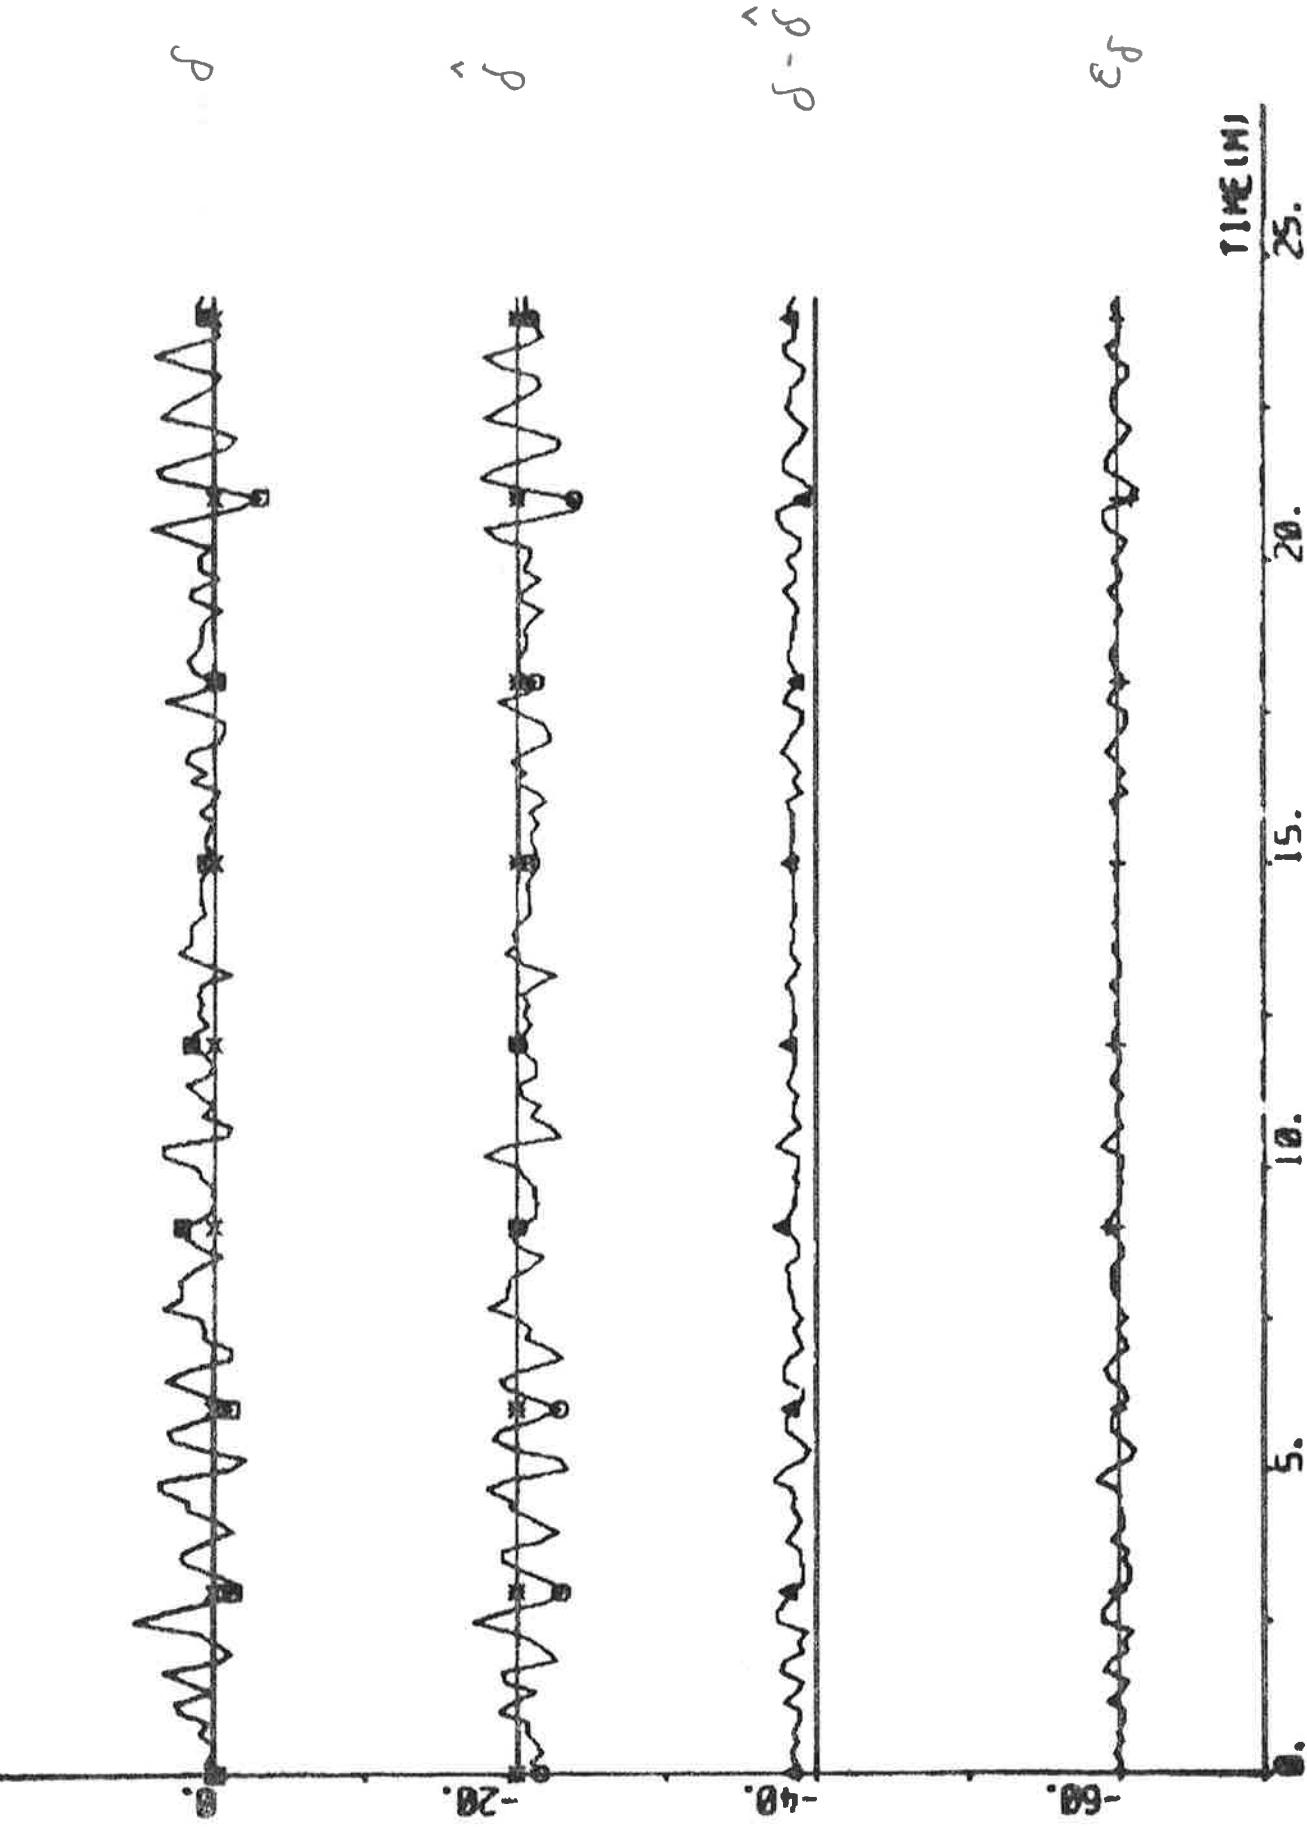

PL0T A14P1(1)-A14P2(3) A14P2(4) A14P2(5) A14P2(6) 00 02 04 06 -0.5 1.5

$0.5 * \hat{\delta}_\theta$ deg




$2 * \hat{d}_v$ knots




$100 * \hat{dr}$ deg/s



$0.5 * \hat{d}_\theta$ deg

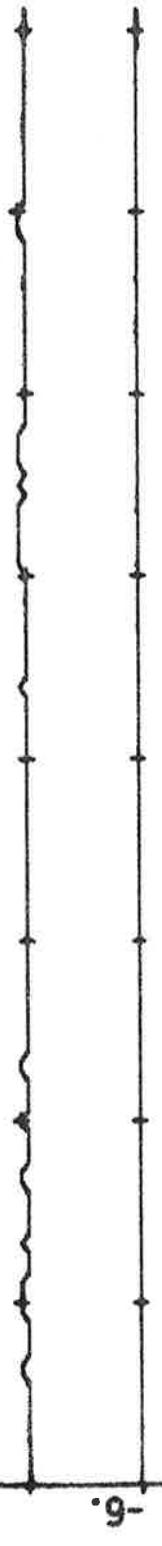

PLOT A14P2(1) A14P2(7) A14P2(8) A14P2(9) A14P2(10) A14P2(11) A14P2(12) A1

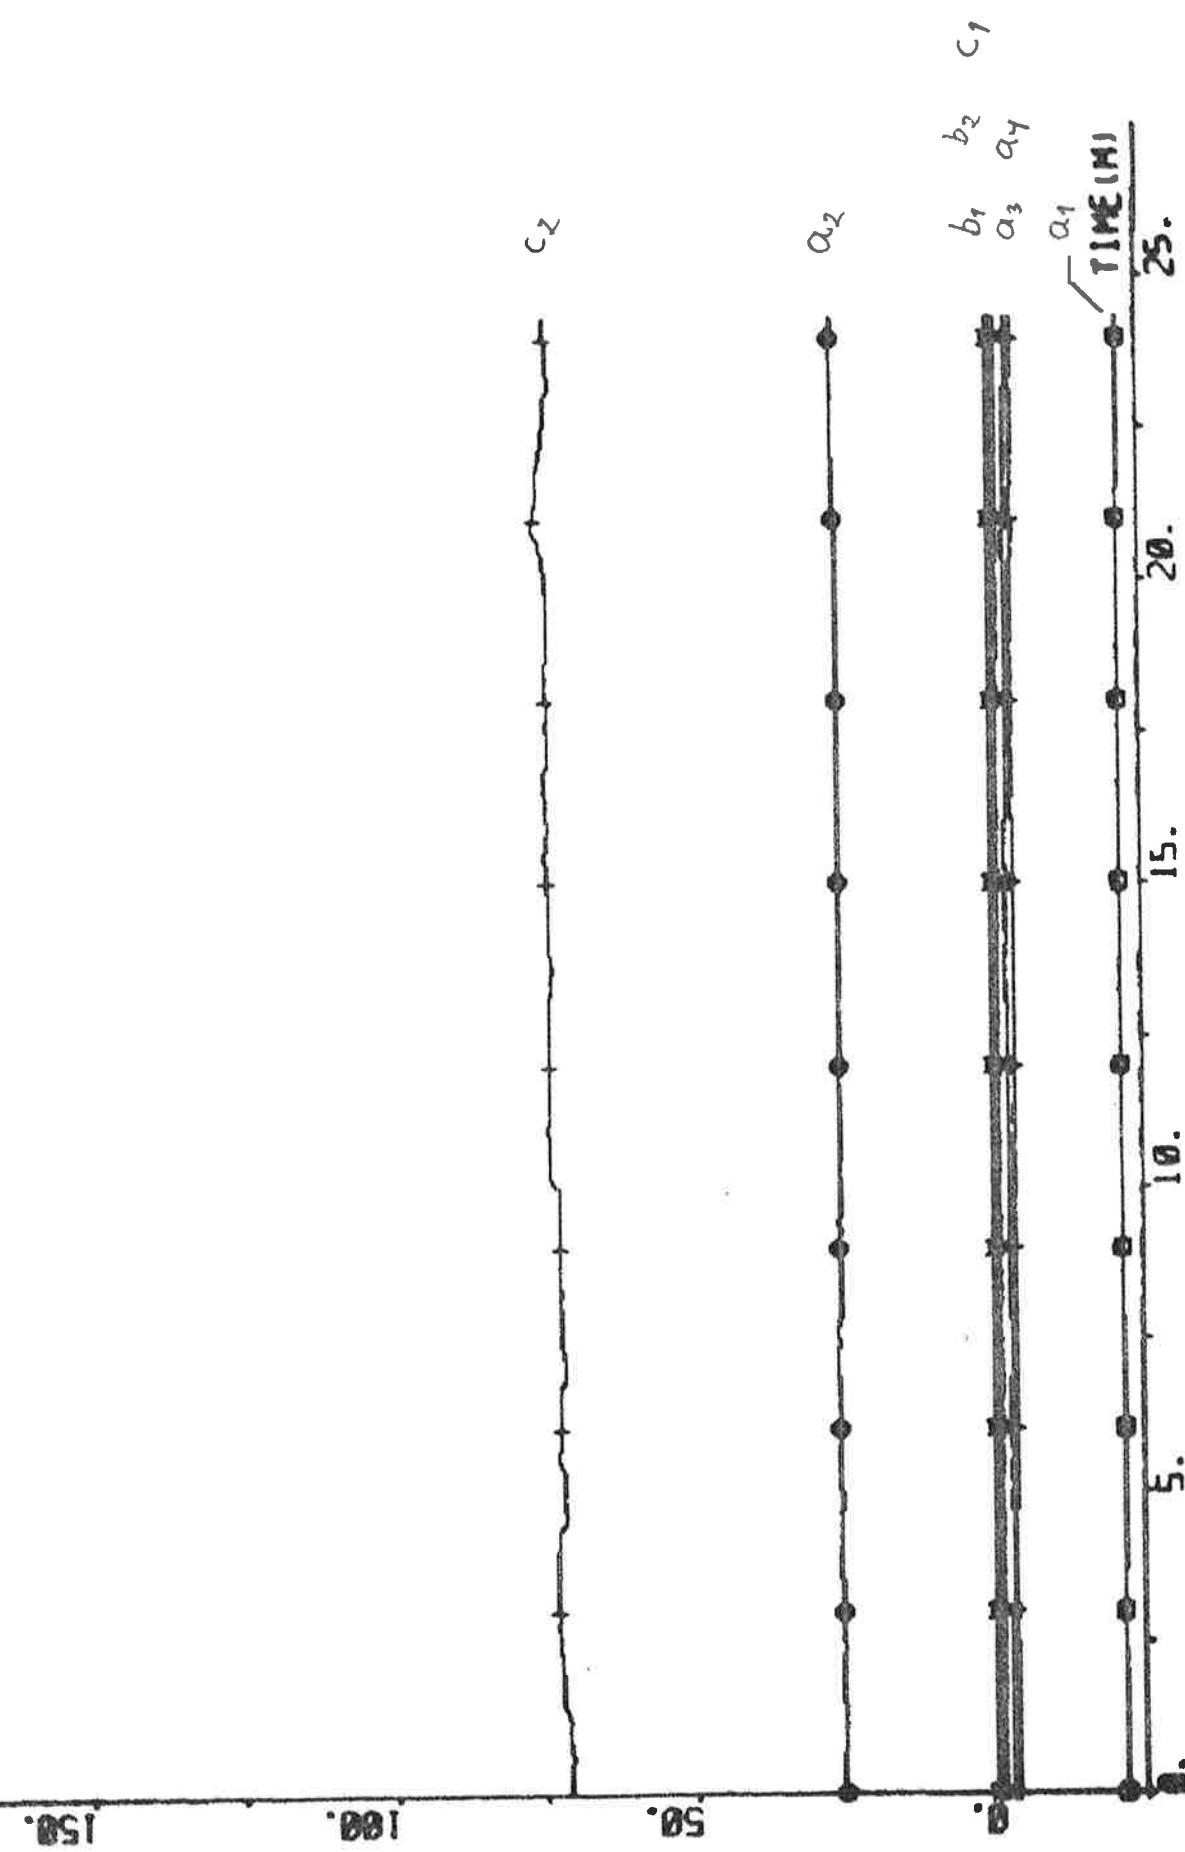

EXPERIMENT A15

Date	1976-04-24	Forward draught	8.5 m
Time	10.09	Aft draught	12.5 m
Duration	25 min	Wind direction	-
Position	N 02°45' W 12°57'	Wind velocity	0 m/s (calm)
ψ_{ref}	149 deg	Wave height	Swell

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 0 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \end{bmatrix} = \begin{bmatrix} -7.76 \\ 5.70 \\ 4.43 \\ -2.61 \\ 0.49 \\ 0.17 \\ -1.81 \end{bmatrix} \quad P = \begin{bmatrix} 3.74 & & & & & & \\ -5.01 & 11.78 & & & & & \\ 0.55 & -8.18 & 14.43 & & & & \\ 1.11 & 1.15 & -7.13 & 5.49 & & & \\ 0.08 & -0.39 & 0.41 & -0.09 & 0.03 & & \\ -0.02 & 0.05 & -0.22 & 0.21 & 0.00 & 0.02 & \\ -0.86 & 1.03 & 0.34 & -0.53 & -0.02 & 0.01 & 0.45 \end{bmatrix}$$


$$a_1 + a_2 + a_3 + a_4 = -0.24$$

$$\hat{\delta}_0 = -0.6 \text{ deg} \quad \hat{d}_v = 0.07 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.6 \text{ deg}$$

Statistics (mean value and standard deviation)

δ_c	-0.68 ± 0.82 deg	P_s	14.4 ± 0.1 MW
δ	0.88 ± 0.70 deg	ϵ_v	0.00 ± 0.02 knots
$\psi - \psi_{ref}$	0.015 ± 0.158 deg	ϵ_r	0.00 ± 0.03 deg/s
n	69.4 ± 0.3 rpm	ϵ_ψ	0.00 ± 0.04 deg
u	13.3 ± 0.1 knots	ϵ_δ	0.0 ± 0.4 deg
$V_1 = 0.081$			

PLOT R15P1(1) R15P1(8) MP R15P1(10) Q2 - C 1 - DEG

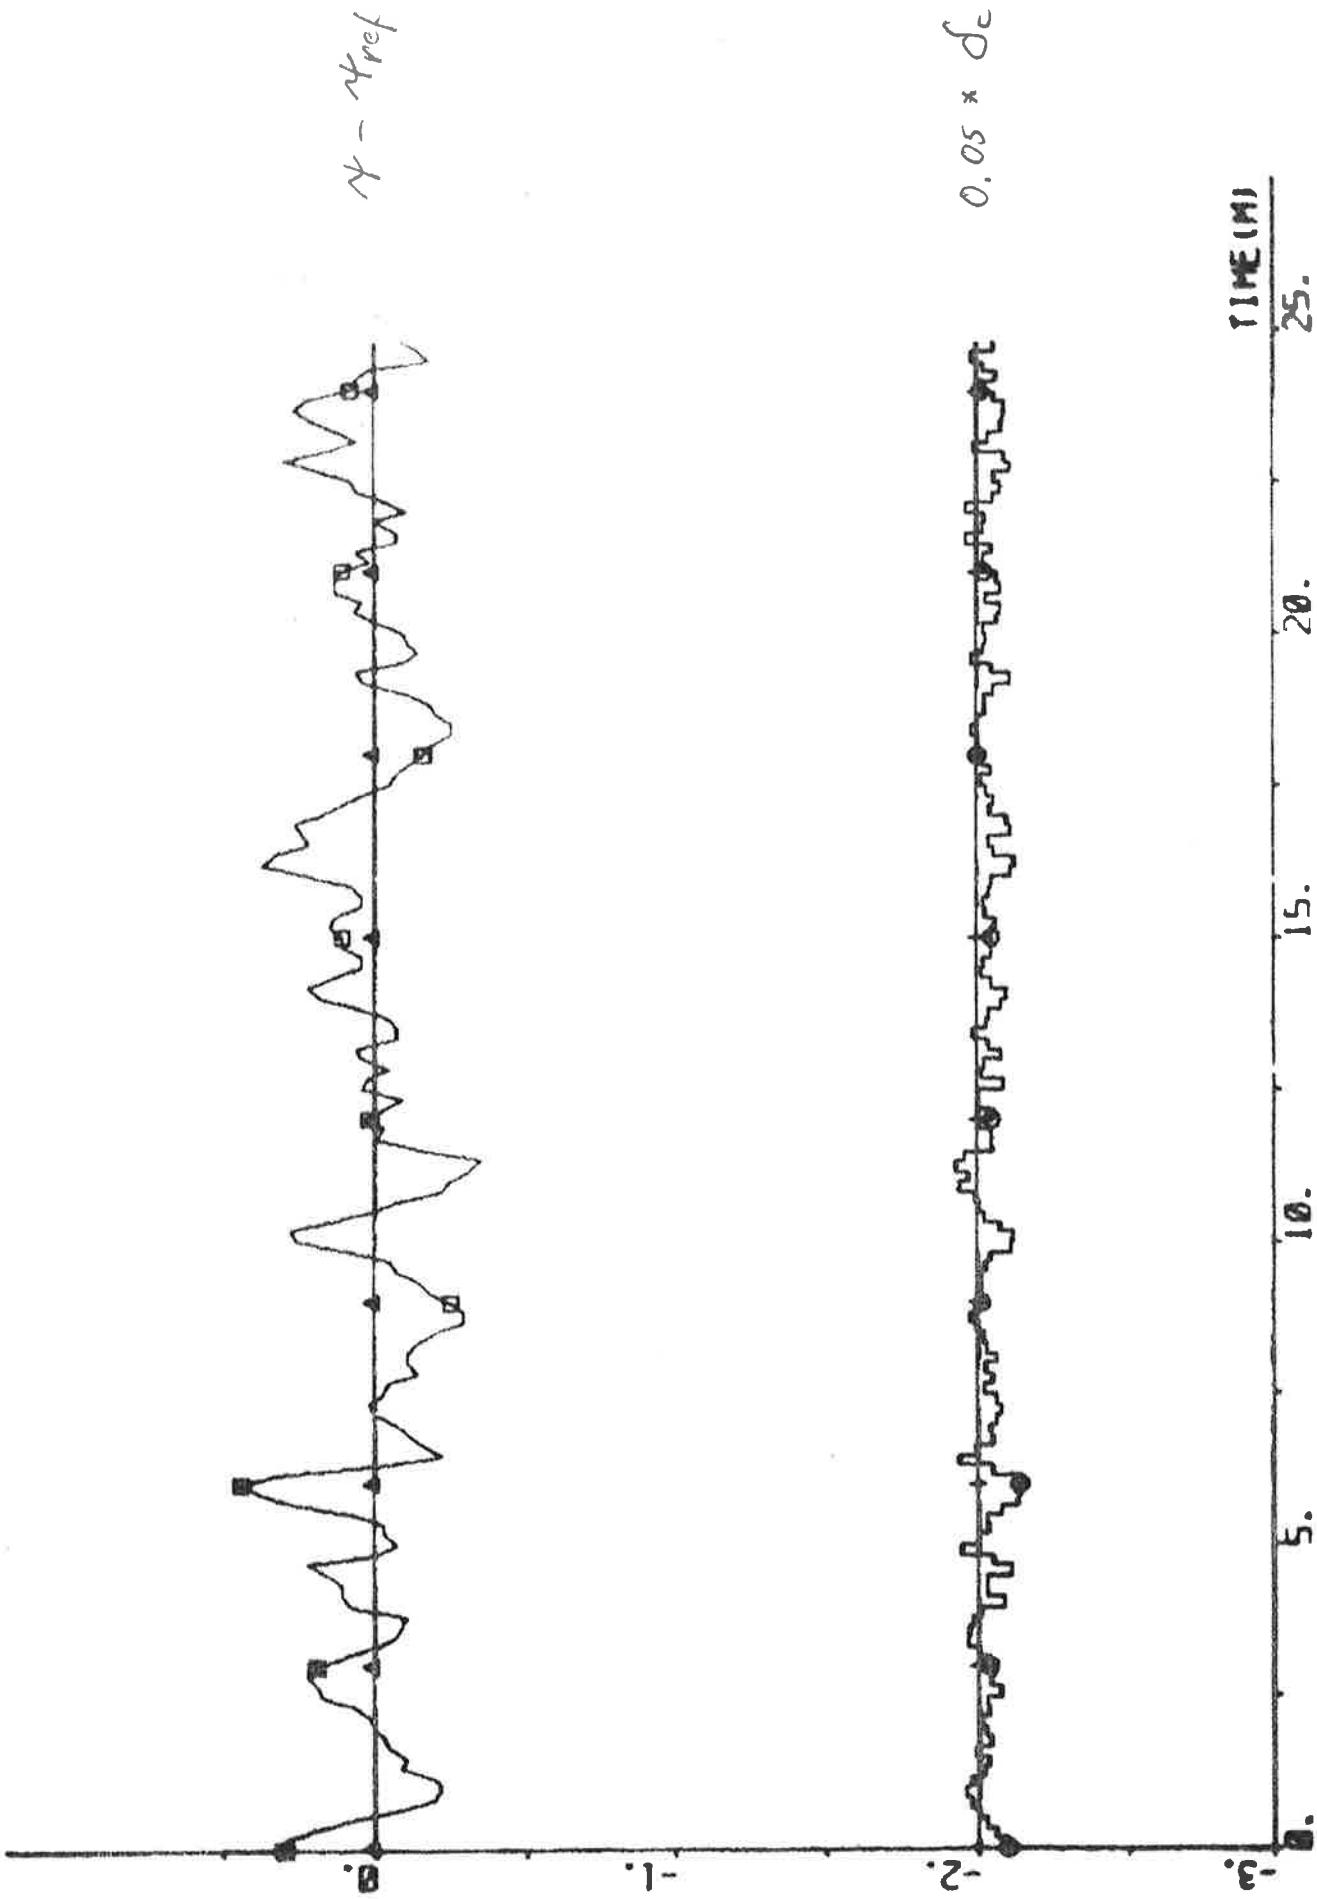



deg

df


MW

knots


nautical

0.5 * u
2 * u

PLOT A15P1(1)-A15P2(1) A15P2(2) ERRE 03 01 02 -3.4 0.0 - MOTS

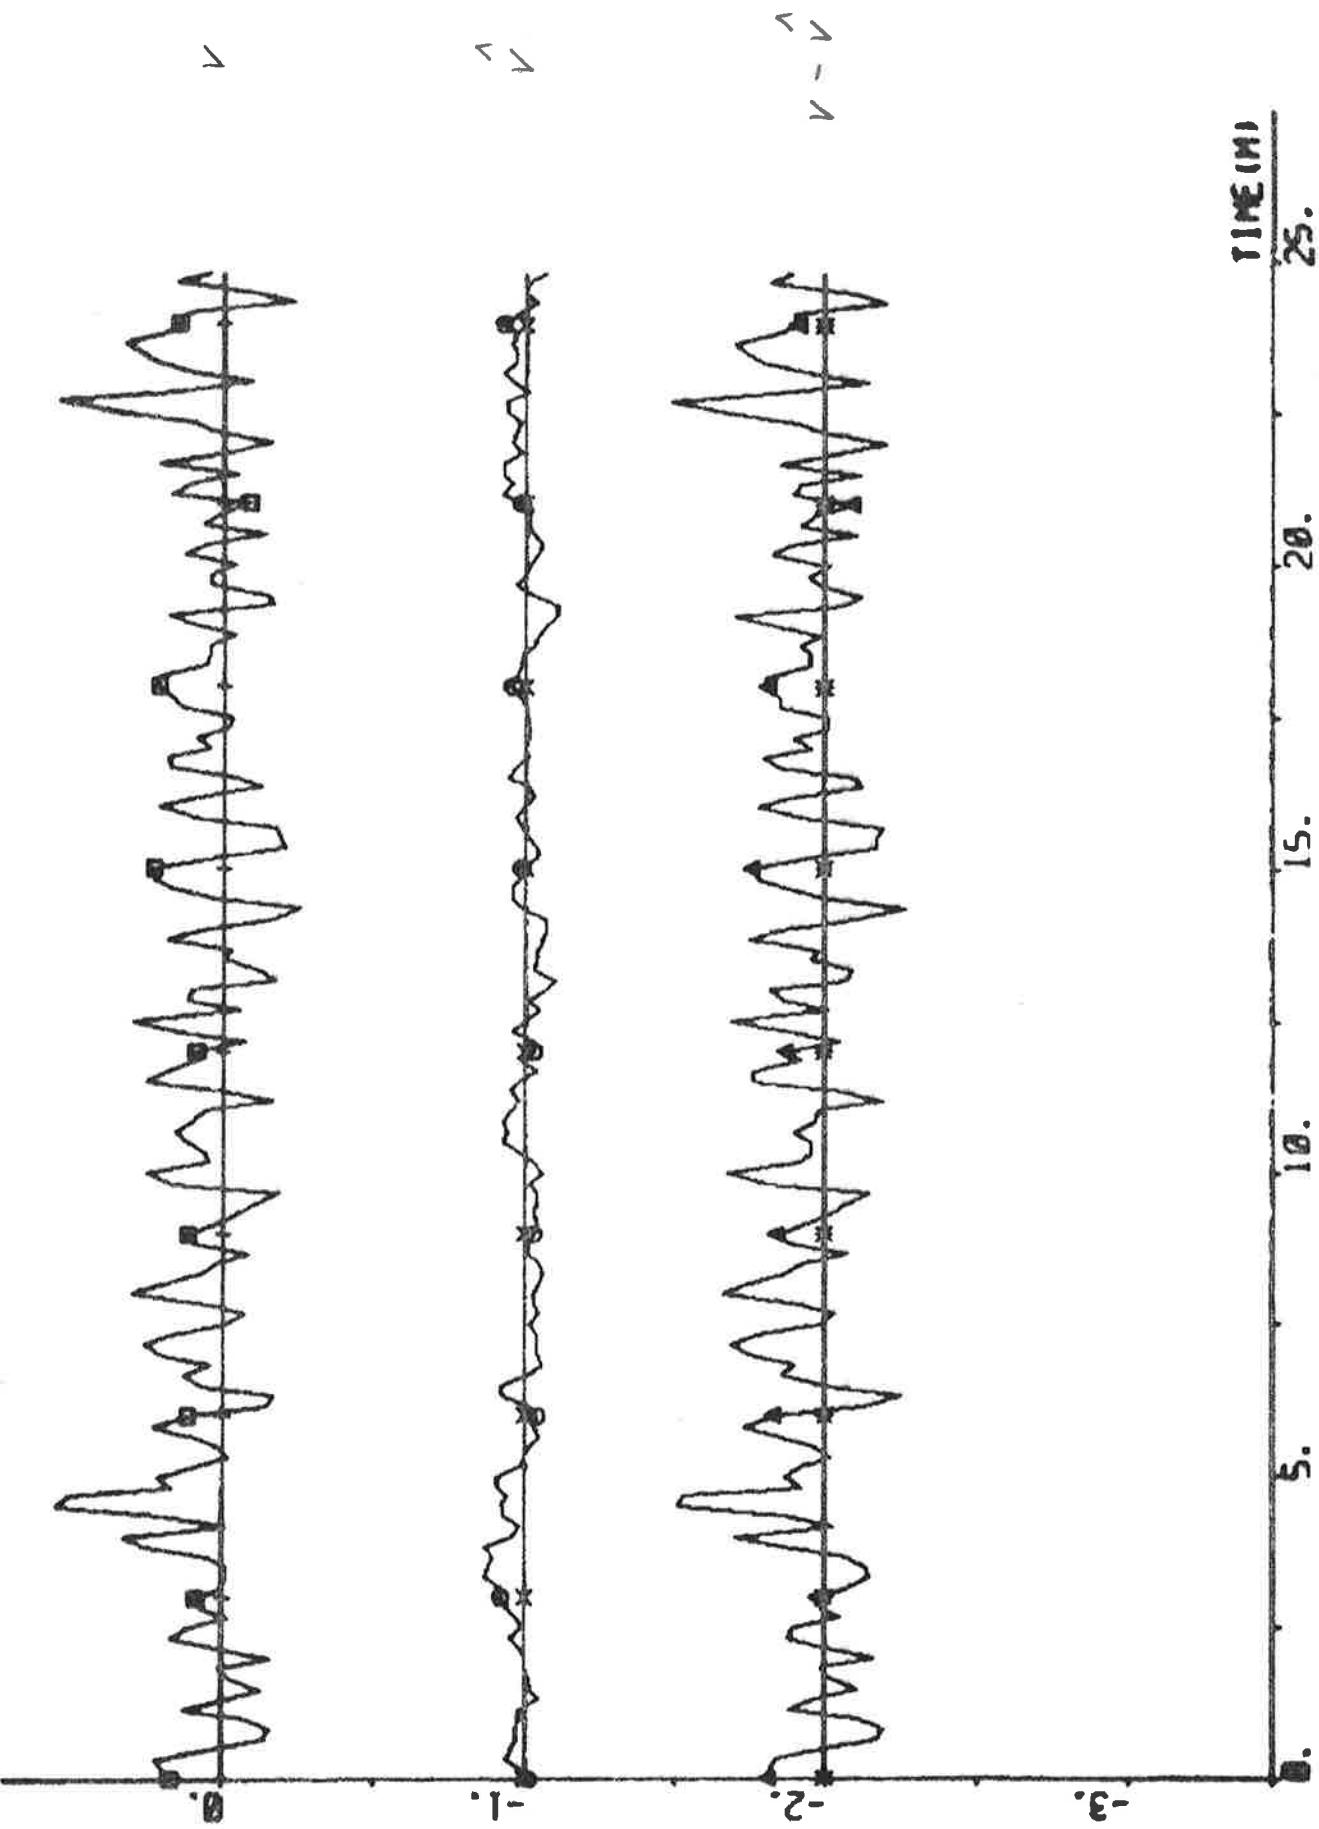

PL07 A15P1(1)-A15P1(4) A15P1(5) ERR2 EPS2 00 01 02 03 - 3.4 0.0 - 1000s

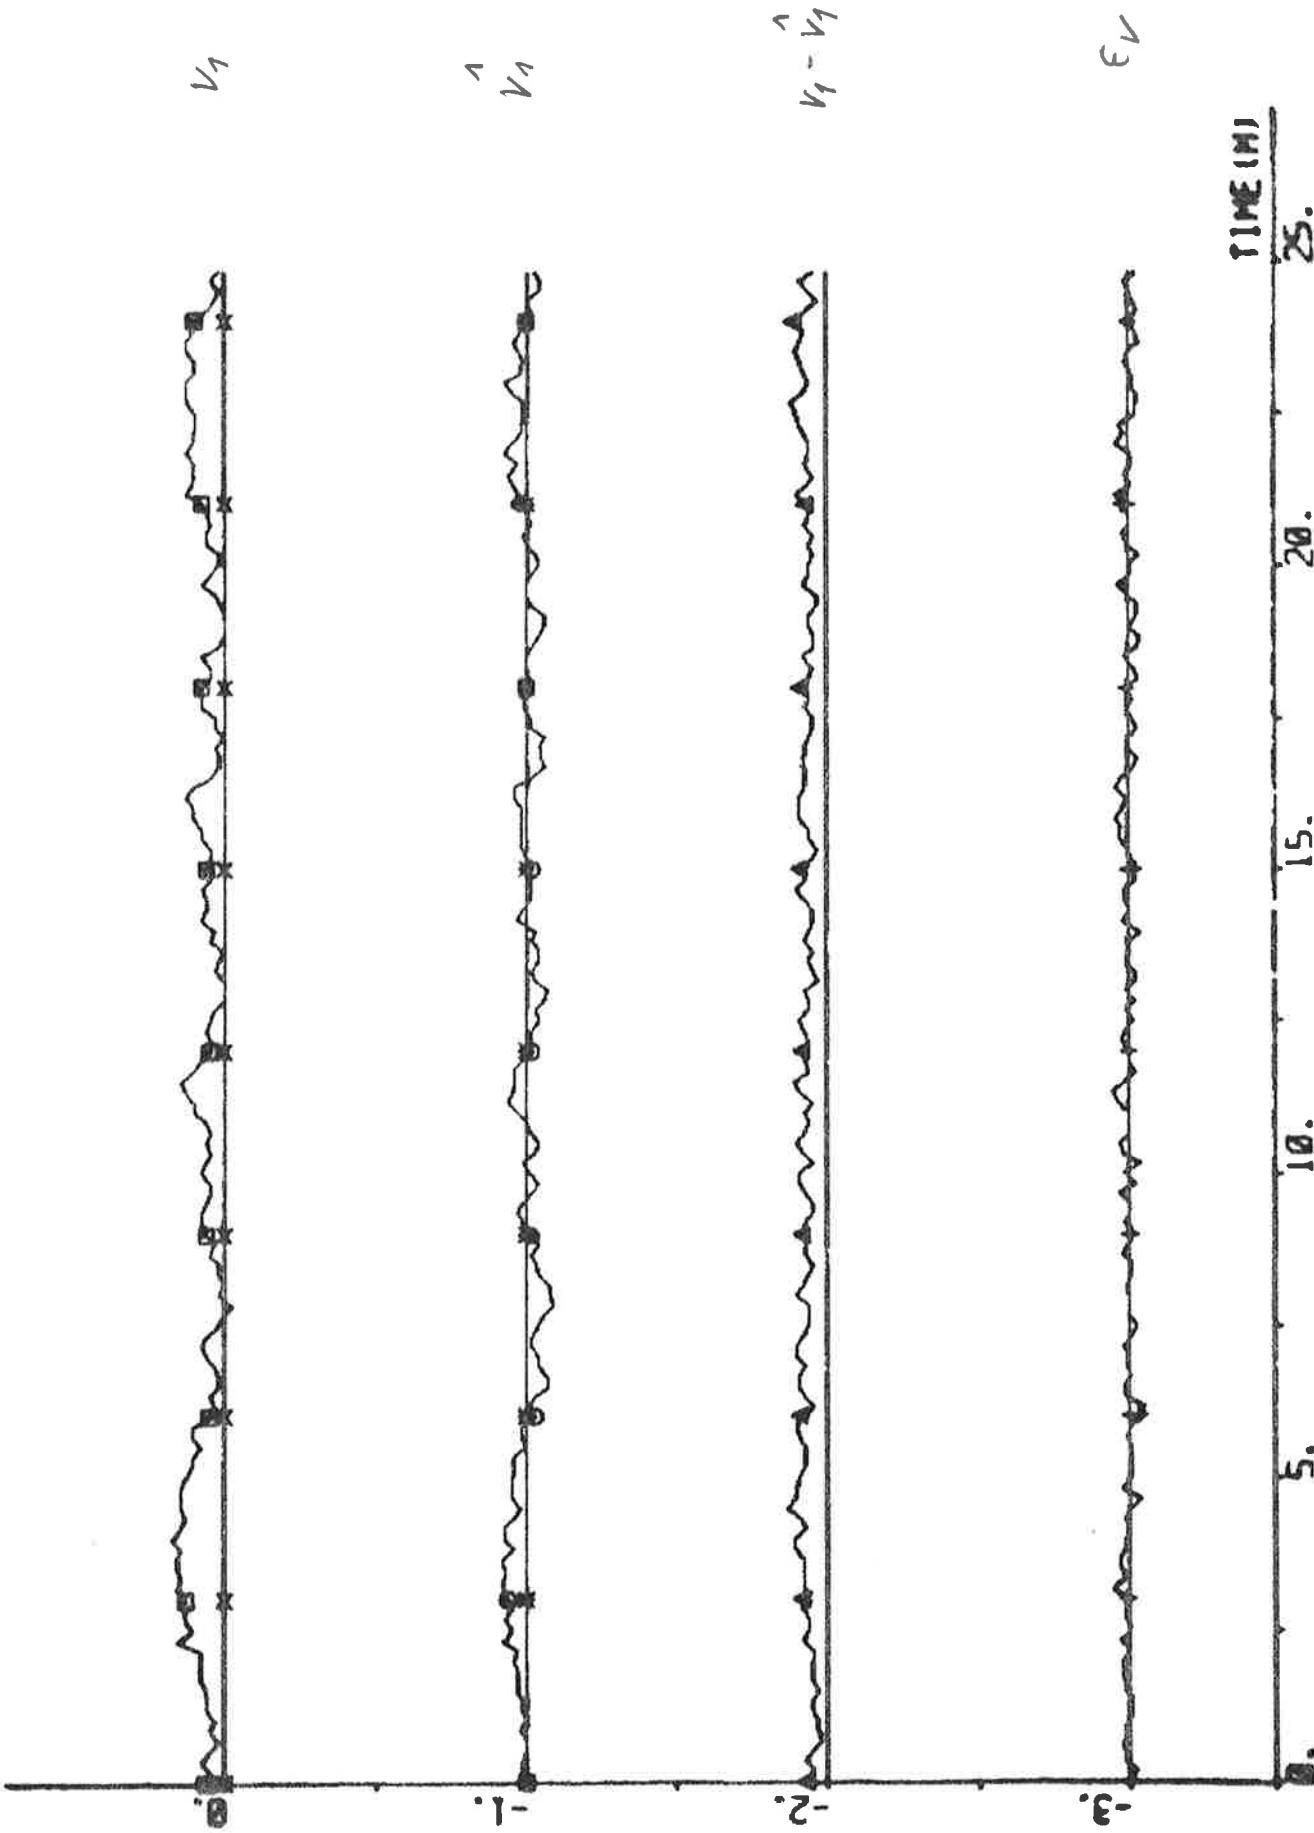

THE SEA STRATUS EXPERIMENTS, APRIL 1976
PART II

CLAES KÄLLSTRÖM

Lund Institute of Technology
Department of Automatic Control
September 1976

THE SEA STRATUS EXPERIMENTS, APRIL 1976

PART II

CLAES KÄLLSTRÖM

TABLE OF CONTENTS

	Page
PART I	
1. INTRODUCTION	6
2. MEASUREMENT EQUIPMENT	8
3. AUTOPILOT	10
3.1 Kalman Filter	12
3.2 Self-tuning Regulator	17
3.3 PID-regulator	21
3.4 Yaw Regulator	22
4. DISCUSSION OF THE EXPERIMENTS	27
4.1 Kalman Filter Testing	28
4.2 Straight Course Keeping	32
4.3 Yawing	37
4.4 Experiments for Identification	38
5. CONCLUSIONS	40
6. ACKNOWLEDGEMENTS	42
7. REFERENCES	43
APPENDIX A - NOTATIONS	44
APPENDIX B - STANDARD PARAMETER VALUES	50
APPENDIX C - PROGRAM LISTINGS	56
APPENDIX D - EXPERIMENTS	67
A1	79
A2	89
A3	99
A4	109
A5	119
A6	129
A7	139

Page

A8	149
A9	159
A10	169
A11	179
A12	189
A13	199
A14	209
A15	219
A16	229
A17	239
A18	249
A19	259
A20	269
A21	278

PART II

A22	288
A23	298
A24	308
A25	318
A26	328
A27	338
A28	348
A29	358
A30	368
A31	377
A32	386
A33	396

Page

A34	406
A35	416
A36	425
B1	435
B2	441
B3	447
C1	453
C2	463
C3	473
C4	483
C5	493
C6	503
D1	513
D2	523
D3	533
E1	543
E2	552
E3	561
E4	571
F1	580
F2	581
F3	582
F4	583

EXPERIMENT A22

Date	1976-04-25	Forward draught	8.5 m
Time	11.14	Aft draught	12.5 m
Duration	24 min	Wind direction	SE (1; see App. A)
Position	S 01°39' W 09°50'	Wind velocity	13 m/s (strong breeze)
ψ_{ref}	141 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter

The rudder angle δ was not used by the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 Ts = 10 s V0 = 6 m/s IVVC = 1

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.04 \\ 6.23 \\ 4.52 \\ -2.99 \\ 0.51 \\ 0.16 \\ -1.89 \\ 35.94 \end{bmatrix} \quad P = \begin{bmatrix} 4.01 & & & & & & & \\ -4.83 & 10.86 & & & & & & \\ -0.07 & -6.92 & 13.00 & & & & & \\ 1.10 & 0.75 & -6.22 & 4.74 & & & & \\ -0.07 & -0.17 & 0.33 & -0.10 & 0.03 & & & \\ -0.04 & -0.04 & -0.04 & 0.12 & 0.00 & 0.02 & & \\ -0.51 & 0.67 & 0.17 & -0.32 & -0.01 & -0.01 & 0.81 & \\ 7.52 & -9.92 & -5.56 & 8.39 & 0.02 & -0.21 & 15.47 & 744.94 \end{bmatrix}$$


$$a_1 + a_2 + a_3 + a_4 = -0.28$$

$$\hat{\delta}_0 = 1.8 \text{ deg} \quad \hat{d}_v = 0.27 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_{\delta} = -$$

Statistics (mean value and standard deviation)


δ_c	2.32	\pm 0.95	deg	P_s	14.5	\pm 0.1	MW
δ	3.82	\pm 0.80	deg	ε_v	0.00	\pm 0.02	knots
$\psi - \psi_{ref}$	-0.006	\pm 0.204	deg	ε_r	0.00	\pm 0.03	deg/s
n	68.9	\pm 0.3	rpm	ε_ψ	-0.01	\pm 0.03	deg
u	12.8	\pm 0.2	knots	ε_δ	-		
V_1	= 0.117						

PLOT R22P1(1)-R22P1(8) HP R22P1(18) R22P1(15) R2 -3 1 - 38C

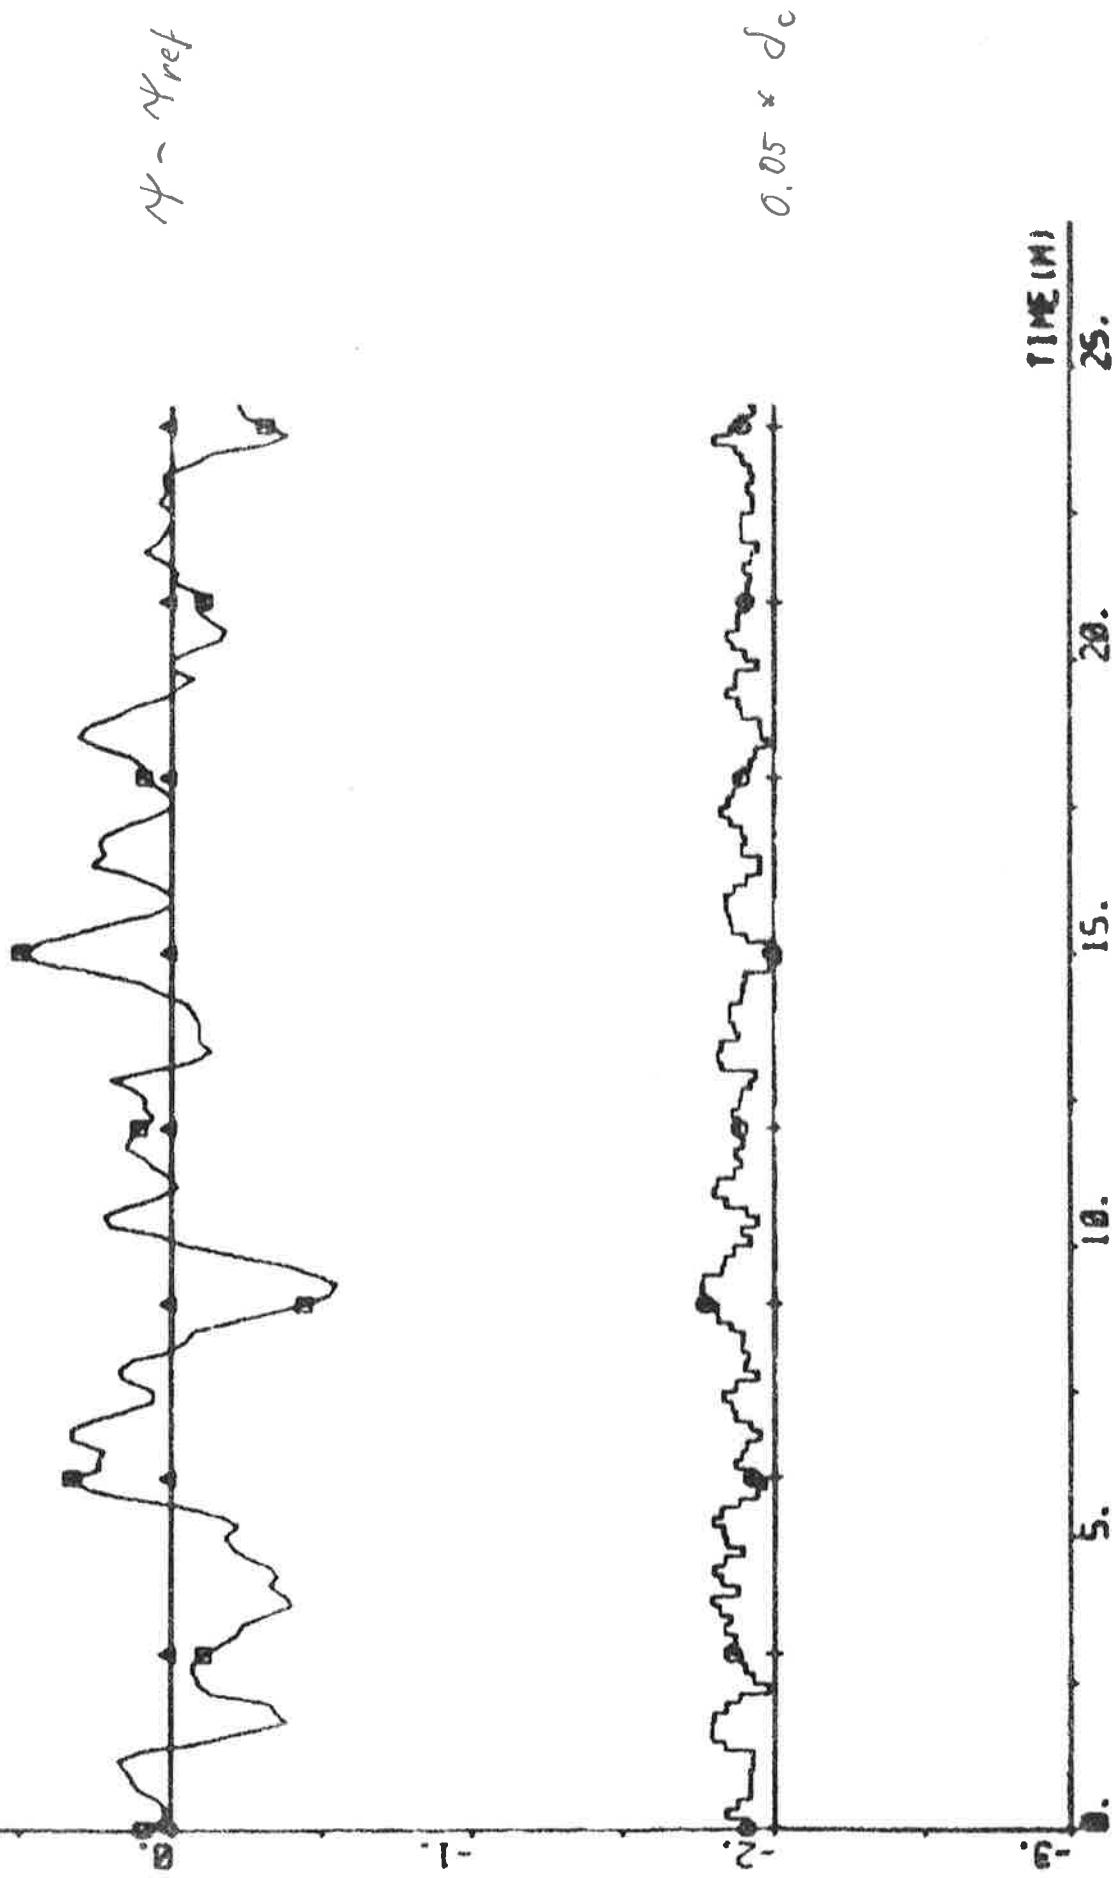





PLT 02222(1) - 02222(2) DATES 00 01 02 - 03.14.03 - MOTRS

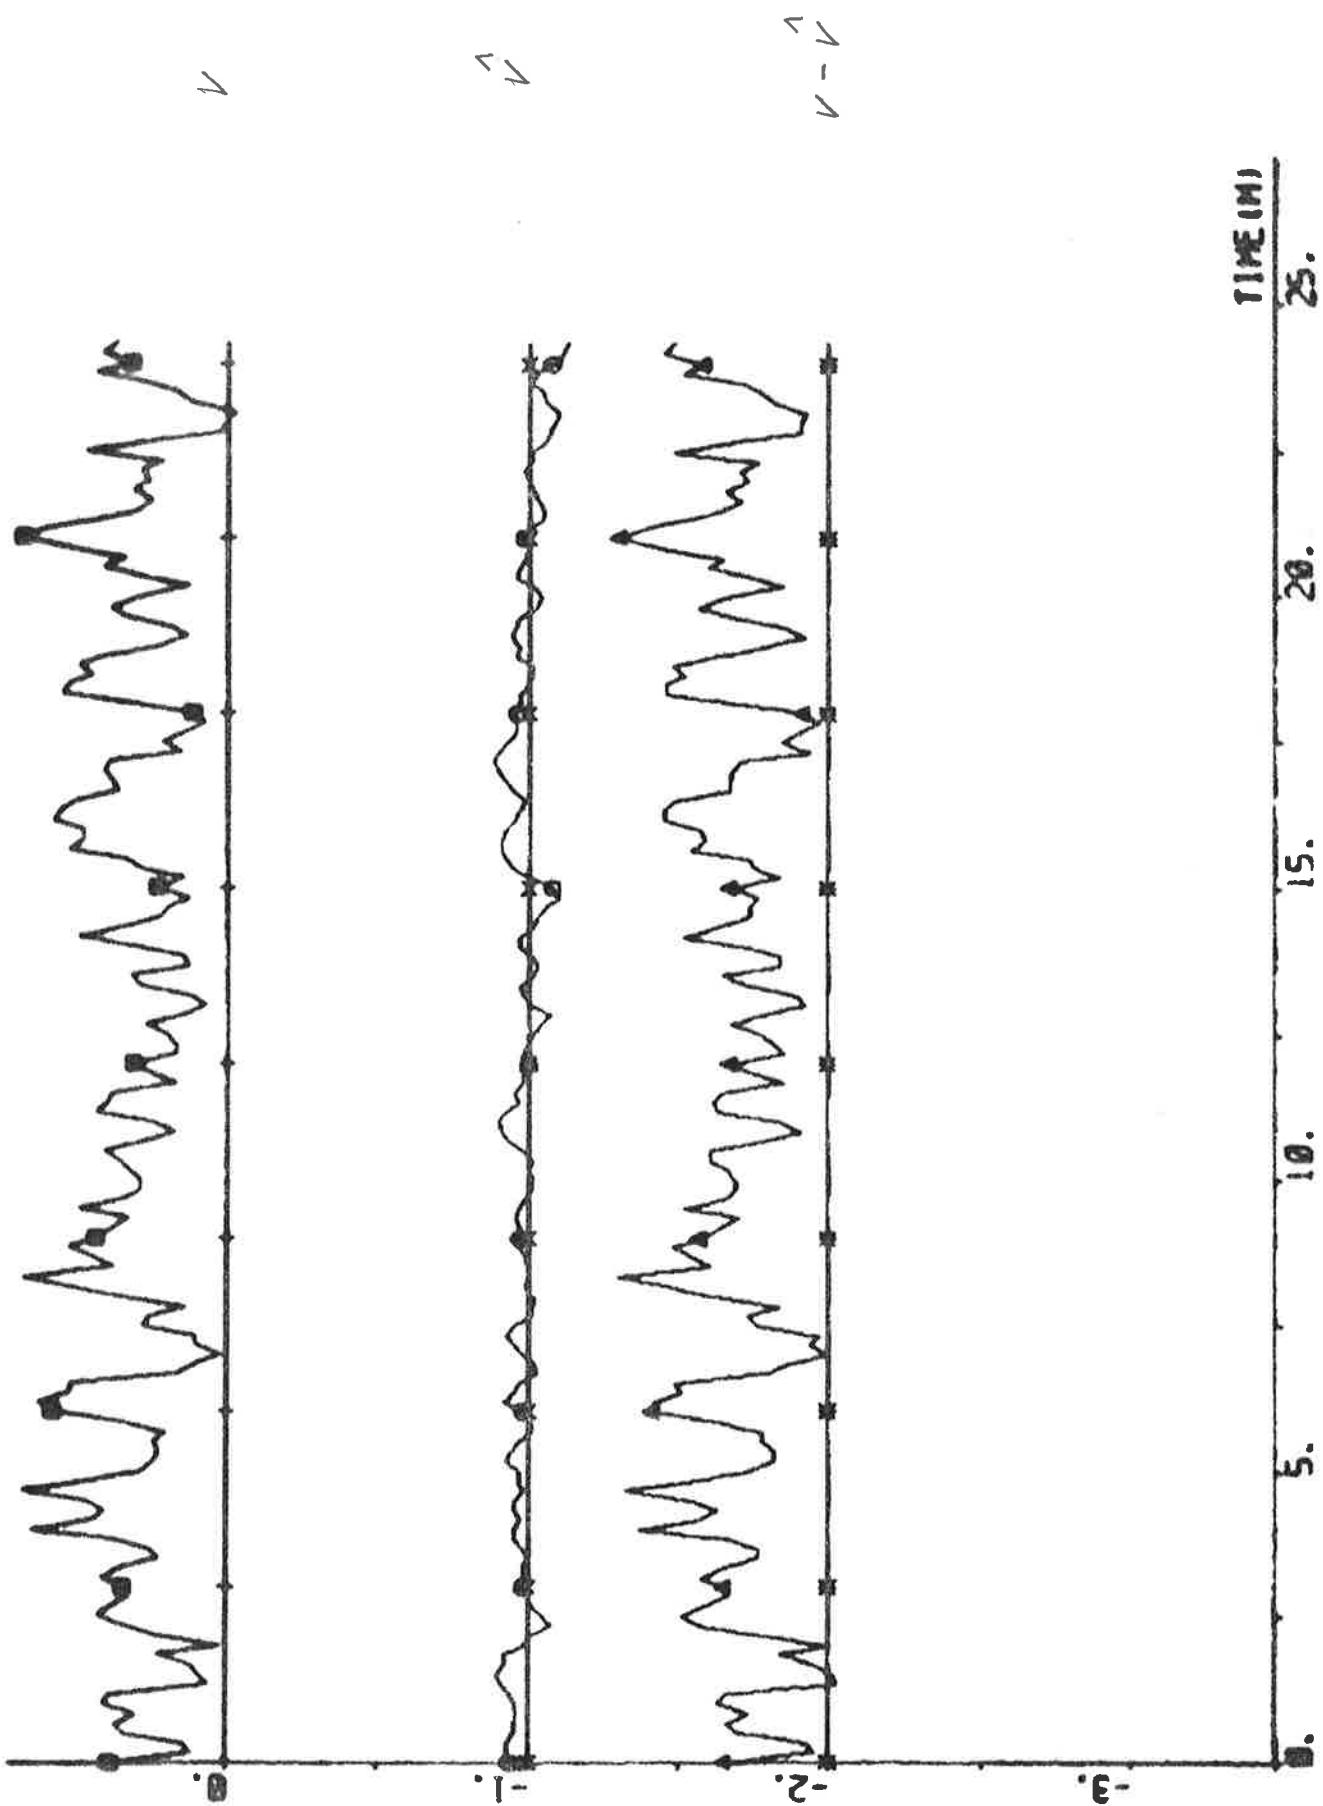


PL01 R22P1(1)-R22P1(4) A22P1(5) E22P2 EP32 00 01 02 03 -3.4 0.3 -

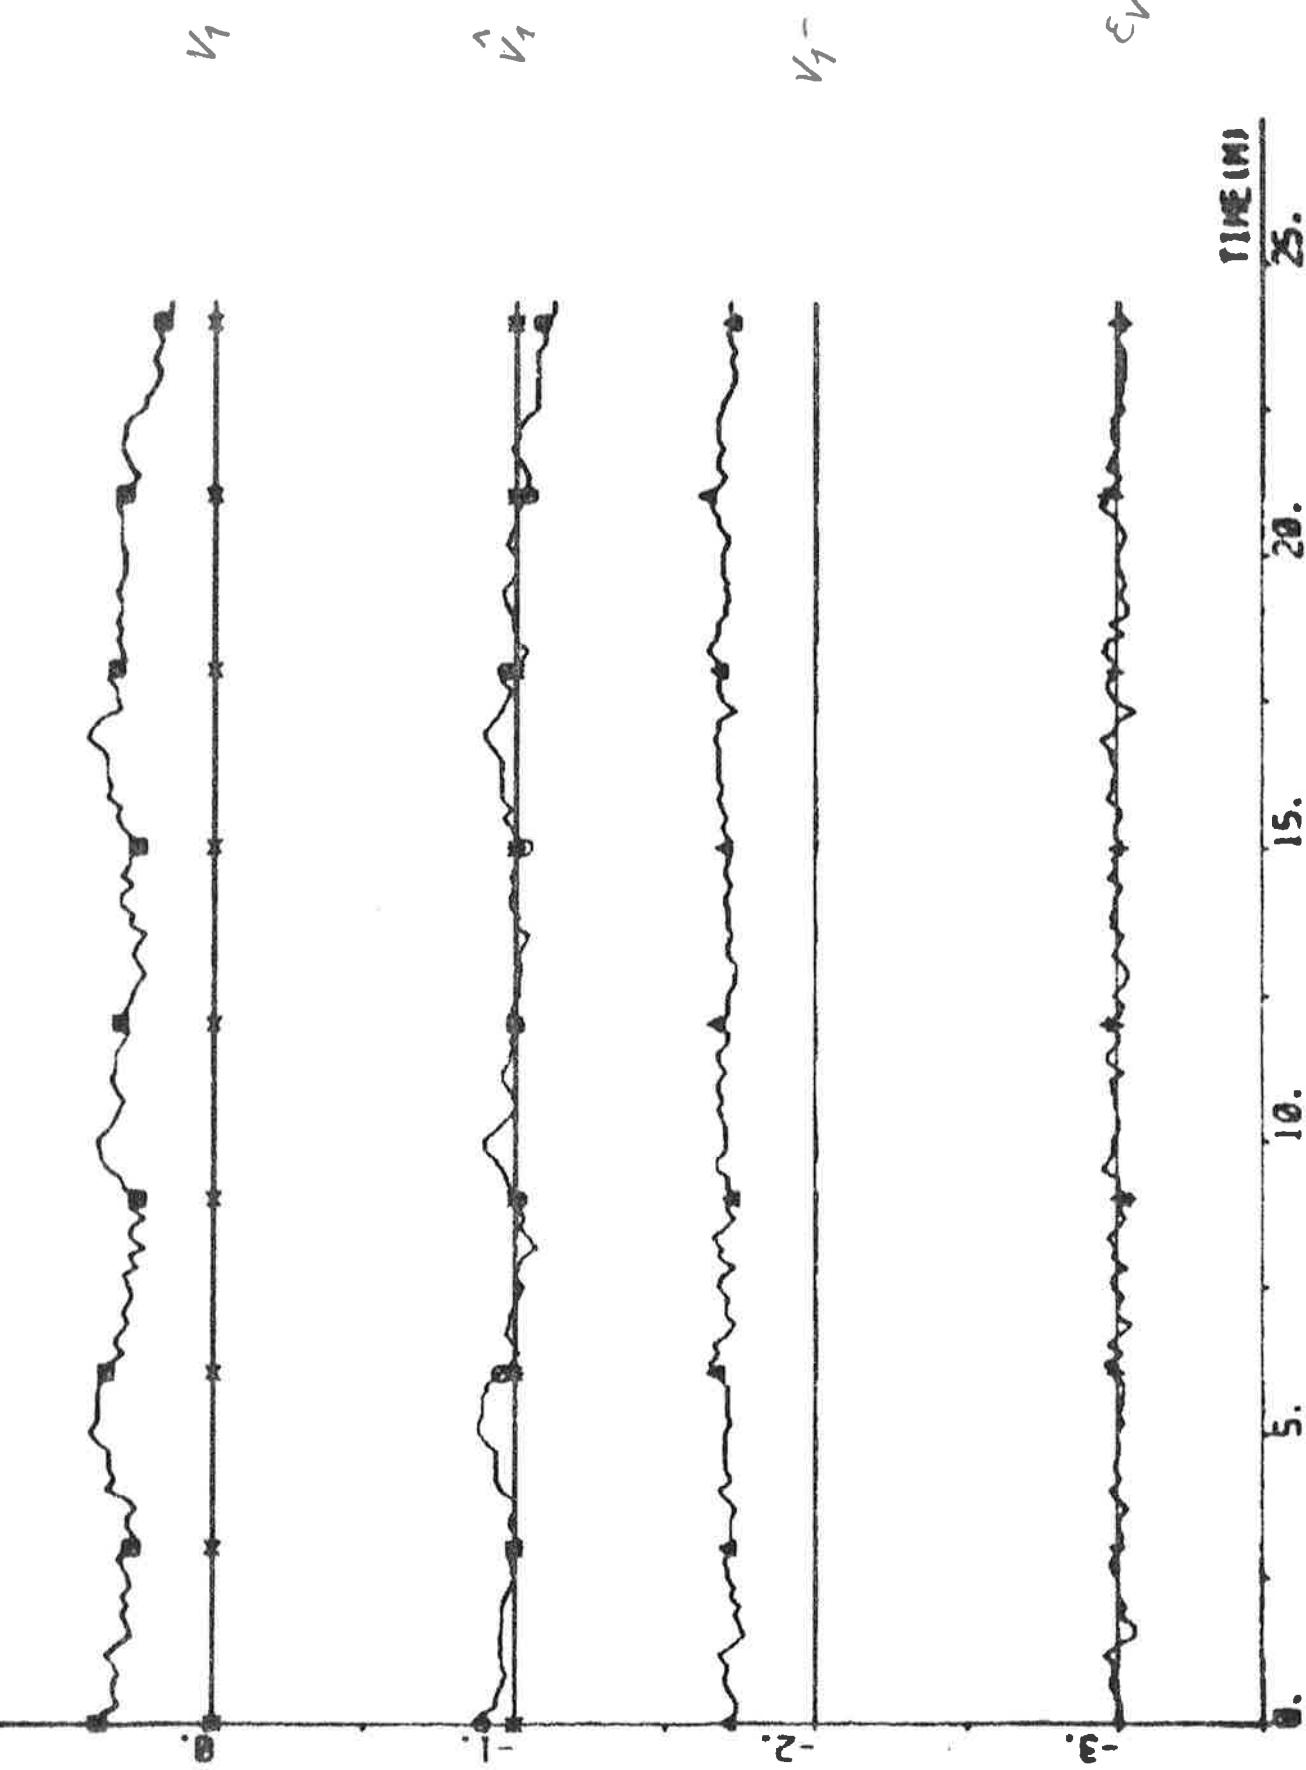


Plot R22P1(1)-R22P1(6) R22P1(7) ER23 EPS3 as sec -0.7 0. + sec

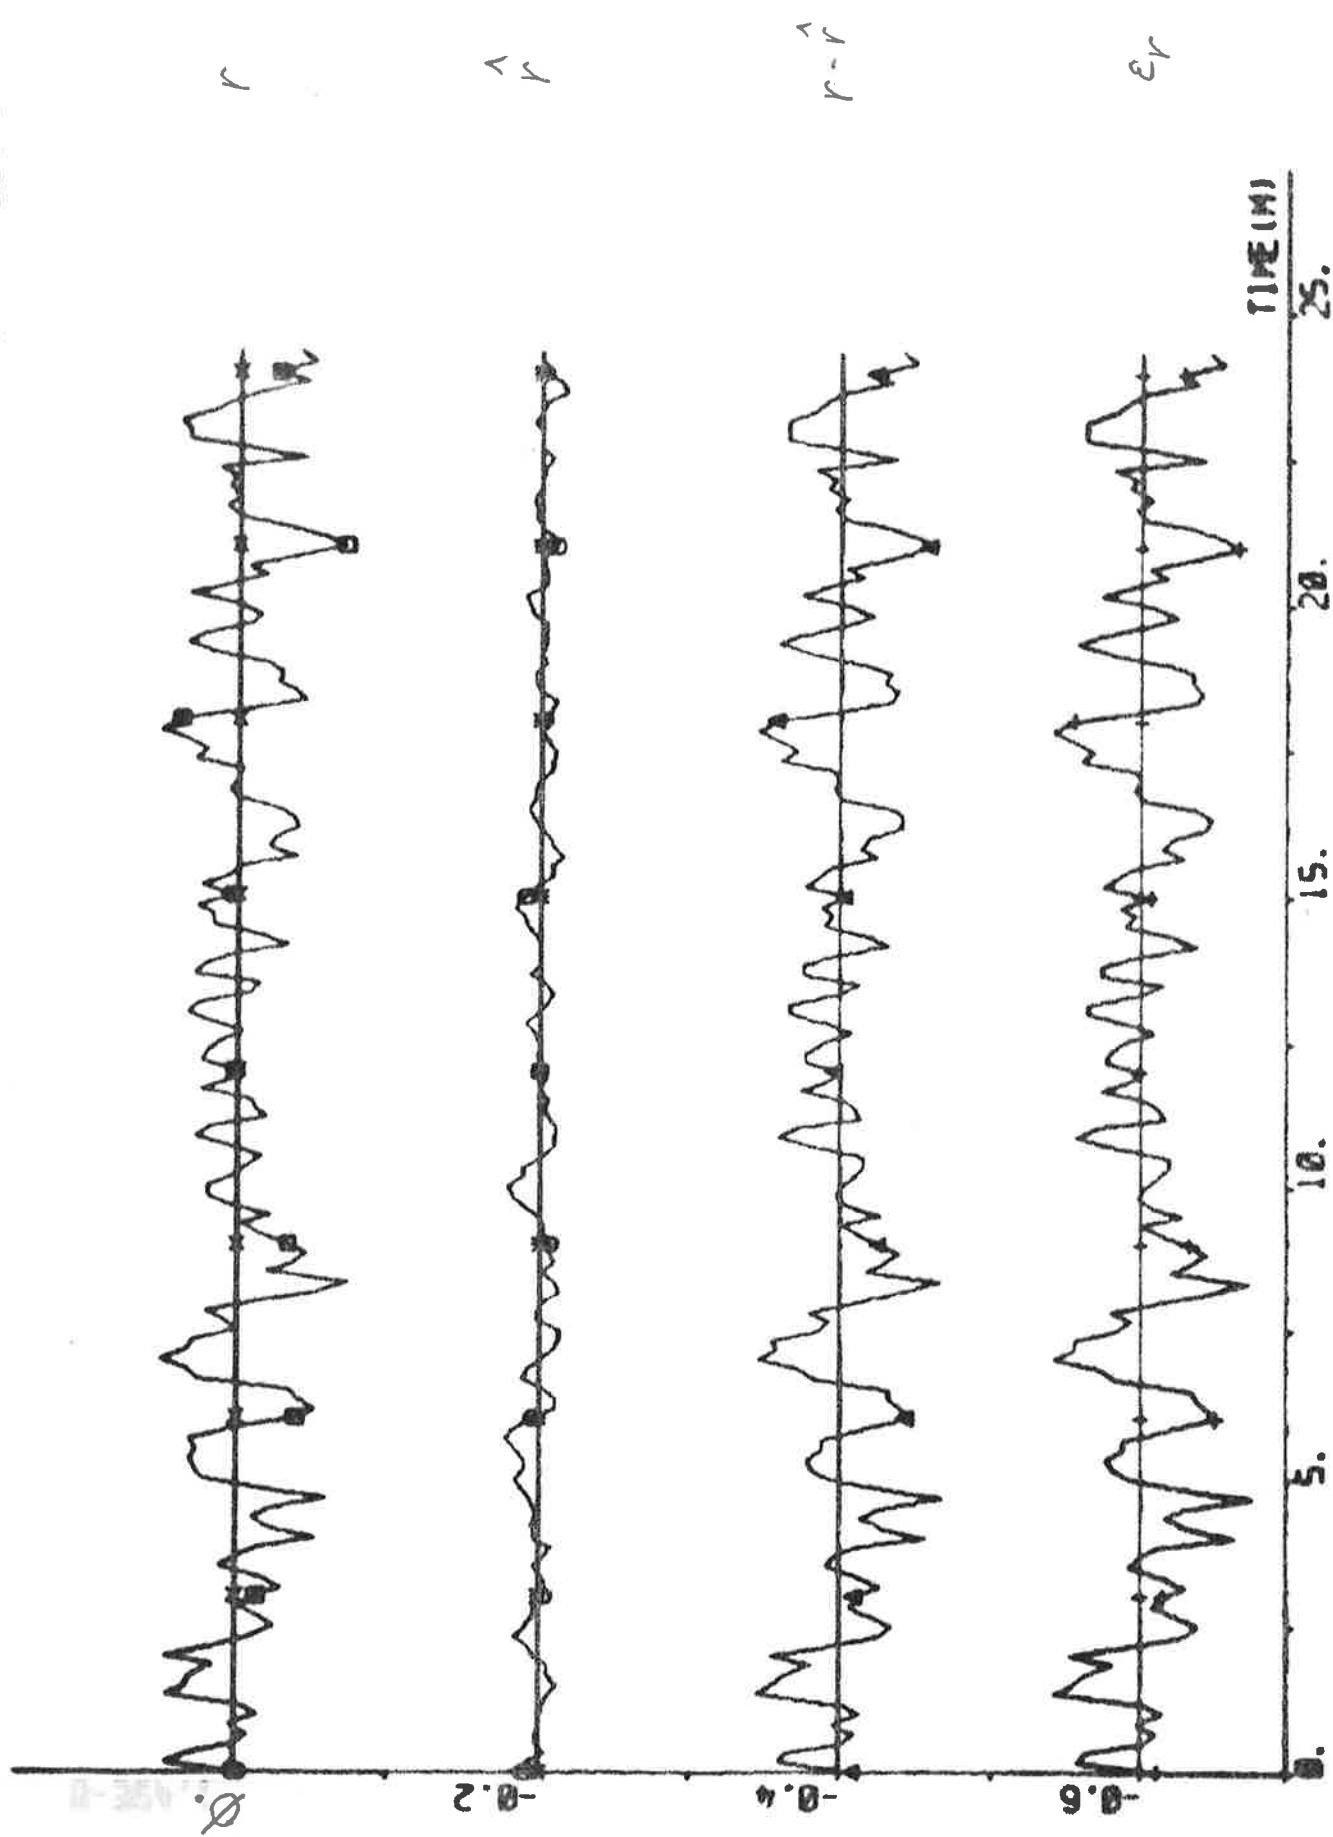


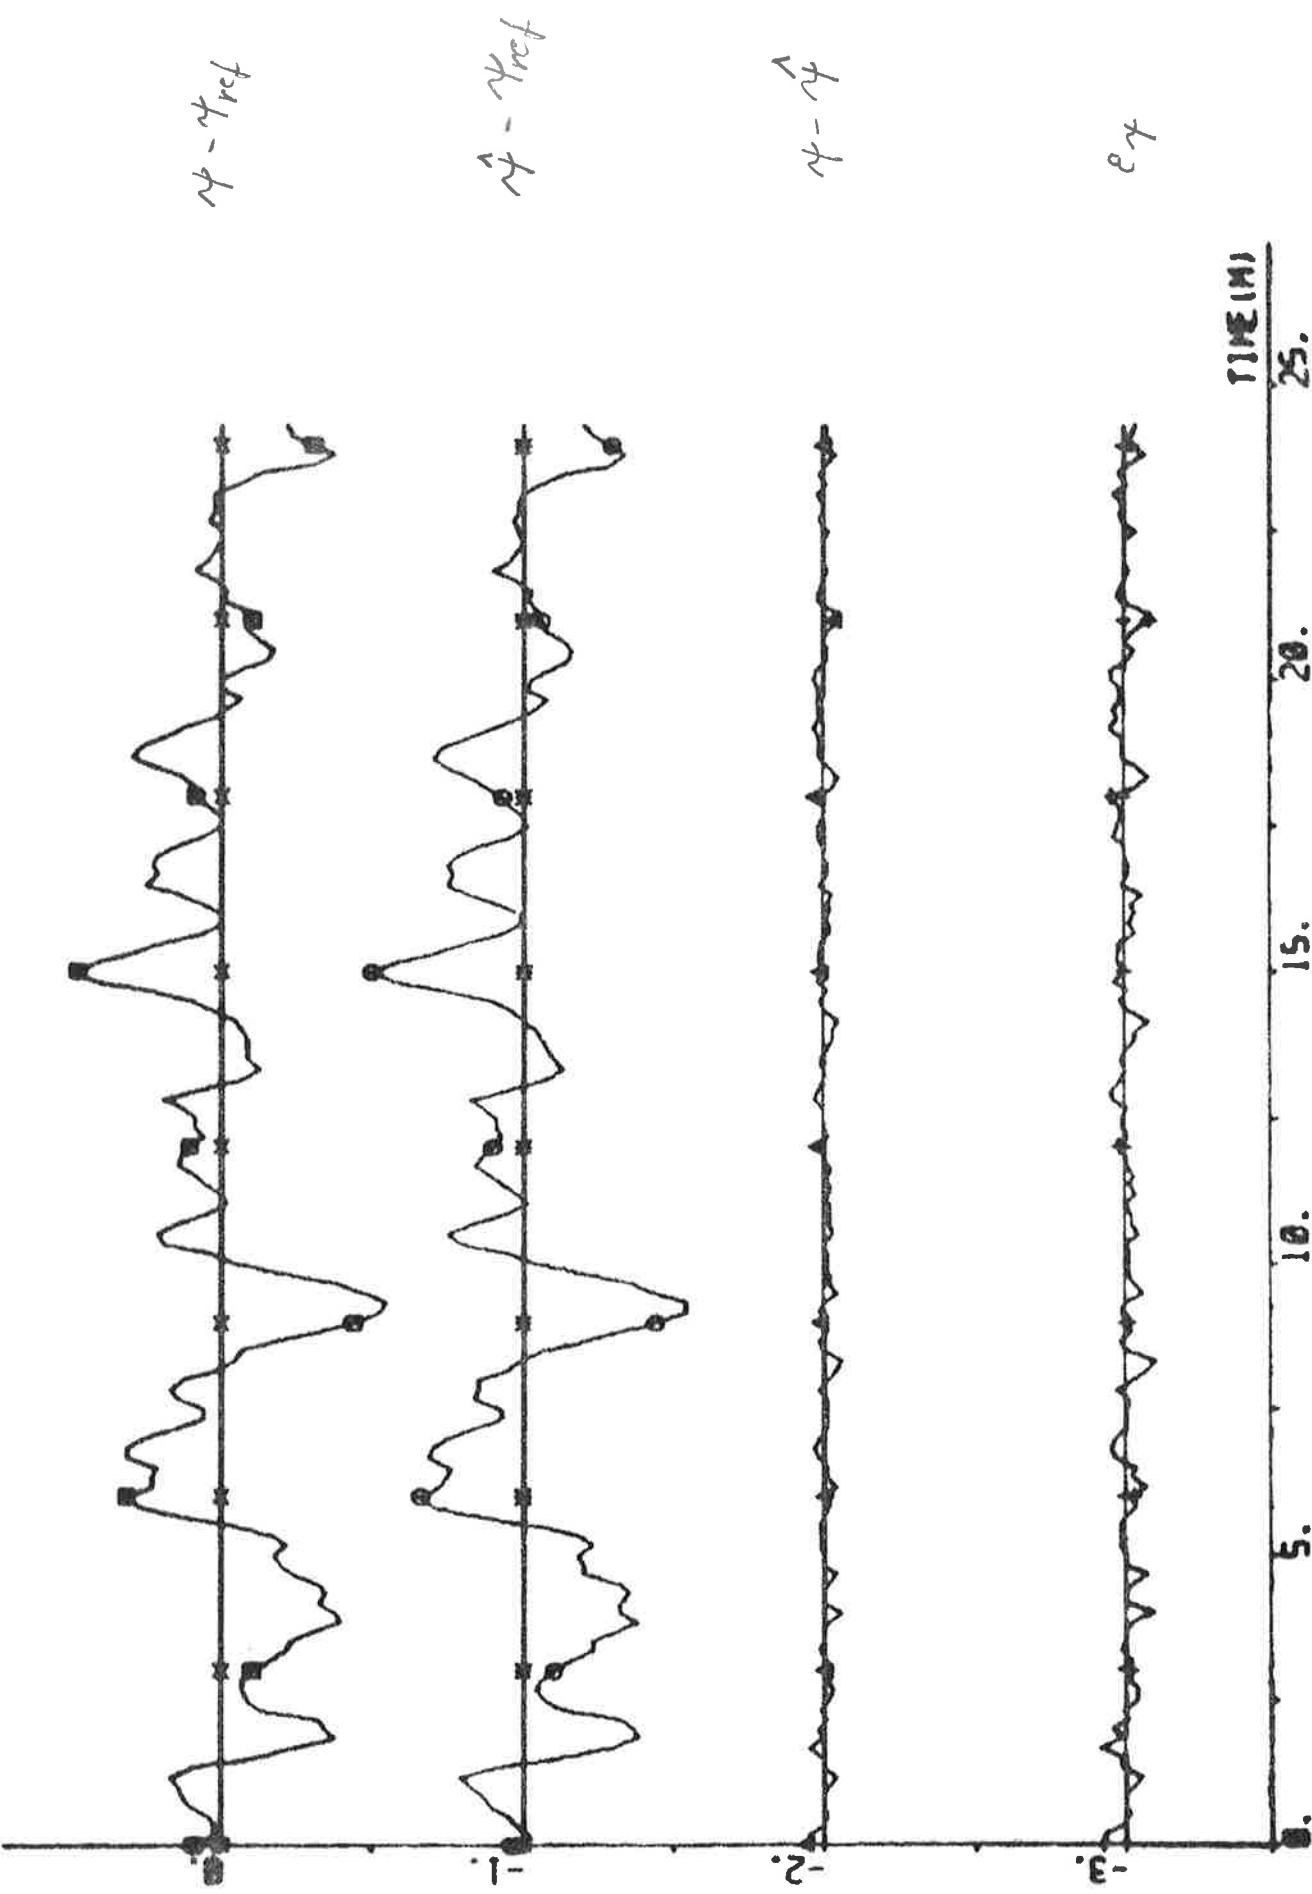

PL01 0222P1(1)-0222P1(2) 0222P1(3) ERRI 00 020 040 -68 16 - DEC

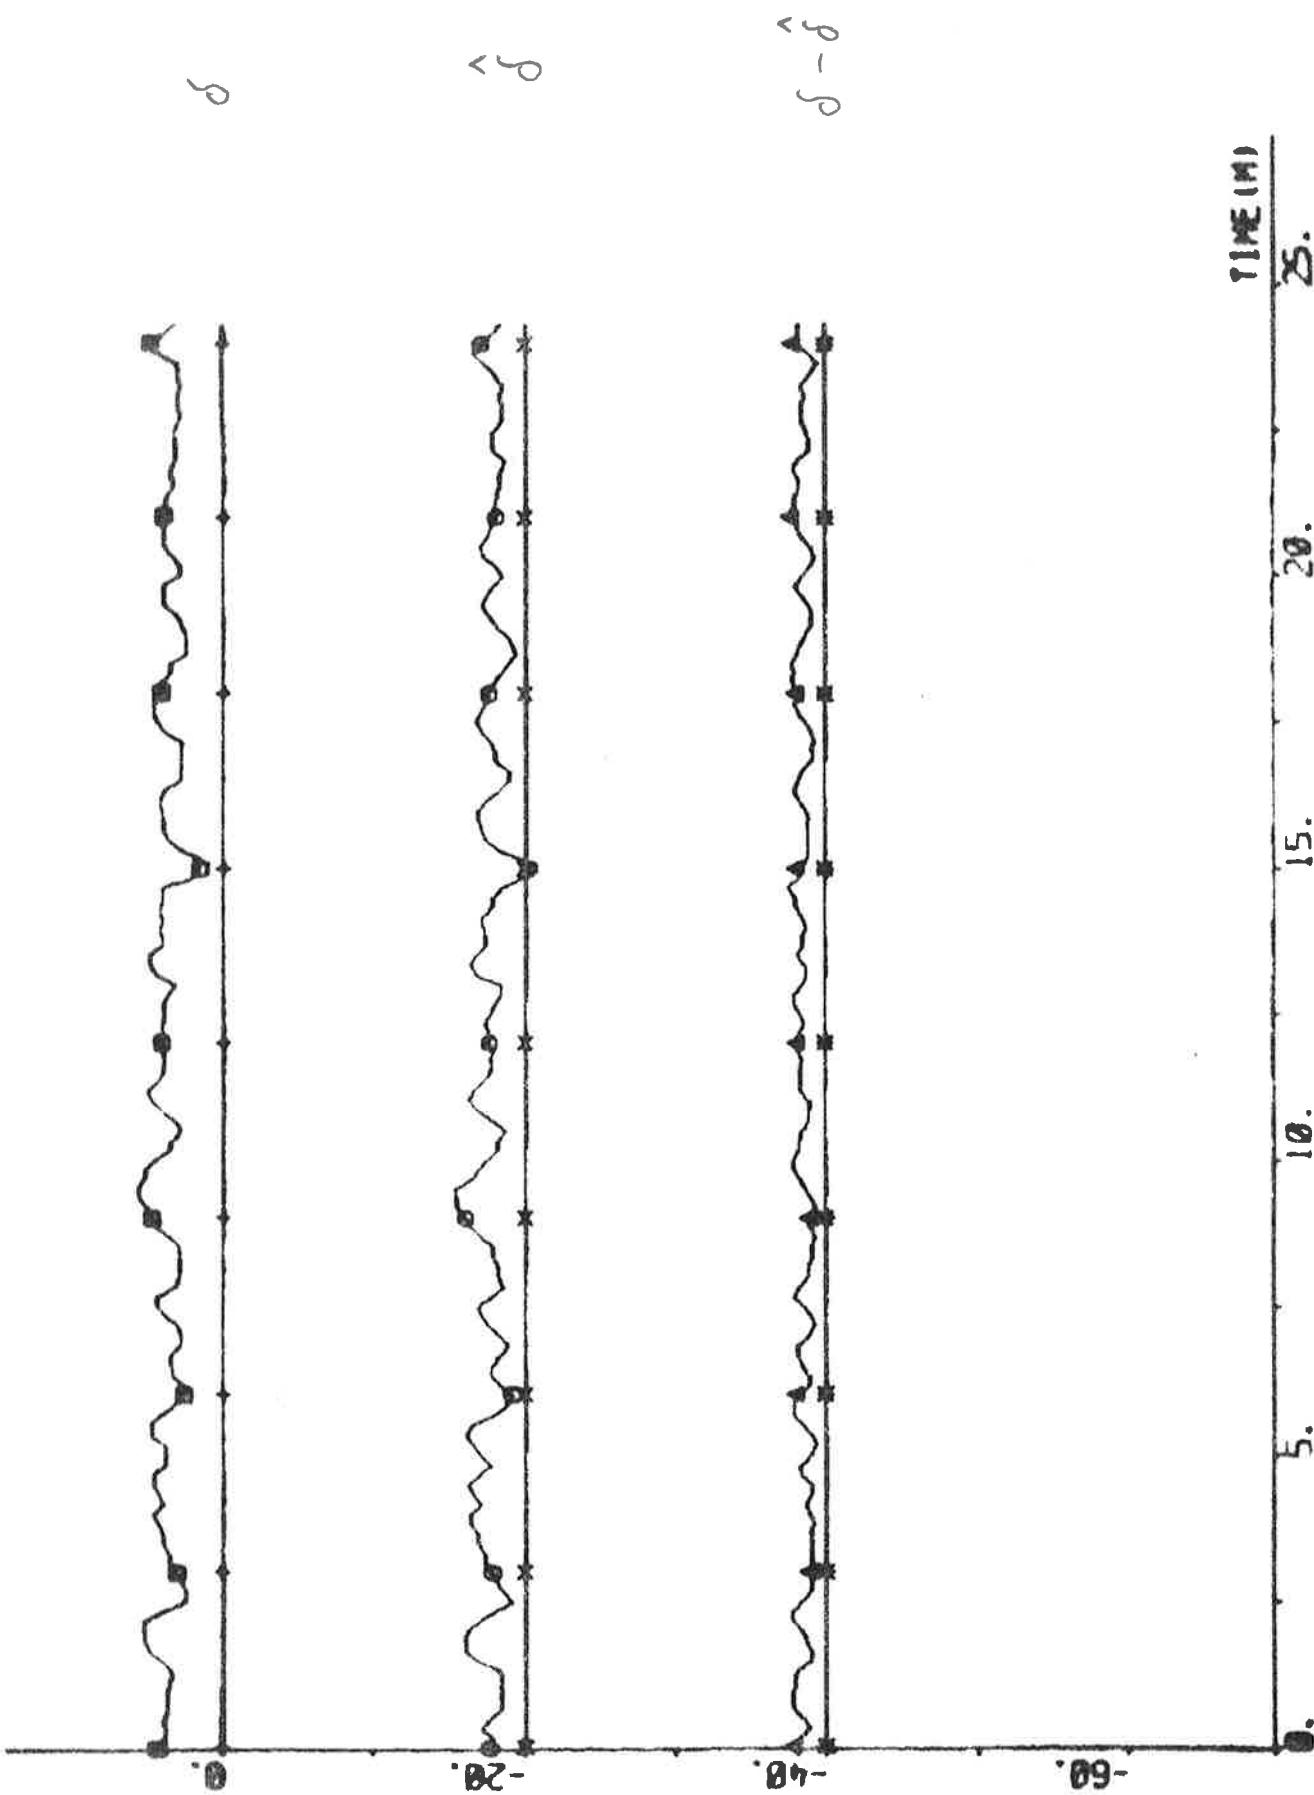

PLOT #222P2(4) #222P2(3) #222P2(1) #222P2(5) 08 02 04 -0.5 1.6

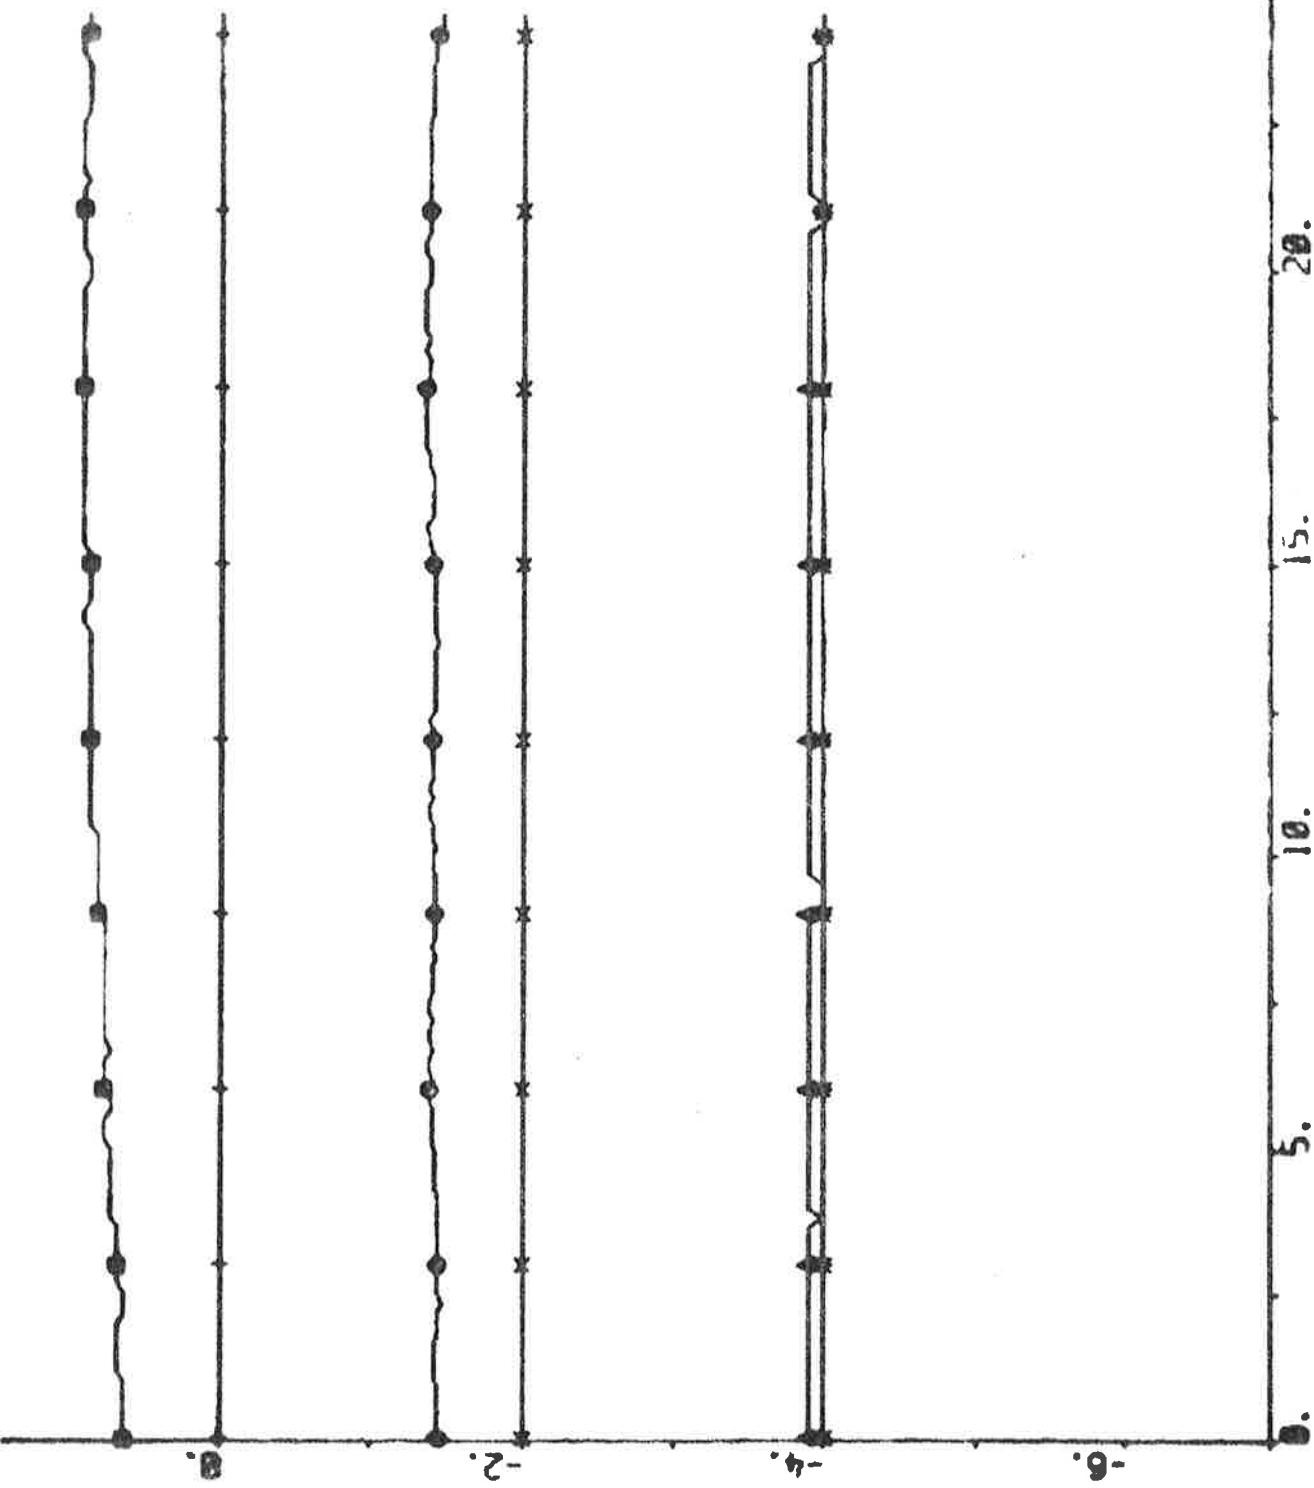

296



EXPERIMENT A23

Date	1976-04-25	Forward draught	8.5 m
Time	13.28	Aft draught	12.5 m
Duration	25 min	Wind direction	SE (1; see App. A)
Position	S 02°02' W 09°33'	Wind velocity	13 m/s (strong breeze)
ψ_{ref}	141 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter

The sway velocity v_1 was not used by the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
 Ts = 10 s V0 = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.24 \\ 6.33 \\ 4.12 \\ -3.37 \\ 0.50 \\ 0.12 \\ -1.82 \\ 37.53 \end{bmatrix} \quad P = \begin{bmatrix} 6.02 & & & & & & & \\ -6.95 & 13.83 & & & & & & \\ -0.65 & -7.97 & 15.99 & & & & & \\ 1.79 & 0.91 & -7.59 & 5.45 & & & & \\ 0.01 & -0.32 & 0.46 & -0.14 & 0.04 & & & \\ 0.02 & -0.02 & -0.15 & 0.18 & 0.00 & 0.03 & & \\ -3.79 & 3.37 & 1.52 & -0.74 & -0.03 & -0.07 & 6.81 & \\ -41.09 & 26.99 & 19.96 & 1.18 & -0.25 & -1.28 & 112.93 & 2271.61 \end{bmatrix}$$


$$a_1 + a_2 + a_3 + a_4 = -0.16$$

$$\hat{\delta}_0 = 1.6 \text{ deg} \quad \hat{d}_v = - \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$


Statistics (mean value and standard deviation)

PLOT #23P1(1)-#23P1(8) HP #23P1(10) #23P1(115) #23P1(116)

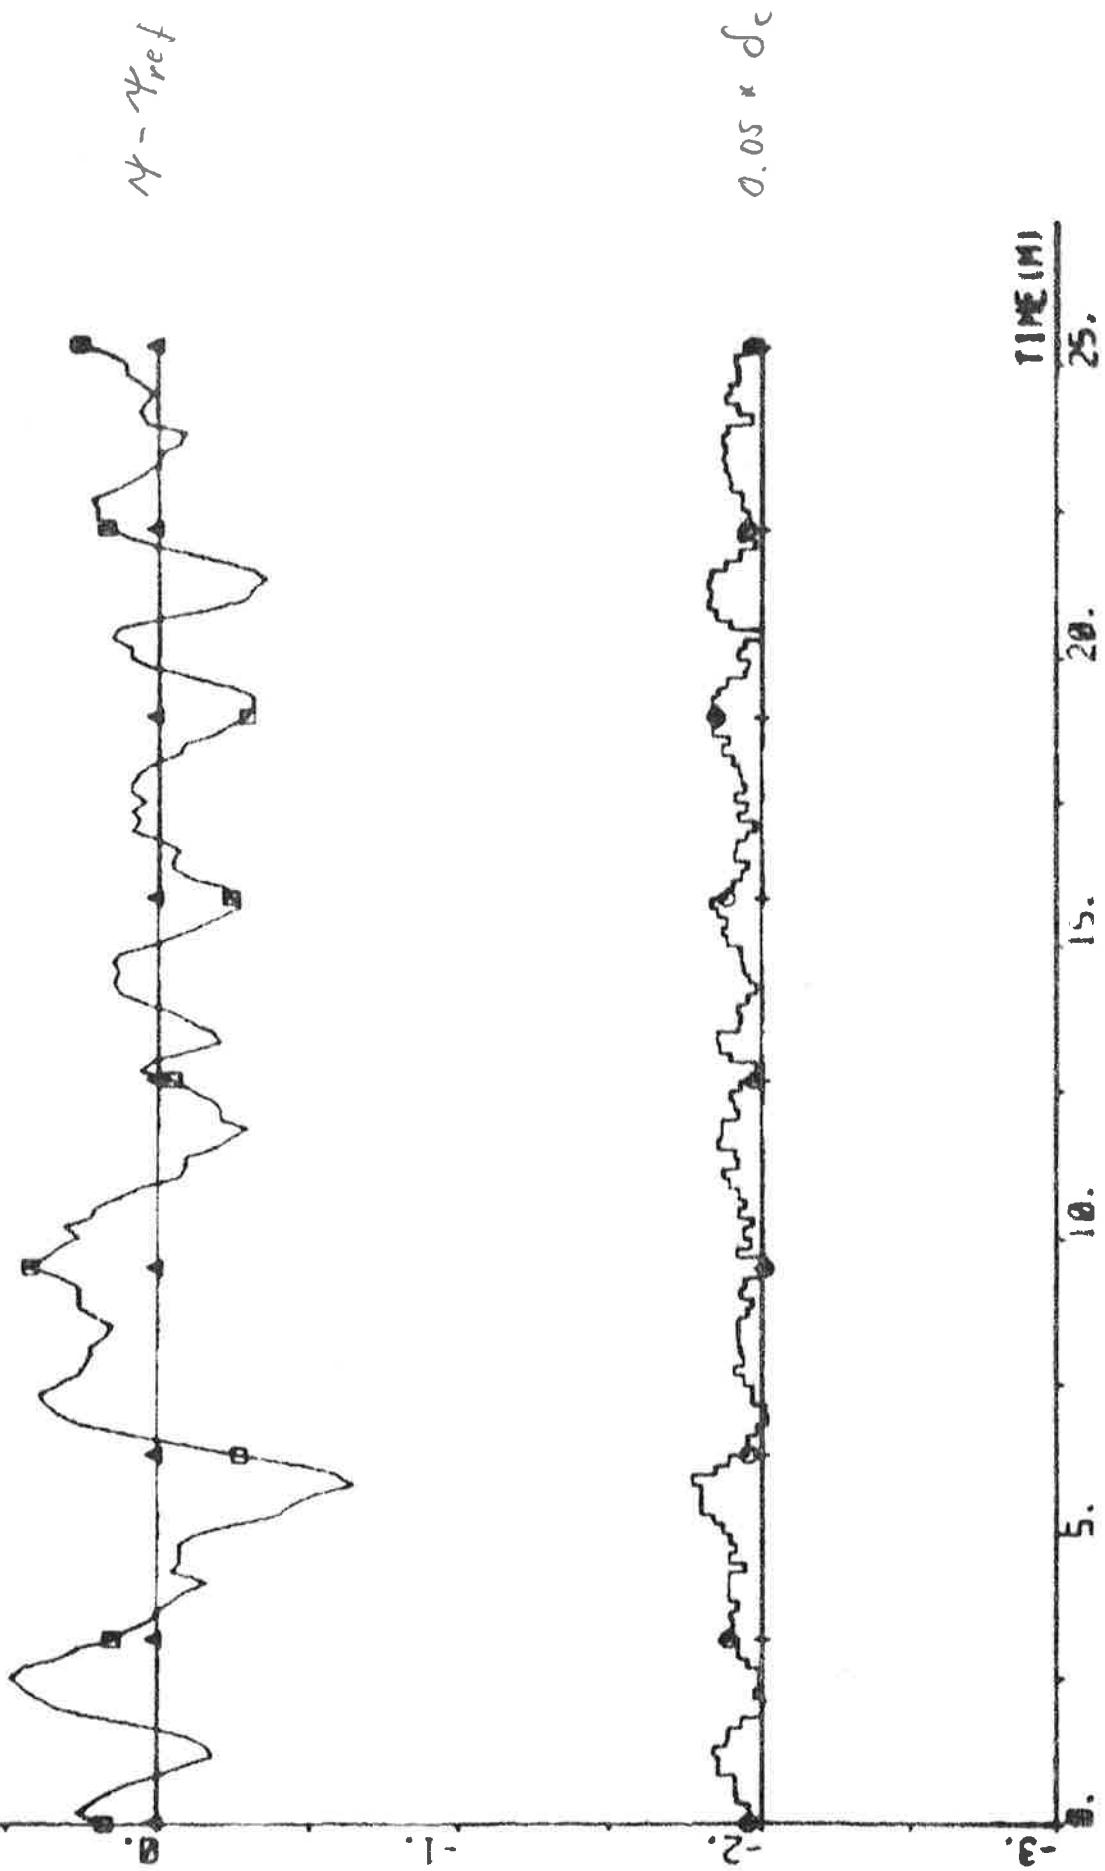


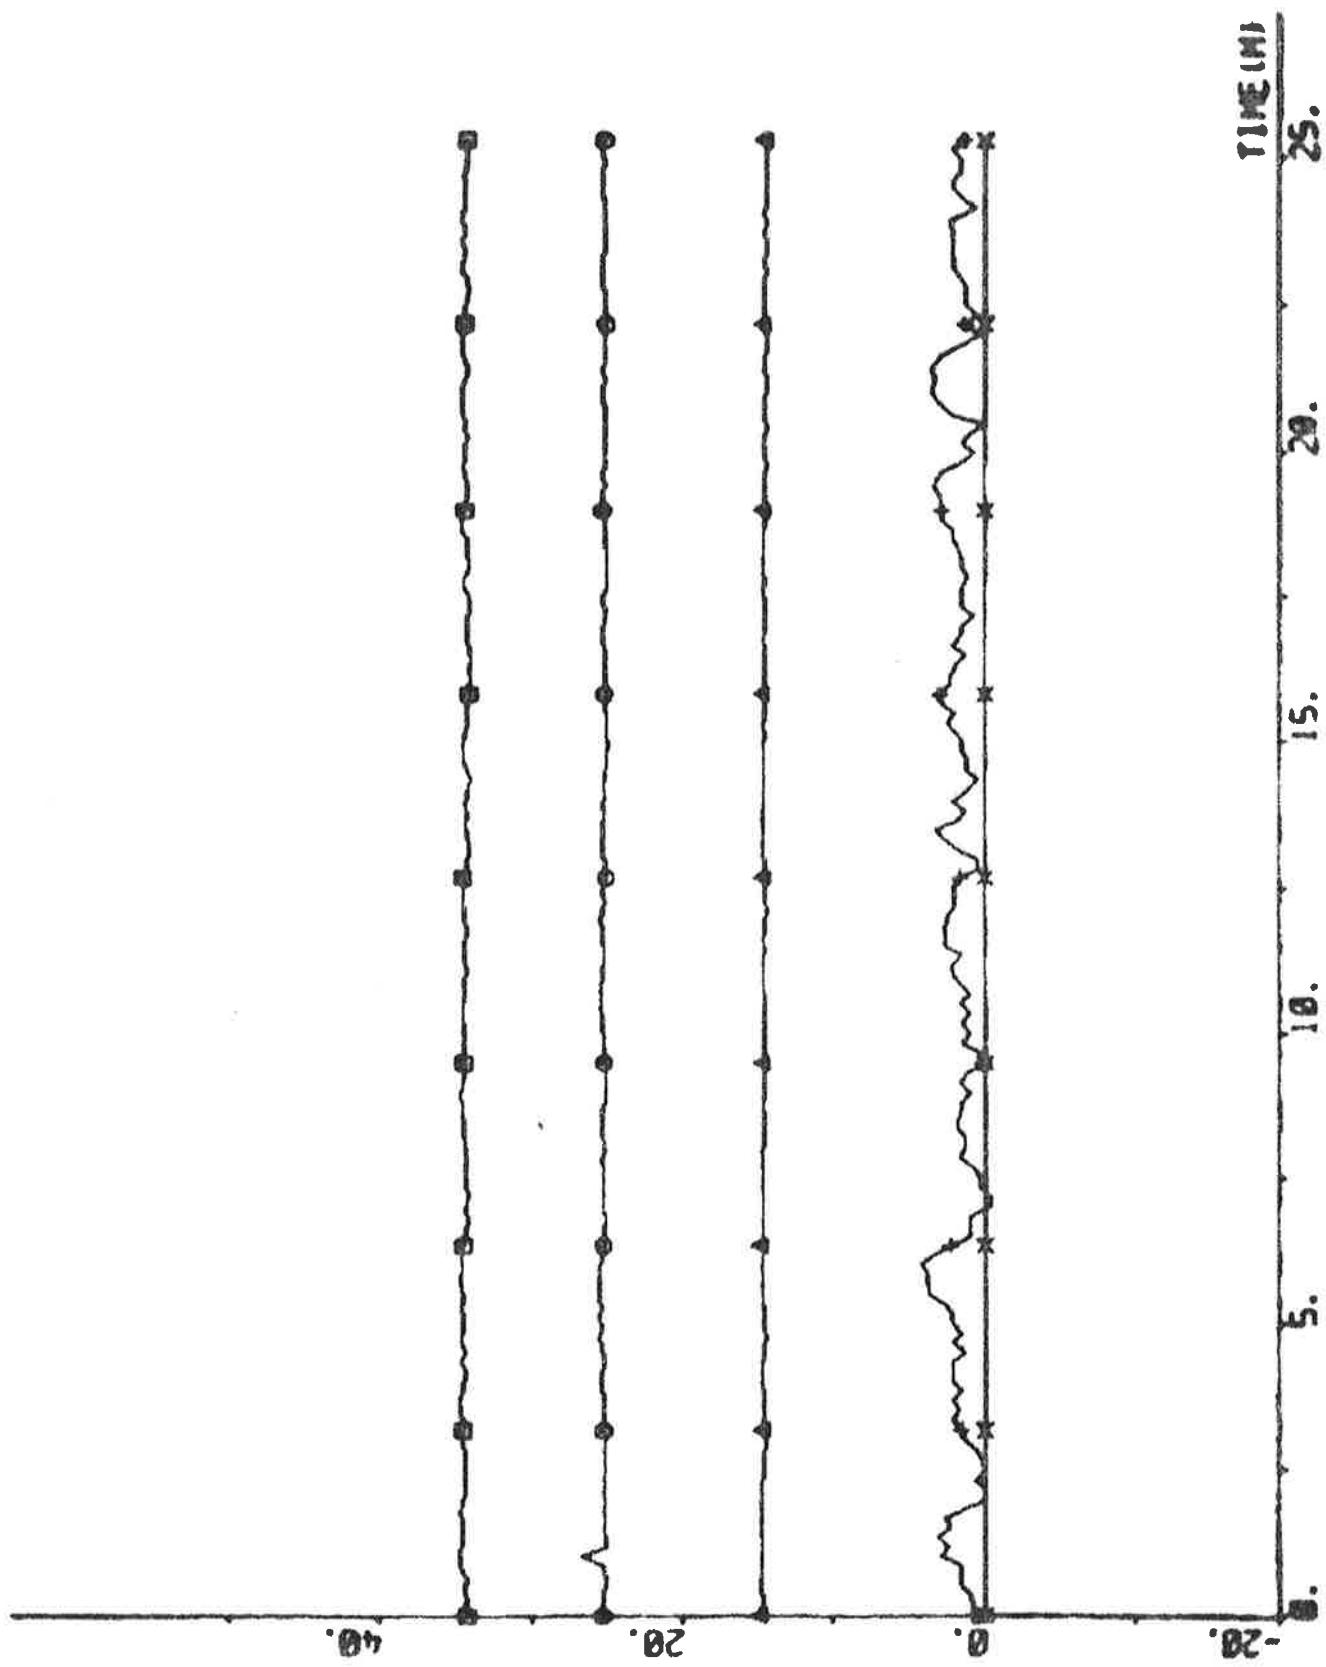

MOT MOT21 (1) + MOT22 (1) MOT21 (2) MOT22 (2) - 3.4-3.6 • GOUTS

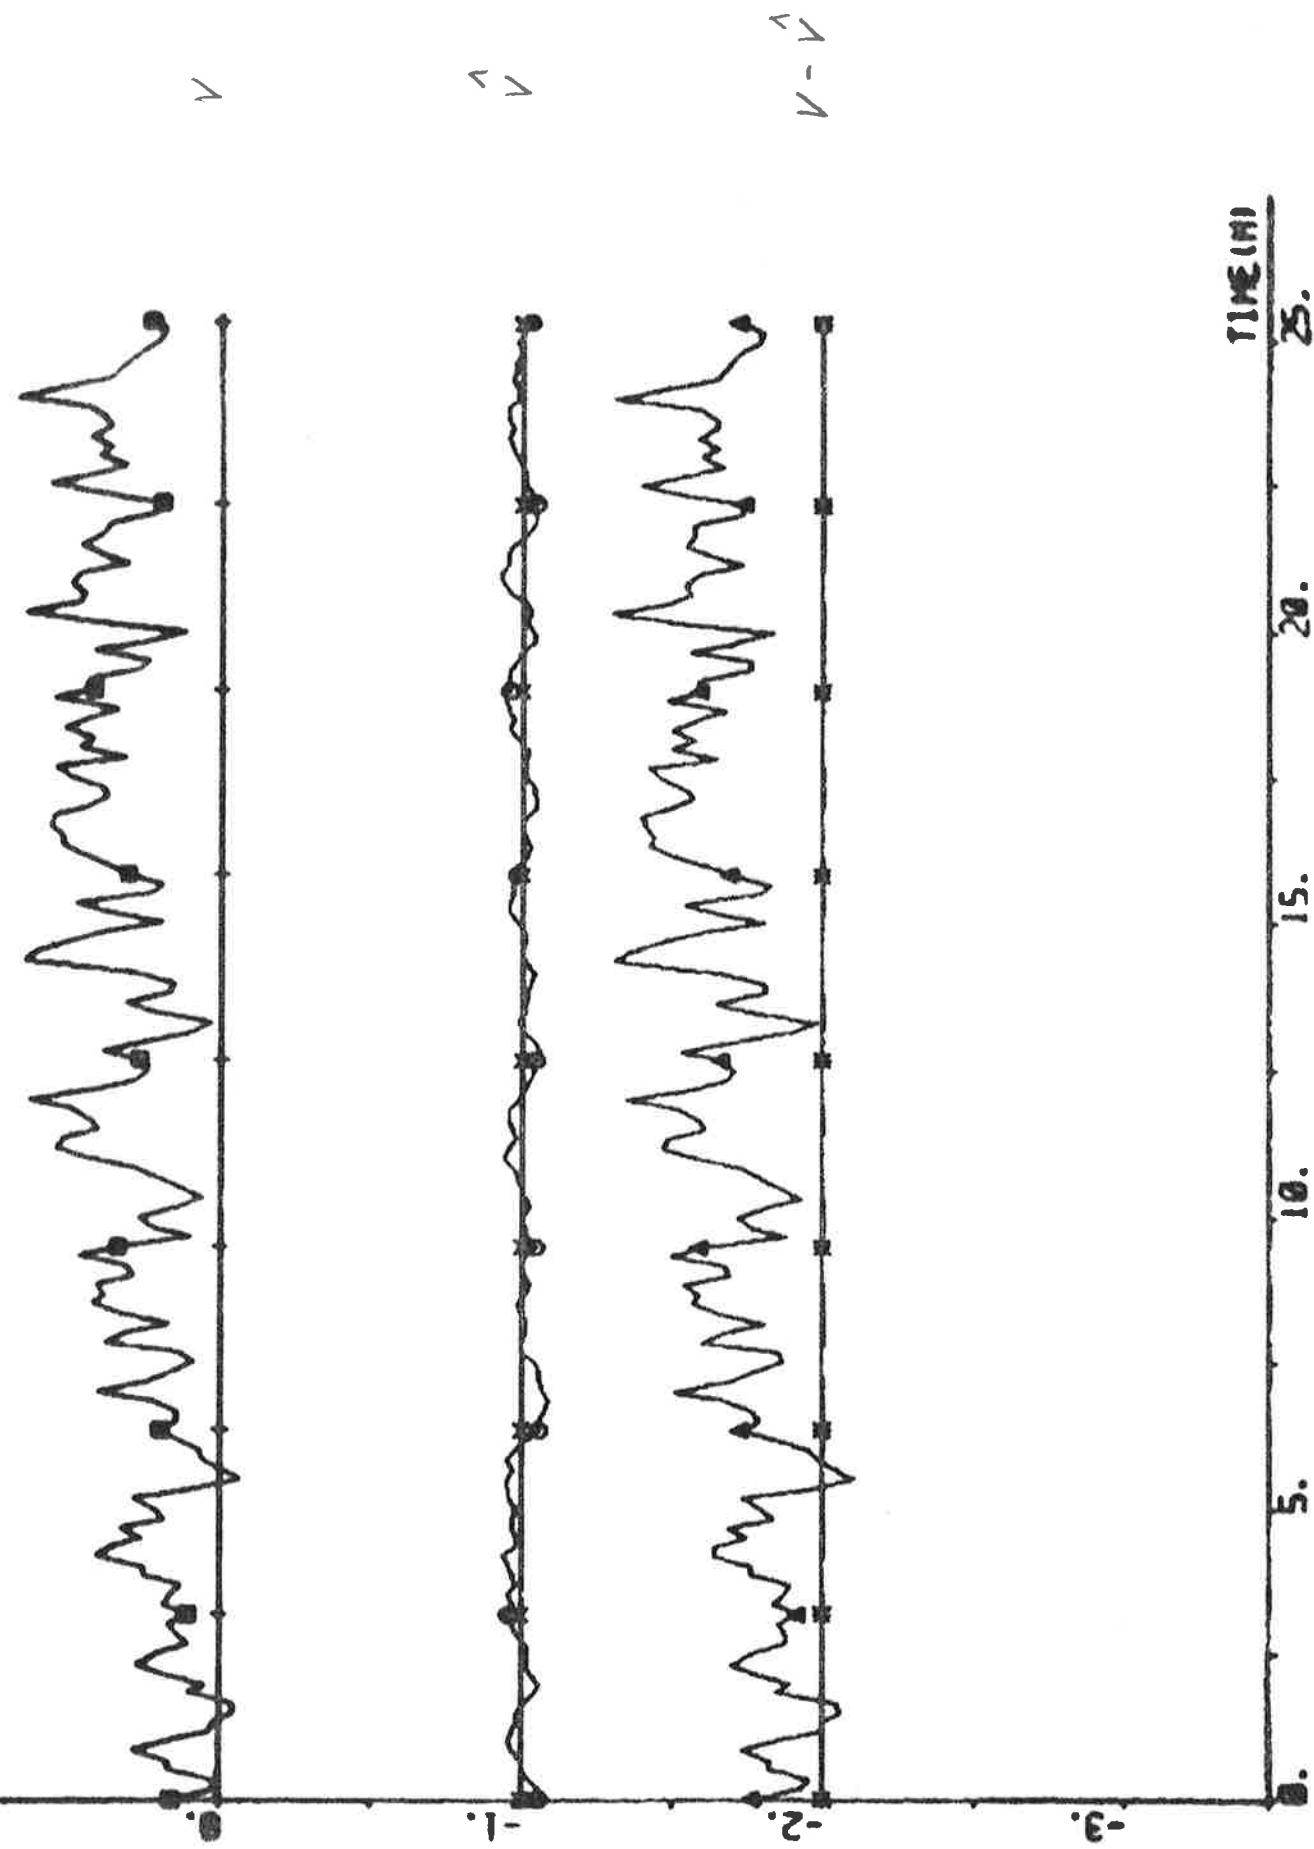

RL01 R231(1) - A231(4) R231(5) E02 00 01 02 03 04 05 06 07 08 09 00

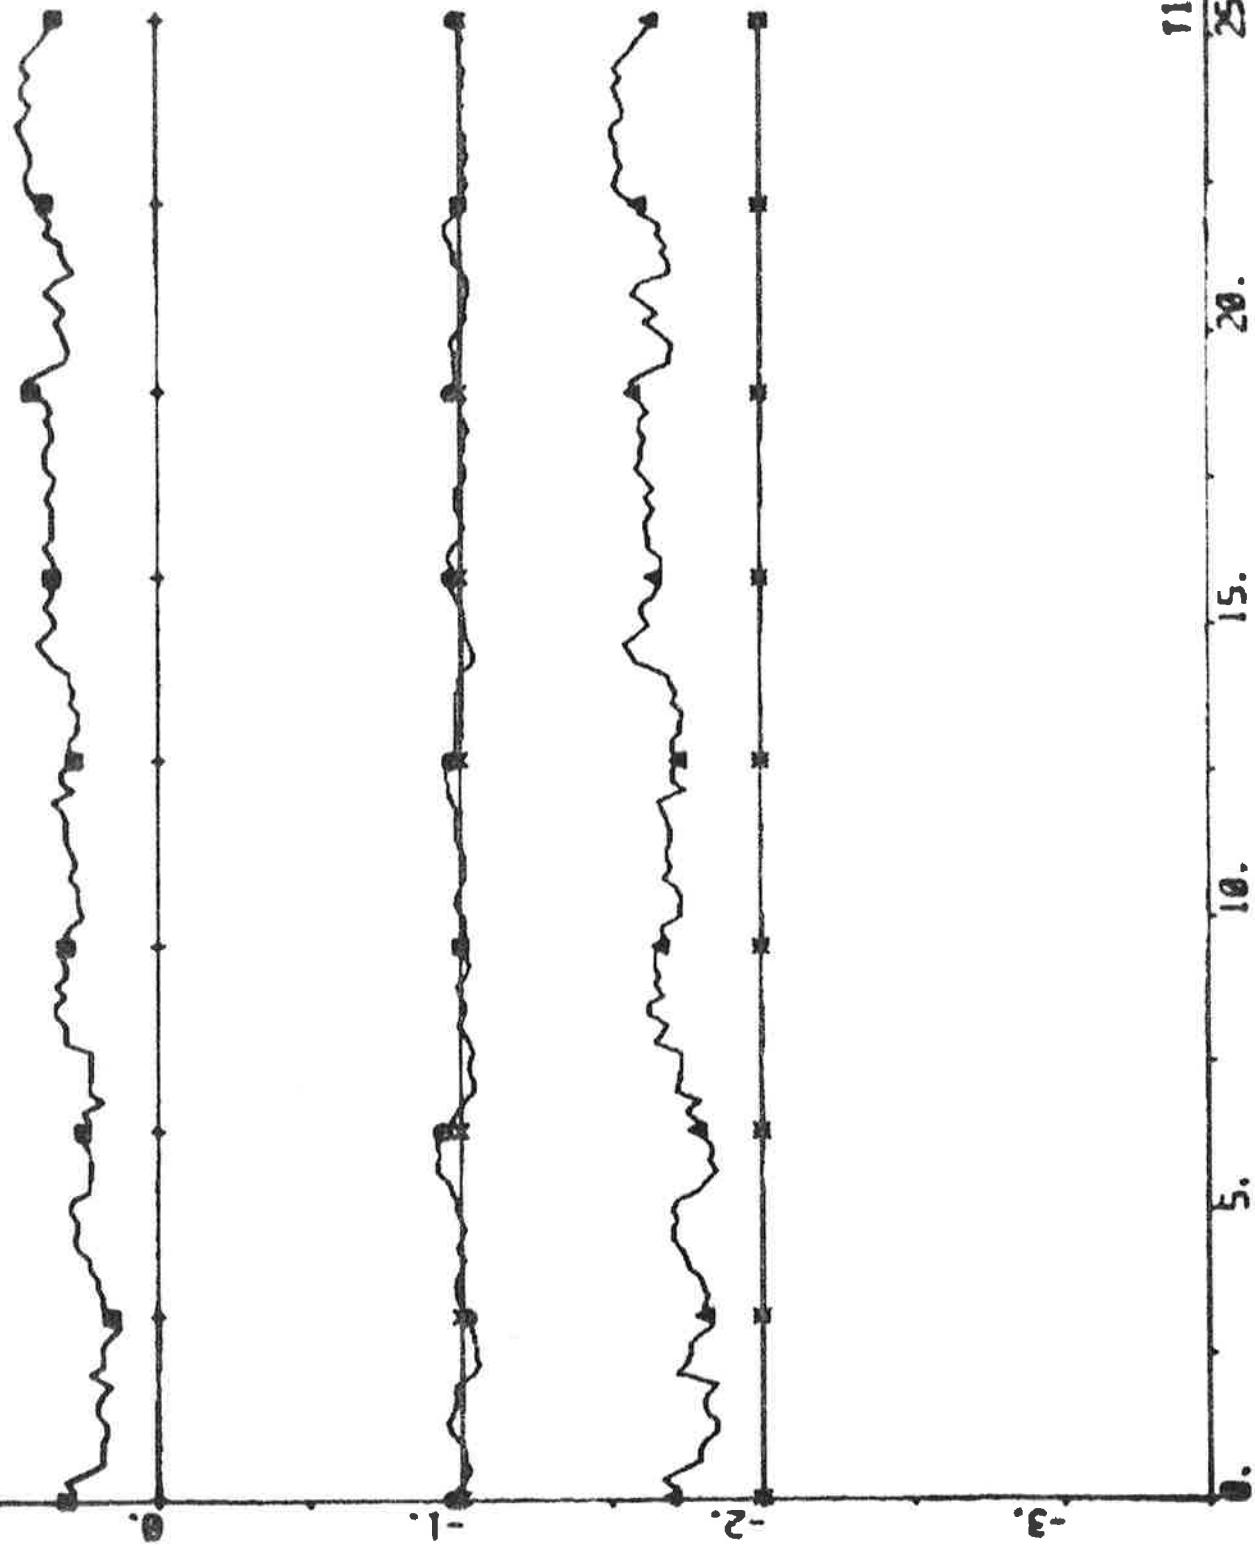

TIME

20.

15.


10.

5.


TIME

25.



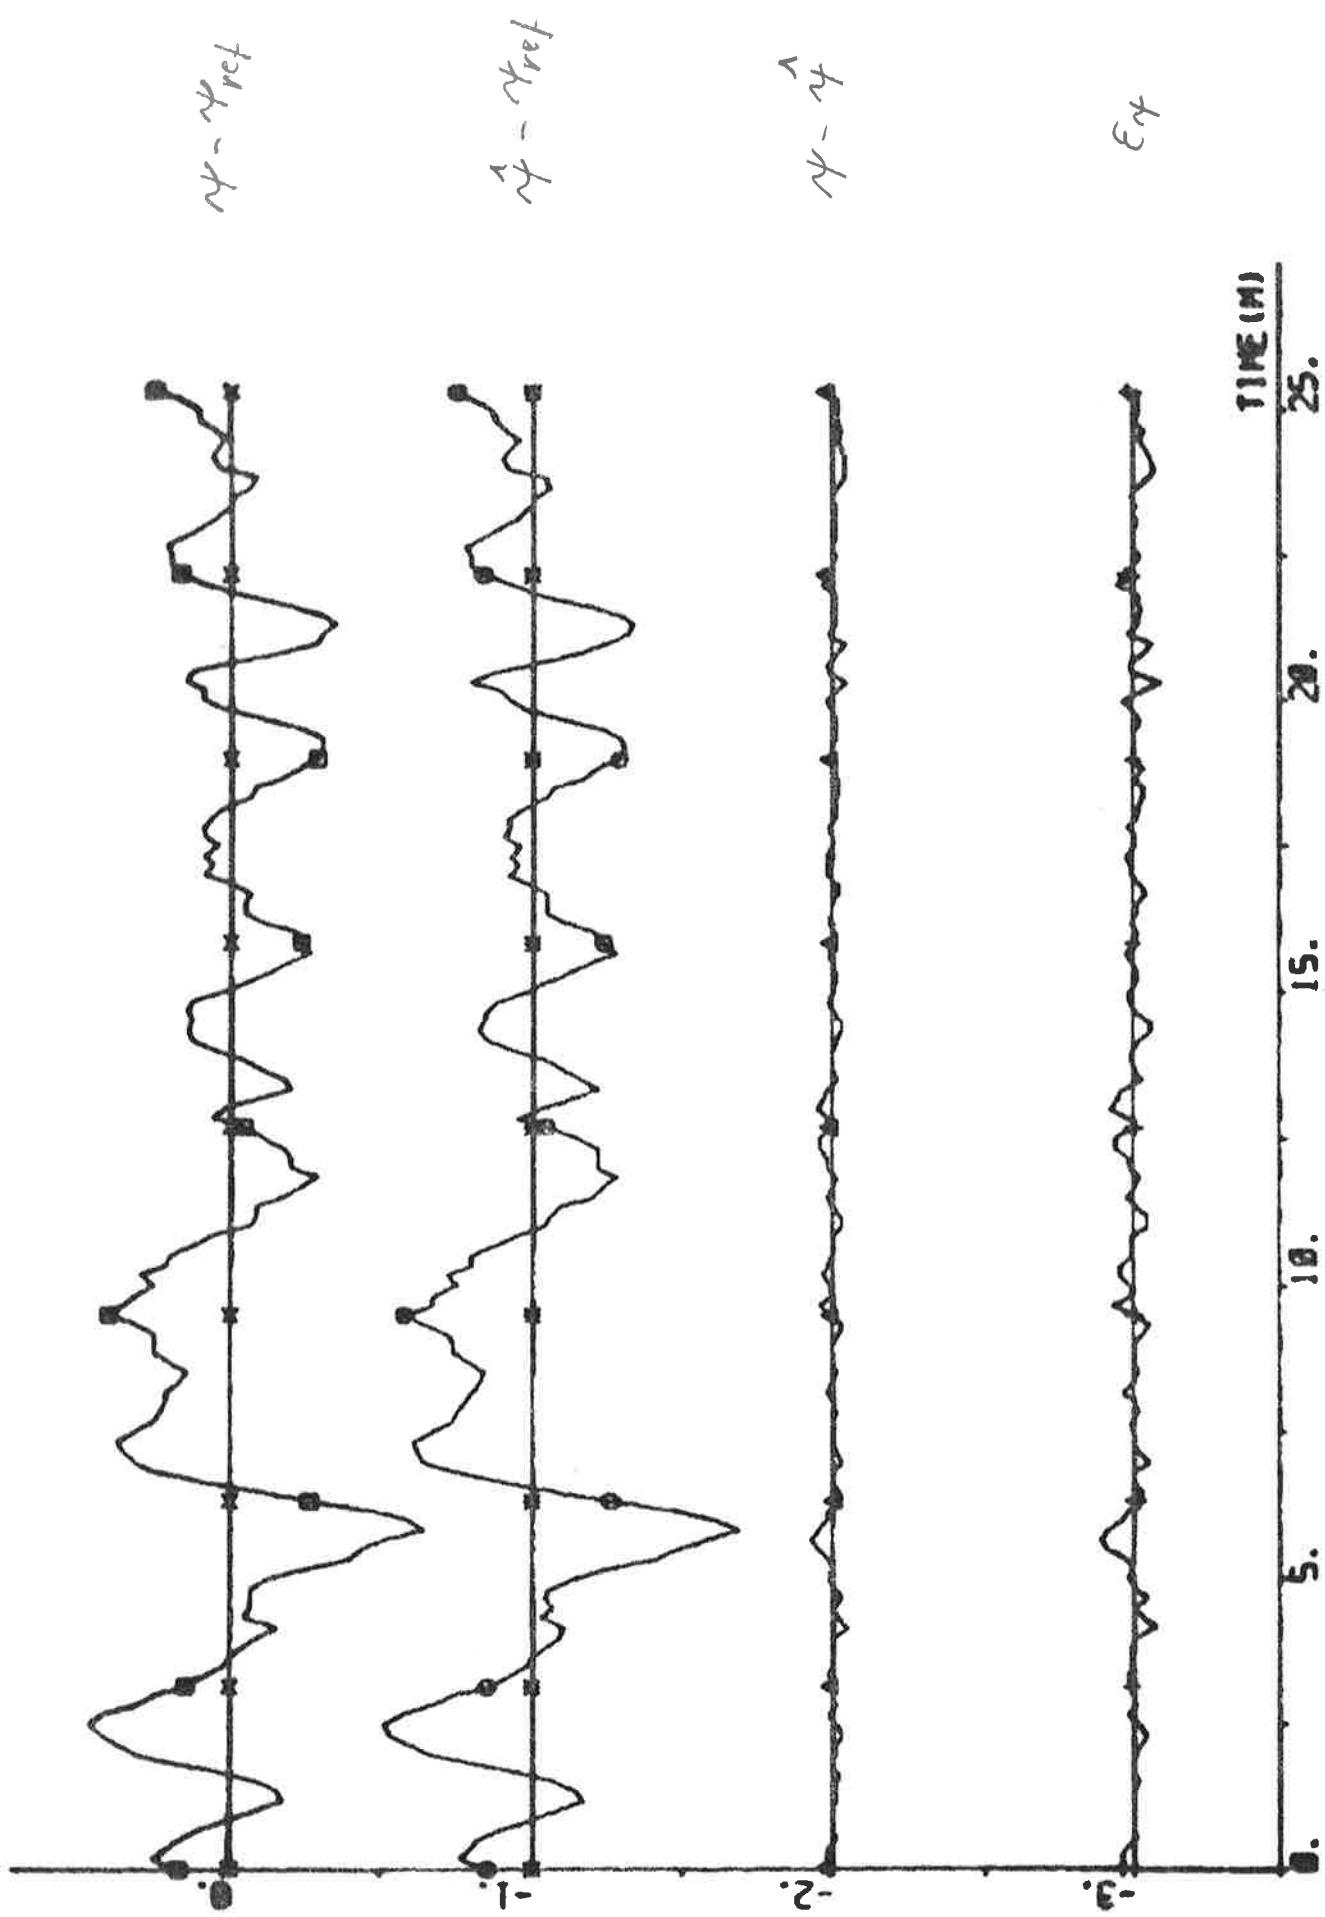

PL07 M23P1(1) -M23P1(2) M23P1(3) M23P1(4)

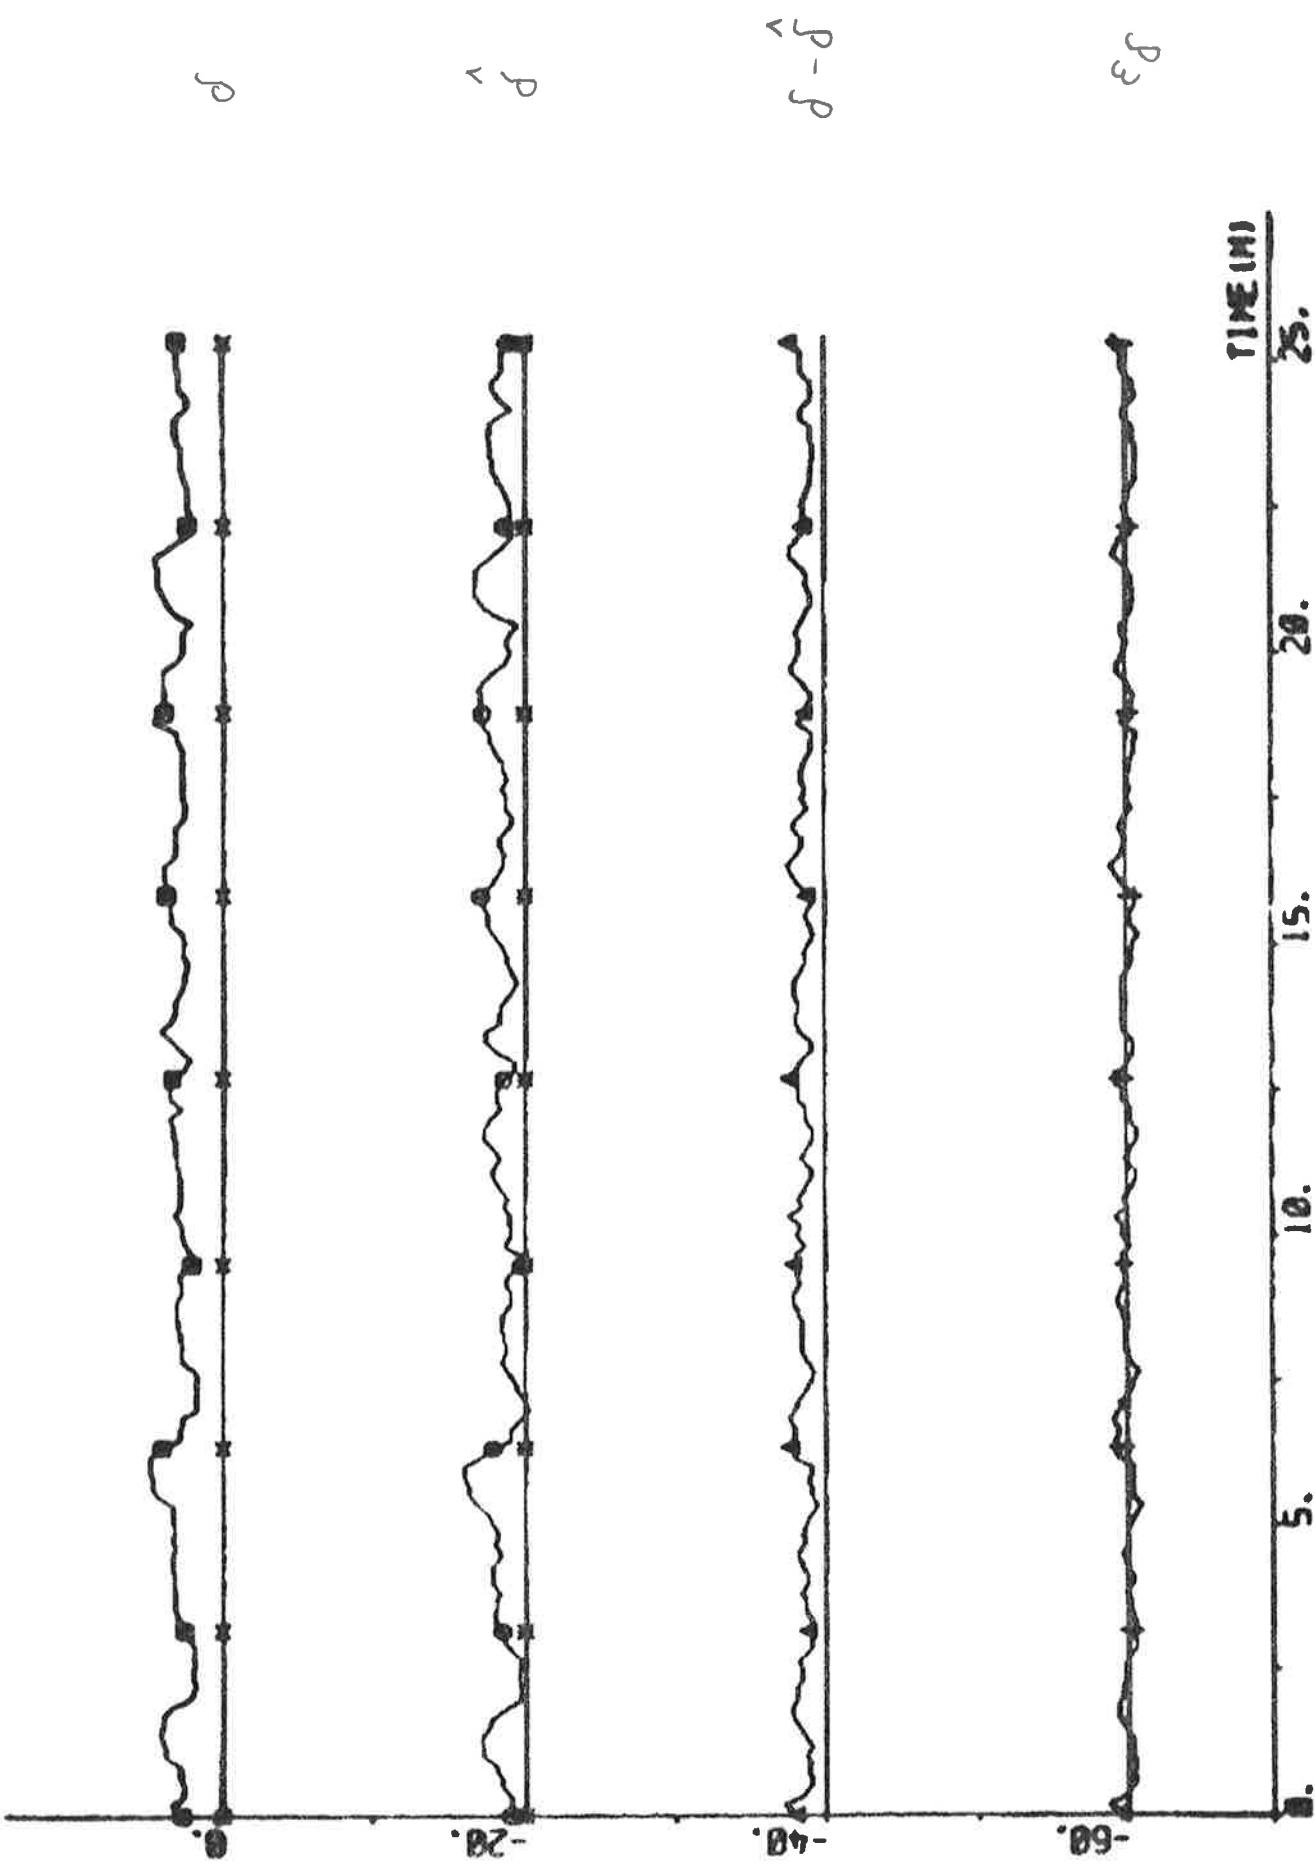



$$\text{deg} \rightarrow 0.5 * d^o$$




$$100 \times \frac{1}{dr} deg/s$$



$$0.5 + dd^{\text{deg}}$$



111E(1)(1) 25.
5. 10. 15. 20. 25.

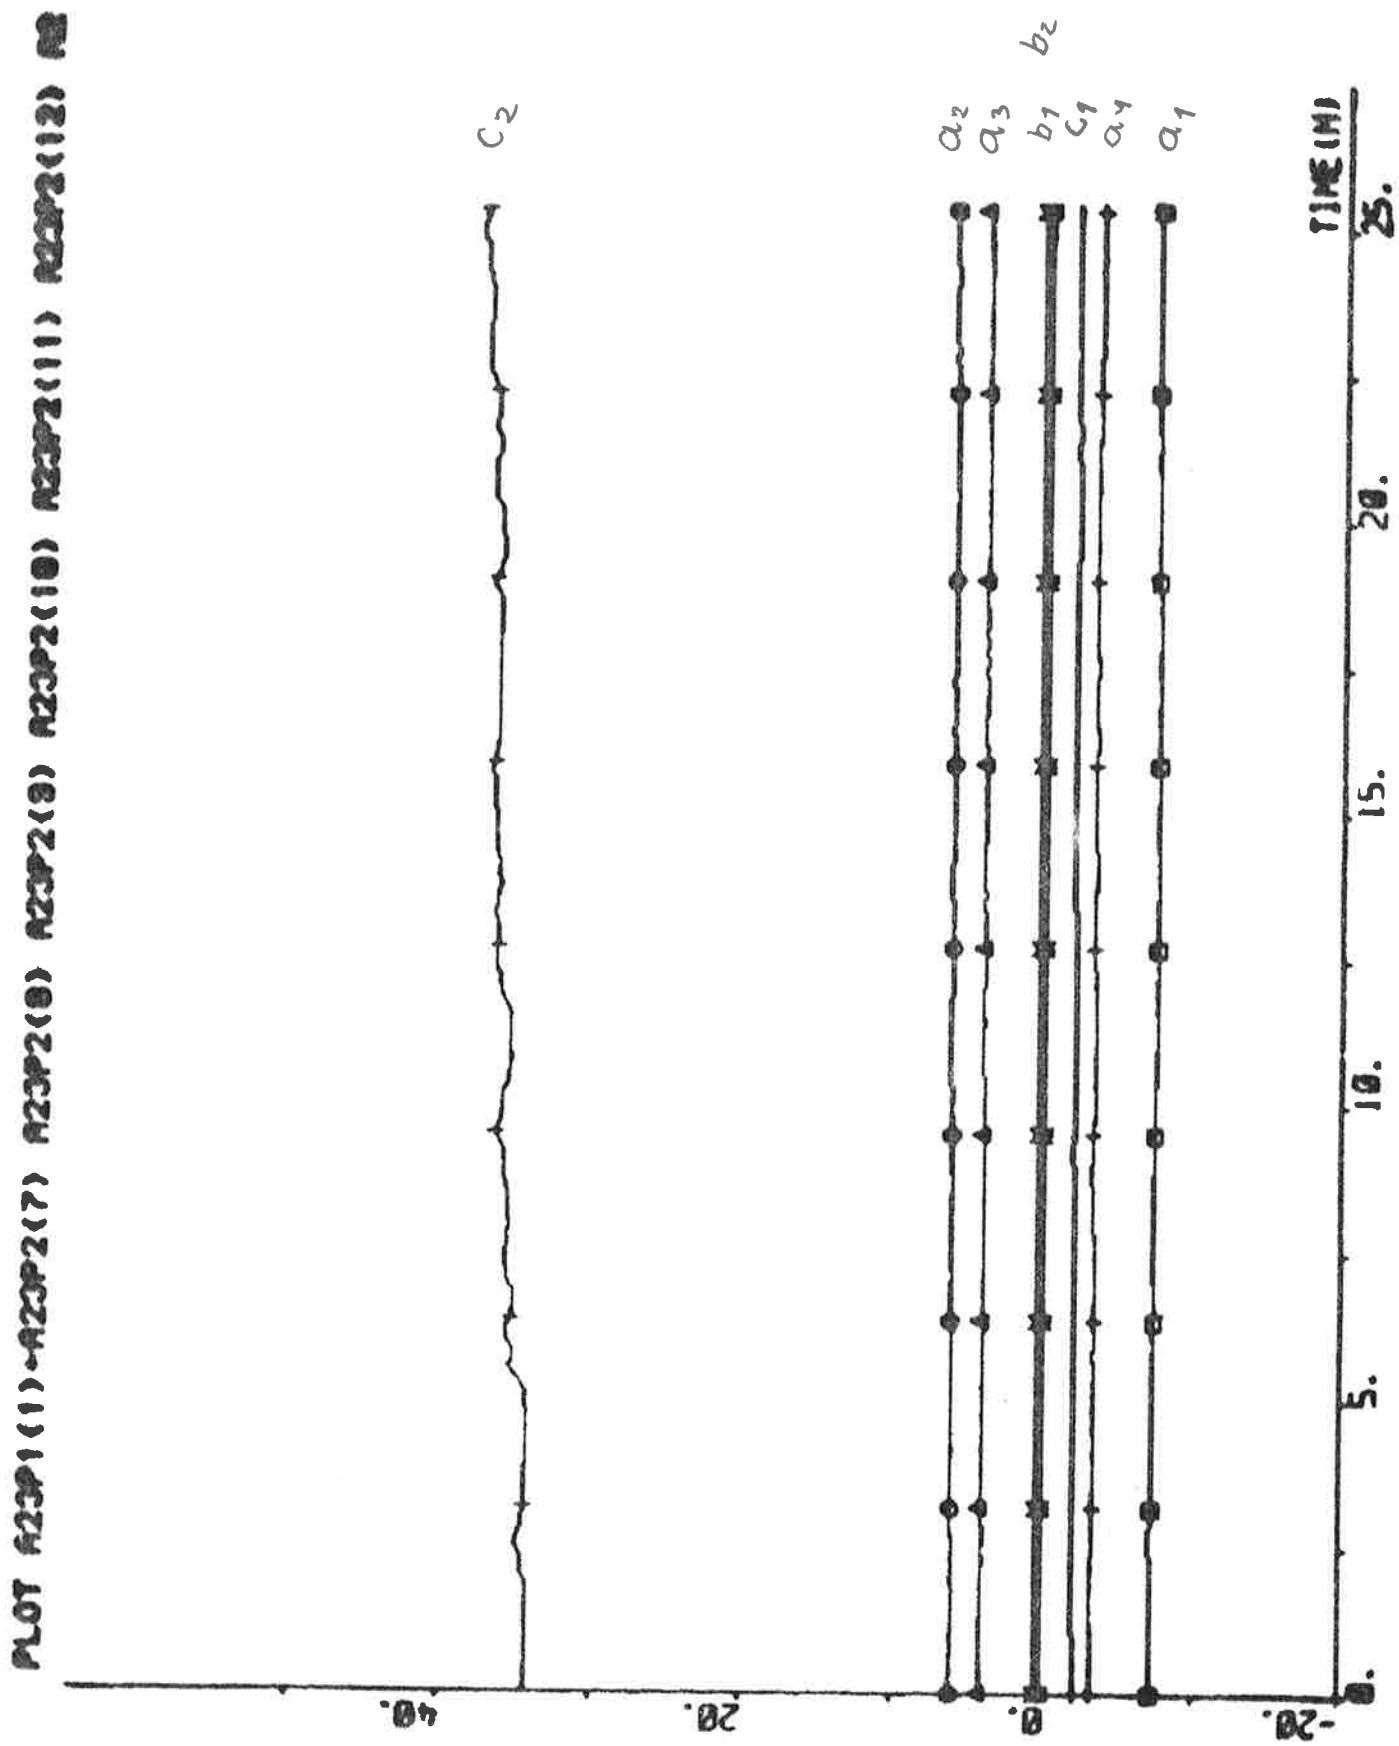

EXPERIMENT A24

Date	1976-04-25	Forward draught	8.5 m
Time	14.30	Aft draught	12.5 m
Duration	25 min	Wind direction	SE (1; see App. A)
Position	S 02°13' W 09°26'	Wind velocity	14 m/s (moderate gale)
ψ_{ref}	141 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter

The yaw rate r was not used by the Kalman filter.

Tuning time before the experiment started: 30 min

NC1 = 1 NC2 = 1 k = 7 q = 0
 T_s = 10 s V_0 = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.40 \\ 7.15 \\ 4.96 \\ -3.79 \\ 0.51 \\ 0.13 \\ -1.76 \\ 40.37 \end{bmatrix} \quad P = \begin{bmatrix} 5.59 \\ -7.19 & 15.43 \\ -1.02 & -8.40 & 18.01 \\ 2.85 & -0.11 & -8.85 & 6.35 \\ -0.12 & -0.32 & 0.74 & -0.30 & 0.07 \\ 0.02 & -0.07 & -0.17 & 0.24 & 0.00 & 0.05 \\ -1.70 & 2.40 & 0.56 & -1.35 & -0.04 & -0.08 & 1.82 \\ 38.35 & -57.33 & -13.04 & 30.46 & -0.15 & 0.43 & 0.22 & 1378.53 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.08$$


$$\hat{\delta}_0 = 1.4 \text{ deg} \quad \hat{d}_v = 0.15 \text{ knots} \quad \hat{d}_r = - \quad \hat{d}_\delta = 1.7 \text{ deg}$$


Statistics (mean value and standard deviation)

NOTE READING (1) - 024115, READING (2) - 024116, READING (3) - 024117

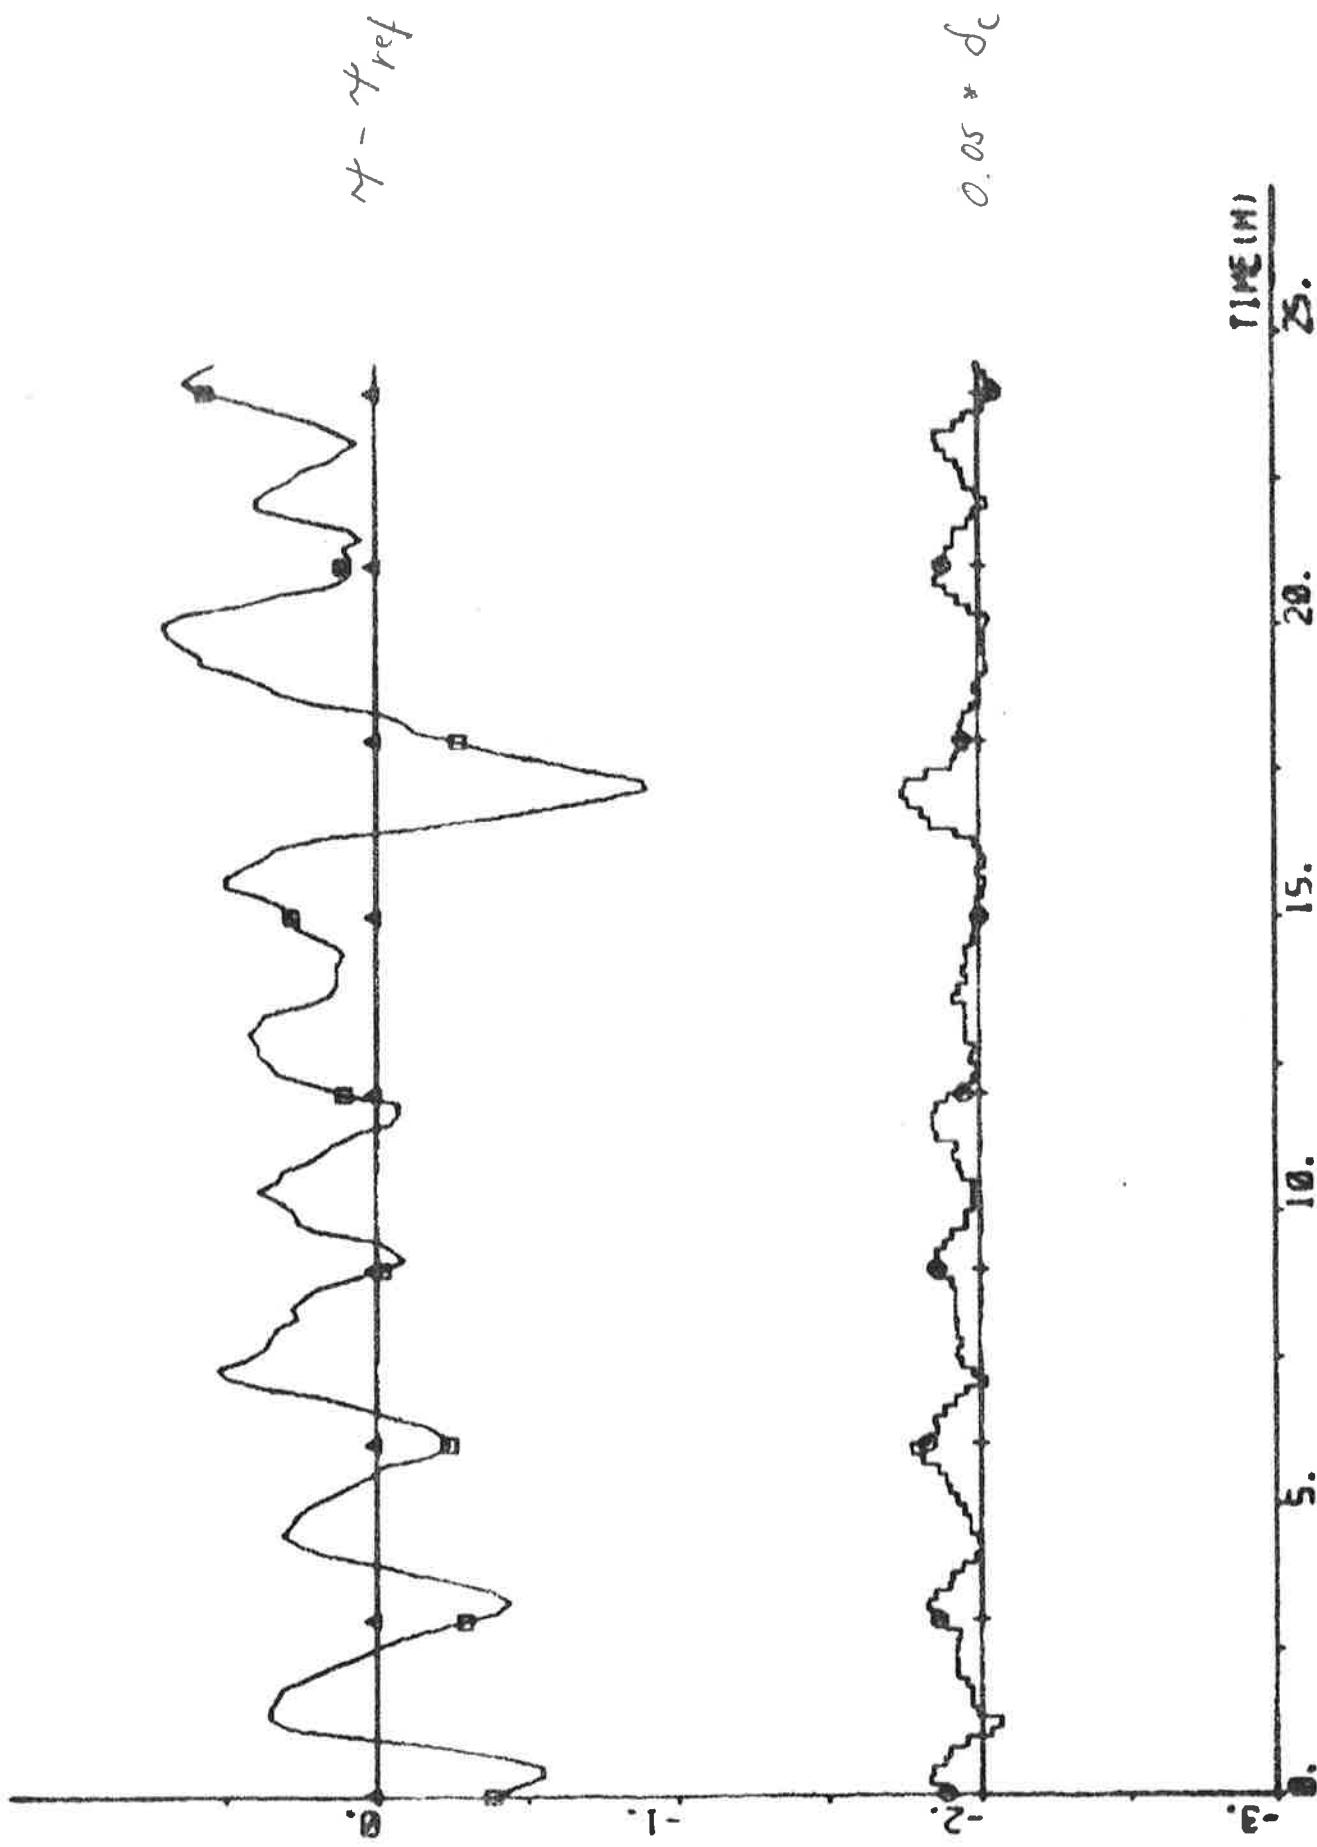


Plot #2111-12111 (11) R2111 (14) R2111 (12) (11) 12111 (13) R2111 (11)

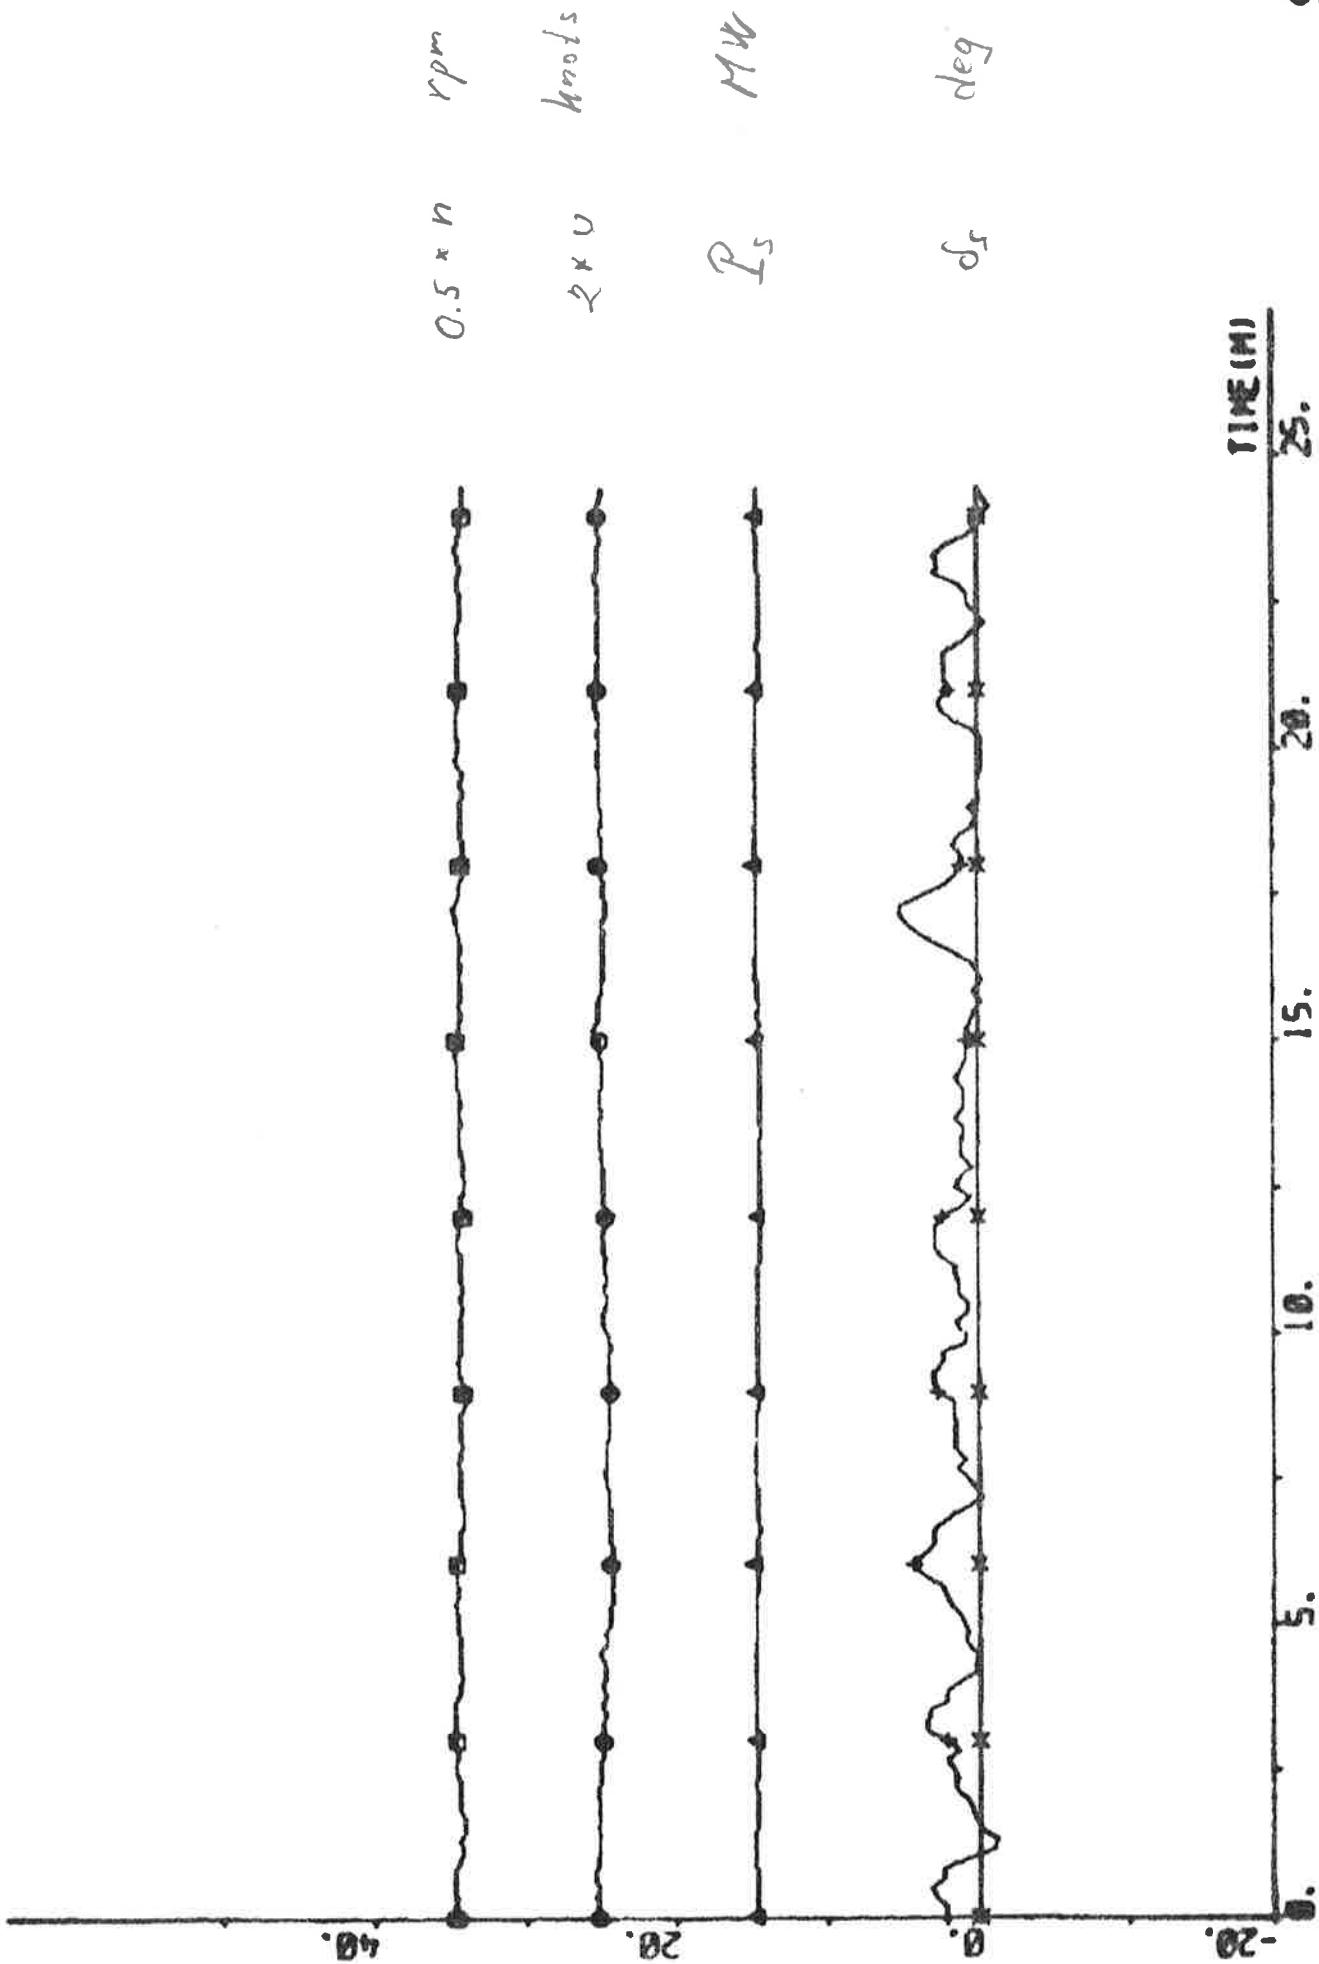

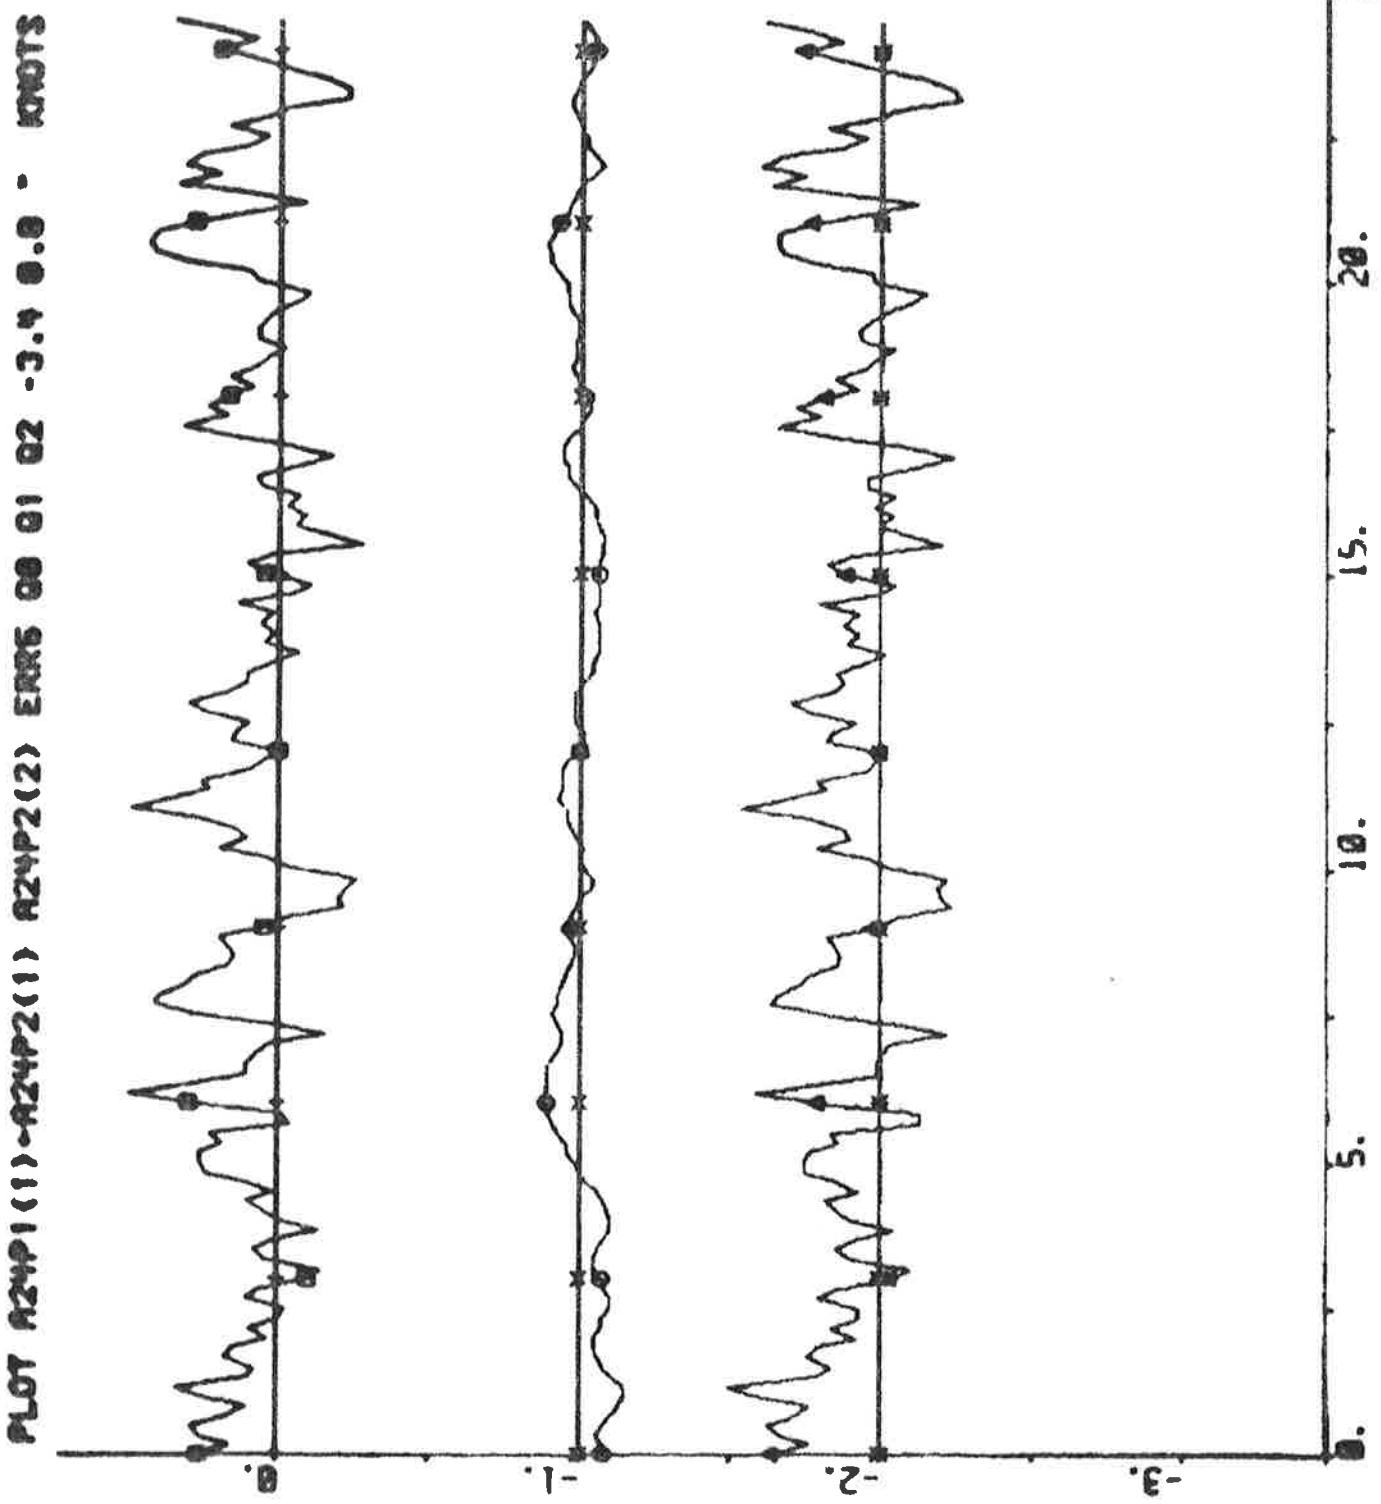


ALOT (AZTEC1(11)-AZTEC2(11)) AZTEC2(12) EERS 00 01 02 - 3.4 0.0 - MOTS

PLOT #24P1(1)-#24P1(4) P24P1(E) EMAZ E52 01 02 03 - 3.4 0.0 - MGRS

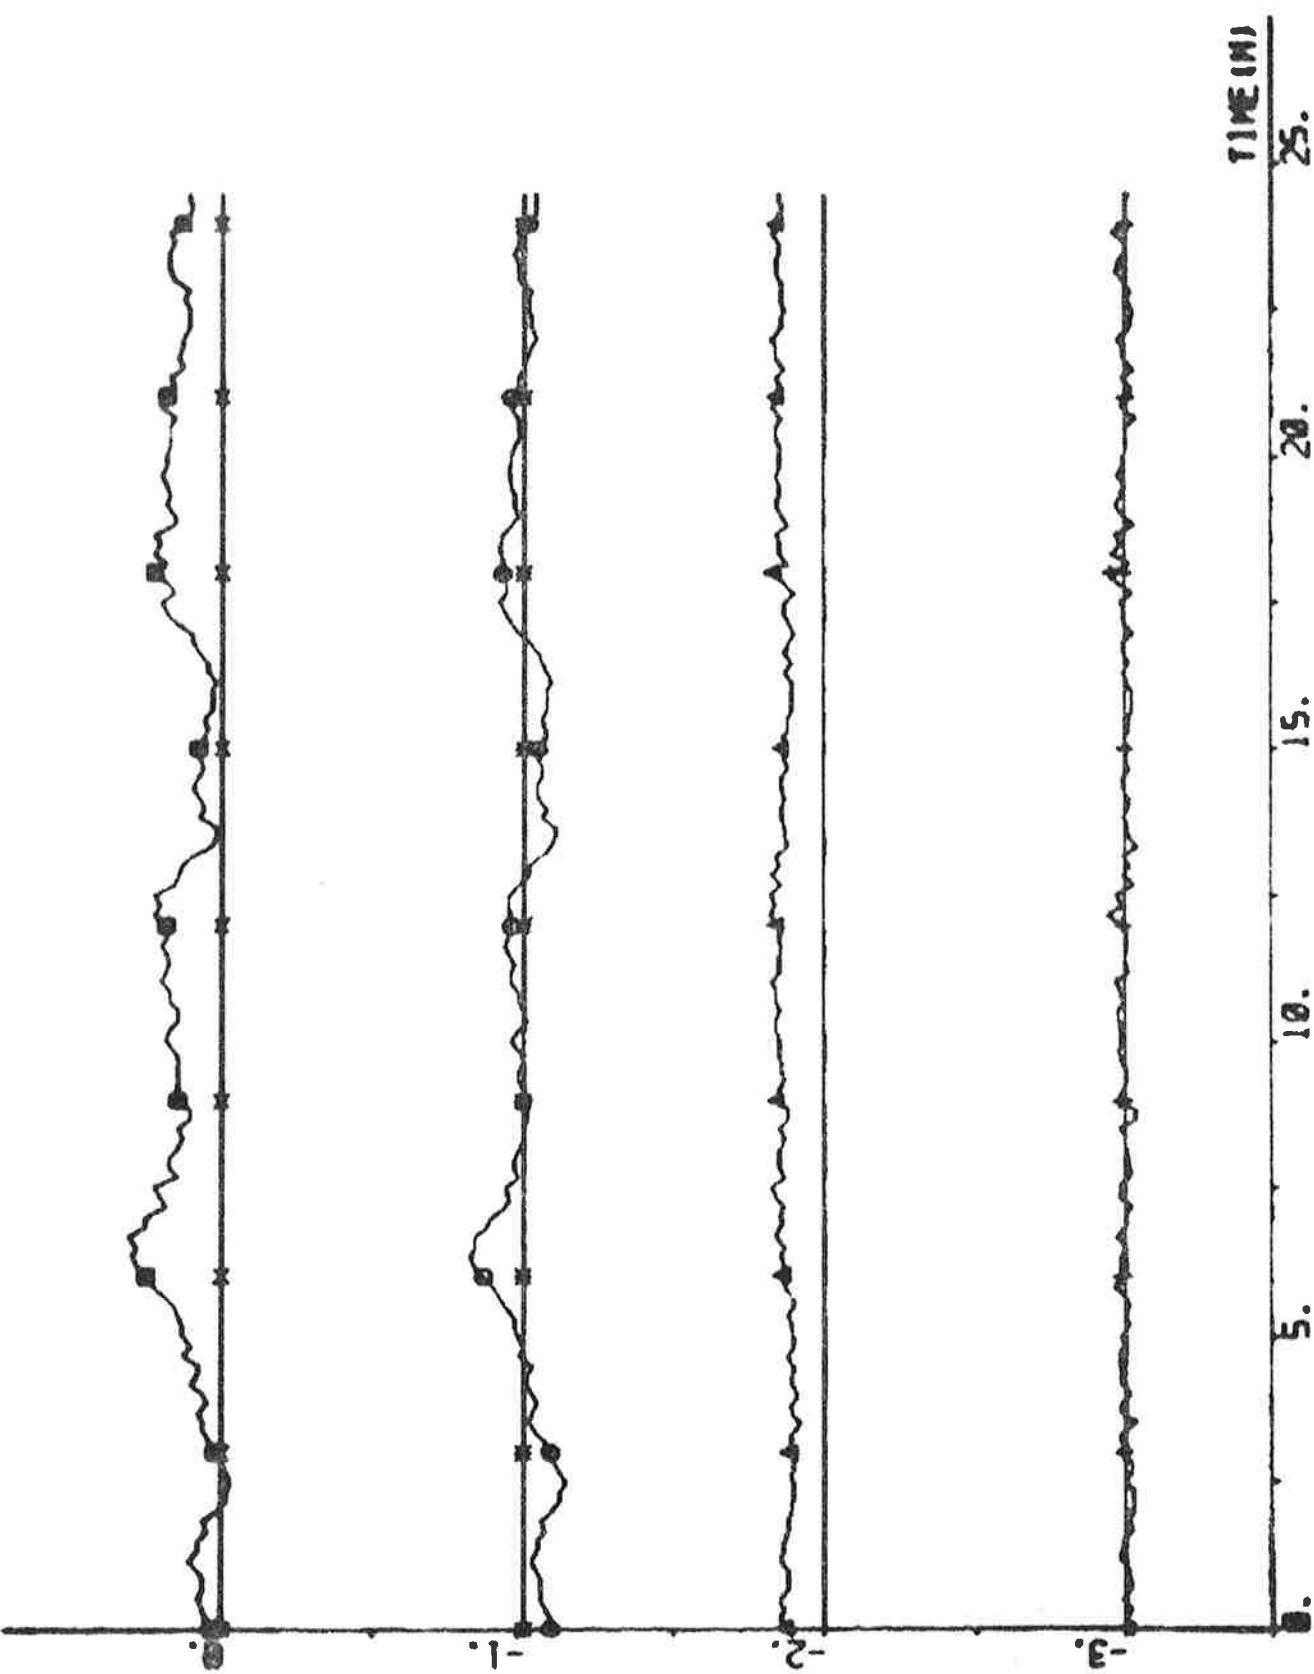

MOT M2441 (1) - M2441 (9) ERDS 00 002 004 - 0.7.0. - DEC 3

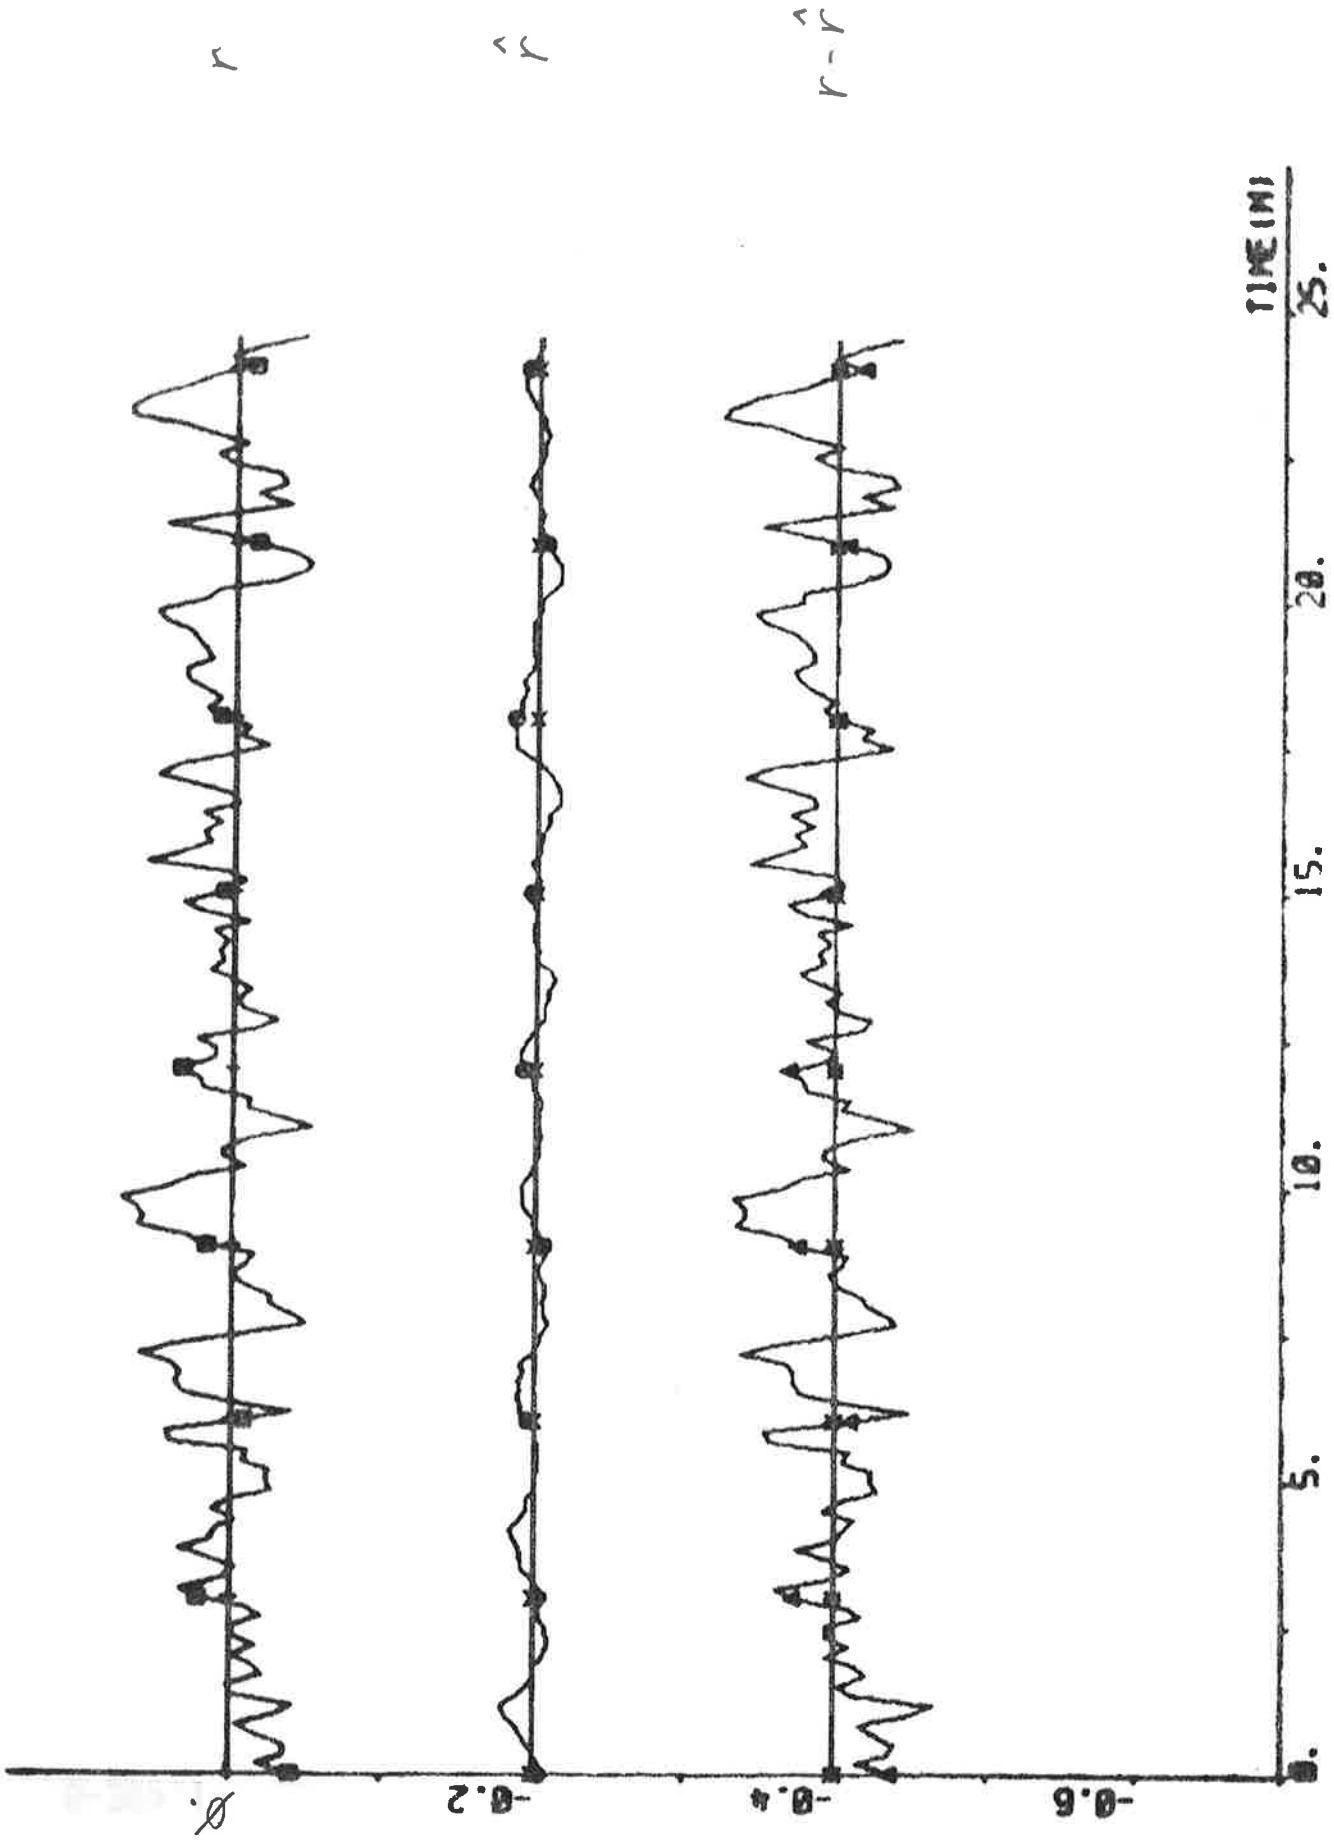


TIME (W)

20.


15.

10.


5.

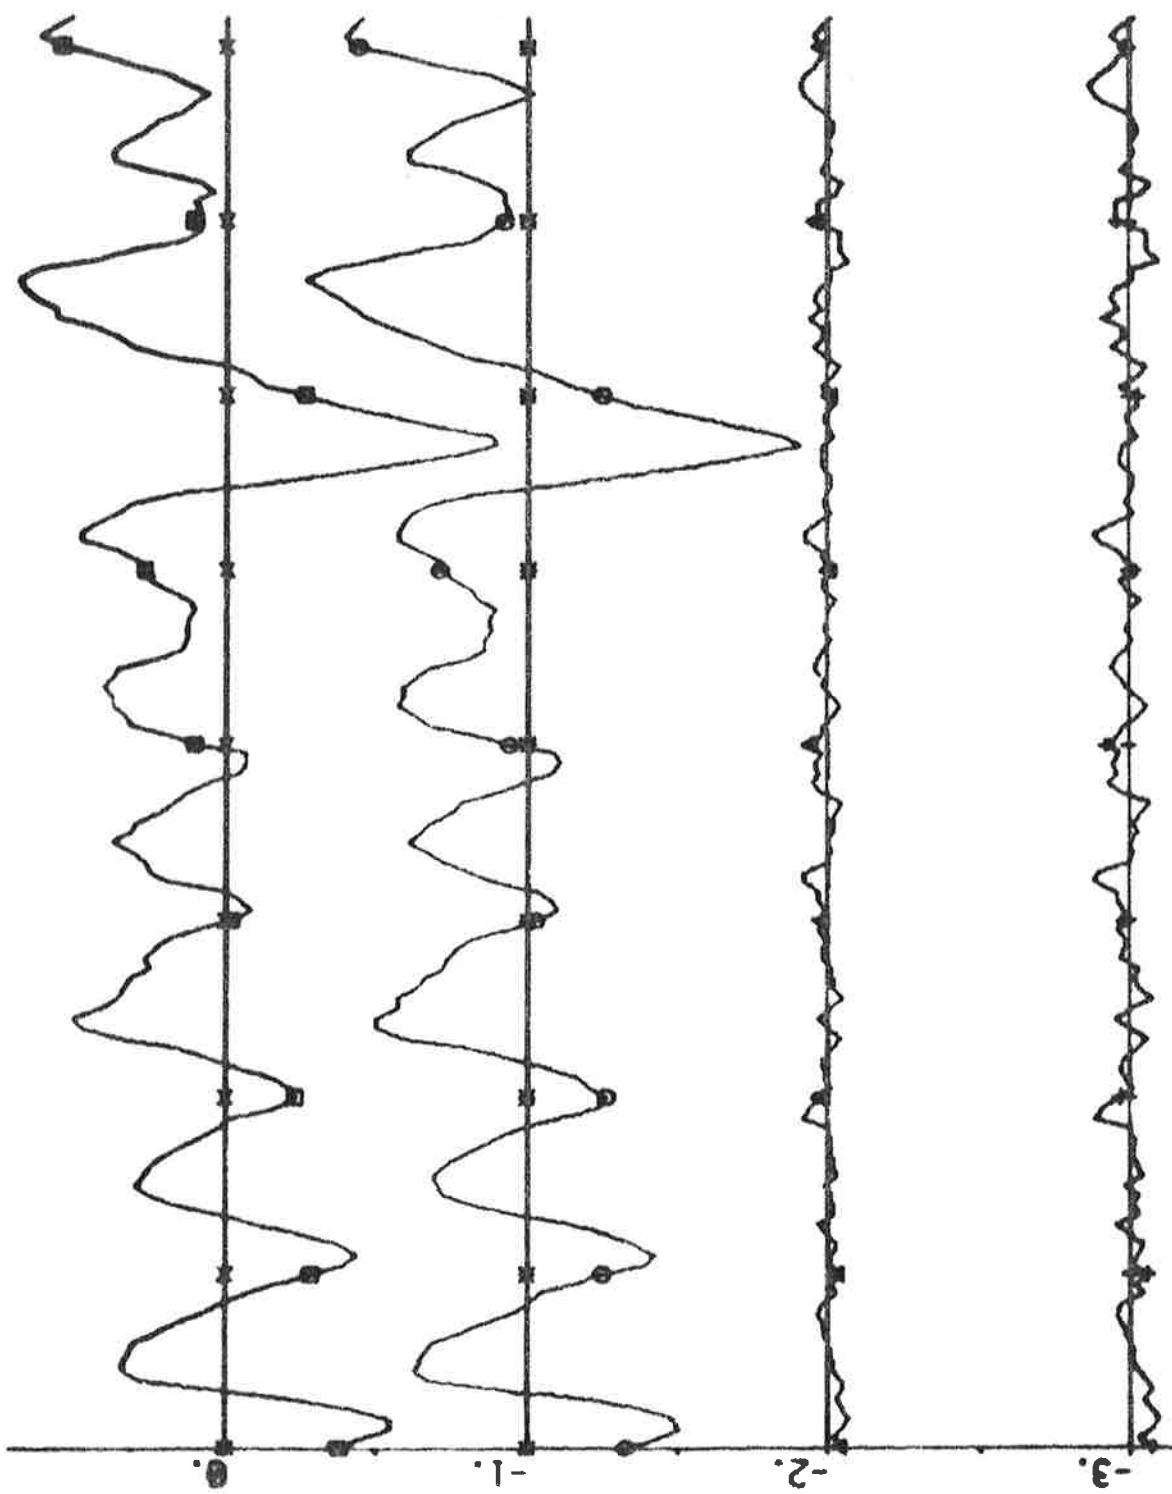E_AA₁-A₂A₁-A₂f₁-f₂

RECORDED NOVEMBER 11, 1924 - 15.000 CPS. (C) ERIC EDPA (2) 112411

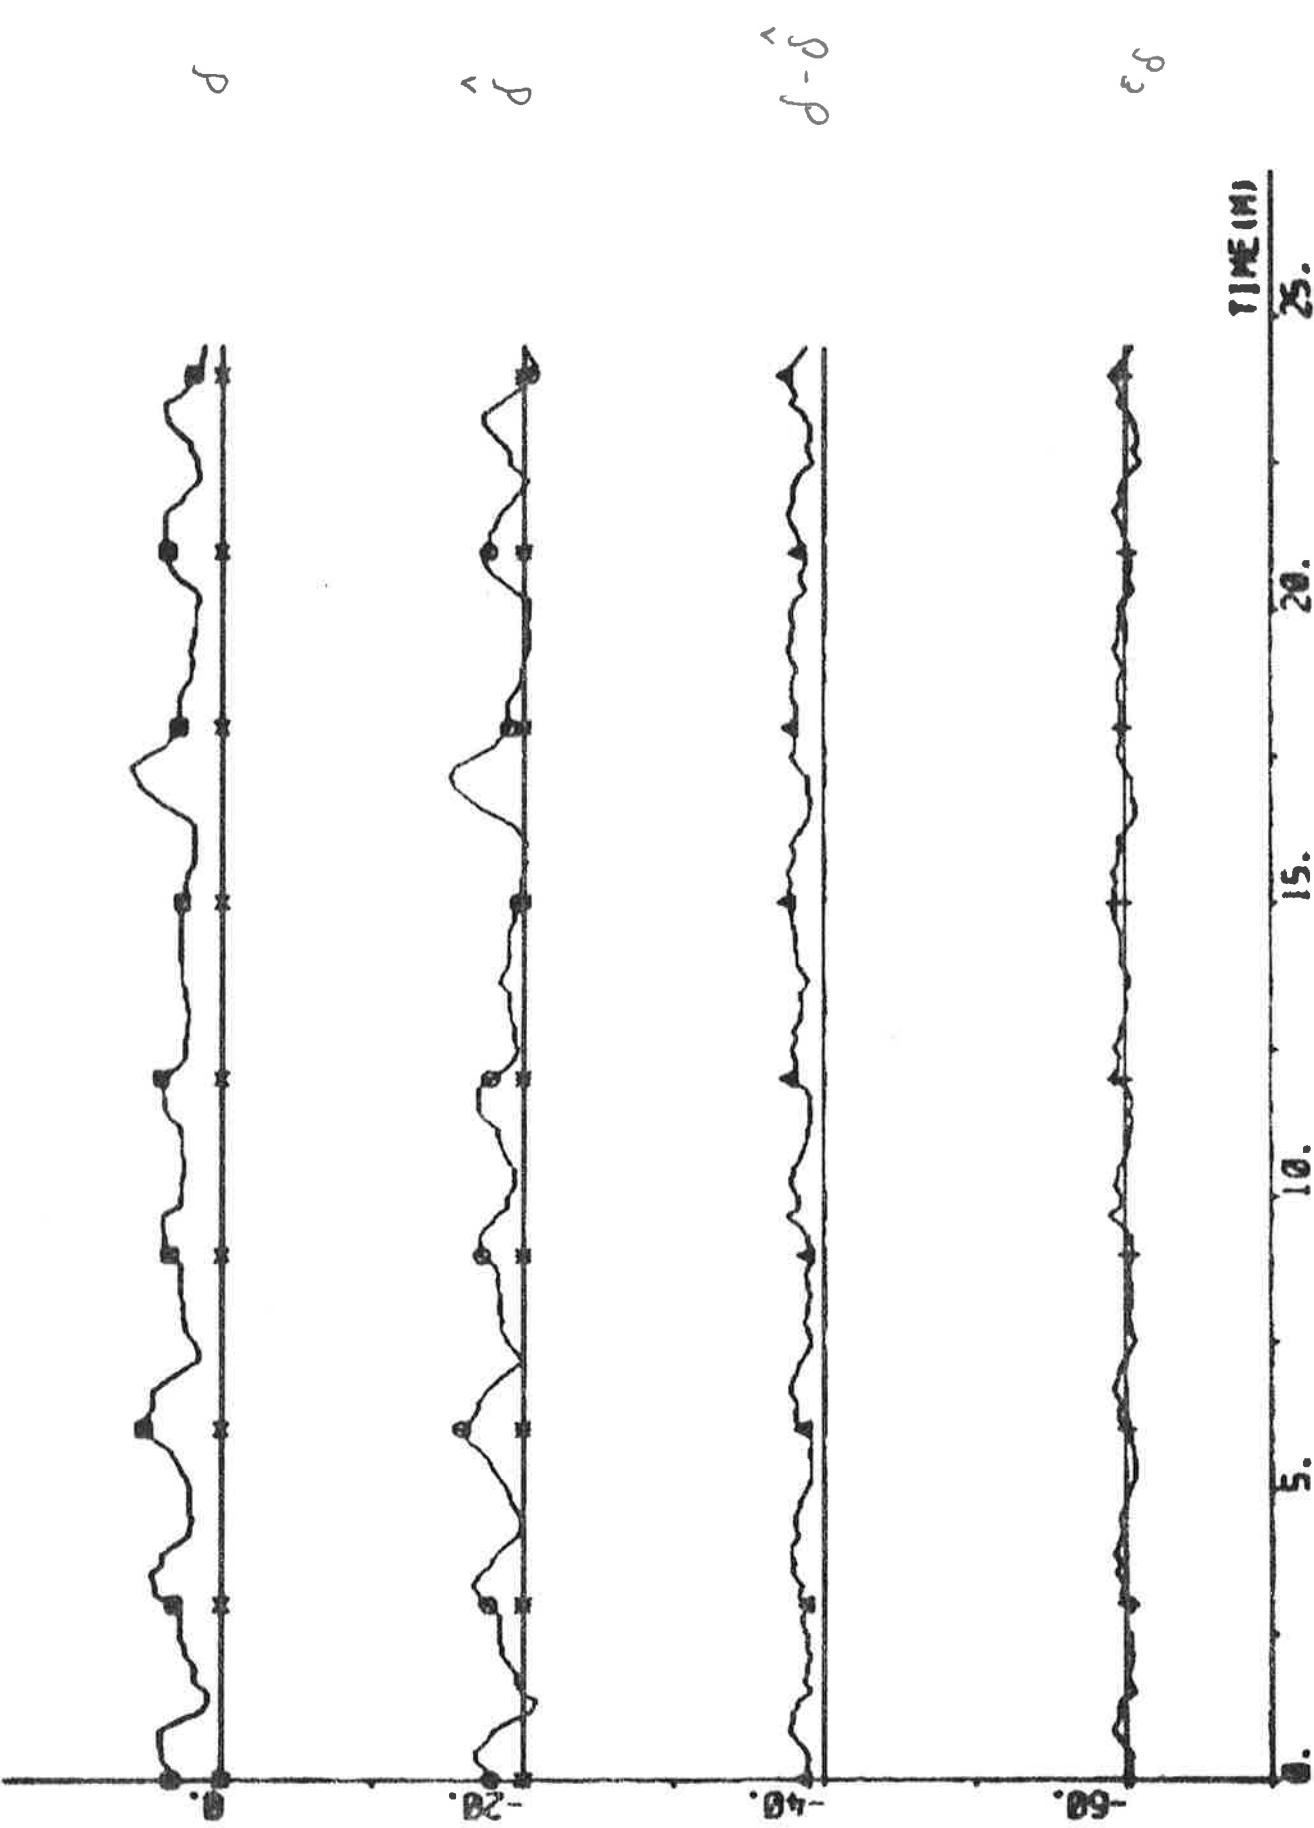

PLOT A24p1(1)-A24p2(3) A24p2(4) A24p2(6) 33 32 30 -6.16 -6.15

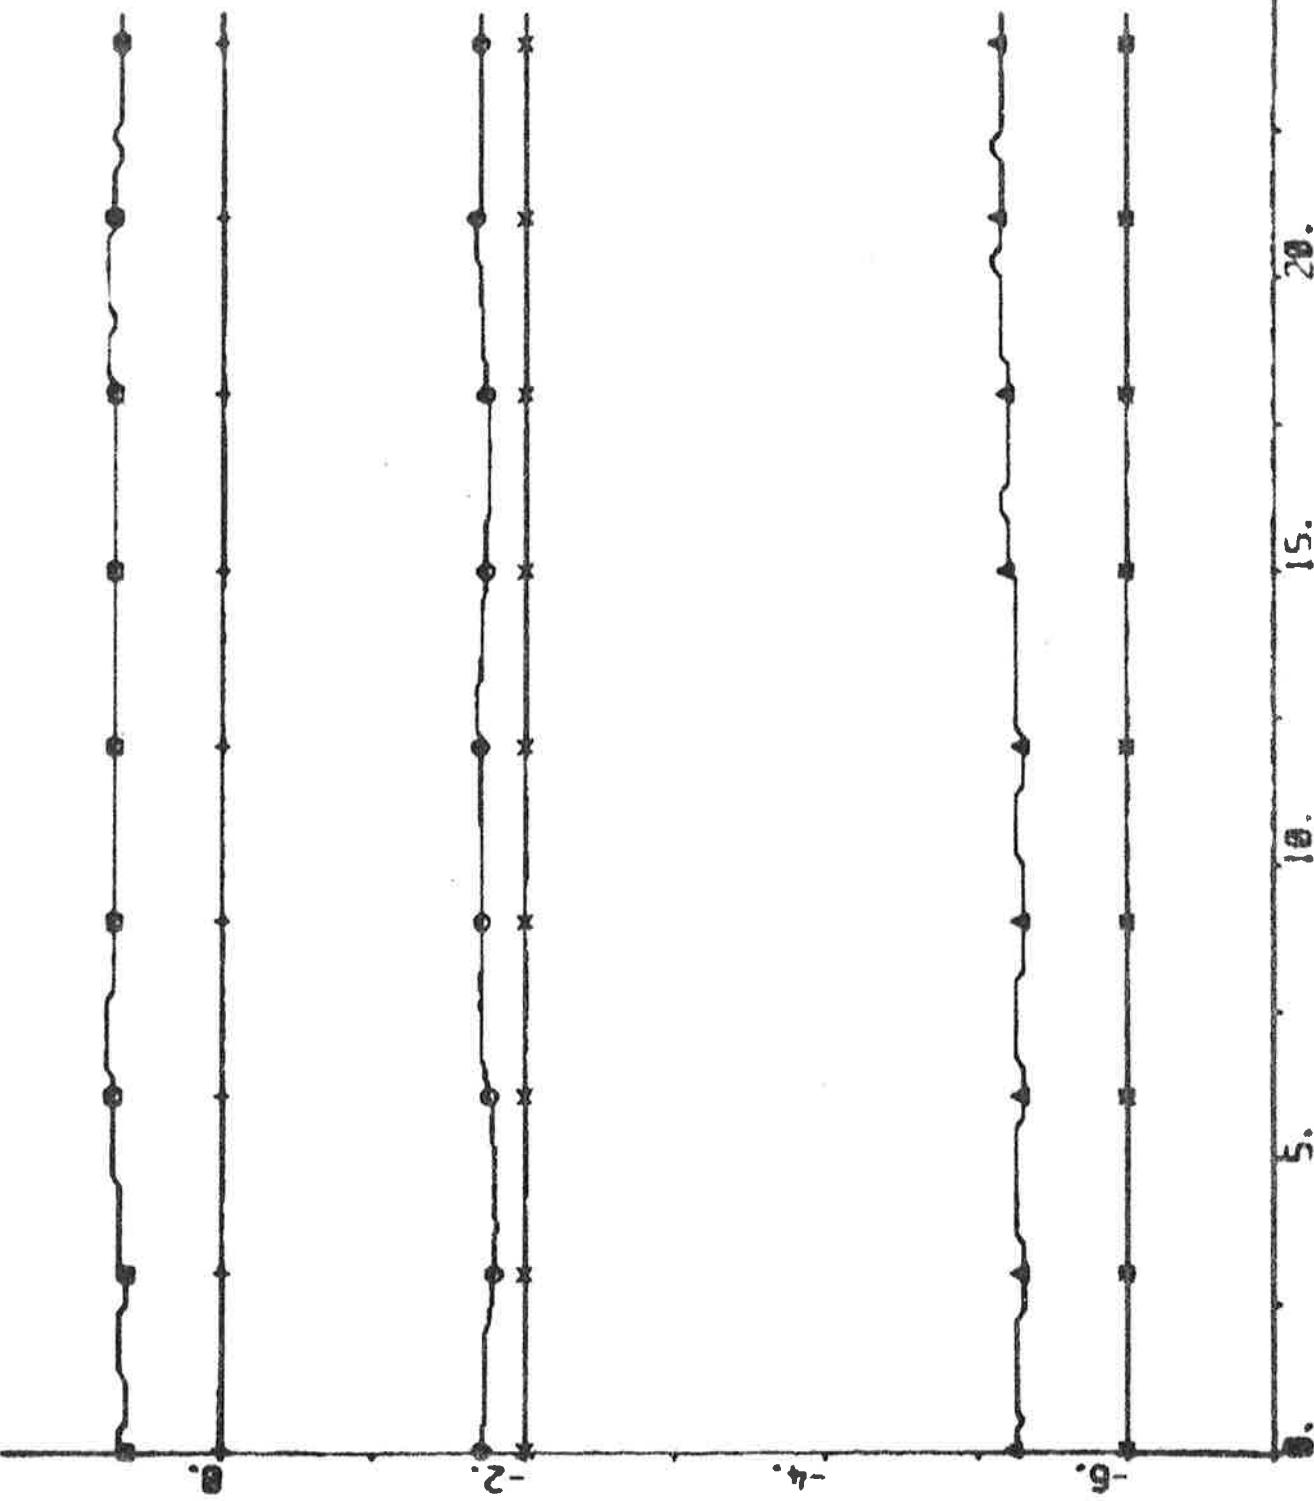

Time (H)

20.

15.


10.

5.

0.

316

MOT MOTS 1 (1) MOTS 2 (1) MOTS 2 (2) MOTS 2 (3) MOTS 2 (4) MOTS 2 (5) MOTS 2 (6)

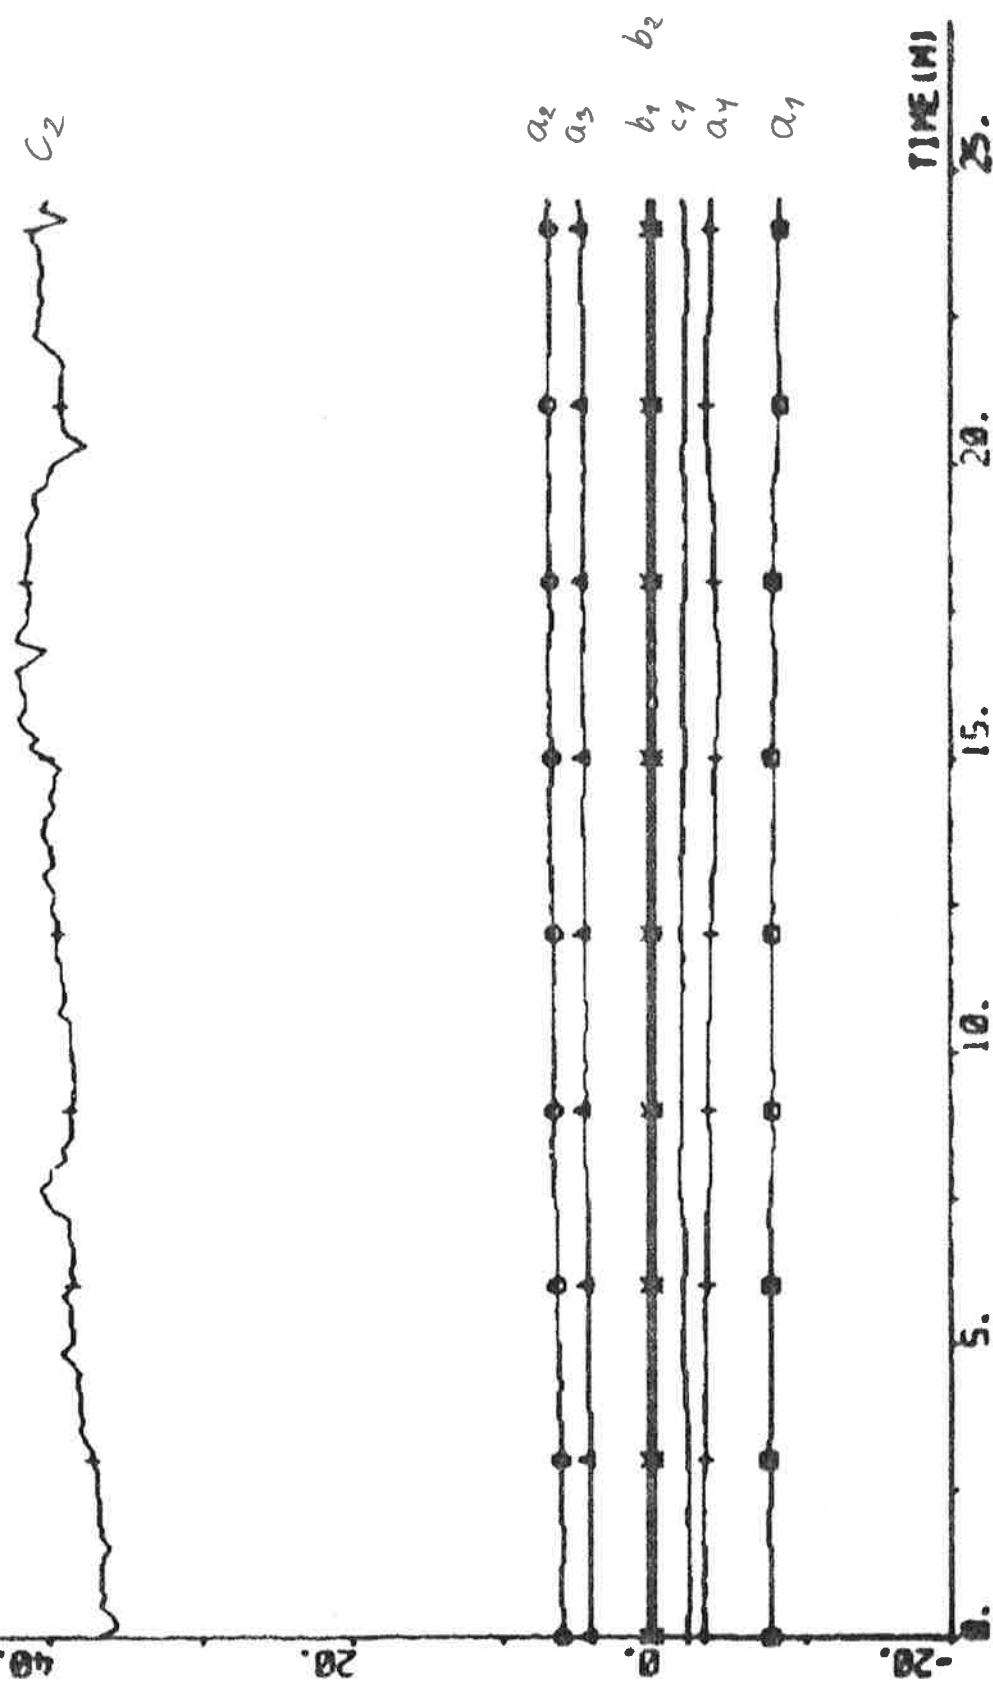

EXPERIMENT A25

Date	1976-04-25	Forward draught	8.5 m
Time	15.33	Aft draught	12.5 m
Duration	25 min	Wind direction	SE (1; see App. A)
Position	S 02°23' W 09°18'	Wind velocity	14 m/s (moderate gale)
ψ_{ref}	141 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter

After 9.5 min of the experiment, the heading angle ψ was not any longer used by the Kalman filter.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\left[\begin{array}{c|cc} a_1 & -8.06 \\ a_2 & 6.68 \\ a_3 & 4.51 \\ a_4 & -3.45 \\ \hline b_1 & 0.48 \\ b_2 & 0.13 \\ c_1 & -1.96 \\ c_2 & 41.91 \end{array} \right] = P = \left[\begin{array}{cccccc} 4.58 & & & & & & \\ -6.04 & 12.90 & & & & & \\ 0.24 & -8.04 & 14.45 & & & & \\ 1.53 & 0.89 & -6.96 & 4.97 & & & \\ -0.08 & -0.12 & 0.34 & -0.13 & 0.04 & & \\ -0.11 & 0.08 & -0.04 & 0.07 & 0.01 & 0.03 & \\ -0.27 & 0.54 & 0.11 & -0.38 & -0.01 & -0.01 & 0.97 \\ 10.37 & -15.36 & -1.46 & 6.10 & -0.01 & -0.29 & 17.04 & 790.91 \end{array} \right]$$

$$a_1 + a_2 + a_3 + a_4 = -0.32$$


$$\hat{\delta}_0 = 1.2 \text{ deg} \quad \hat{d}_v = 0.17 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.8 \text{ deg}$$

Statistics (mean value and standard deviation)


The residual values are computed for the part 9.5 - 25 min.

δ_c	1.25 \pm 0.90 deg	P_s	14.9 \pm 0.1 MW
δ	2.97 \pm 0.70 deg	ϵ_v	0.01 \pm 0.02 knots
$\psi - \psi_{ref}$	-0.034 \pm 0.240 deg	ϵ_r	0.00 \pm 0.02 deg/s
n	69.6 \pm 0.3 rpm	ϵ_ψ	-
u	12.5 \pm 0.2 knots	ϵ_δ	0.1 \pm 0.5 deg
V_1	0.126		

ROT 1281(1) 1281(10) 1281(15) 1281(18)

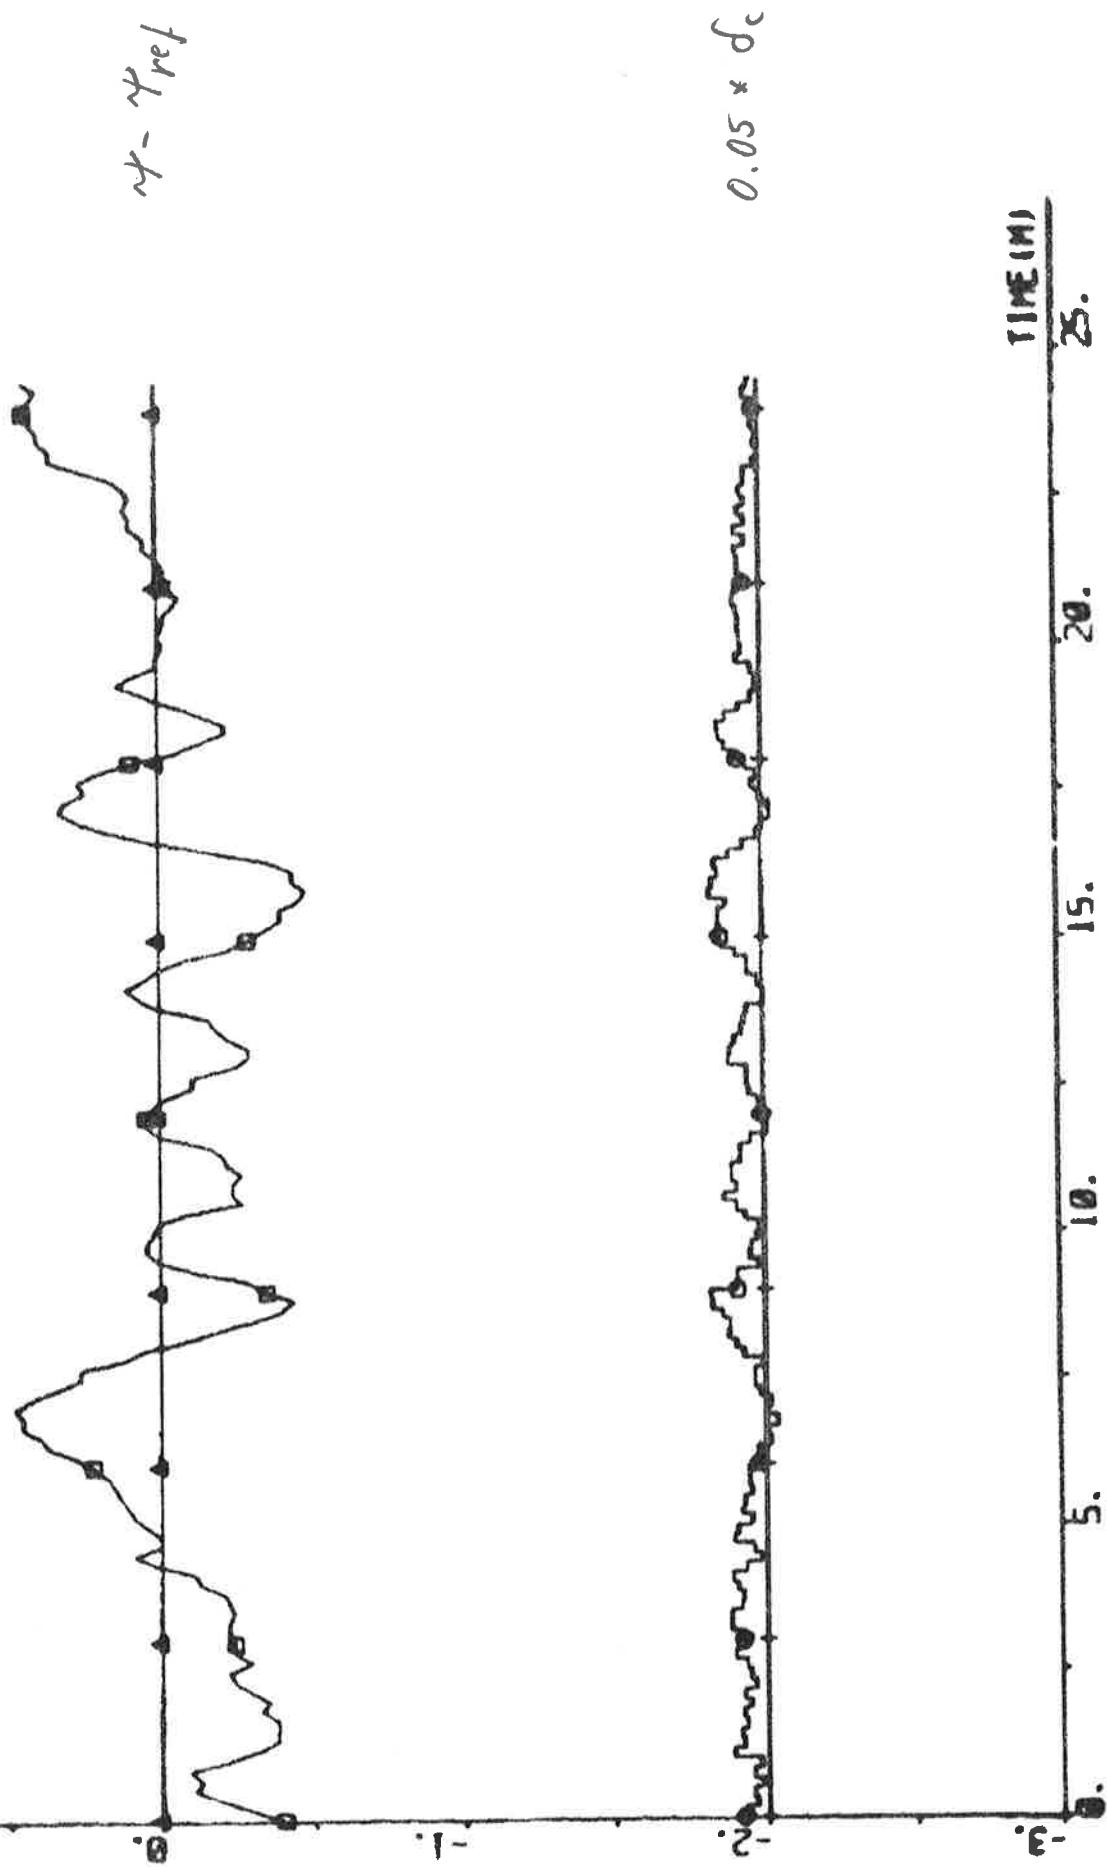


LOG #2501(11) - 2501(12) - 2501(13) - 2501(14) - 2501(15) - 2501(16)

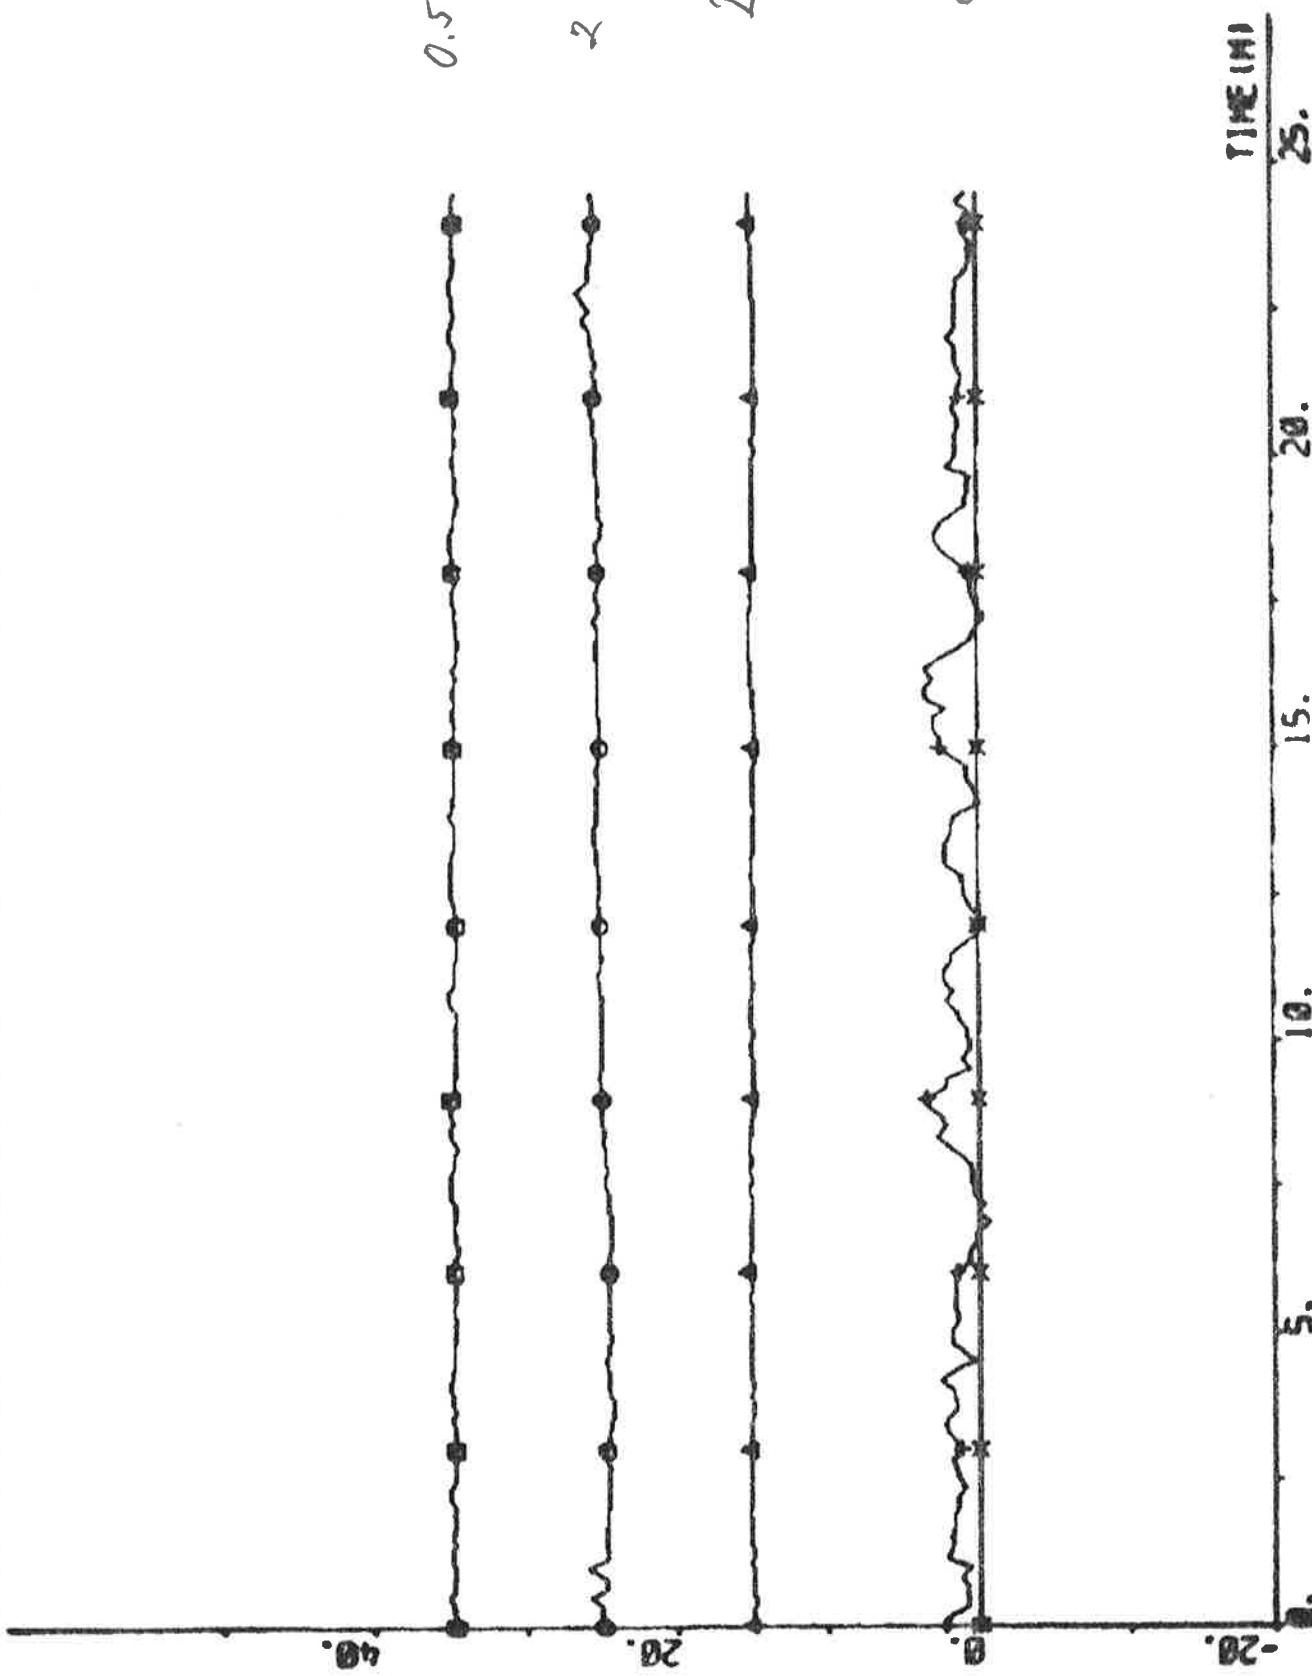


320


MOTOR ACTIVATION (1) - ACTIVATION (2) ERRE 00 01 02 - 3.4 0.3 - Meters

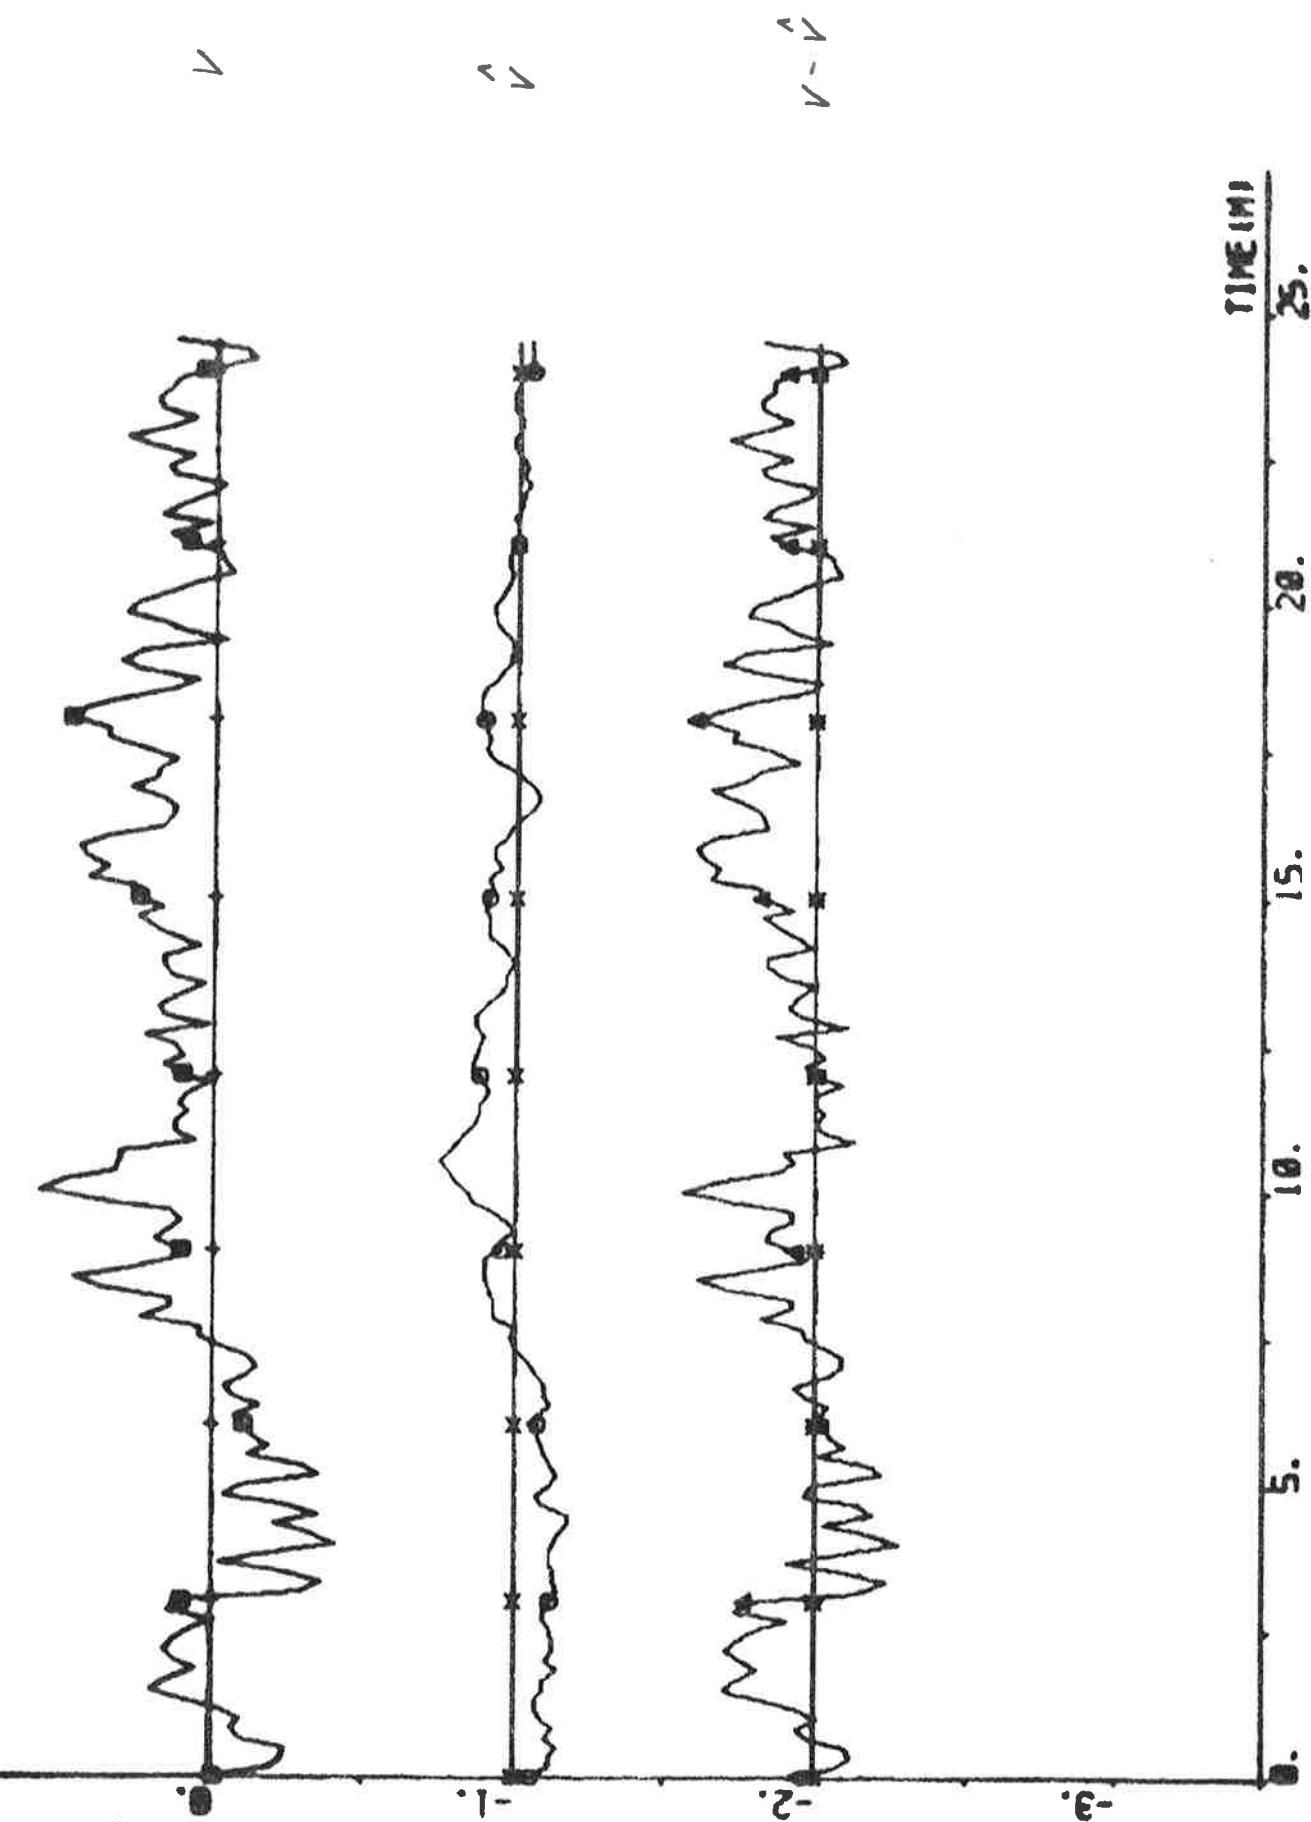


NOI 82521(1) -12521(4) H281(B) E82 E82 03 01 02 03 04 05 -

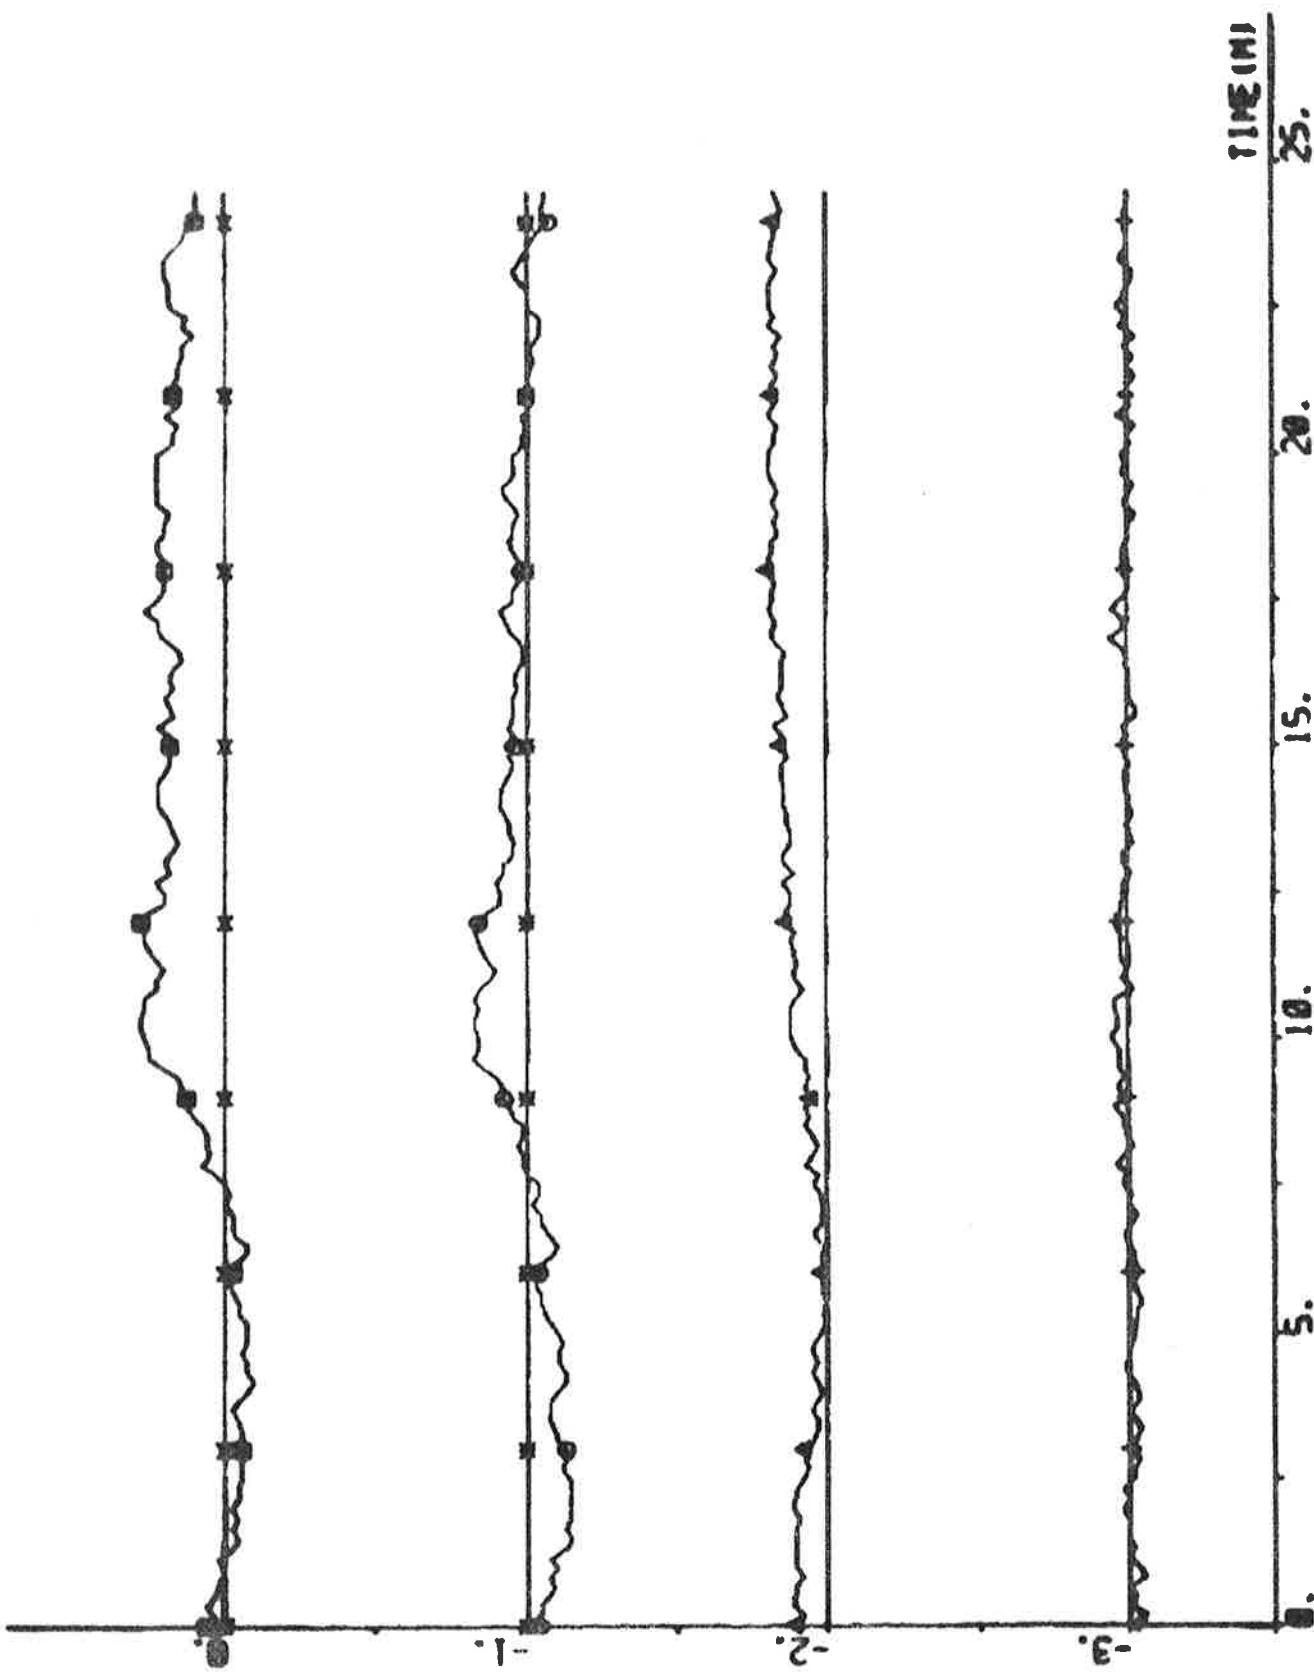


Mar 22 1961 (1) - 0.70. • 0.02 sec see 0.70. • 0.02 sec see 0.70. • 0.02 sec see 0.70.

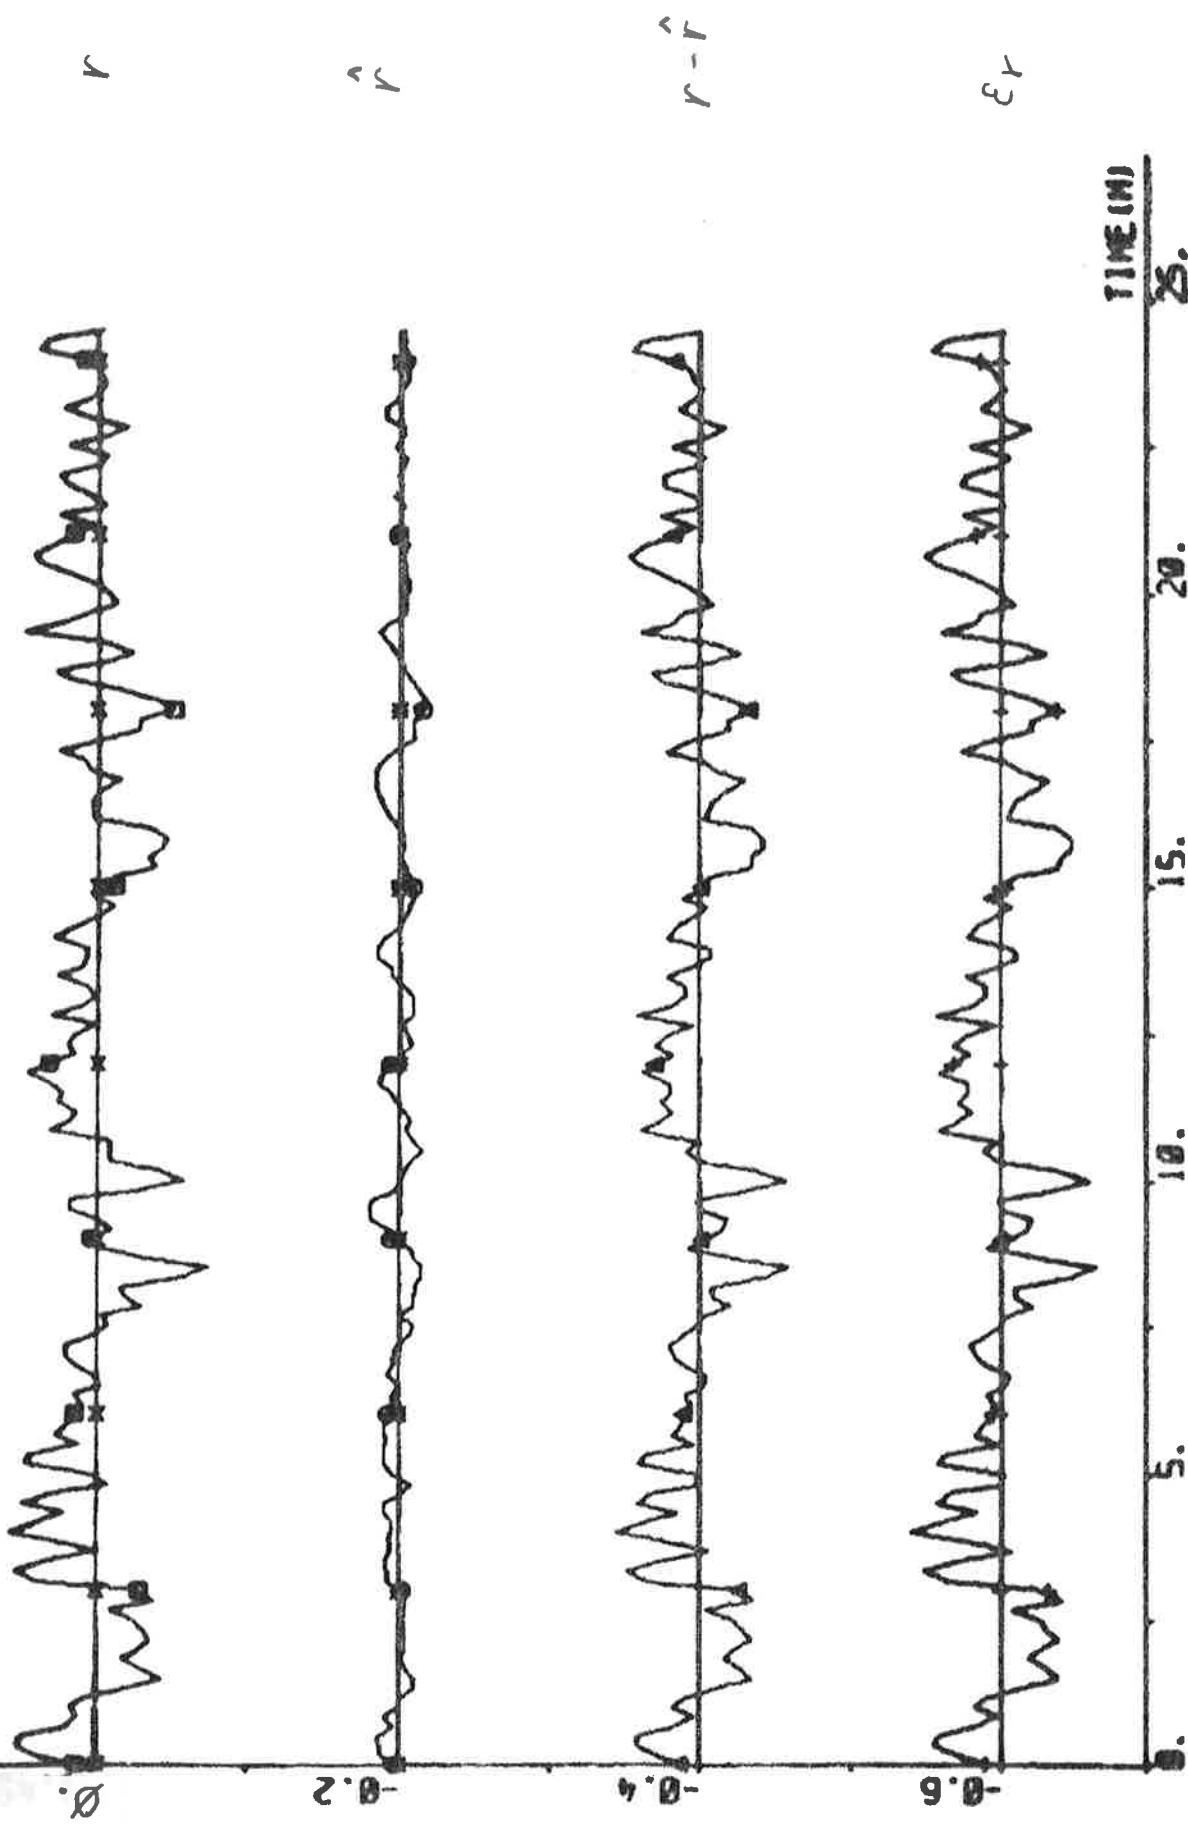

MOR (MOR1(1))>MOR1(1) M2P1(1) E2P1(1) E2M1(1) E2M2(1) E2P2(1)

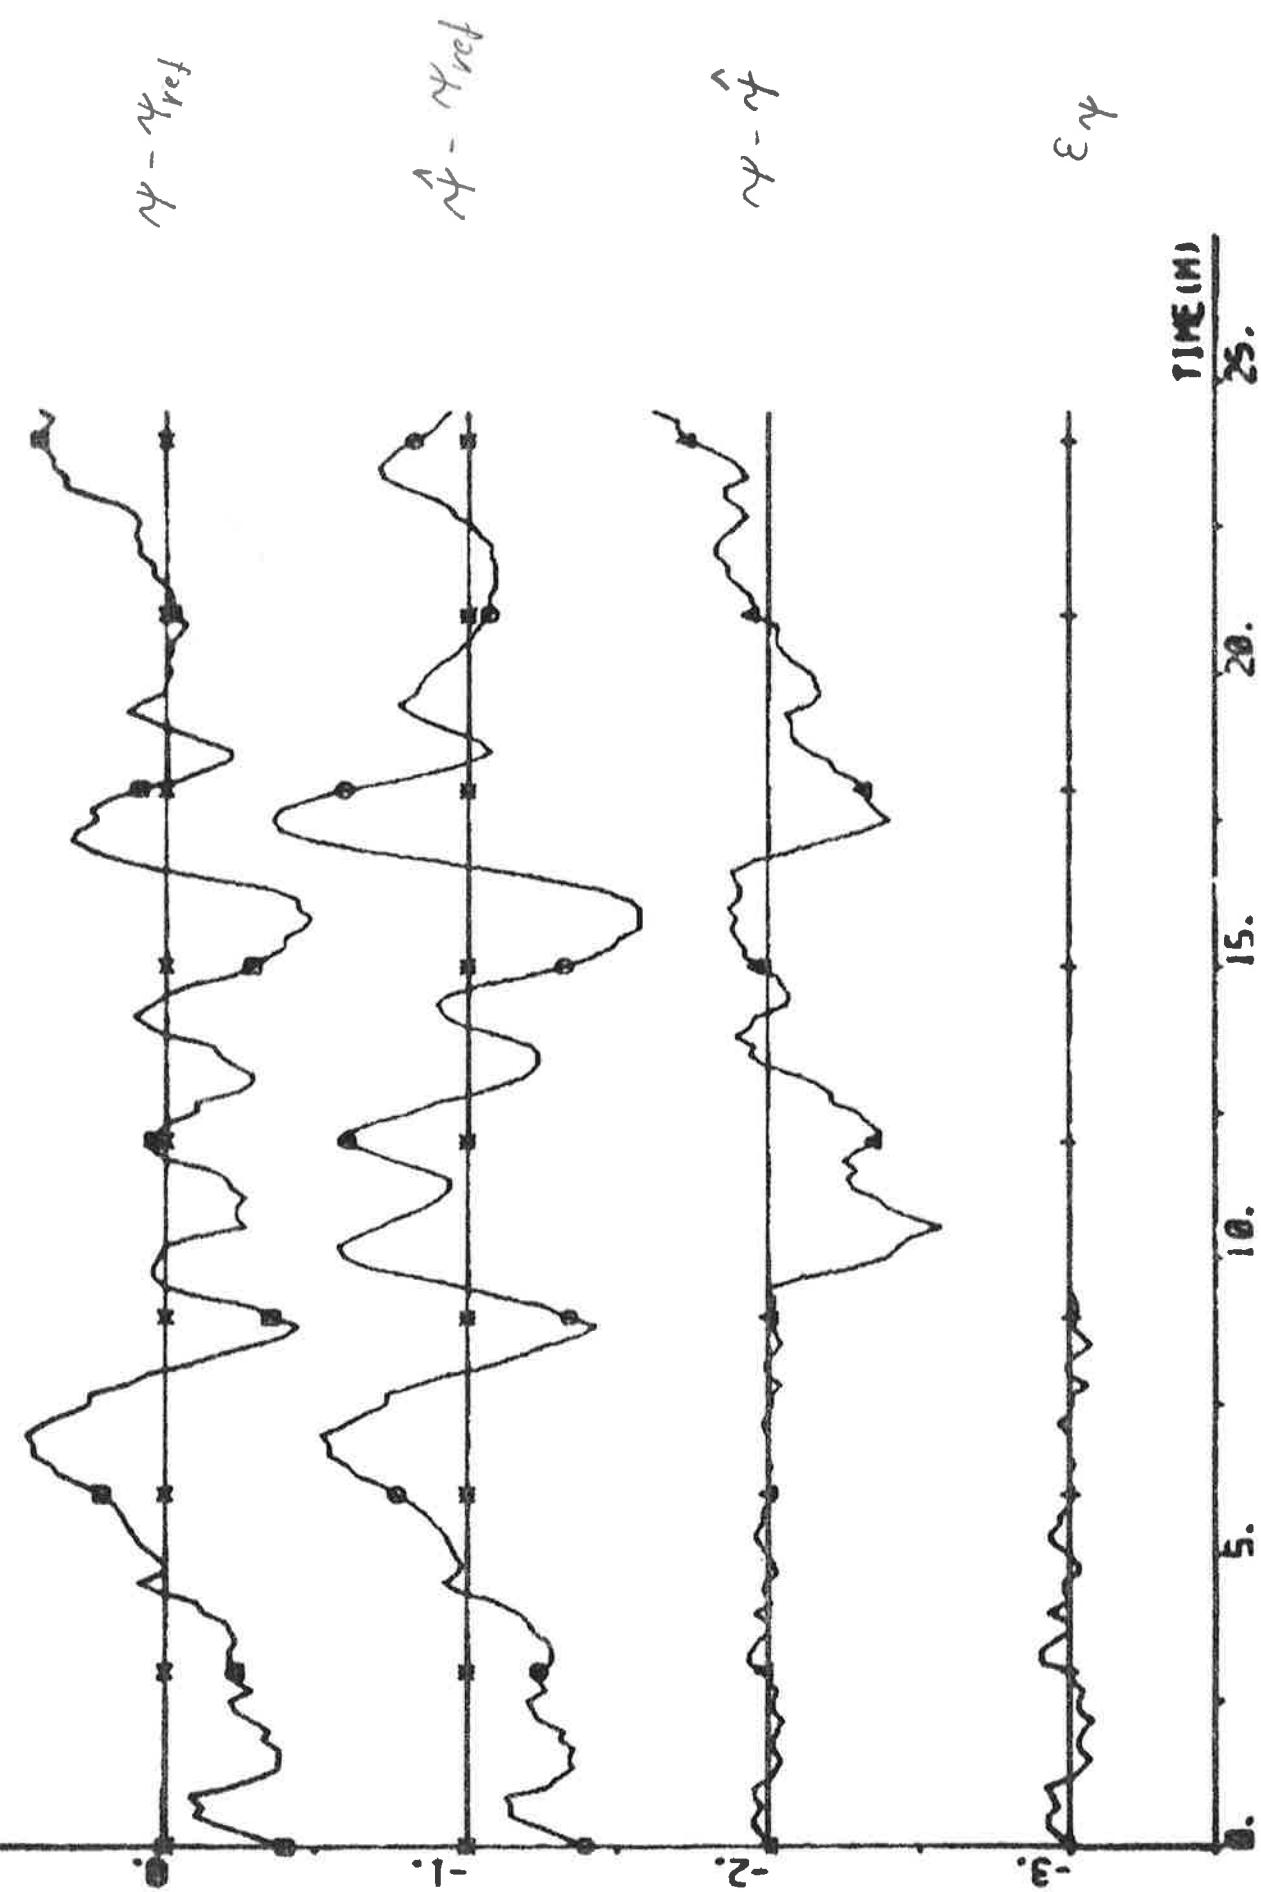


LOT 12241 (11) - 12241 (12) - 12241 (13) - 12241 (14) - 12241 (15) - 12241 (16)

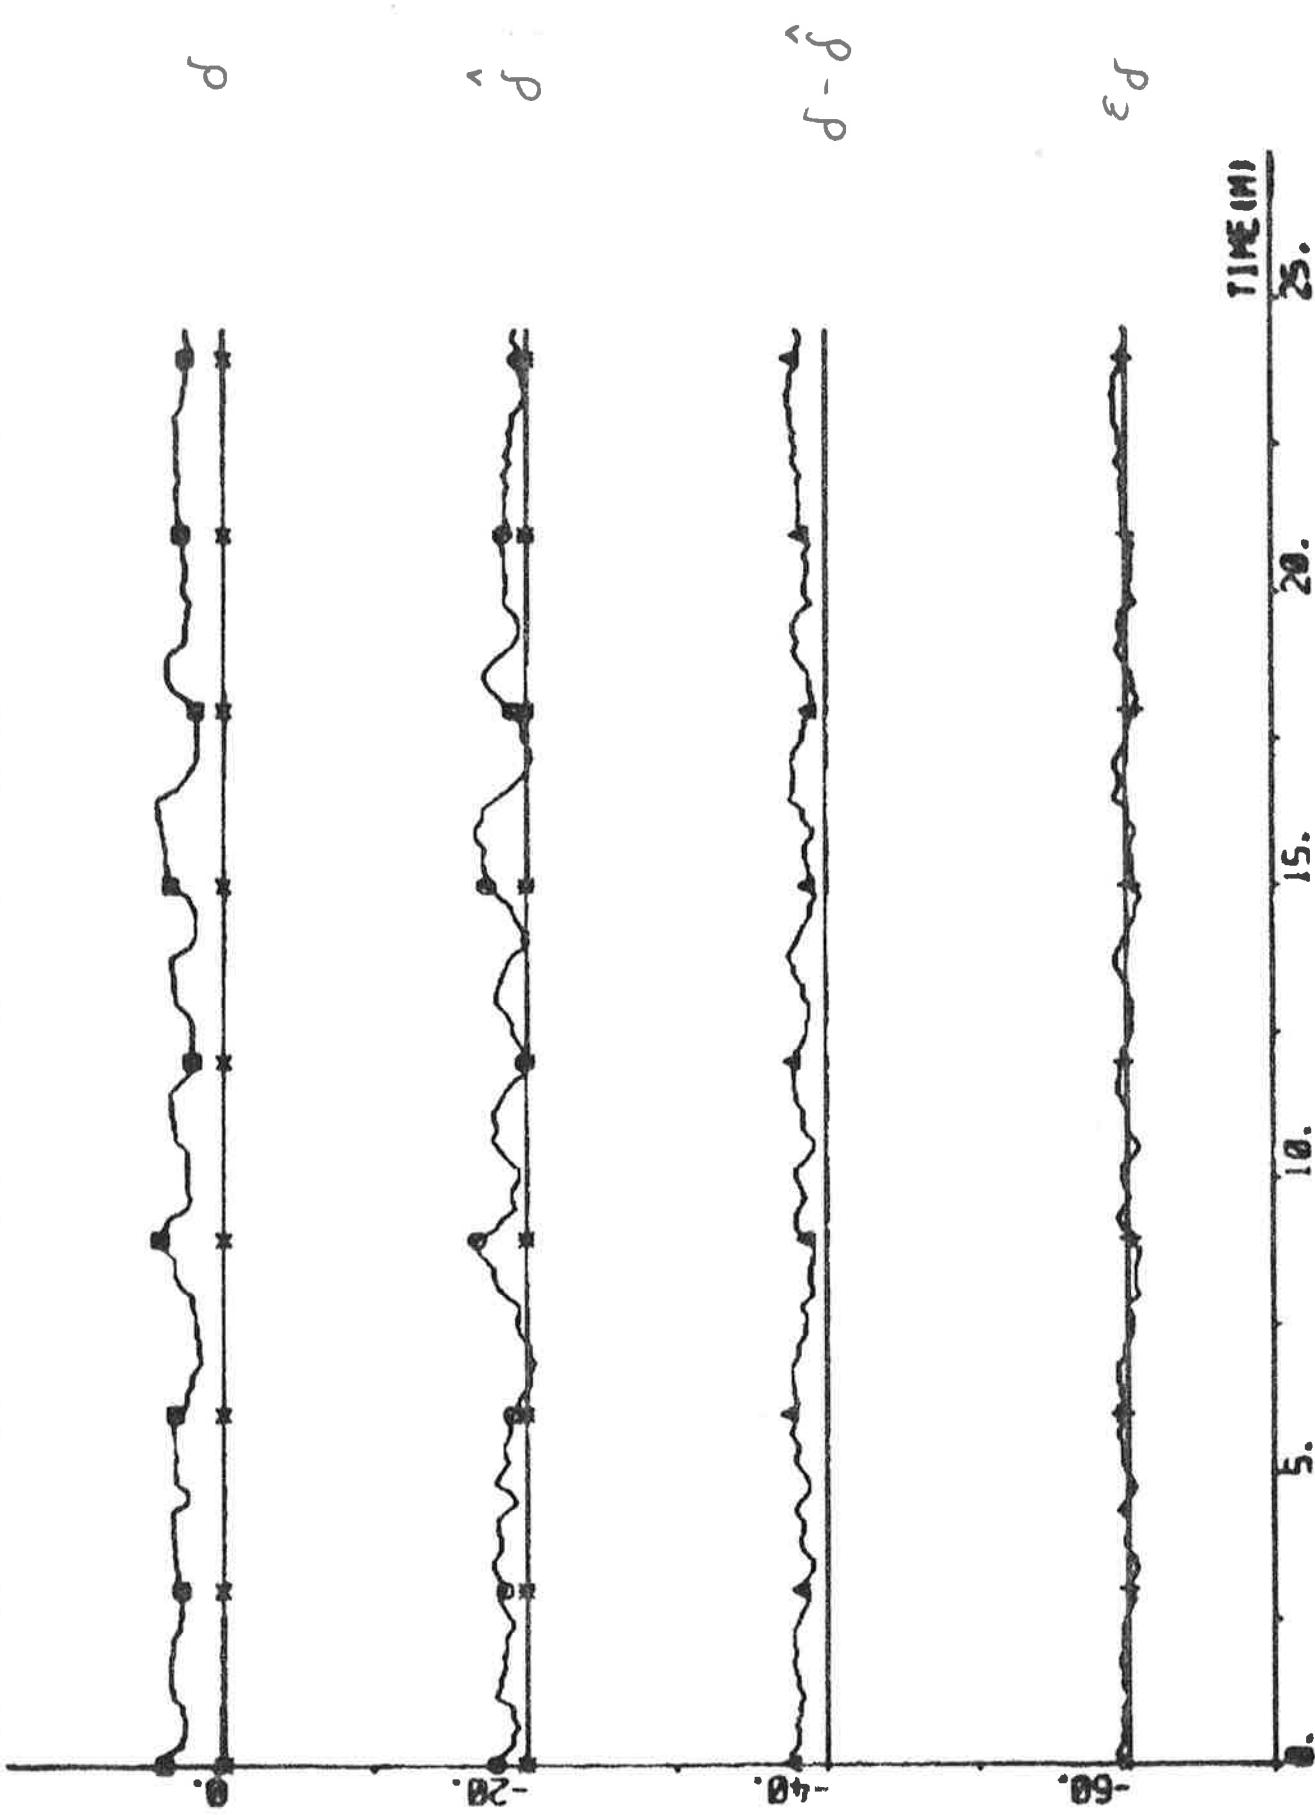



PLAT 12502(11) 12502(7) 12502(6) 12502(10) 12502(11) 12502(12) 12502(13)

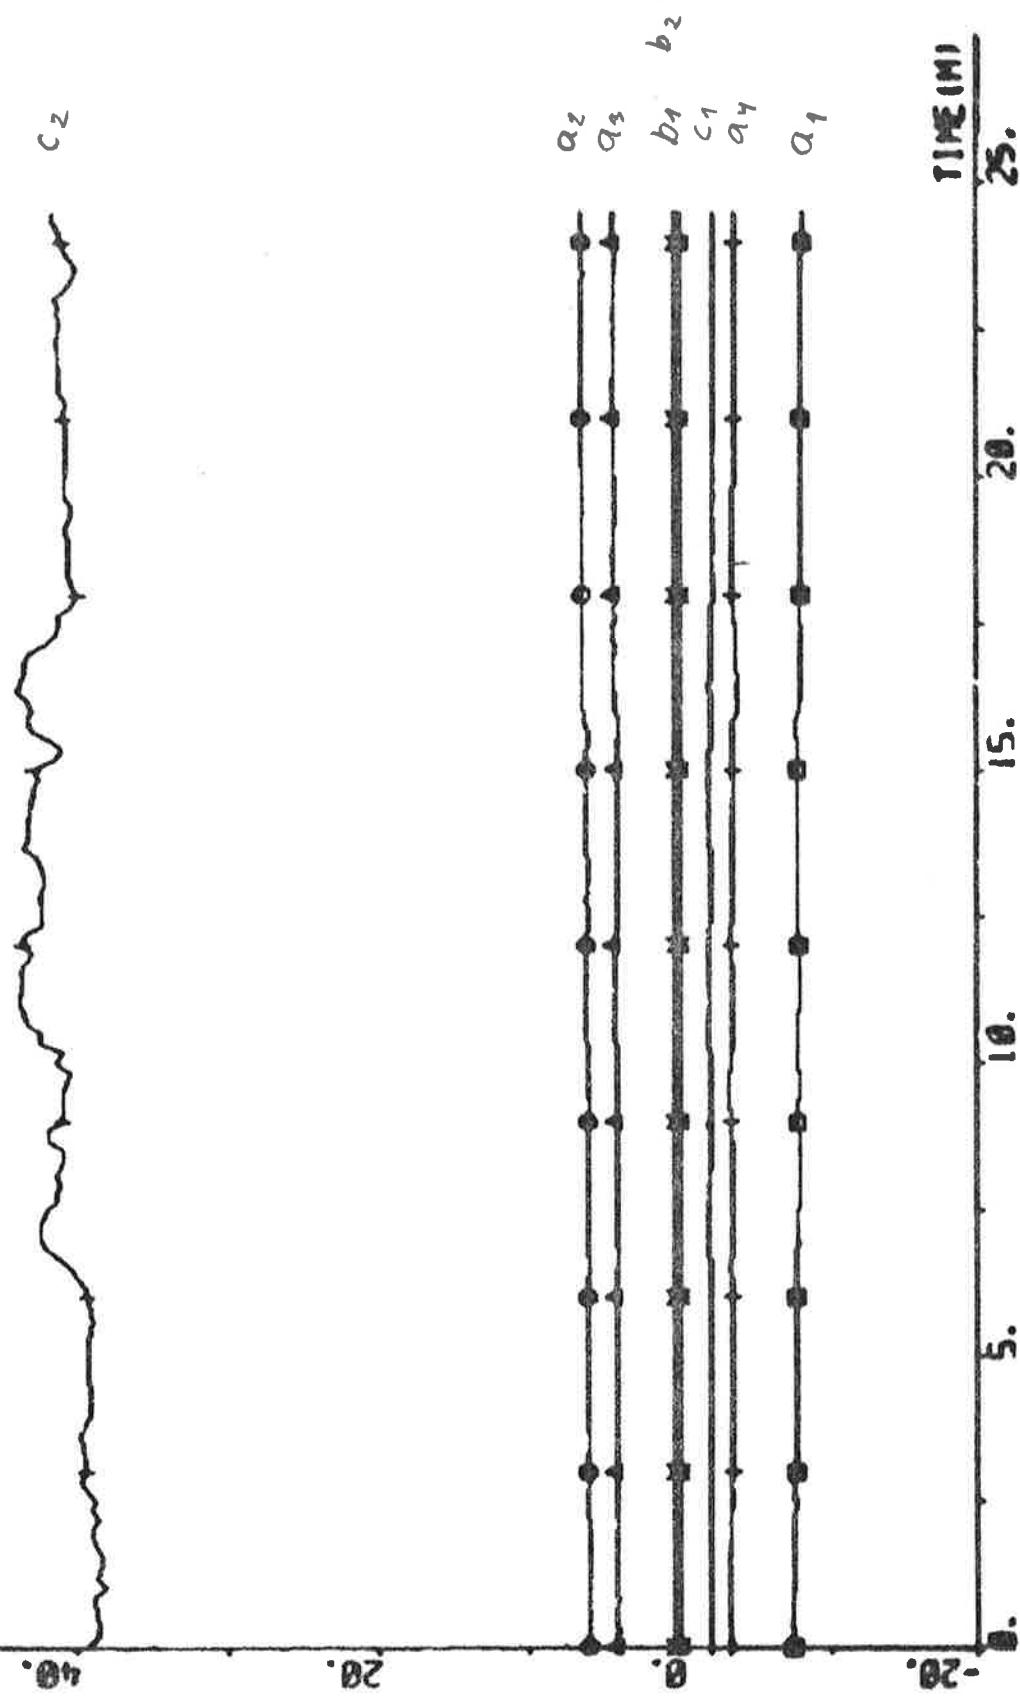

EXPERIMENT A26

Date	1976-04-26	Forward draught	8.5 m
Time	08.58	Aft draught	12.5 m
Duration	27 min	Wind direction	SE (1; see App. A)
Position	S 05°25' W 07°03'	Wind velocity	6 m/s (moderate breeze)
ψ_{ref}	144 deg	Wave height	-

Self-tuning regulator using estimates from the Kalman filter.

The sway velocity v_1 , the yaw rate r and the rudder angle δ were not used by the Kalman filter. The correct filter gain K was used.

Tuning time before the experiment started: 30 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & v_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\left[\begin{array}{c} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{array} \right] = \left[\begin{array}{c} -7.72 \\ 6.23 \\ 4.27 \\ -2.95 \\ 0.49 \\ 0.10 \\ -2.20 \\ 34.95 \end{array} \right] \quad P = \left[\begin{array}{cccccc} 9.67 & & & & & \\ -10.89 & 19.94 & & & & \\ -2.76 & -8.52 & 21.97 & & & \\ 3.77 & -0.40 & -10.60 & 7.64 & & \\ -0.03 & -0.44 & 0.73 & -0.25 & 0.04 & \\ 0.05 & -0.05 & -0.20 & 0.23 & 0.00 & 0.03 \\ -7.91 & 7.29 & 3.69 & -2.26 & 0.07 & -0.06 & 12.53 \\ -33.47 & 16.16 & 19.07 & 7.24 & 0.27 & -1.59 & 128.31 & 2165.90 \end{array} \right]$$


$$a_1 + a_2 + a_3 + a_4 = -0.17$$

$$\hat{\delta}_0 = 0.2 \text{ deg} \quad \hat{d}_v = - \quad \hat{d}_r = - \quad \hat{d}_\delta = -$$


Statistics (mean value and standard deviation)

δ_c	0.24	\pm 0.89	deg	P_s	14.9	\pm 0.1	MW
δ	1.83	\pm 0.72	deg	ϵ_v	-		
$\psi - \psi_{ref}$	0.030	\pm 0.230	deg	ϵ_r	-		
n	69.7	\pm 0.4	rpm	ϵ_ψ	0.00	\pm 0.03	deg
u	13.4	\pm 0.1	knots	ϵ_δ	-		
v_1	0.120						


PL01 R28P1(1) - A28P1(8) MP R28P1(18) R28P1(115) R28P1(116) R28P1(117)

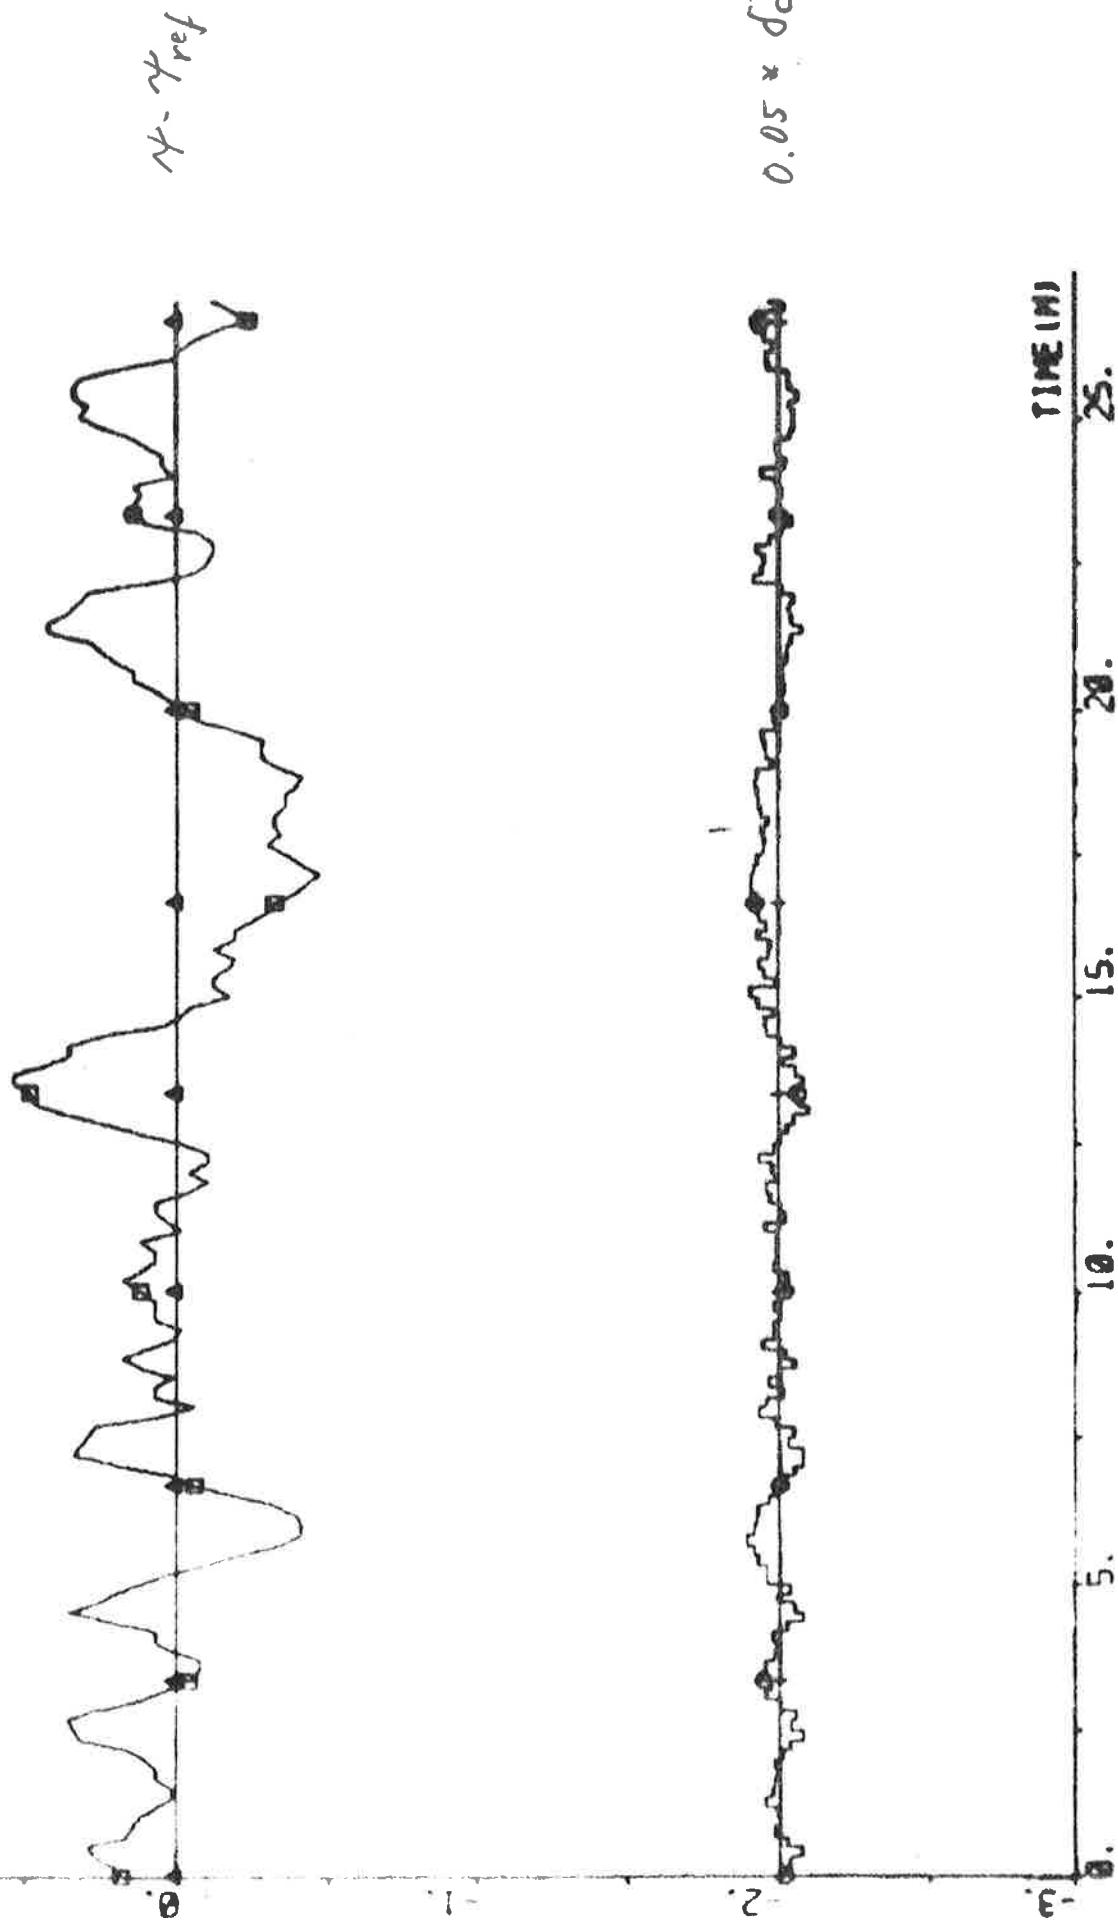

PL07 R28p1 (11) - R28p1 (13) R28p1 (12) R28p1 (19) R28p1 (11)

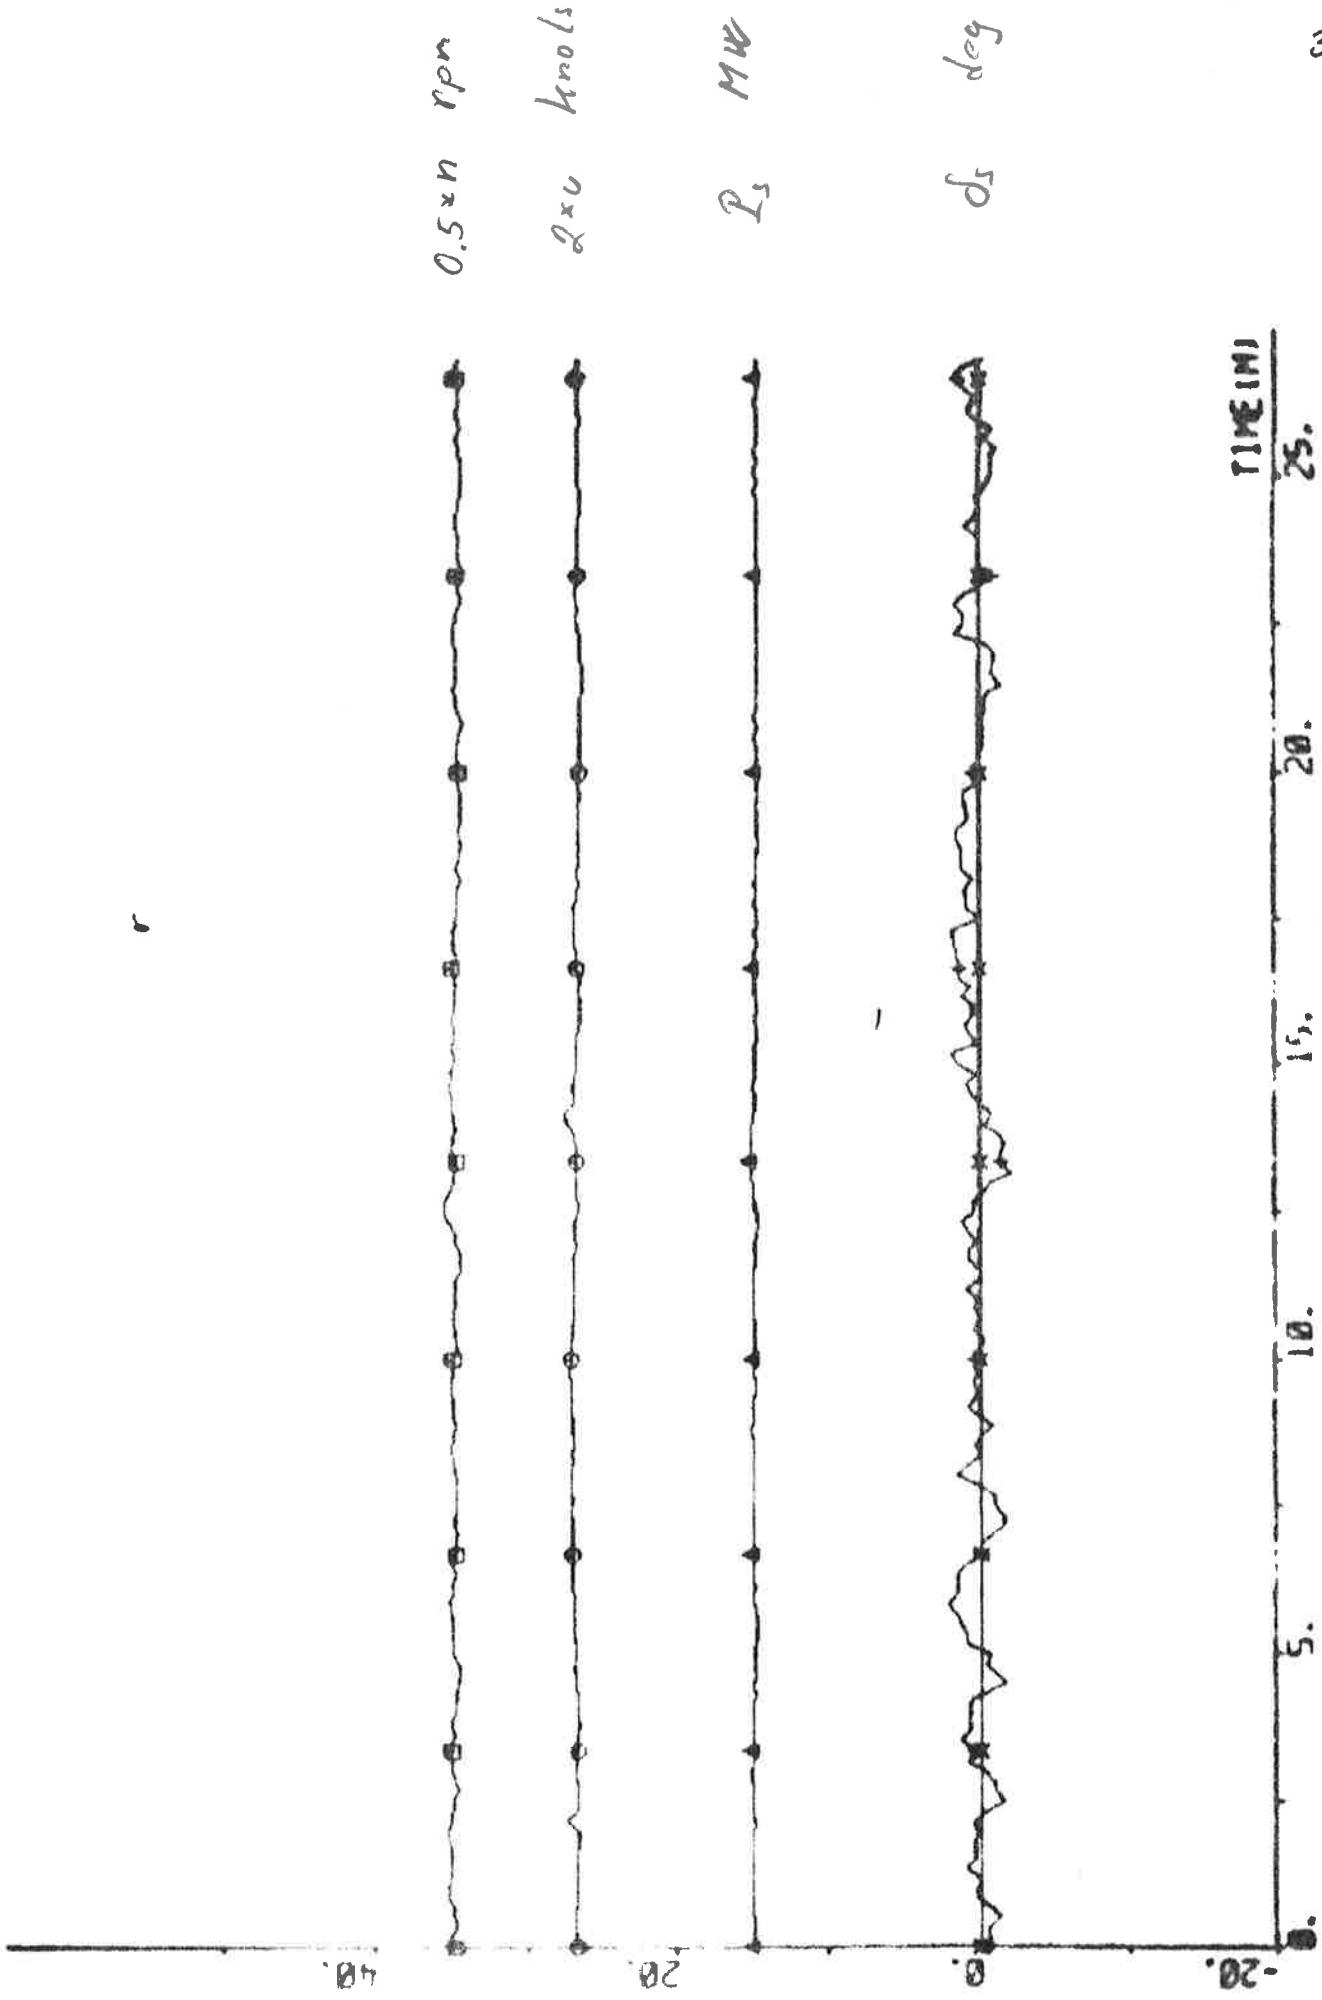

PLOT #2821(1)-#2822(1) #282(2) ERMS 00 01 02 -3.4 0.0 - RAD

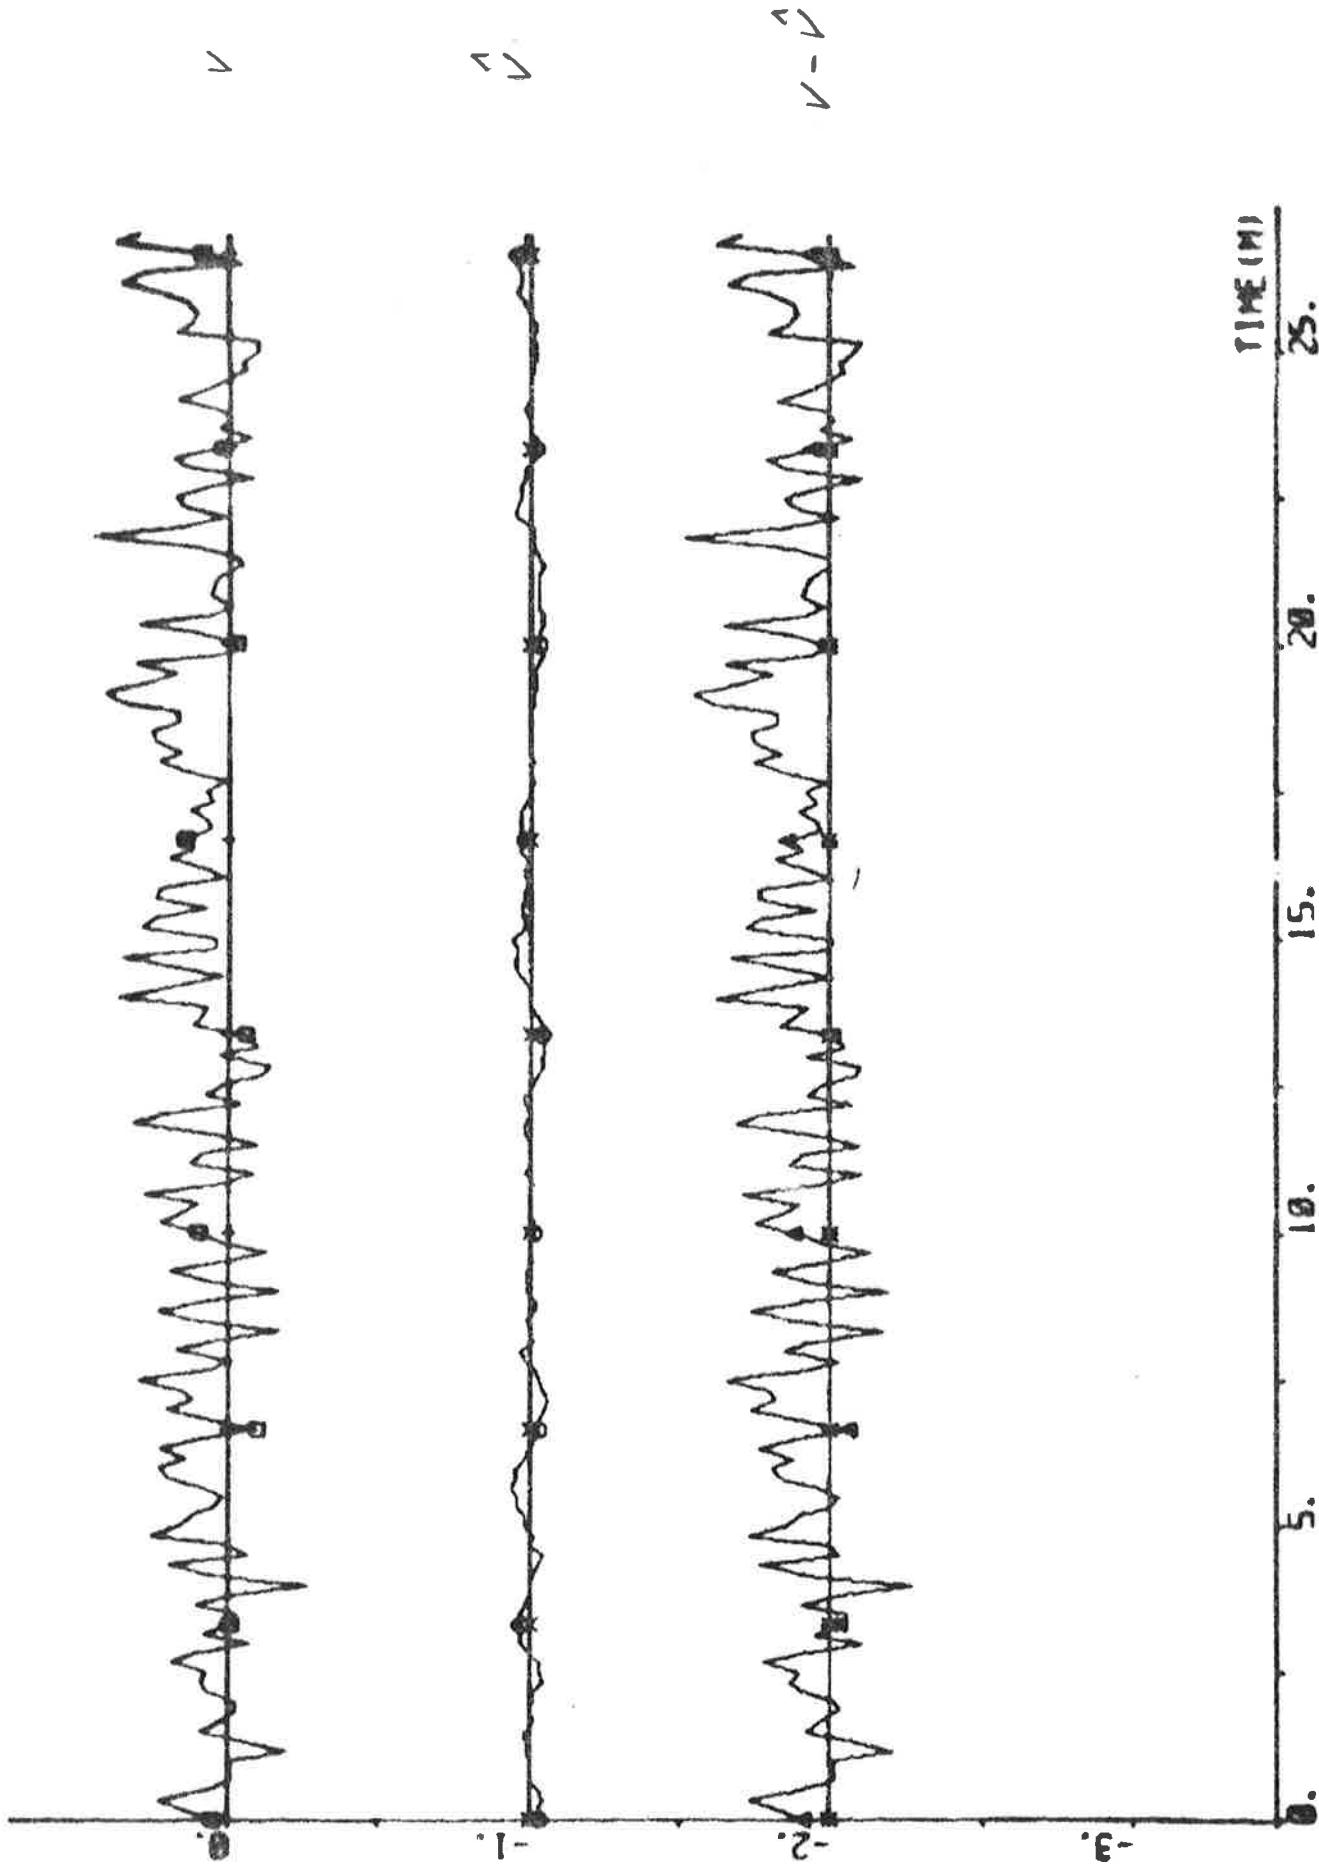

15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.

16.

17.

18.

25.

20.

15.


16.

17.

18.

25.


PL01 R229P1(11)-R229P1(4) R229P1(5) R229P2 00 01 02 -3.4 0.0 - 0.0

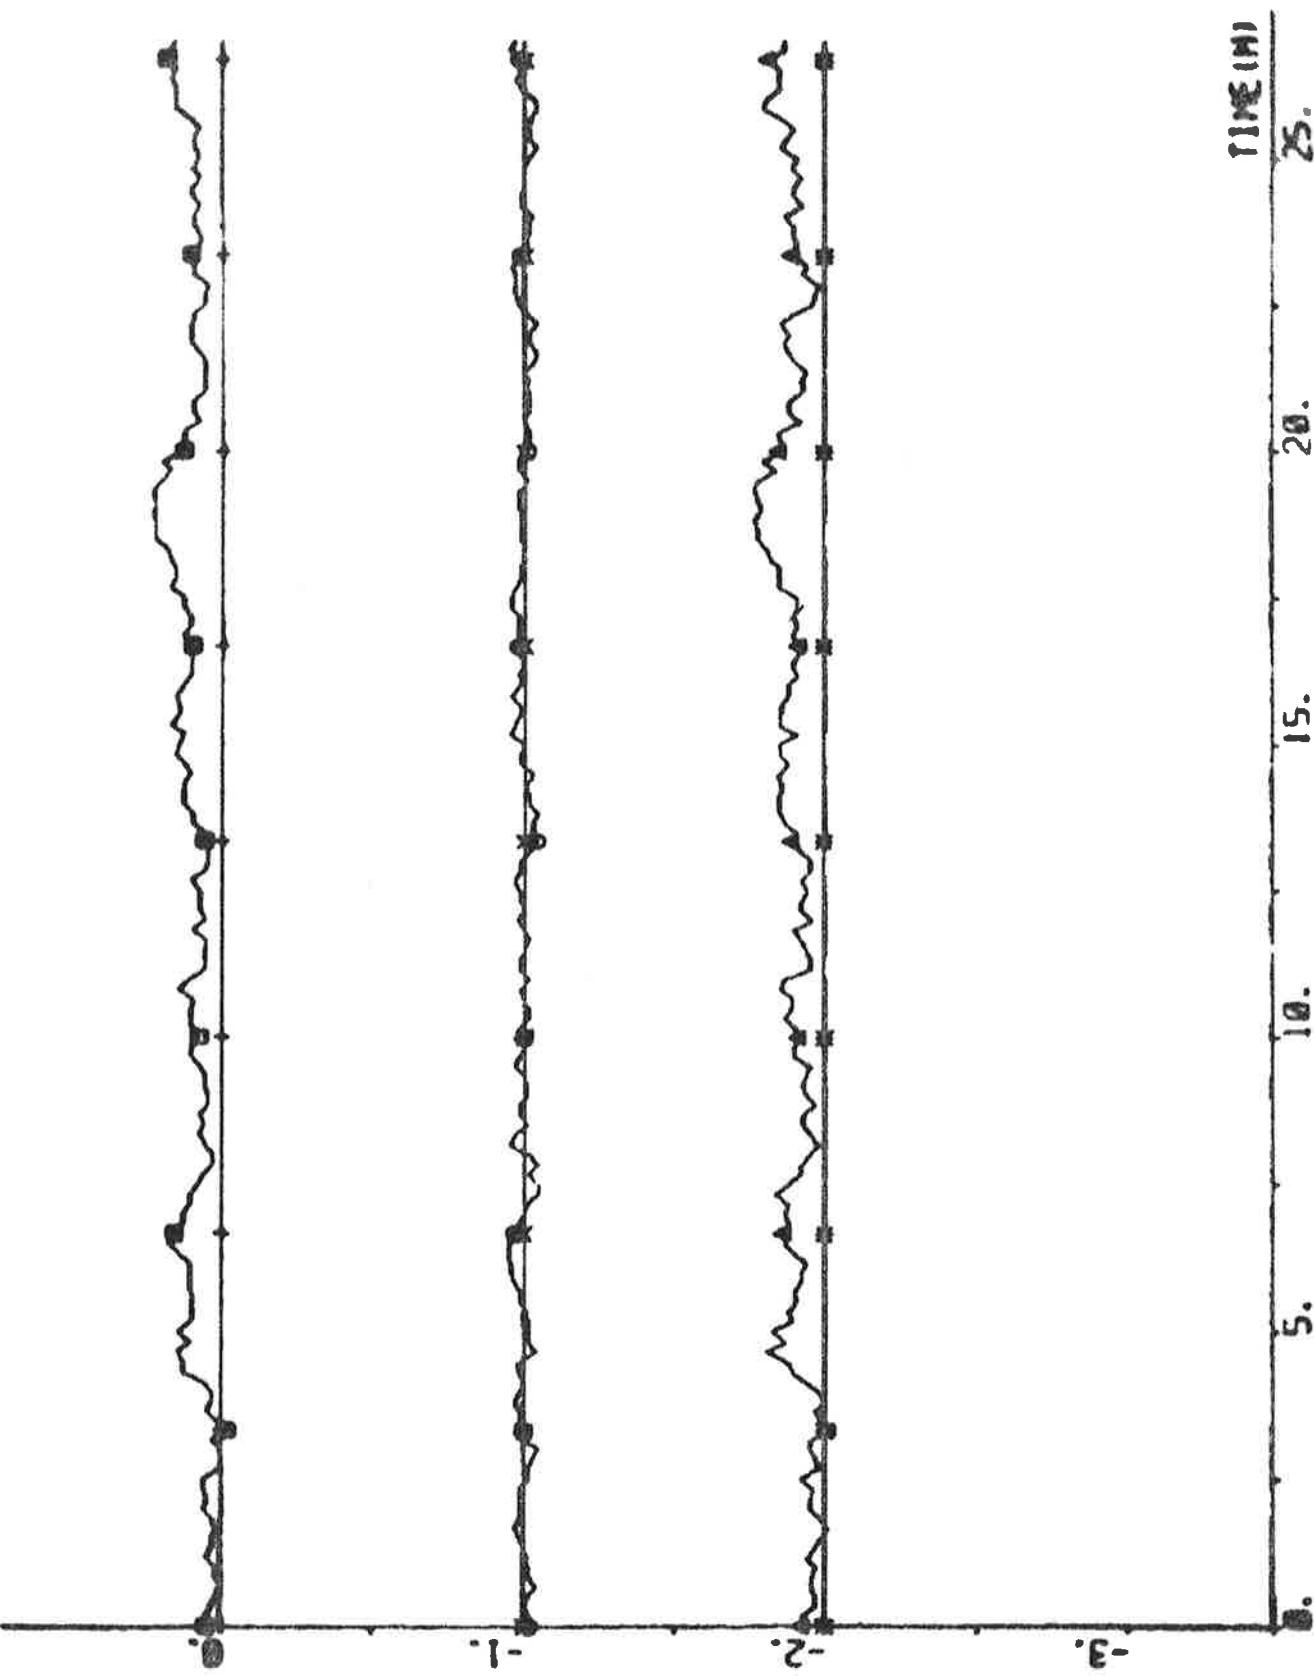




PL01 R2001(1)-R2001(6) R2001(7) ER02 00 002 004-0.7.0. - mcs

PLOT R2SP1(1)-R2SP1(0) R2SP1(0) R2SP1(1)

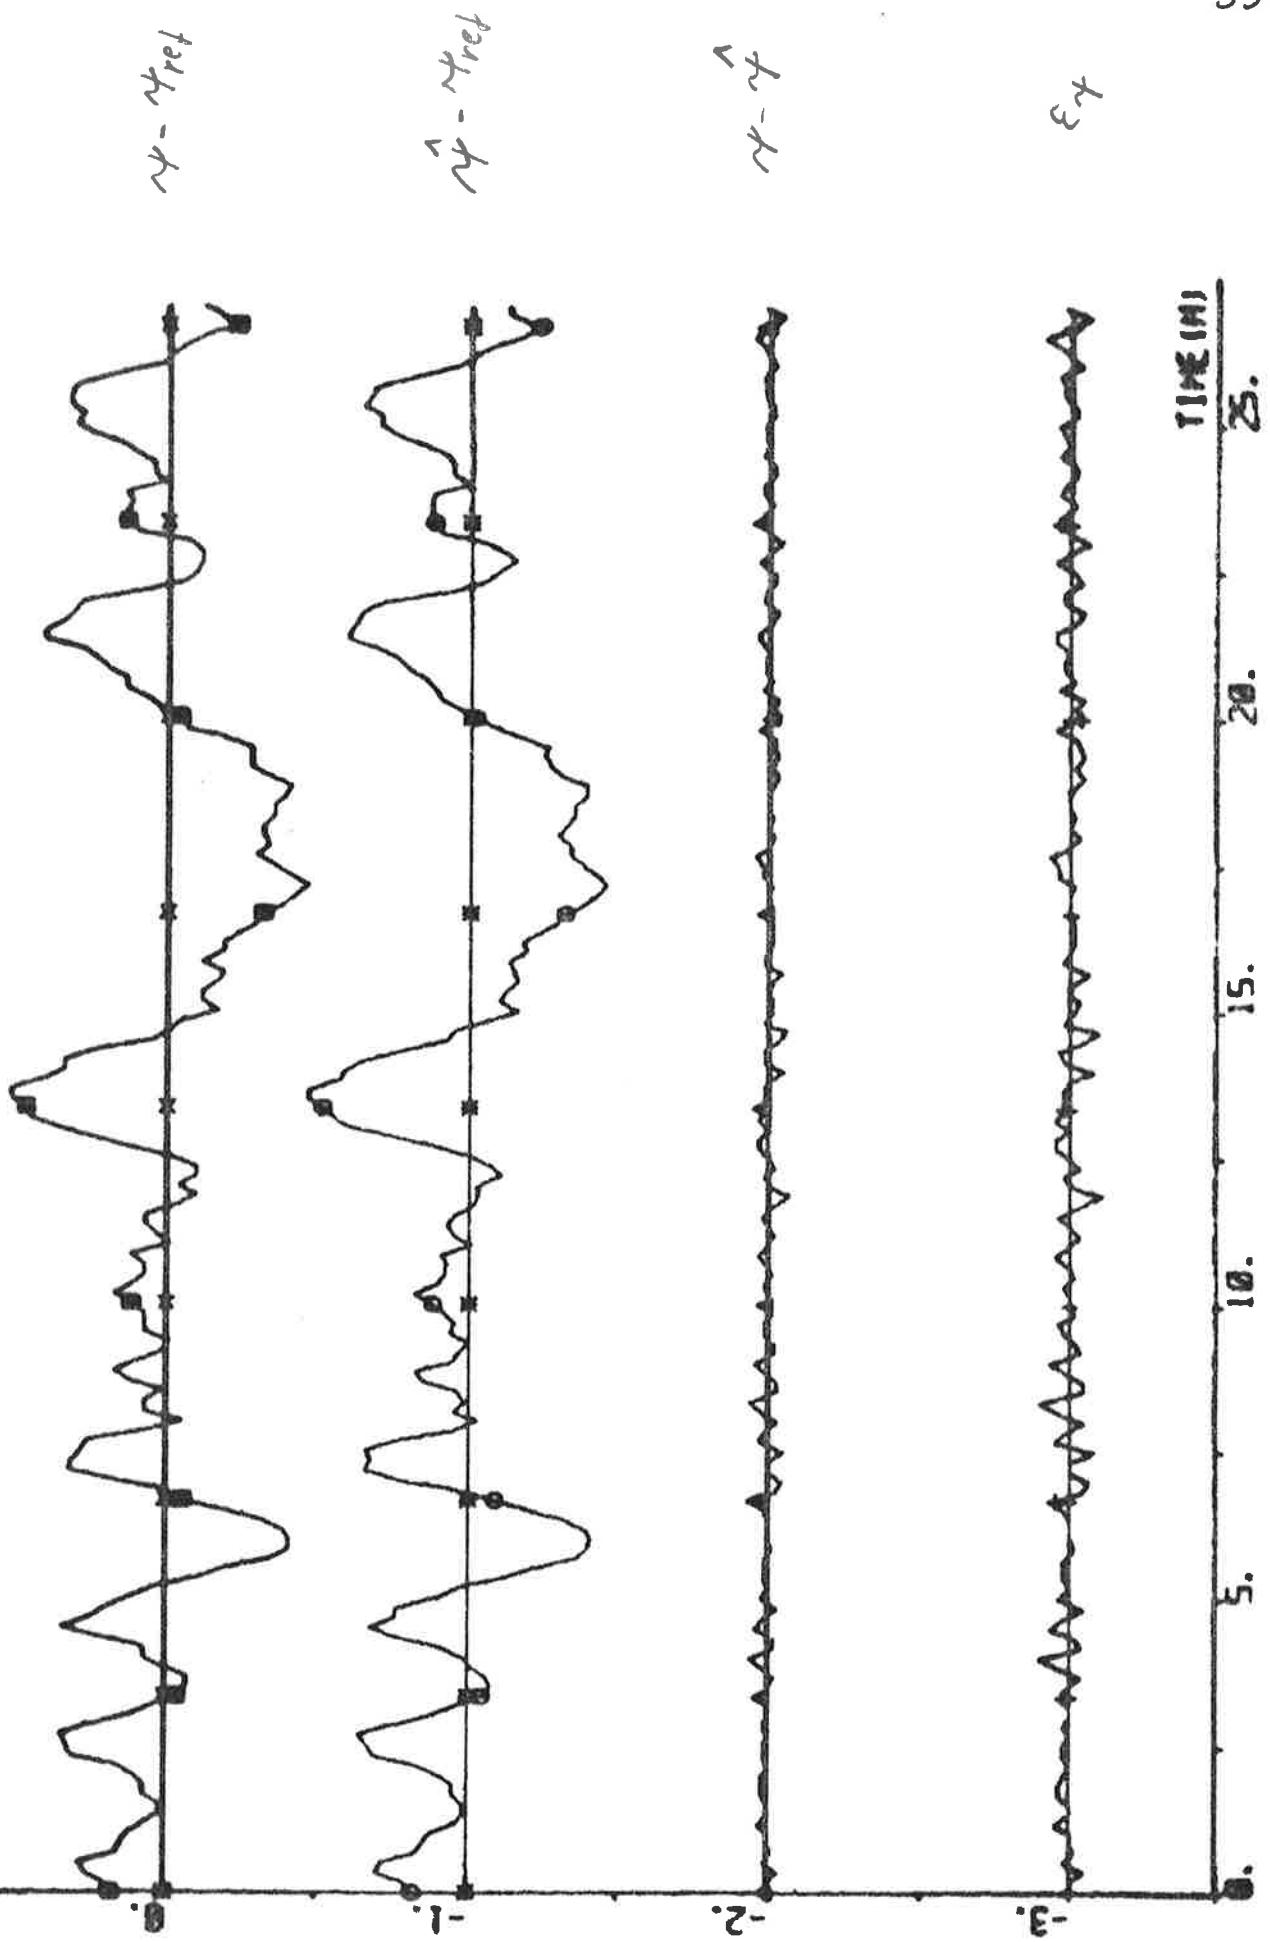


PL07 A2091(11)-A12091(12), A2091(13), E2091 00 020 040 - 00 10 - 005

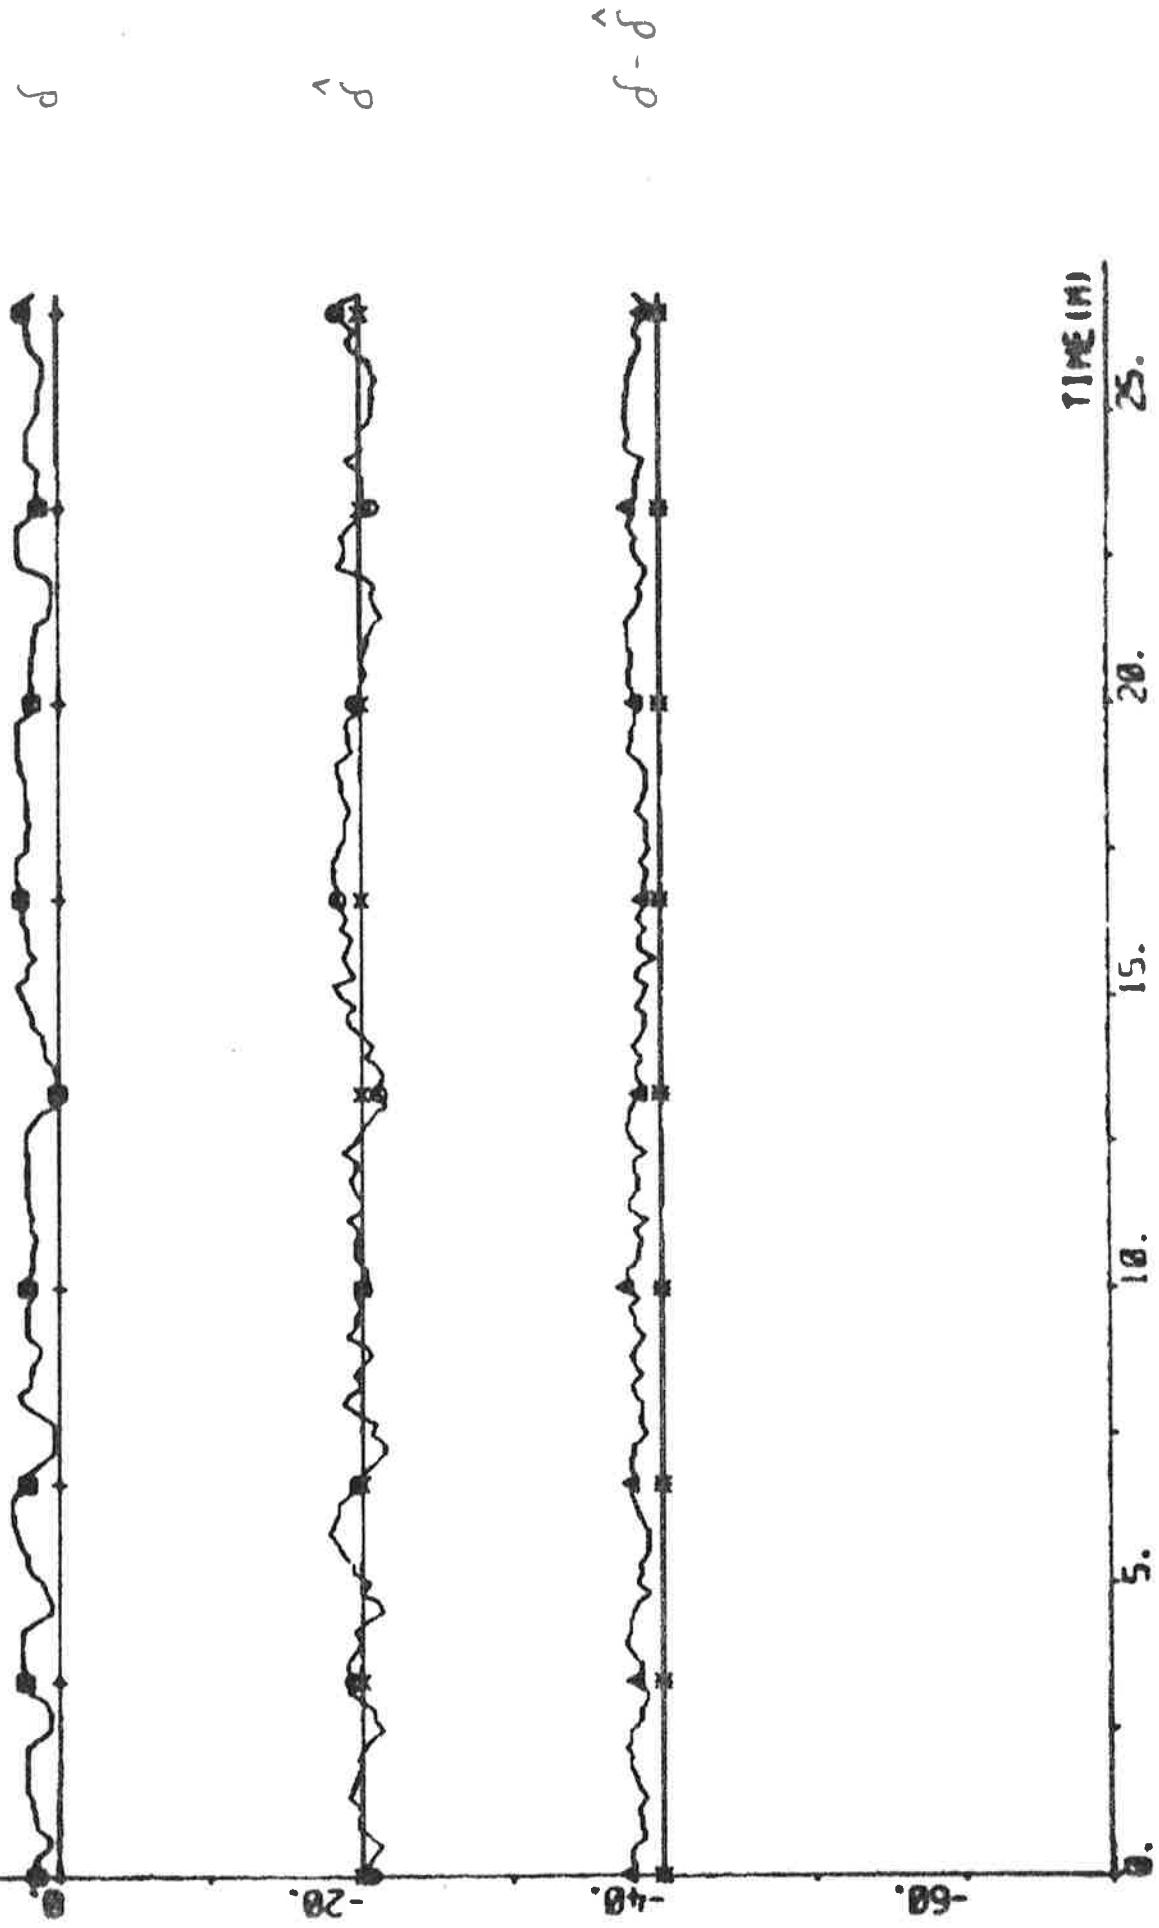



not H2sp1(1) H2sp2(7) H2sp2(8) H2sp2(9) H2sp2(10) H2sp2(11) H2sp2(12)

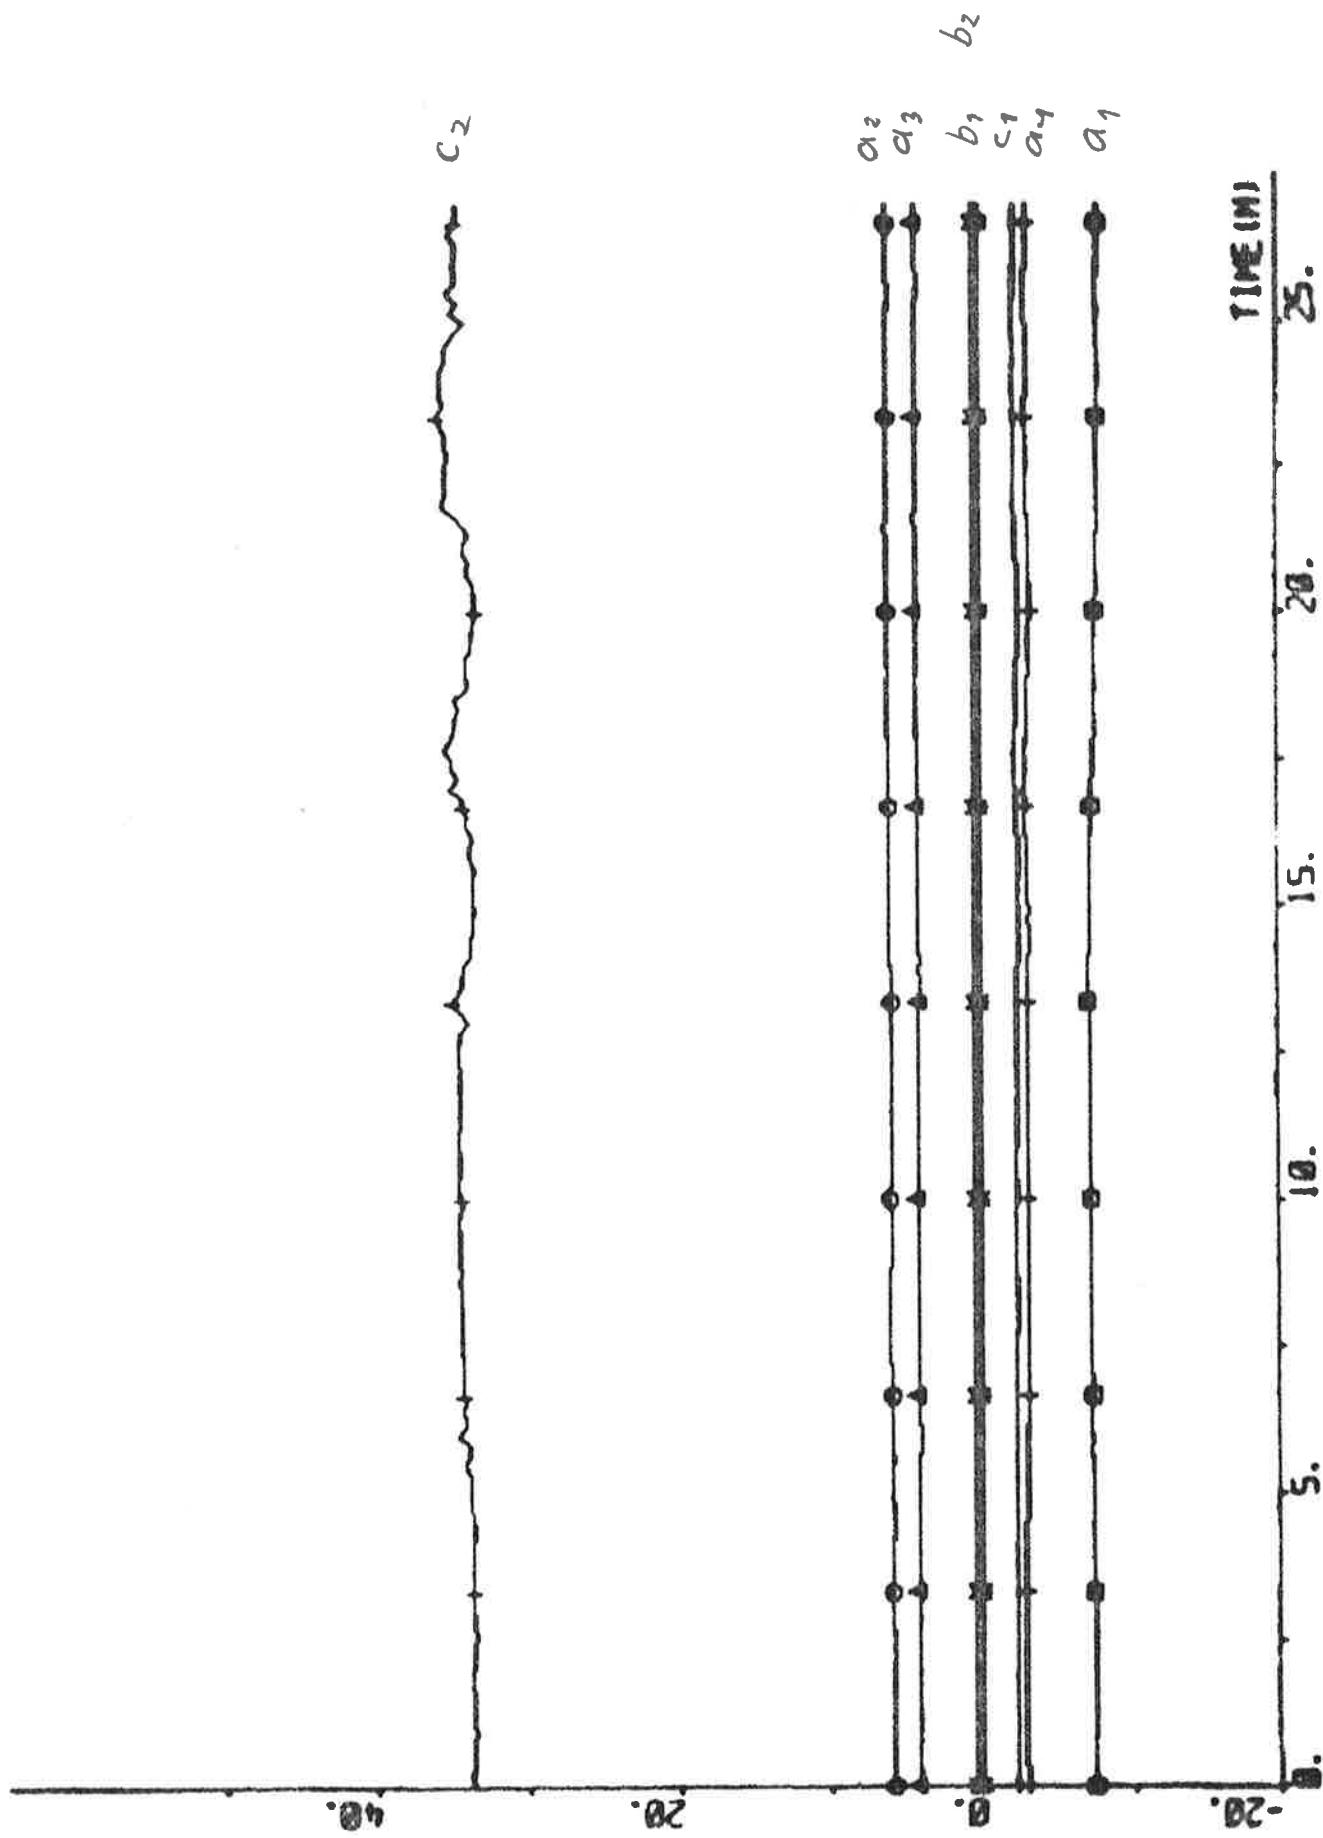

EXPERIMENT A27

| | | | |
|--------------|-------------------|-----------------|-------------------------|
| Date | 1976-04-26 | Forward draught | 8.5 m |
| Time | 10.58 | Aft draught | 12.5 m |
| Duration | 22 min | Wind direction | SE (1; see App. A) |
| Position | S 05°46' W 06°47' | Wind velocity | 7 m/s (moderate breeze) |
| ψ_{ref} | 143 deg | Wave height | - |

Self-tuning regulator using estimates from the Kalman filter.

The sway velocity v_1 , the yaw rate r and the rudder angle δ were not used by the Kalman filter.

Tuning time before the experiment started: 30 min.

NC1 = 1 NC2 = 1 k = 7 q = 0
T_s = 10 s V₀ = 6 m/s IVVC = 1

Final values:

$$\begin{array}{c|ccccc} a_1 & -7.76 & & 8.62 & & \\ a_2 & 6.63 & & -9.82 & 17.35 & \\ a_3 & 4.48 & & -2.84 & -6.15 & 17.88 \\ a_4 & -3.73 & & 3.91 & -1.25 & -9.09 & 6.79 \\ b_1 & 0.45 & & -0.11 & -0.26 & 0.61 & -0.22 & 0.05 \\ b_2 & 0.08 & & 0.03 & -0.05 & -0.17 & 0.22 & 0.01 & 0.03 \\ c_1 & -3.32 & & -5.54 & 5.46 & 2.32 & -1.75 & 0.04 & -0.04 & 7.35 \\ c_2 & 41.43 & & 2.63 & -23.88 & 2.03 & 21.41 & -1.46 & -1.31 & 75.43 & 2667.92 \end{array}$$


$$a_1 + a_2 + a_3 + a_4 = -0.38$$


$$\hat{d}_0 = 0.3 \text{ deg} \quad \hat{d}_v = - \quad \hat{d}_r = - \quad \hat{d}_\delta = -$$

Statistics (mean value and standard deviation)


TIME (ms) 25. 20. 15. 10. 5.

0.05 * dc

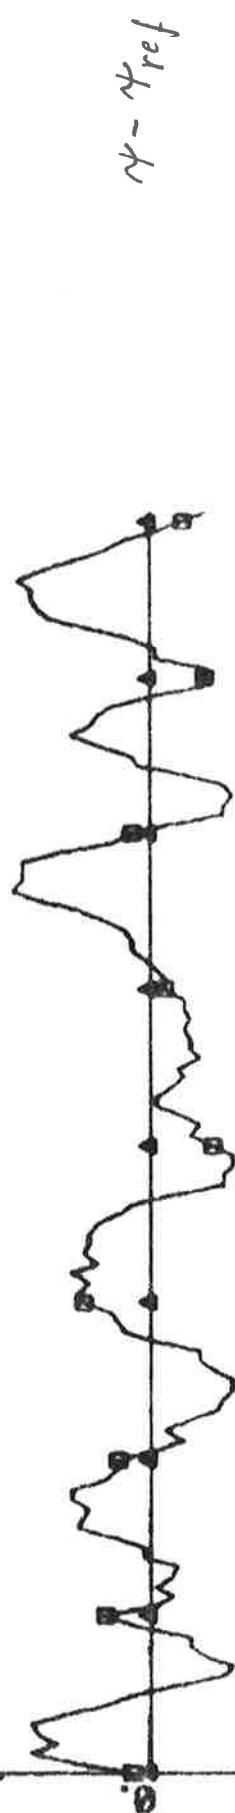


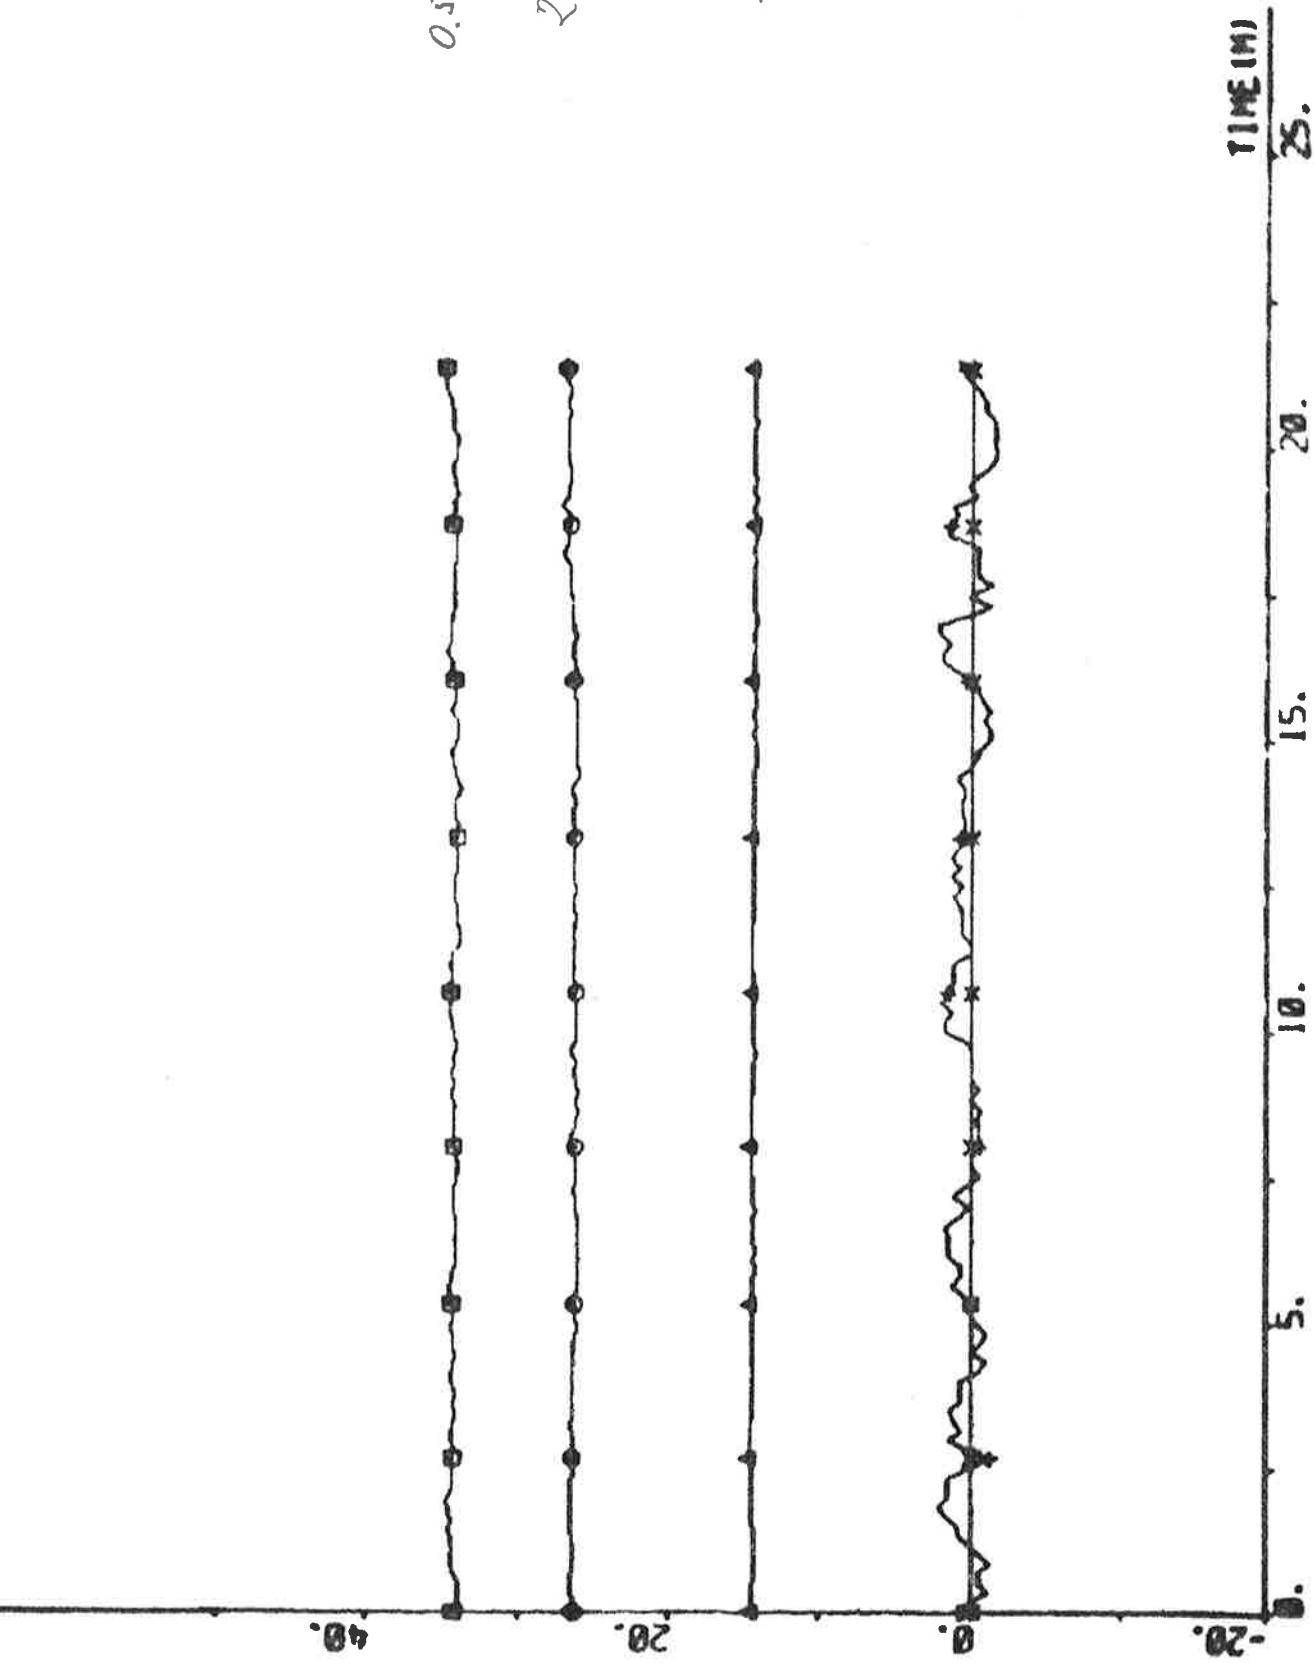



PLOT R27P1(1)-R27P2(1) R27P2(2) ERRE 00 01 02 -3.4 0.0 - 10973

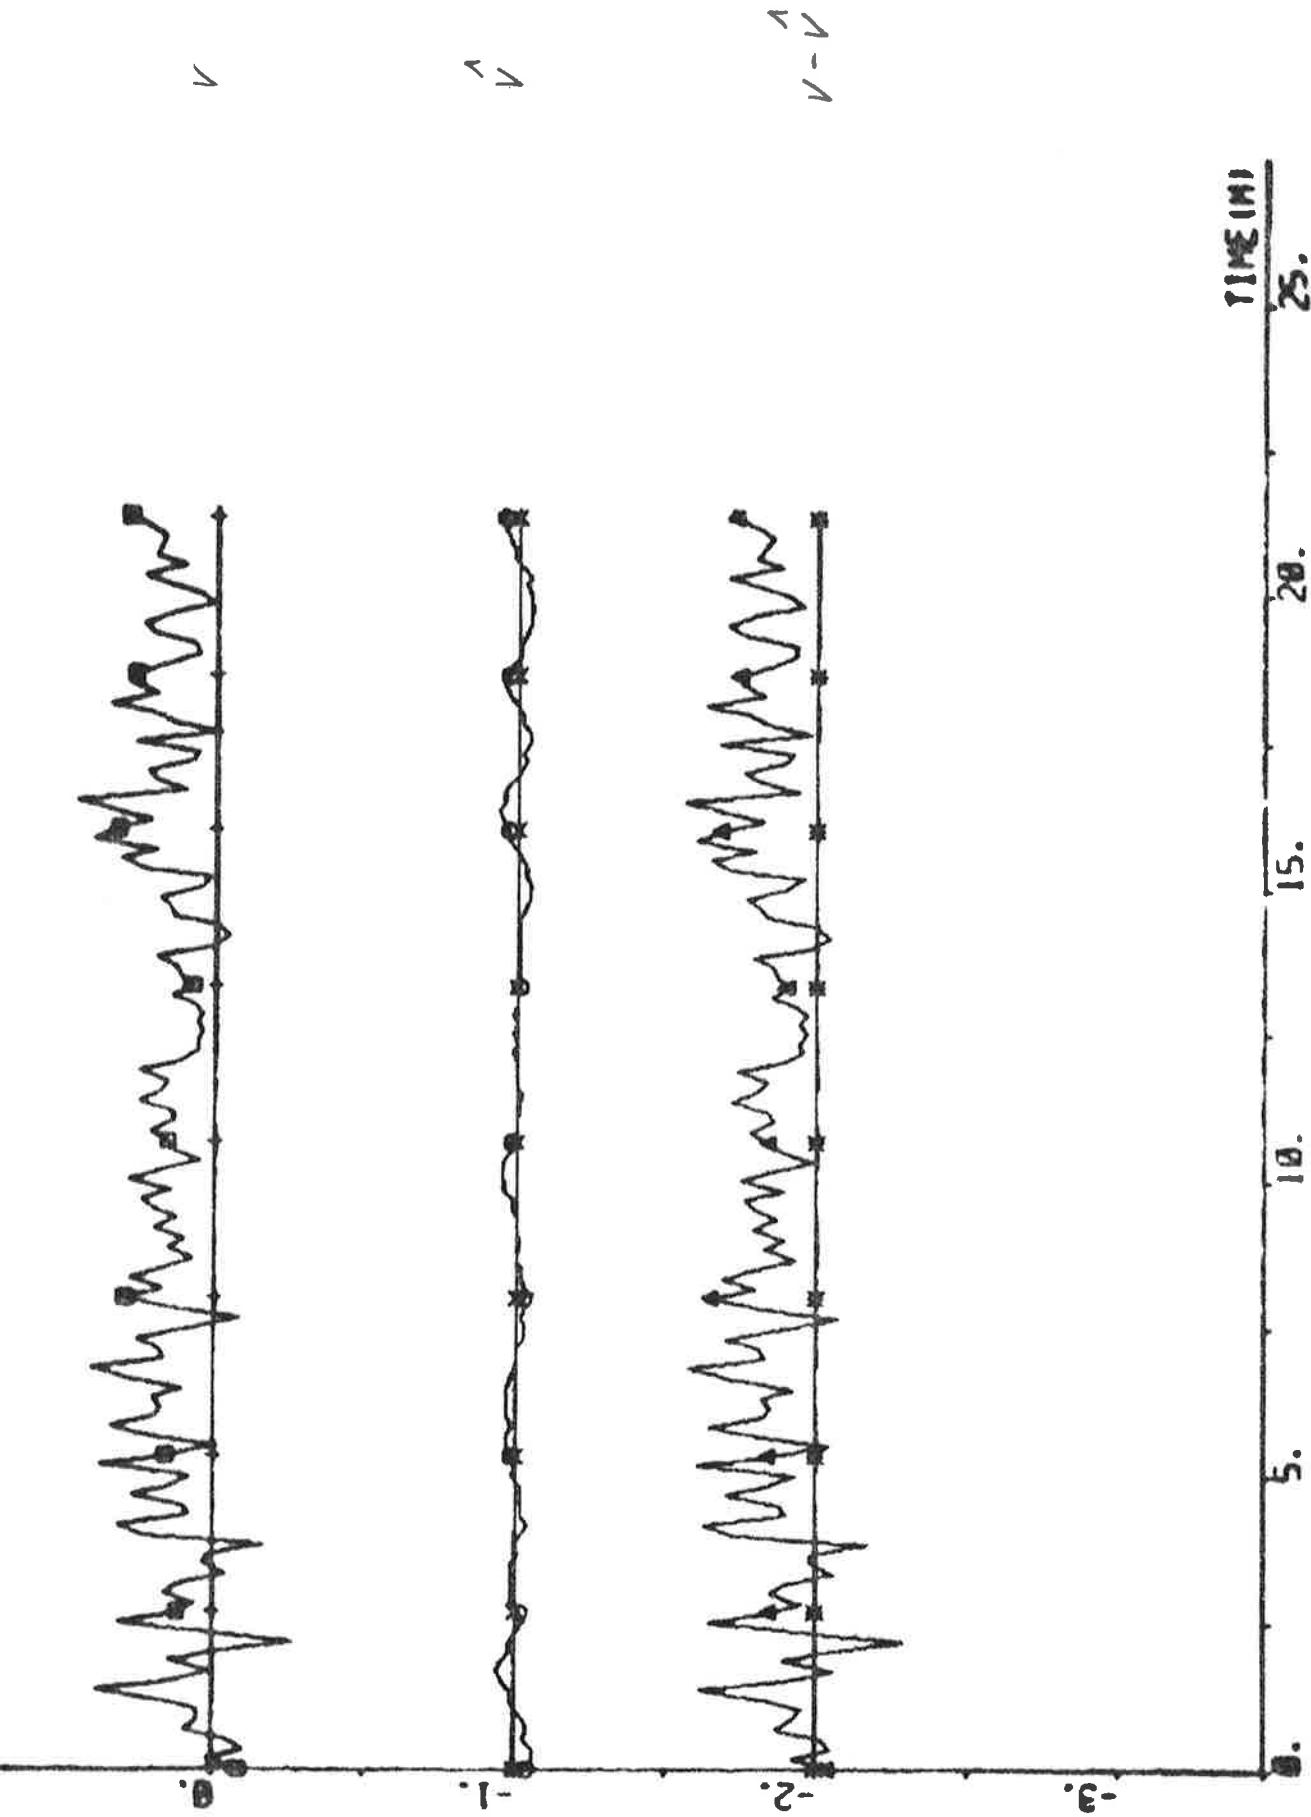


PLOT A27P1(1)-A27P1(4) A27P1(5) ER22 00 01 02 -3.4 0.0 • KNOTS

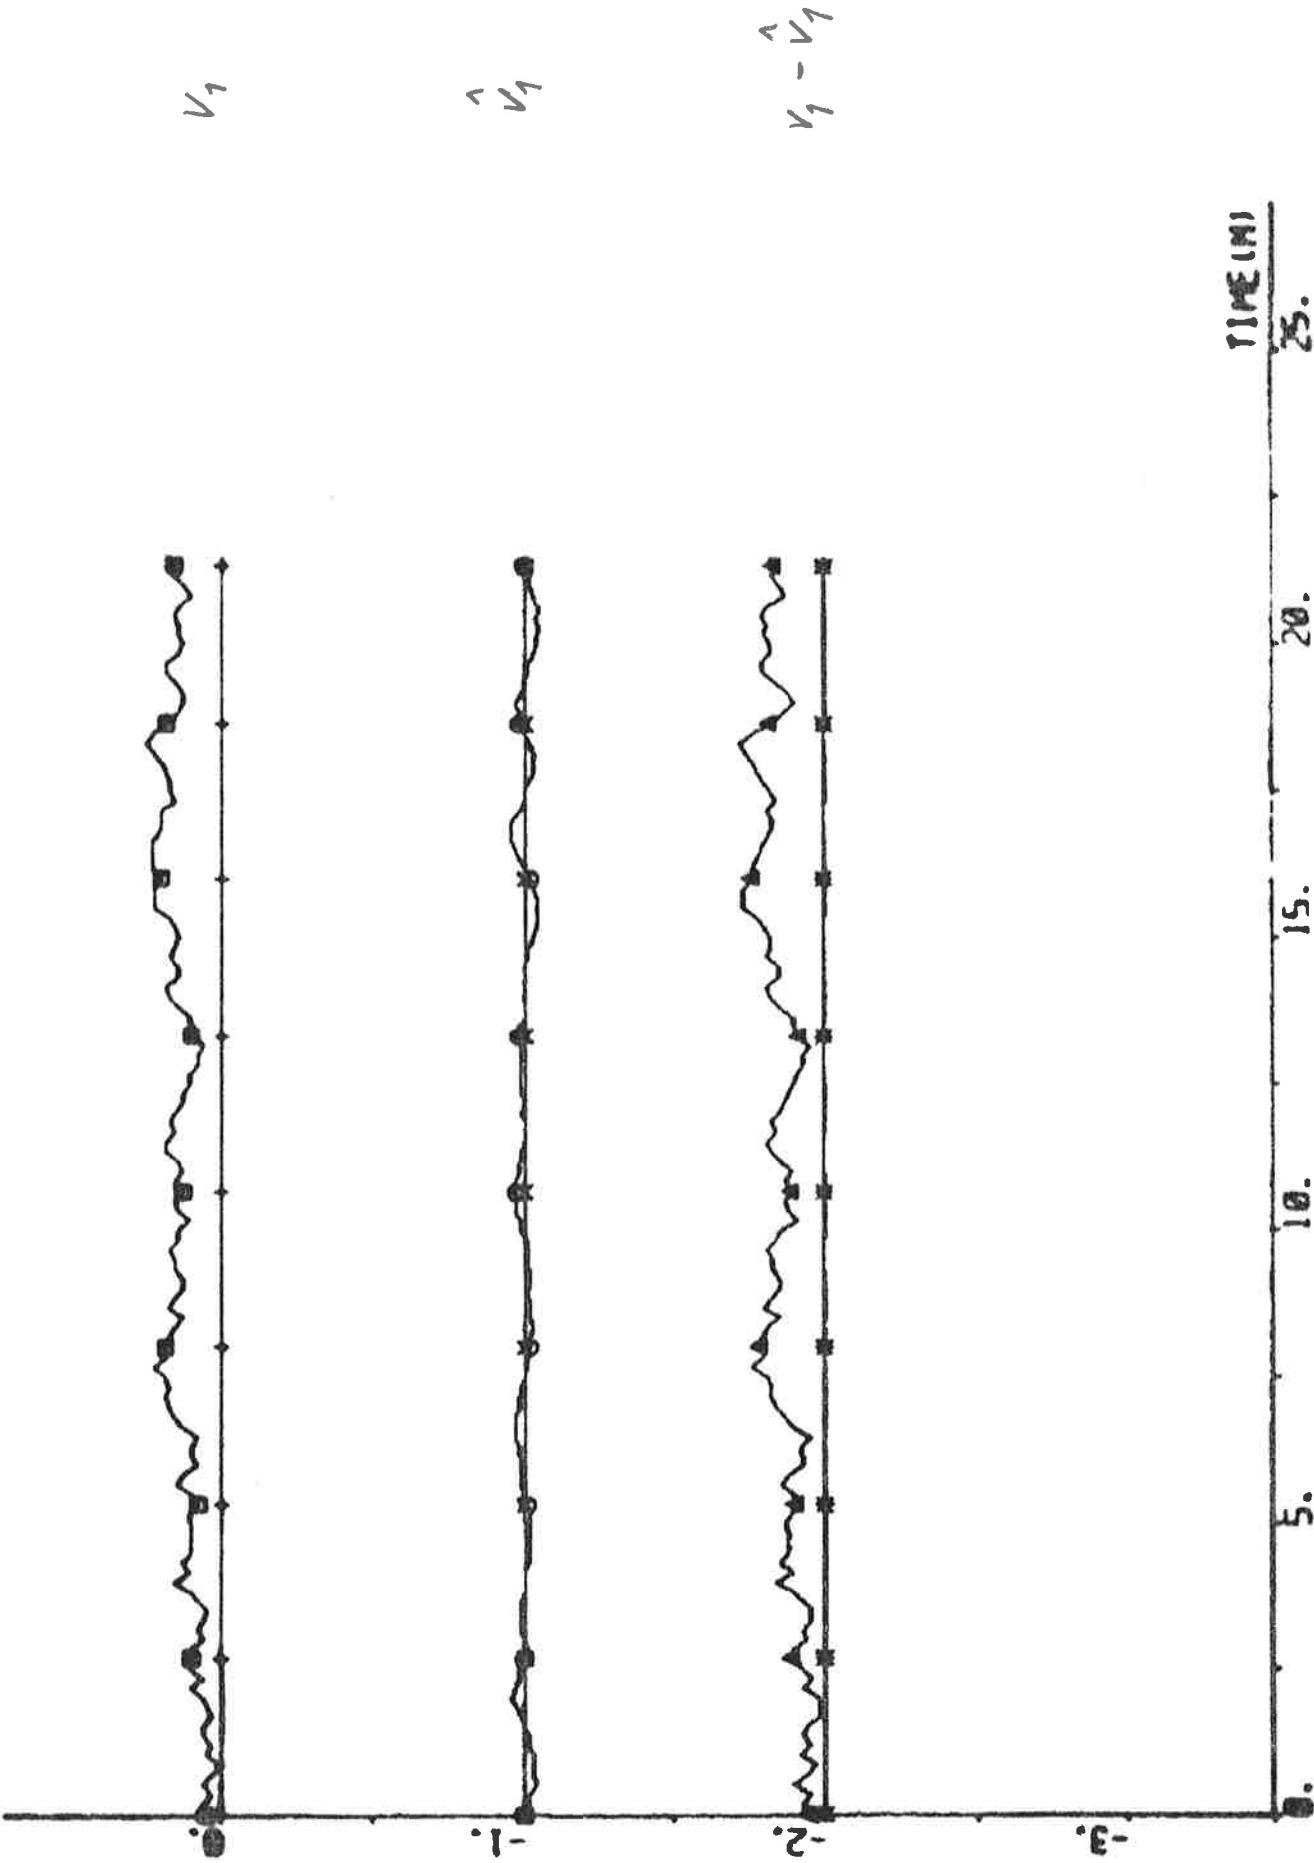

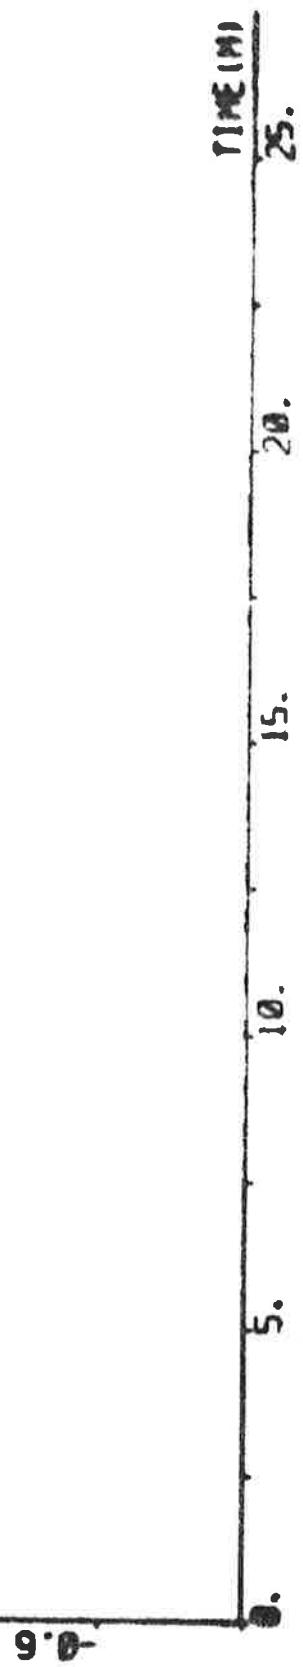


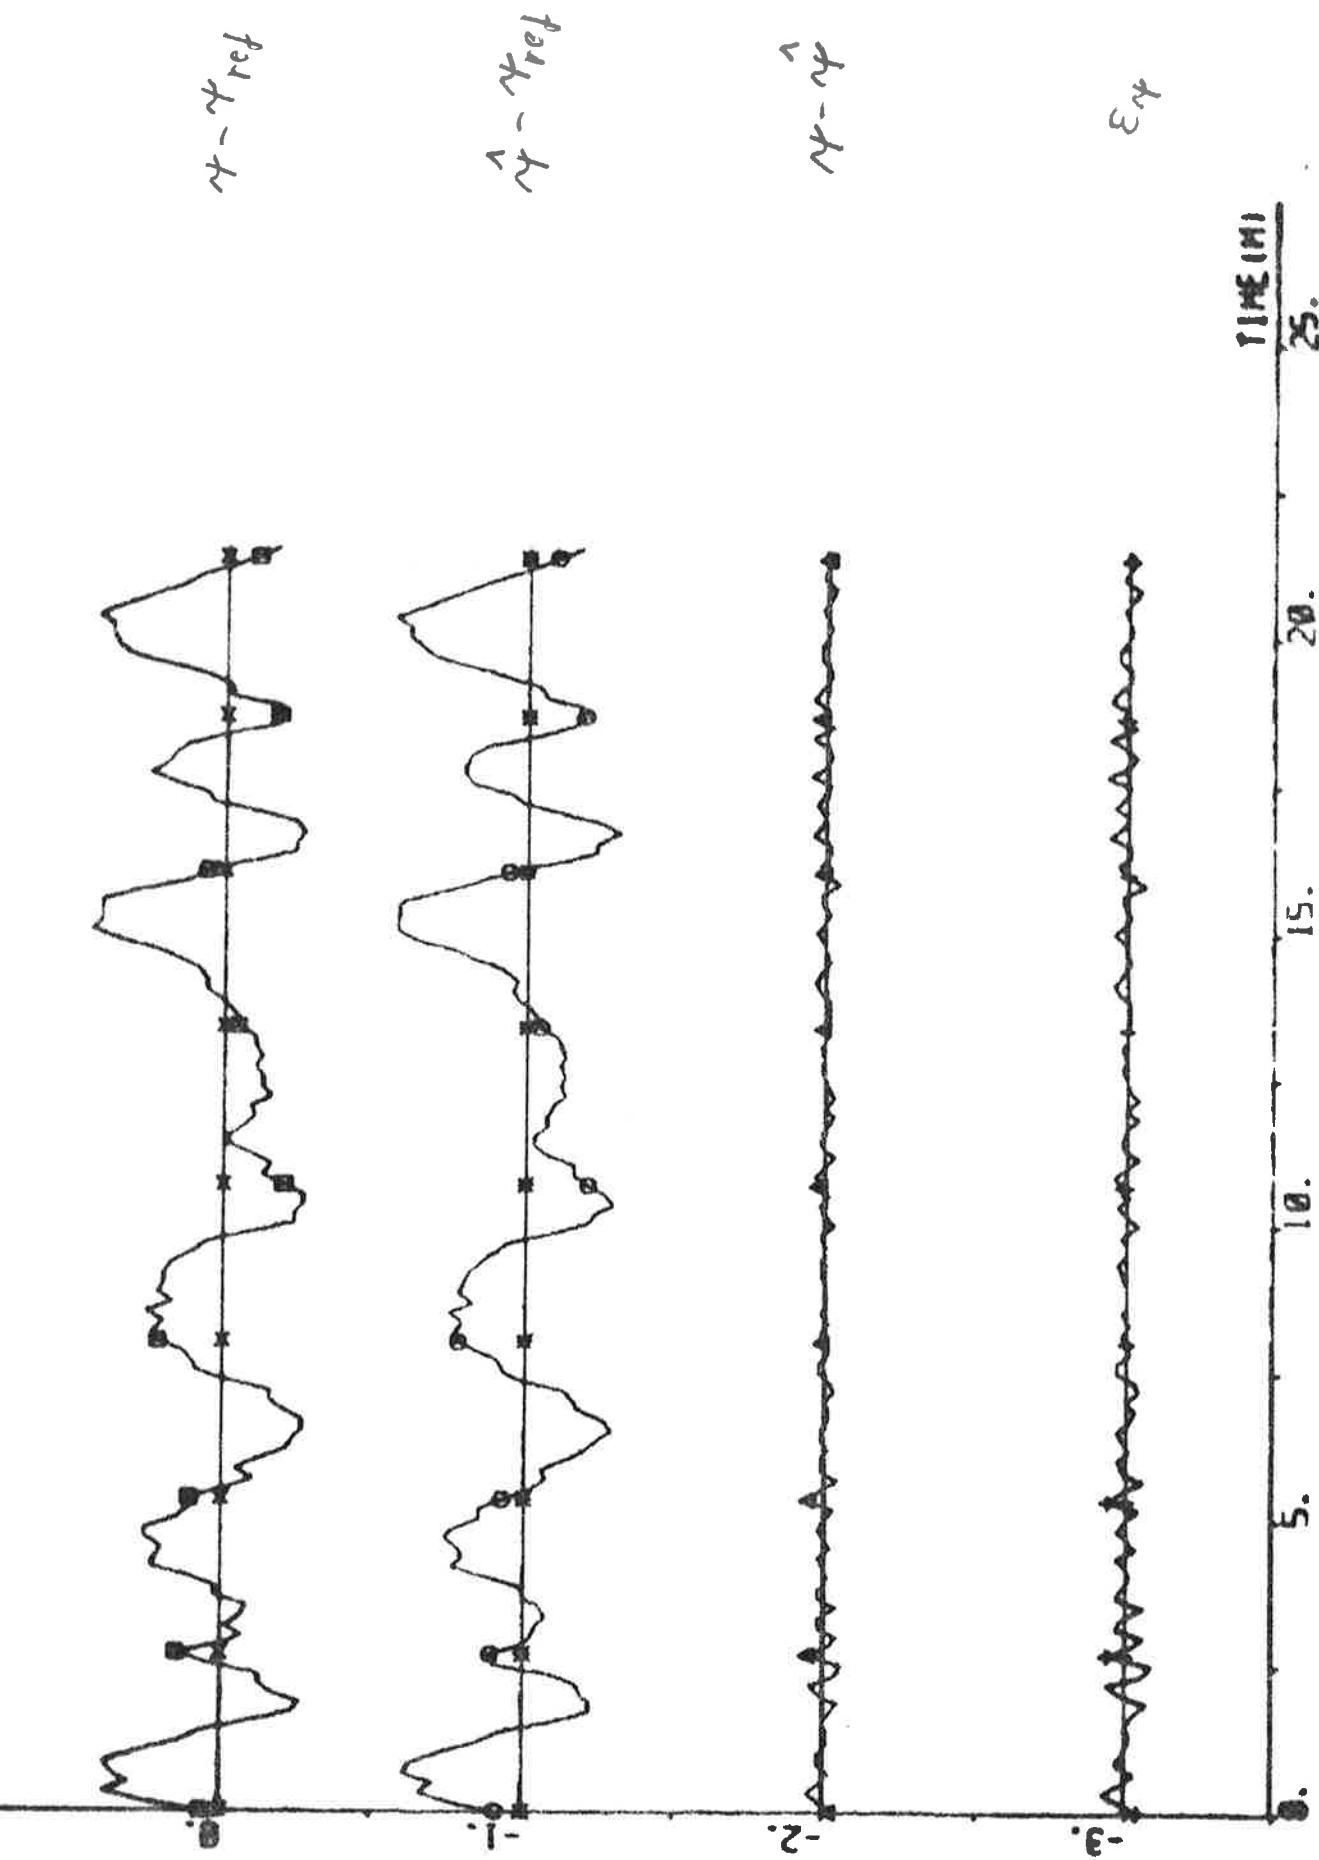


1001 10271(1)-10271(2) 10271(3) 10271(4) 10271(5) 10271(6)

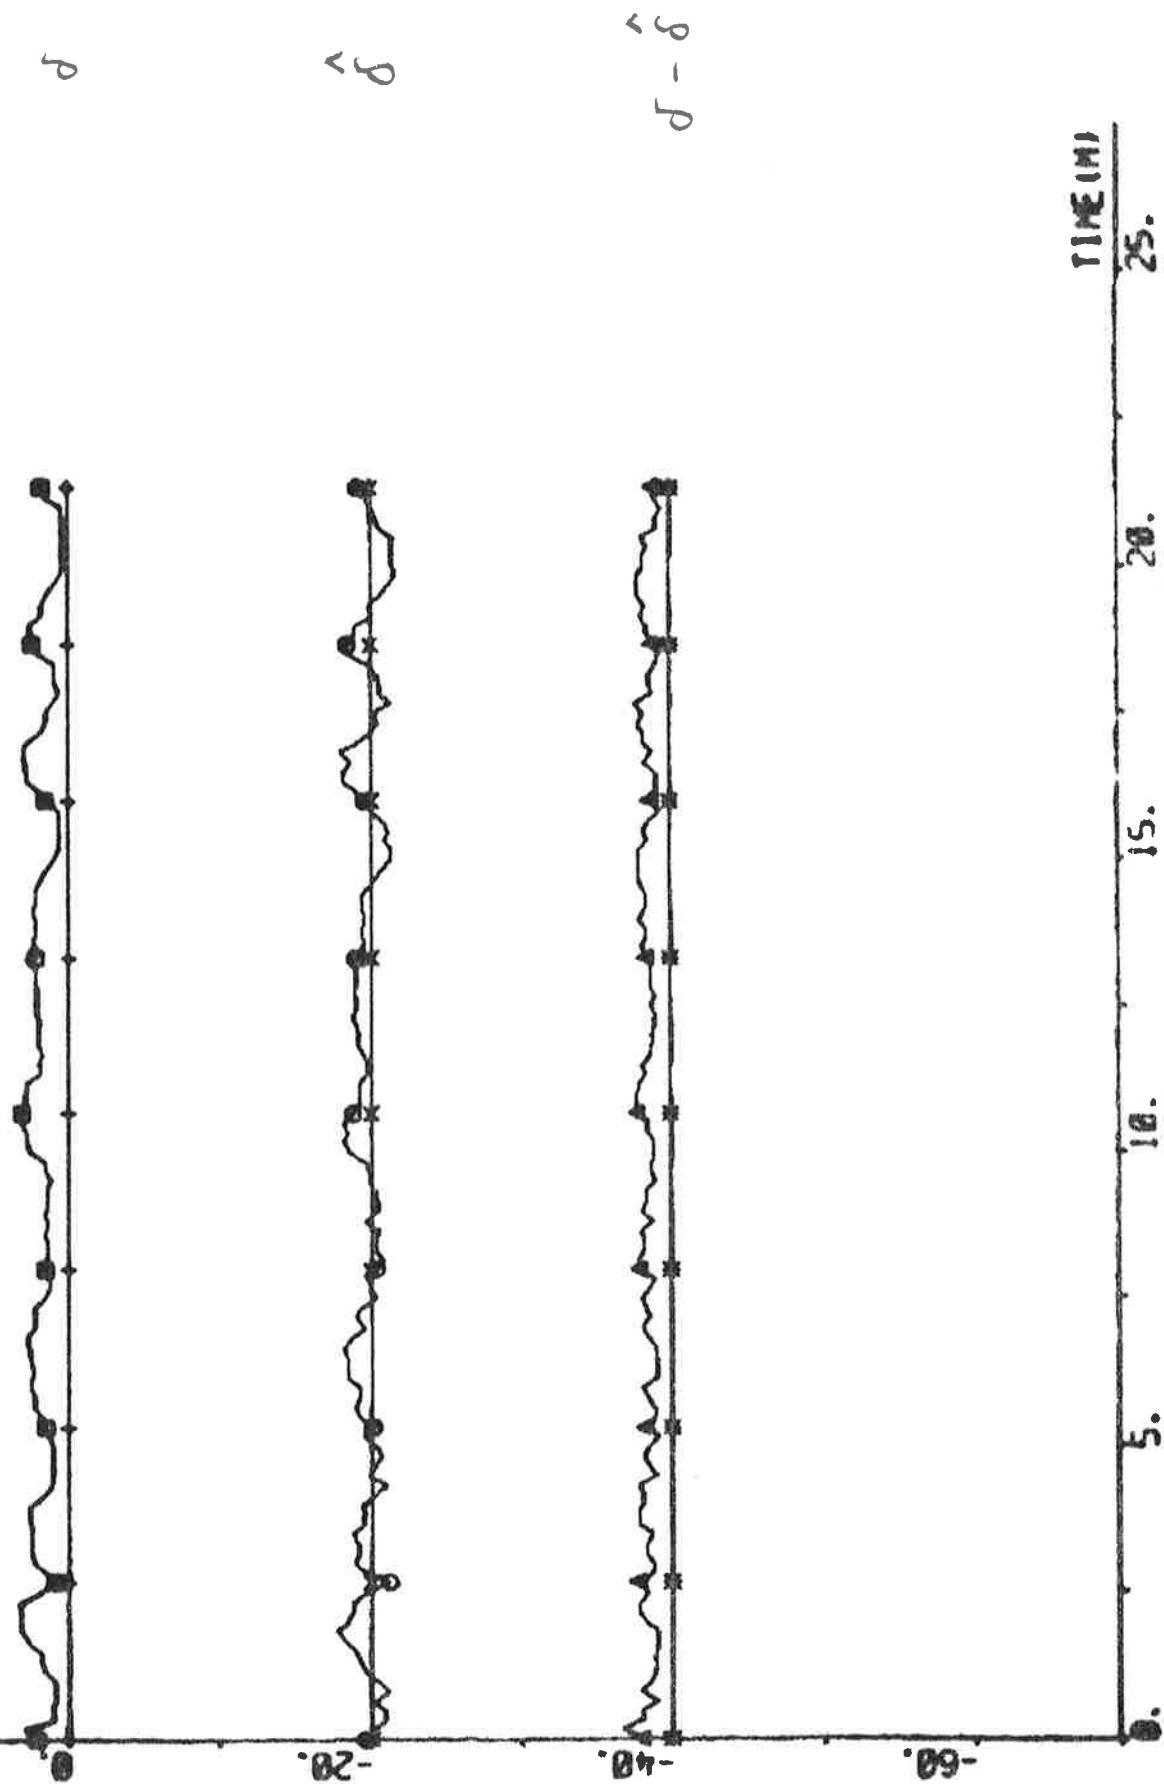

Plot #271 (1) - 42712(3) 83 - 8.5 1.5

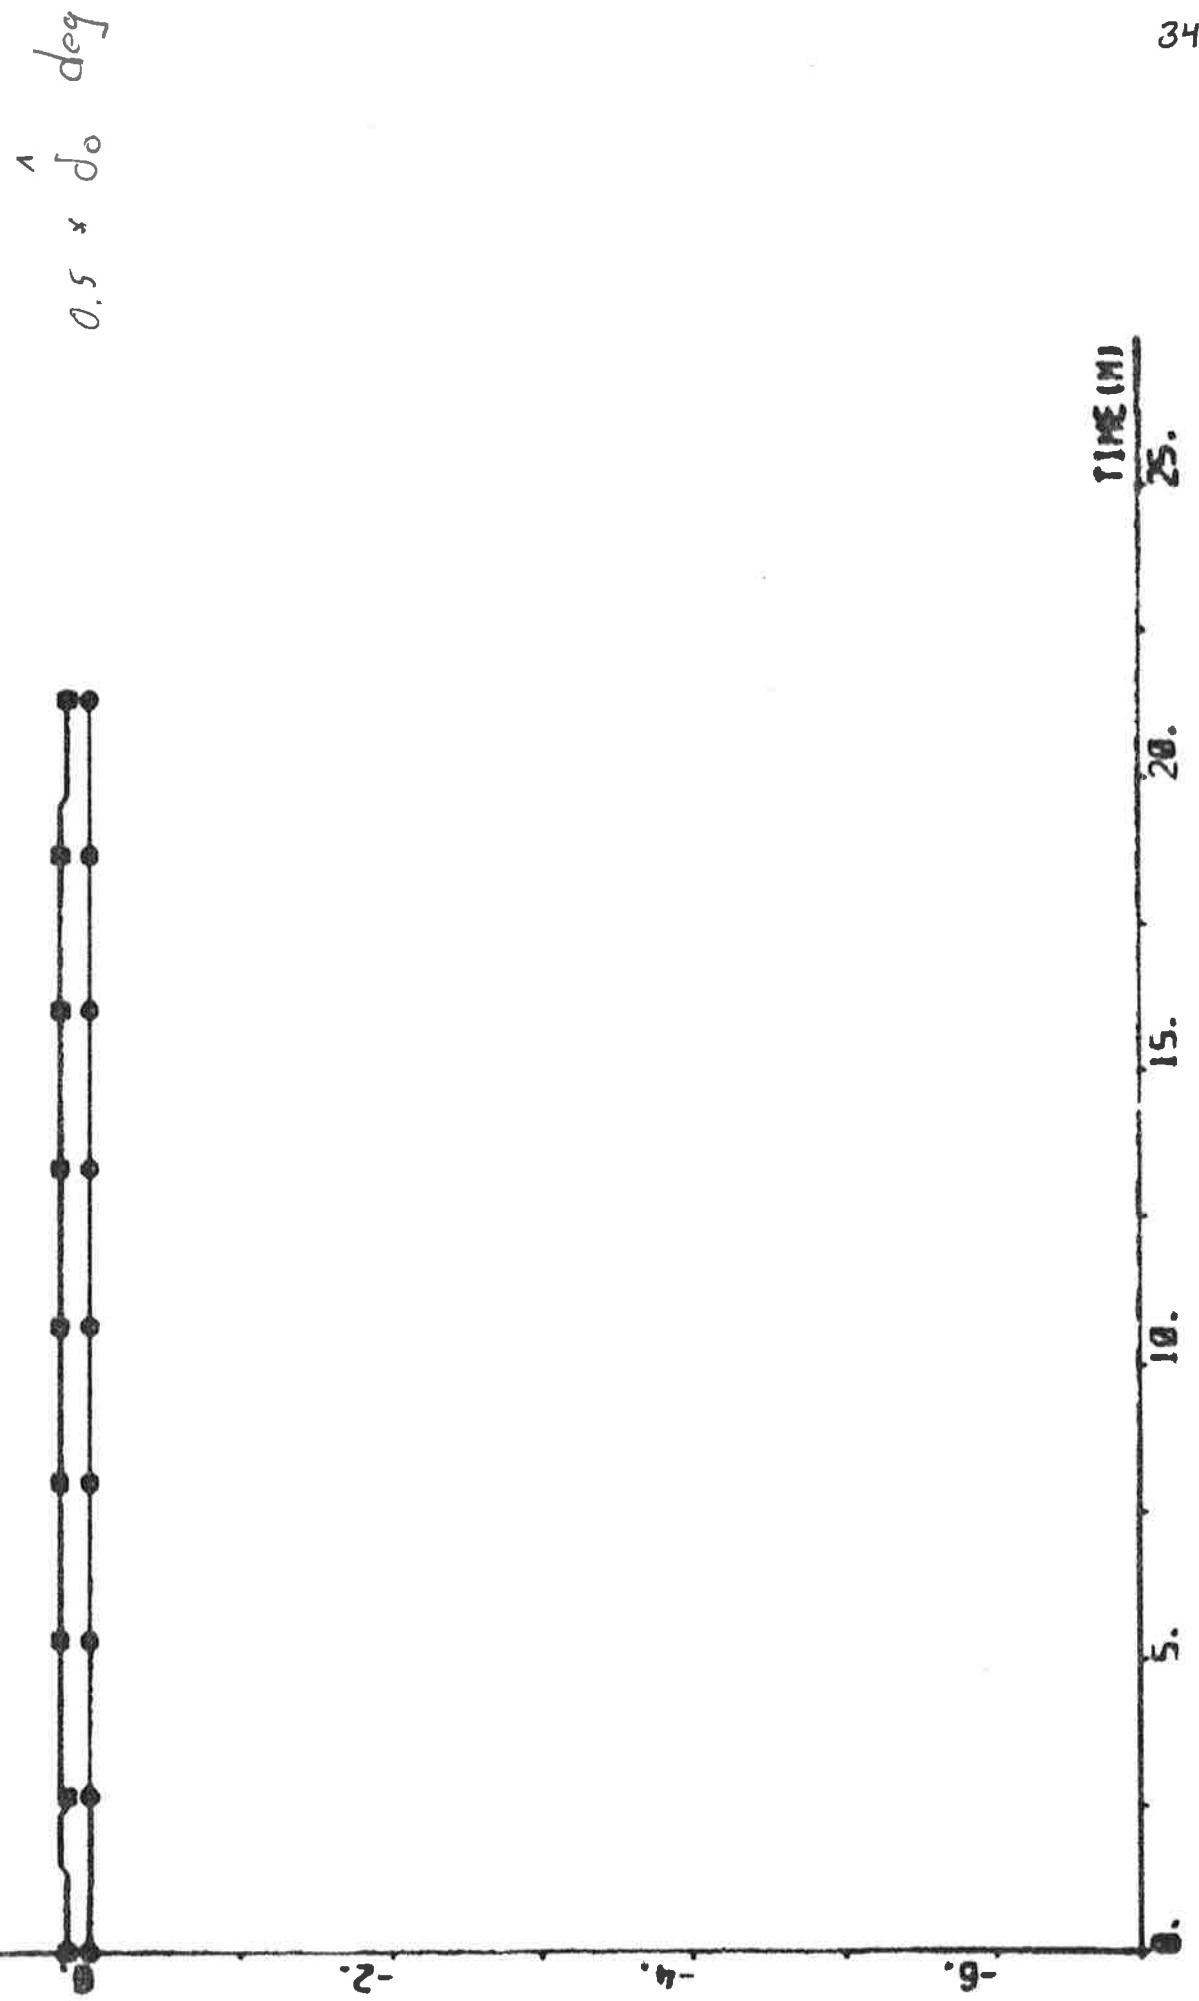

PLOT #27P1(1)-#27P2(7) #27P2(8) #27P2(9) #27P2(10) #27P2(11) #27P2(12)

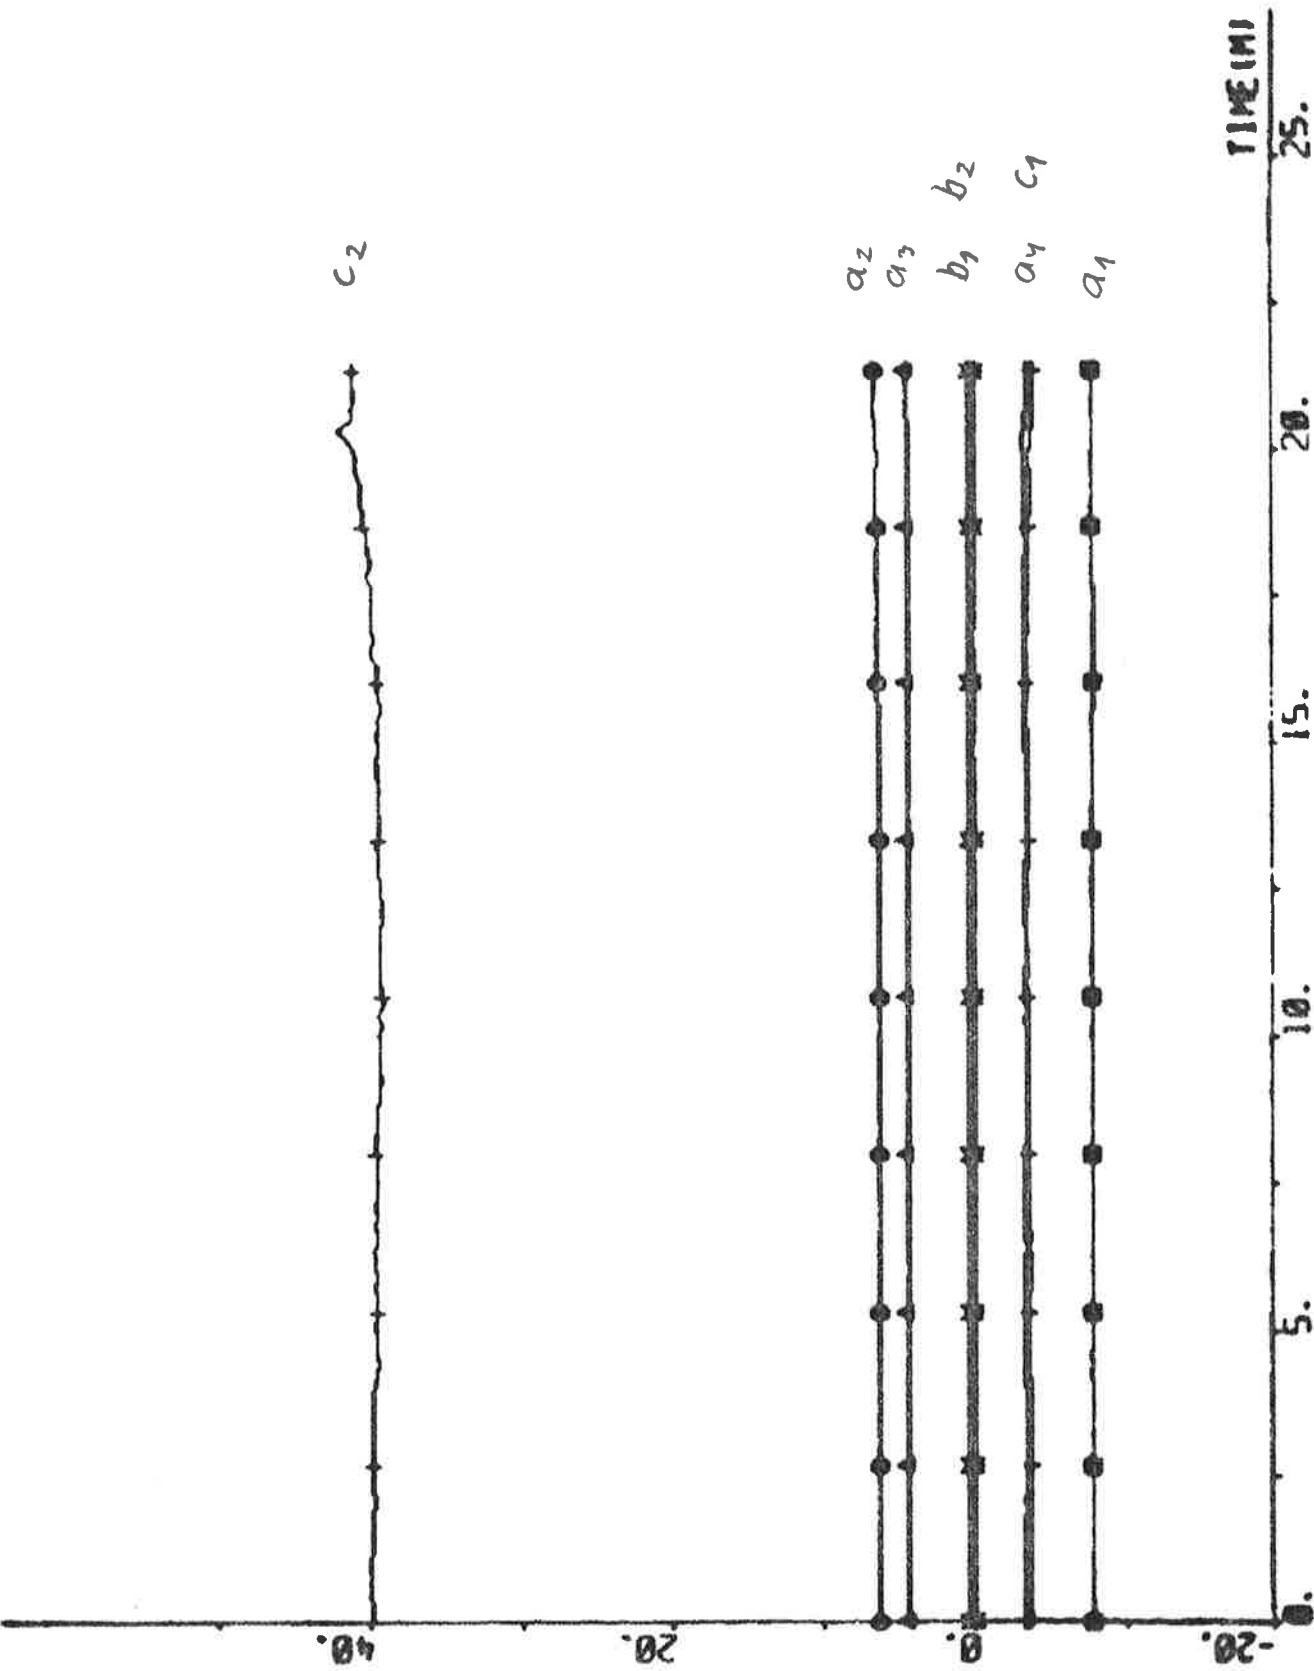

EXPERIMENT A28

| | | | |
|--------------|-------------------|-----------------|-----------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 12.52 | Aft draught | 12.9 m |
| Duration | 24 min | Wind direction | SE (1; see App. A) |
| Position | S 06°06' W 06°32' | Wind velocity | 4 m/s (gentle breeze) |
| ψ_{ref} | 143 deg | Wave height | - |

Self-tuning regulator using estimates from the Kalman filter

Tuning time before the experiment started: 30 min

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\left[\begin{array}{c} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{array} \right] = \left[\begin{array}{c} -8.13 \\ 6.65 \\ 4.67 \\ -3.33 \\ 0.47 \\ 0.10 \\ -1.94 \\ 39.40 \end{array} \right] \quad P = \left[\begin{array}{ccccccccc} 3.92 & & & & & & & & \\ -5.51 & 12.92 & & & & & & & \\ 0.54 & -8.61 & 15.22 & & & & & & \\ 1.55 & 0.86 & -7.45 & 5.55 & & & & & \\ 0.07 & -0.34 & 0.33 & -0.07 & 0.02 & & & & \\ 0.02 & 0.02 & -0.17 & 0.16 & 0.00 & 0.02 & & & \\ -0.75 & 1.00 & 0.19 & -0.48 & -0.01 & 0.01 & 0.79 & & \\ 1.67 & -2.97 & -2.81 & 3.37 & 1.03 & -0.40 & 13.89 & 682.35 & \end{array} \right]$$

$$a_1 + a_2 + a_3 + a_4 = -0.14$$

$$\hat{\delta}_0 = 0.3 \text{ deg} \quad \hat{d}_v = 0.19 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)


| | | | |
|---------------------|-----------------------|-------------------|-----------------------|
| δ_c | 0.16 \pm 0.95 deg | P_s | 15.0 \pm 0.1 MW |
| δ | 1.72 \pm 0.87 deg | ϵ_v | 0.00 \pm 0.02 knots |
| $\psi - \psi_{ref}$ | 0.006 \pm 0.239 deg | ϵ_r | 0.00 \pm 0.02 deg/s |
| n | 69.9 \pm 0.4 rpm | ϵ_ψ | 0.00 \pm 0.03 deg |
| u | 13.5 \pm 0.1 knots | ϵ_δ | 0.0 \pm 0.5 deg |
| V_1 | 0.132 | | |



$0.05 \times d_c$



$\gamma - \gamma_{ref}$

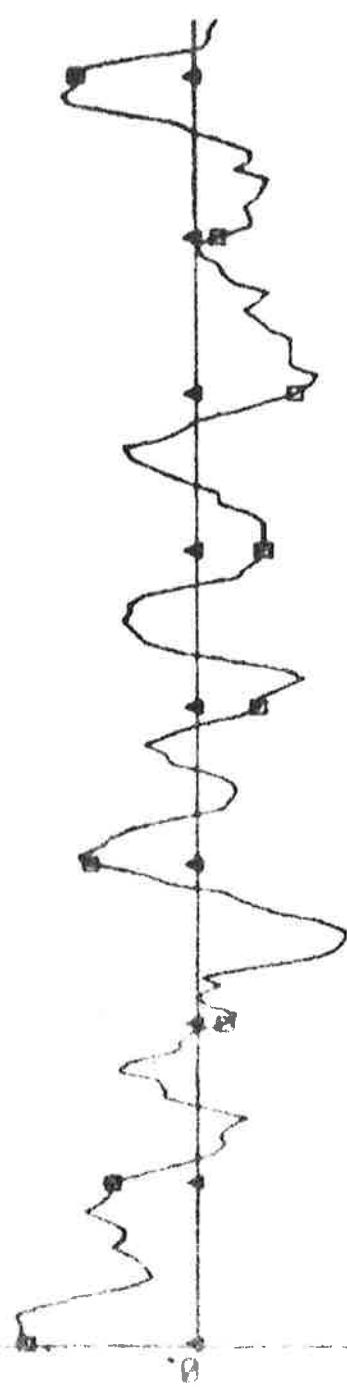


350




plot 12001(11) 12001(12) 12001(13) 12001(14) 12001(15)


0.5 x n rpm
240 knots

P_s MW
d₅ deg

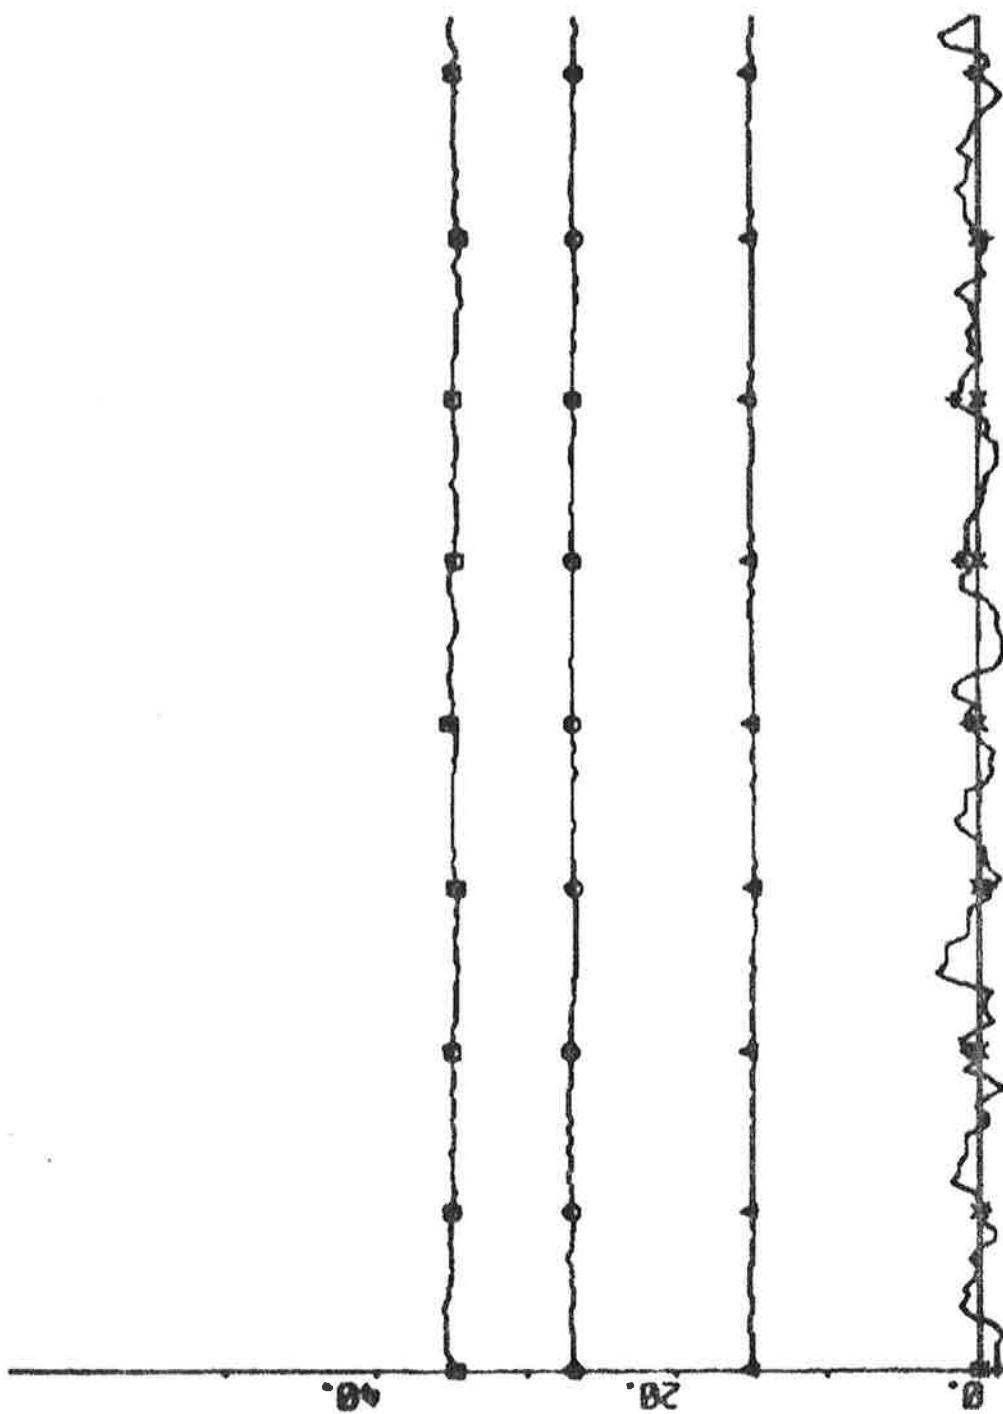


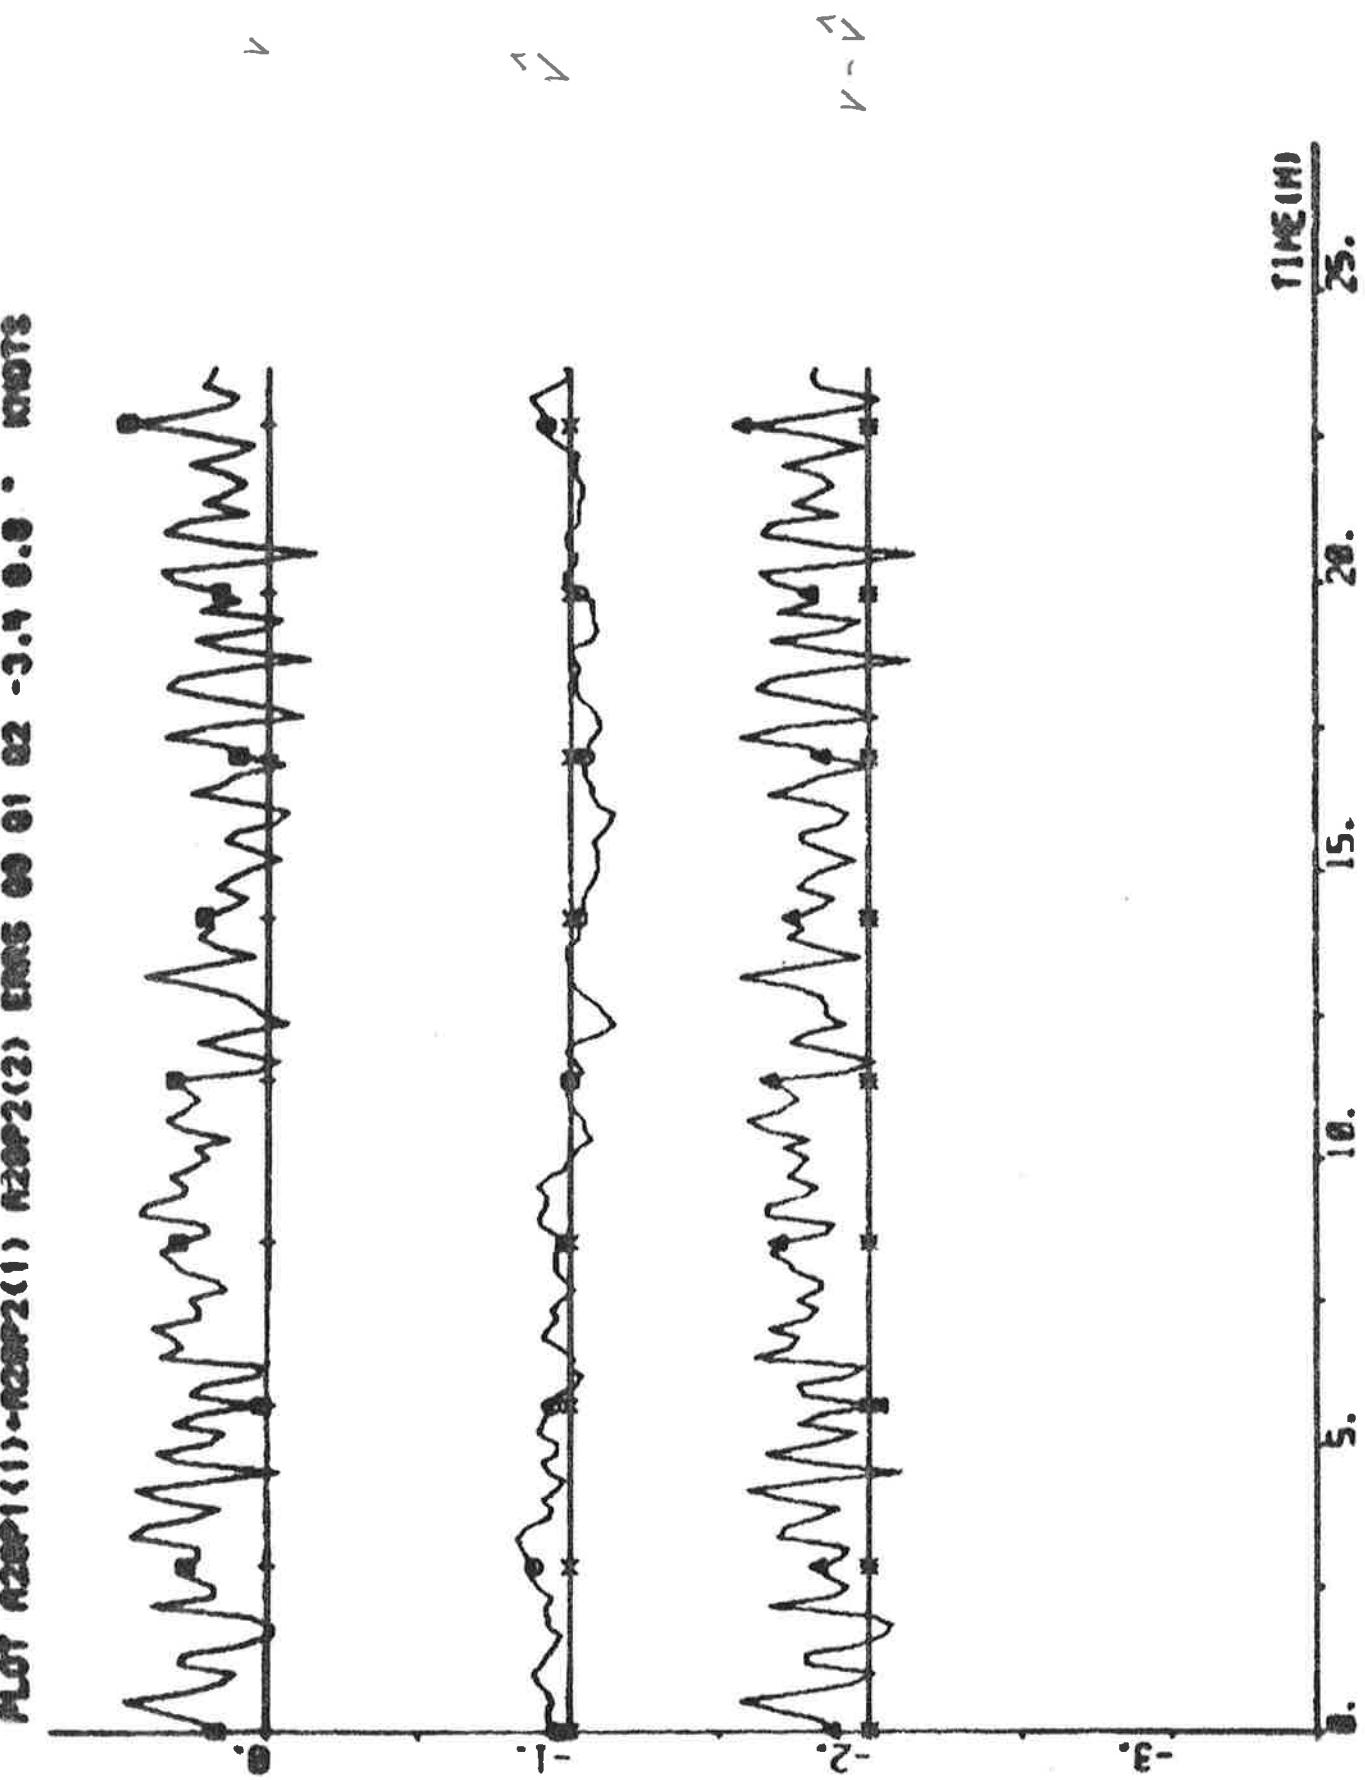


NOTE (2001-11-22) (4) (2001-11-22) (4) (2001-11-22) (4) (2001-11-22) (4) (2001-11-22) (4)

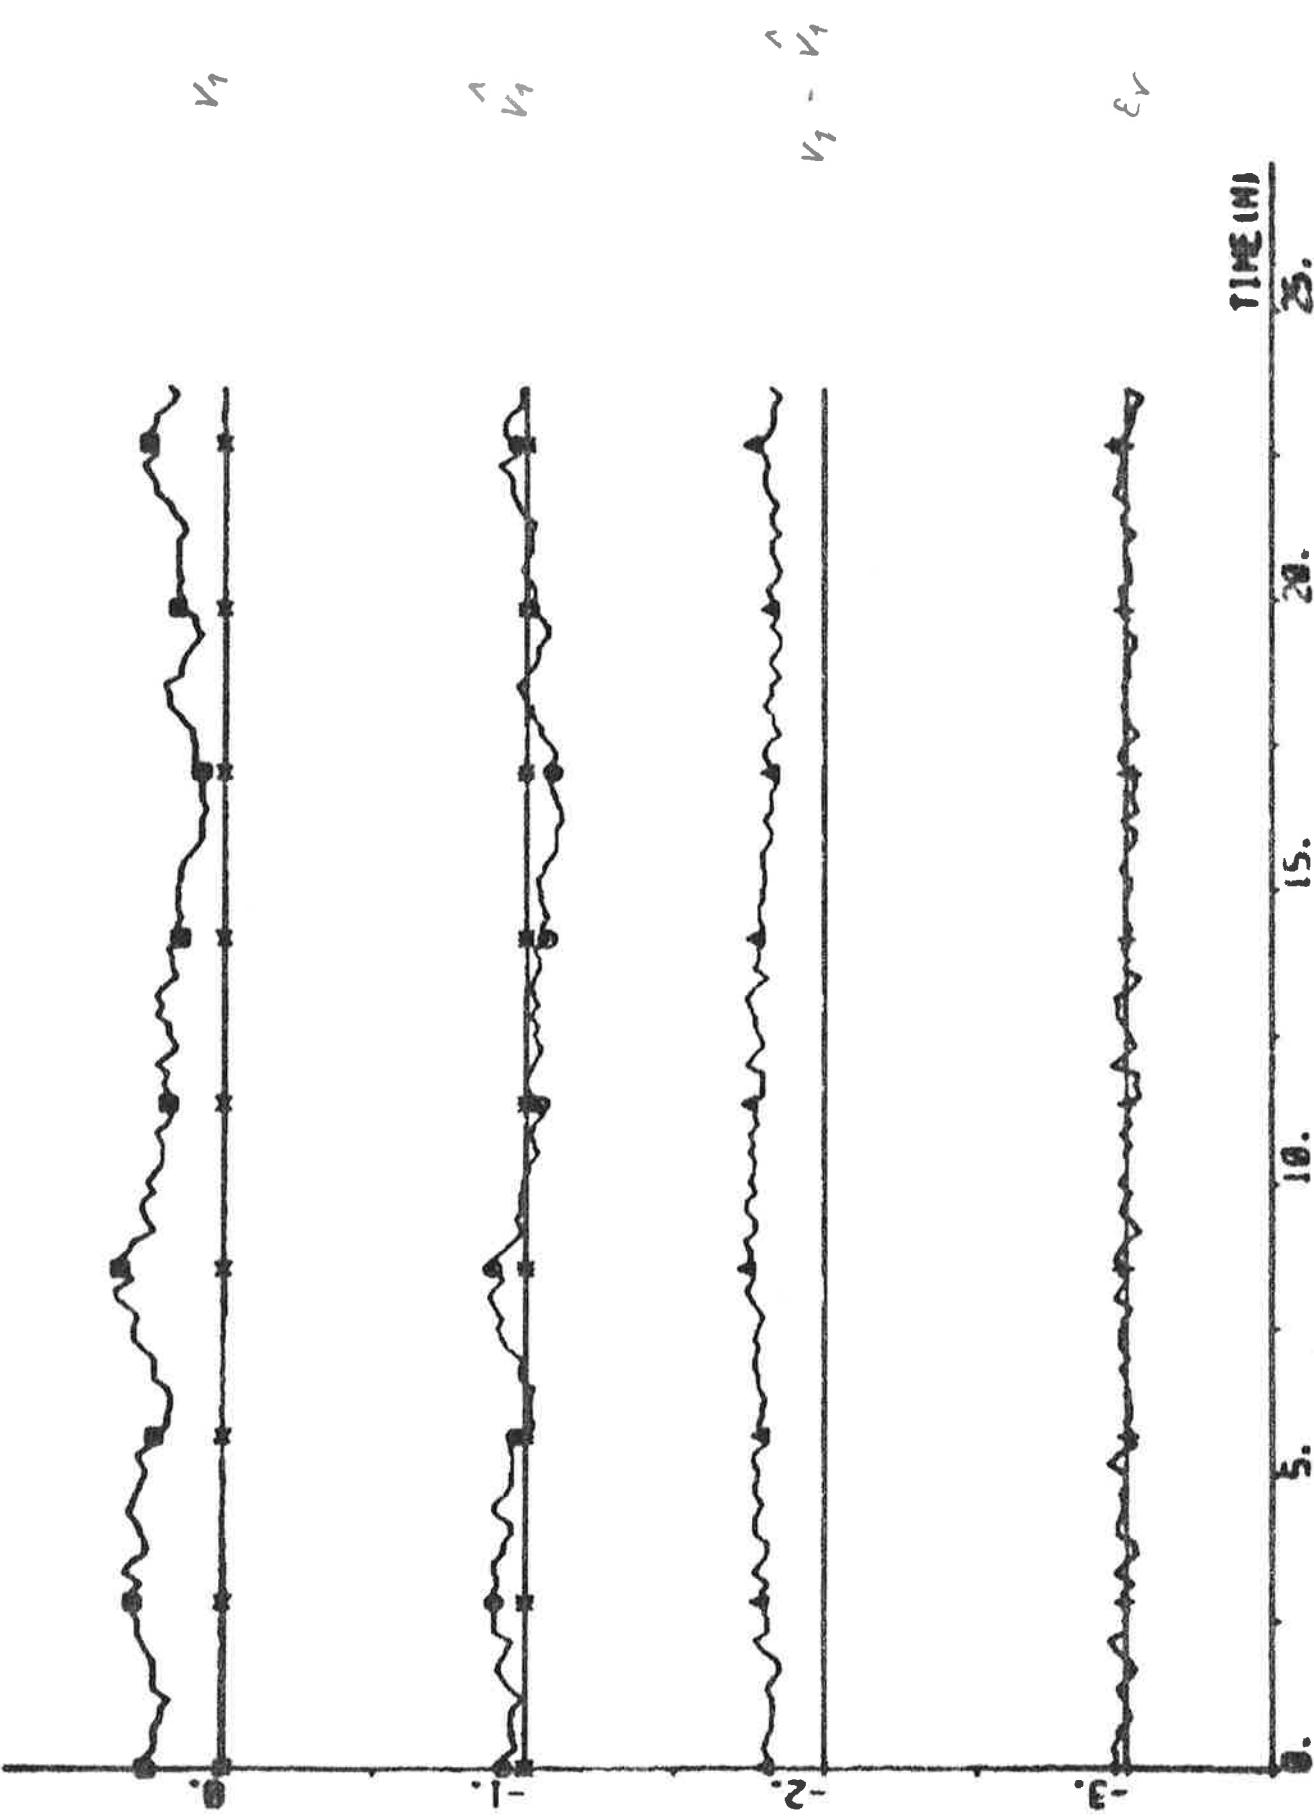


Wet sand (11) - 100% (17) 2000 sec 0.70. - 0.70. - 0.70.

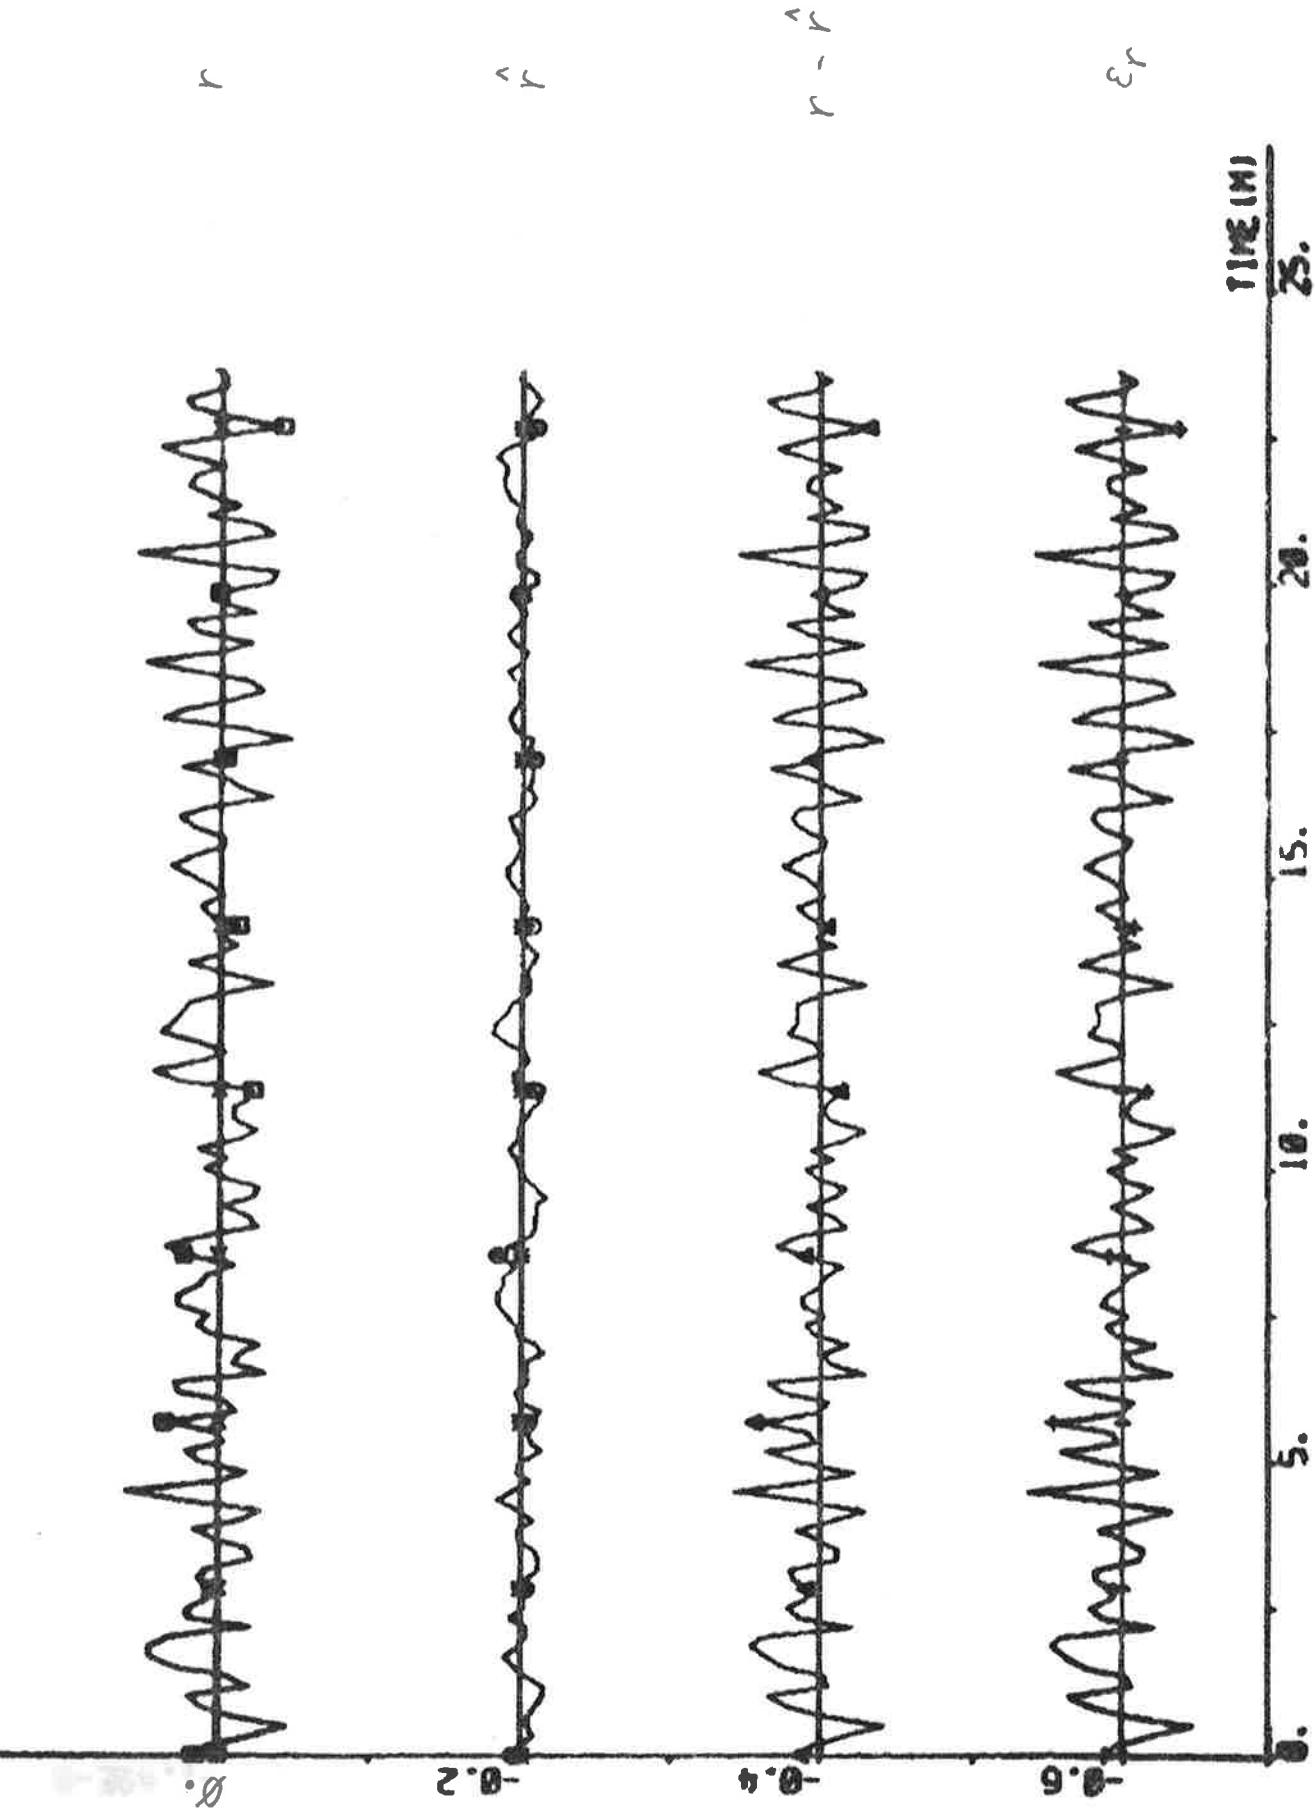



MAR 2021 (1) - 122P (8) ESW ESW 01 02 03 - 3.1.0.0.0 - 000

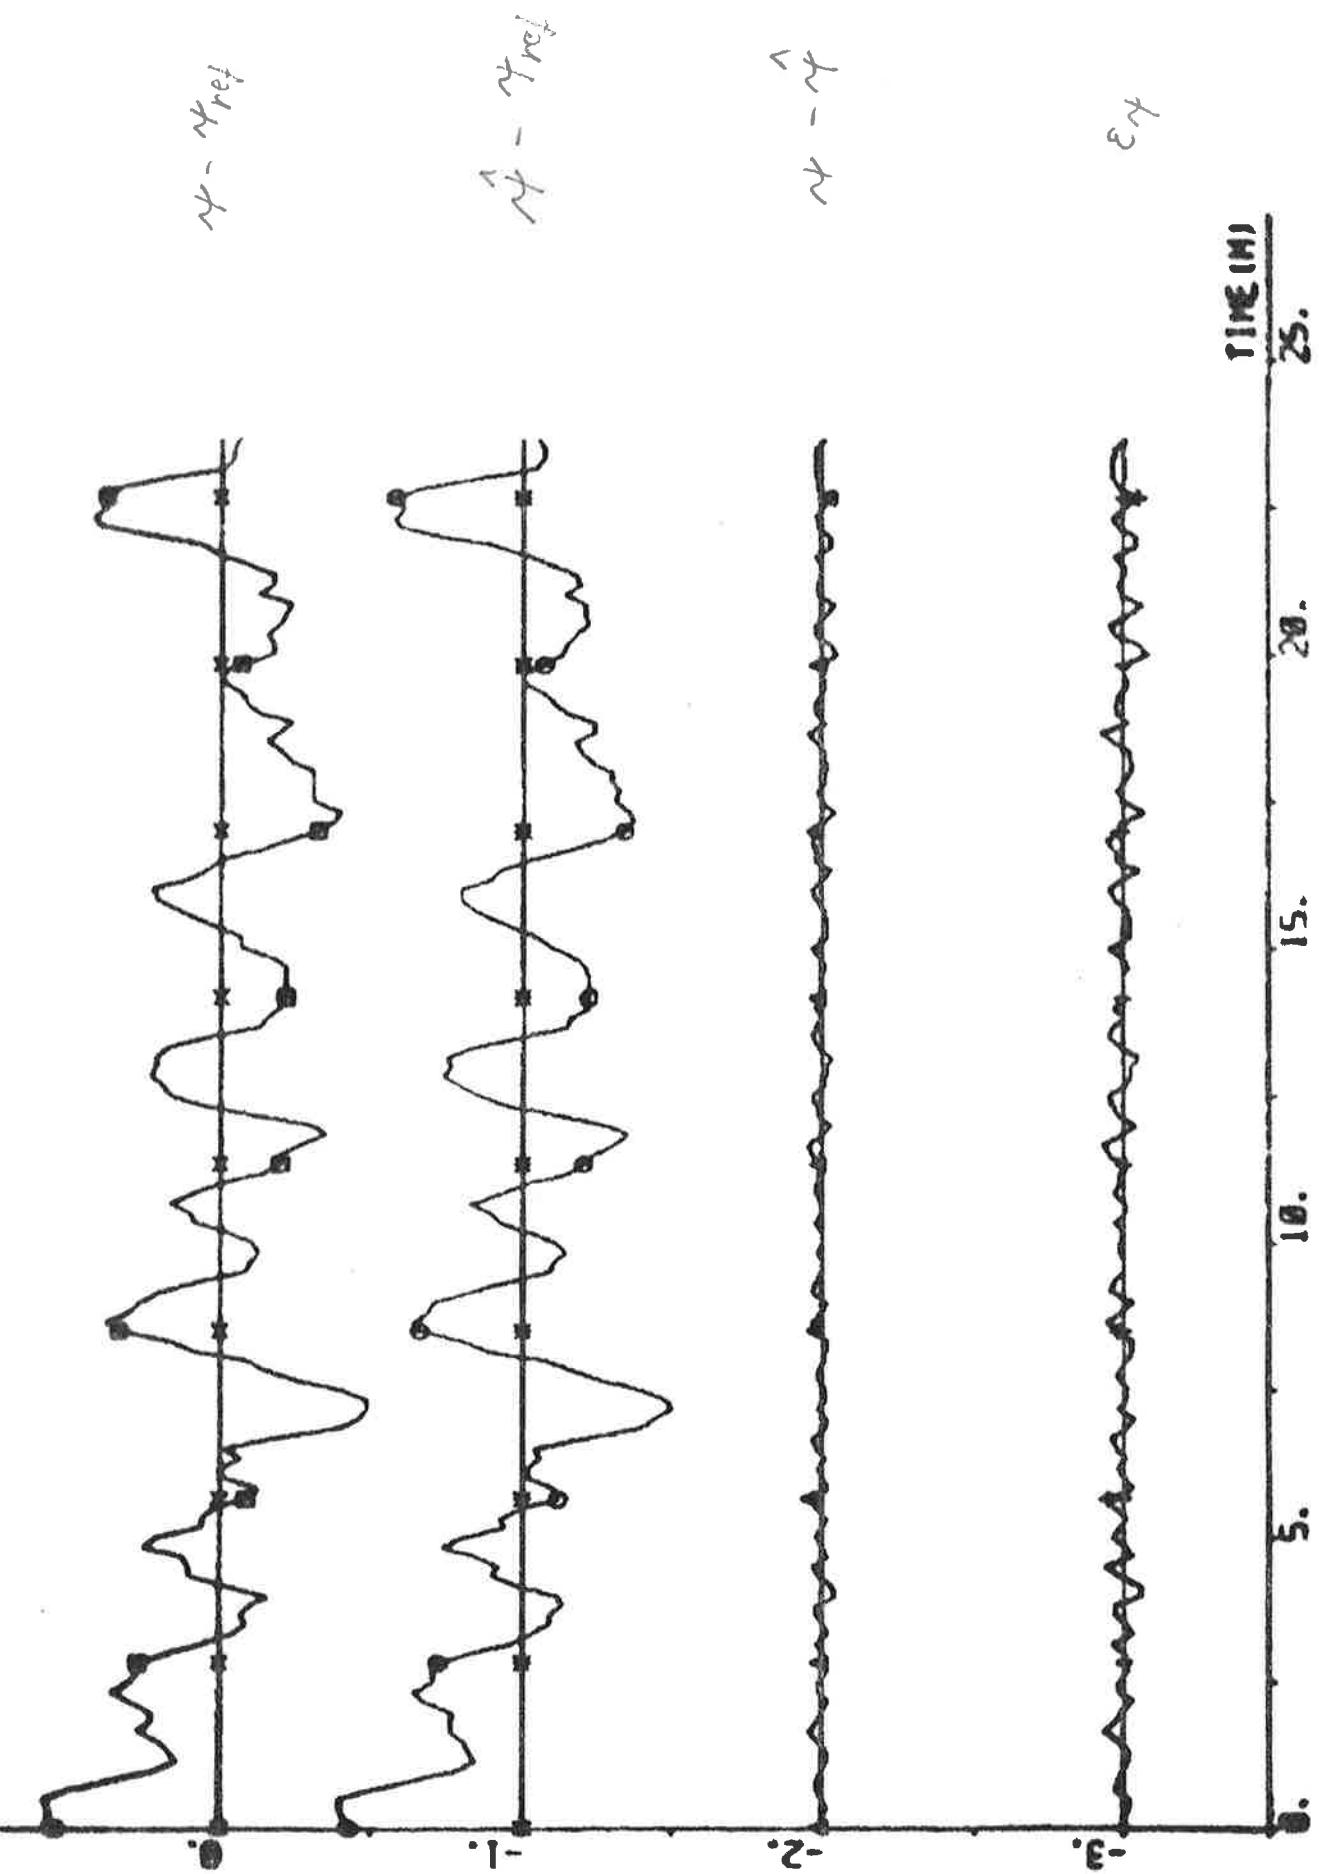

PLUT N291 (1) - A291 (2) N291 (3) ERI ERI ERI

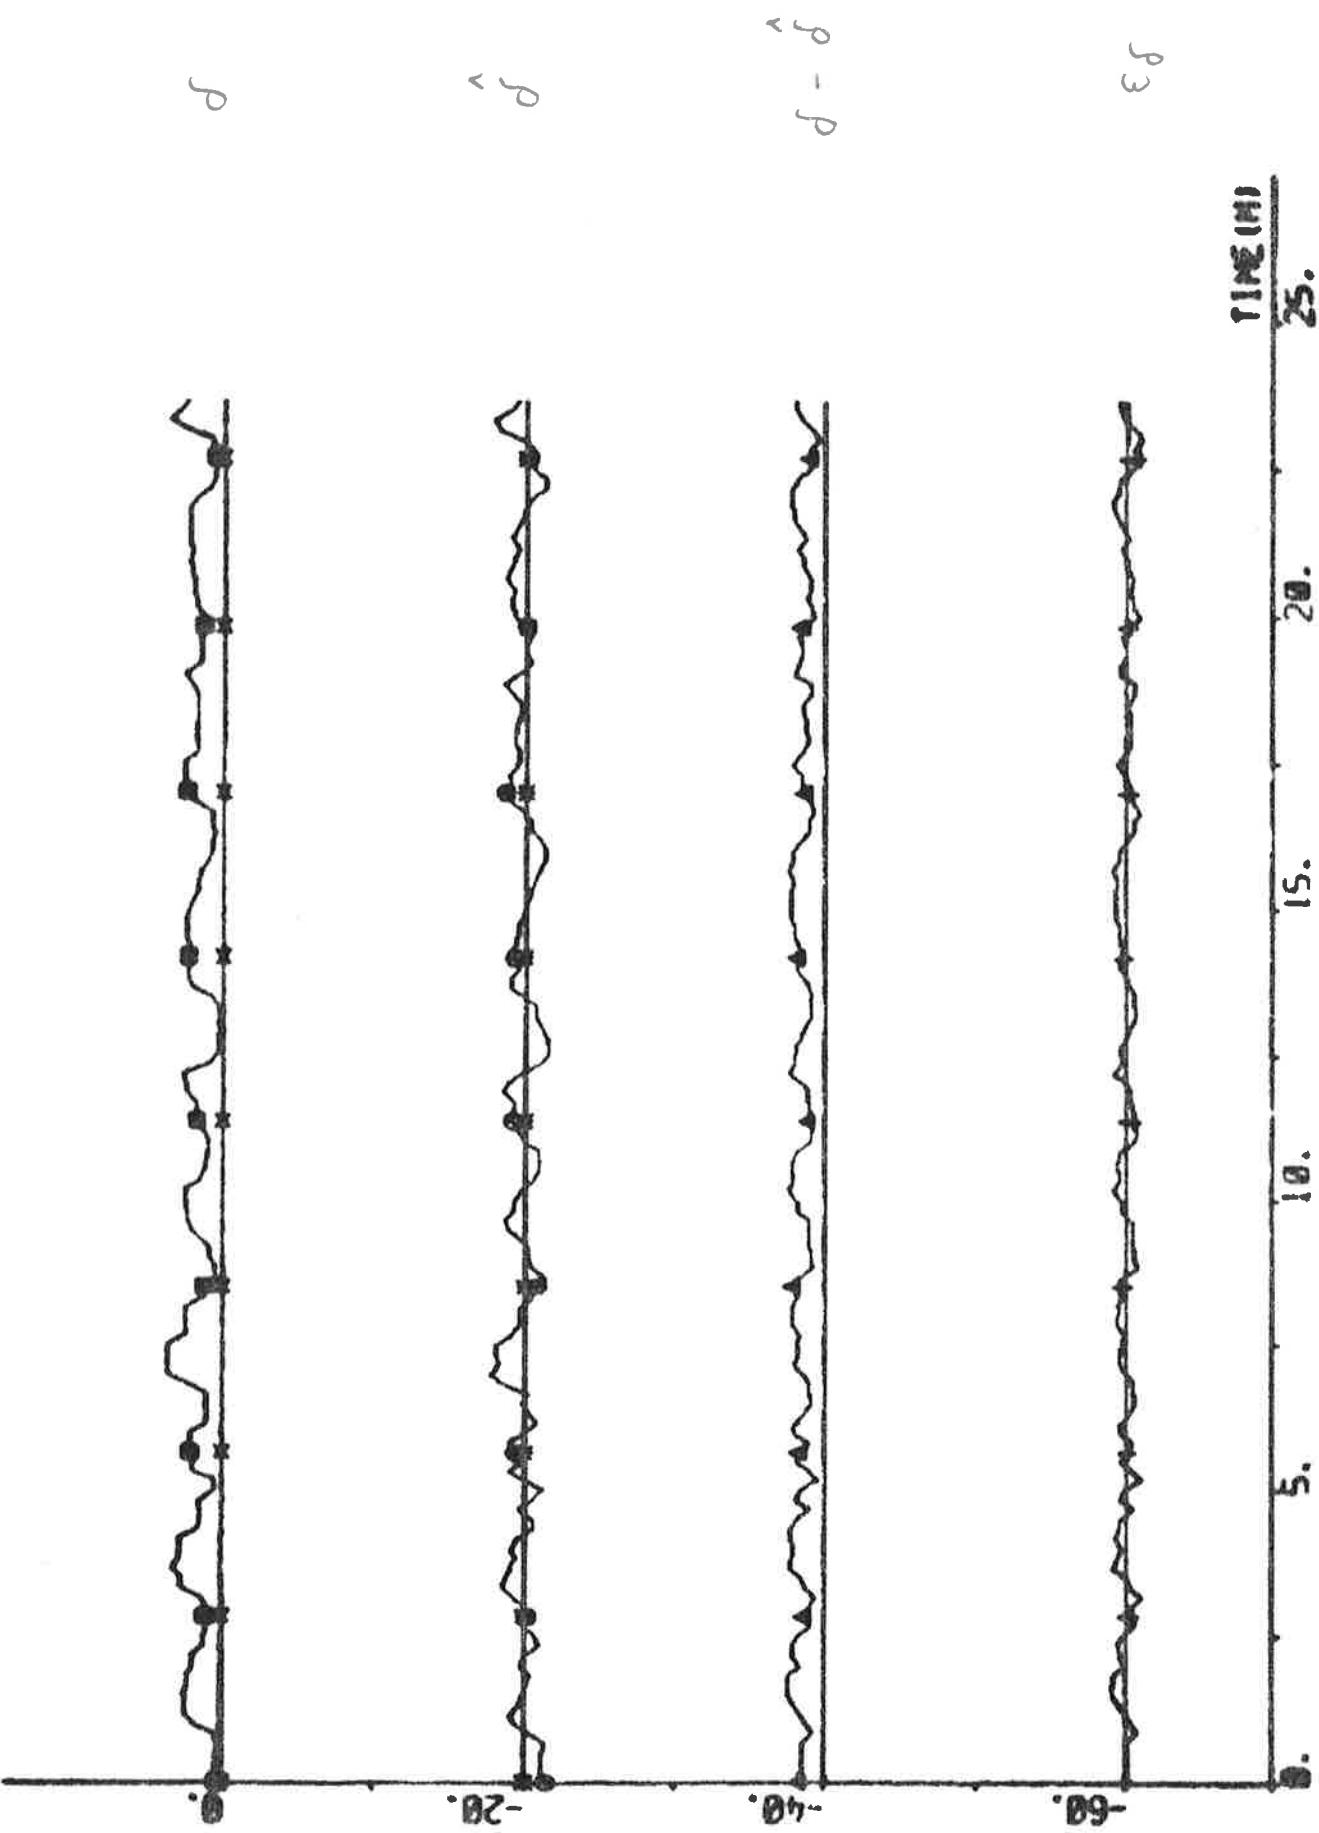

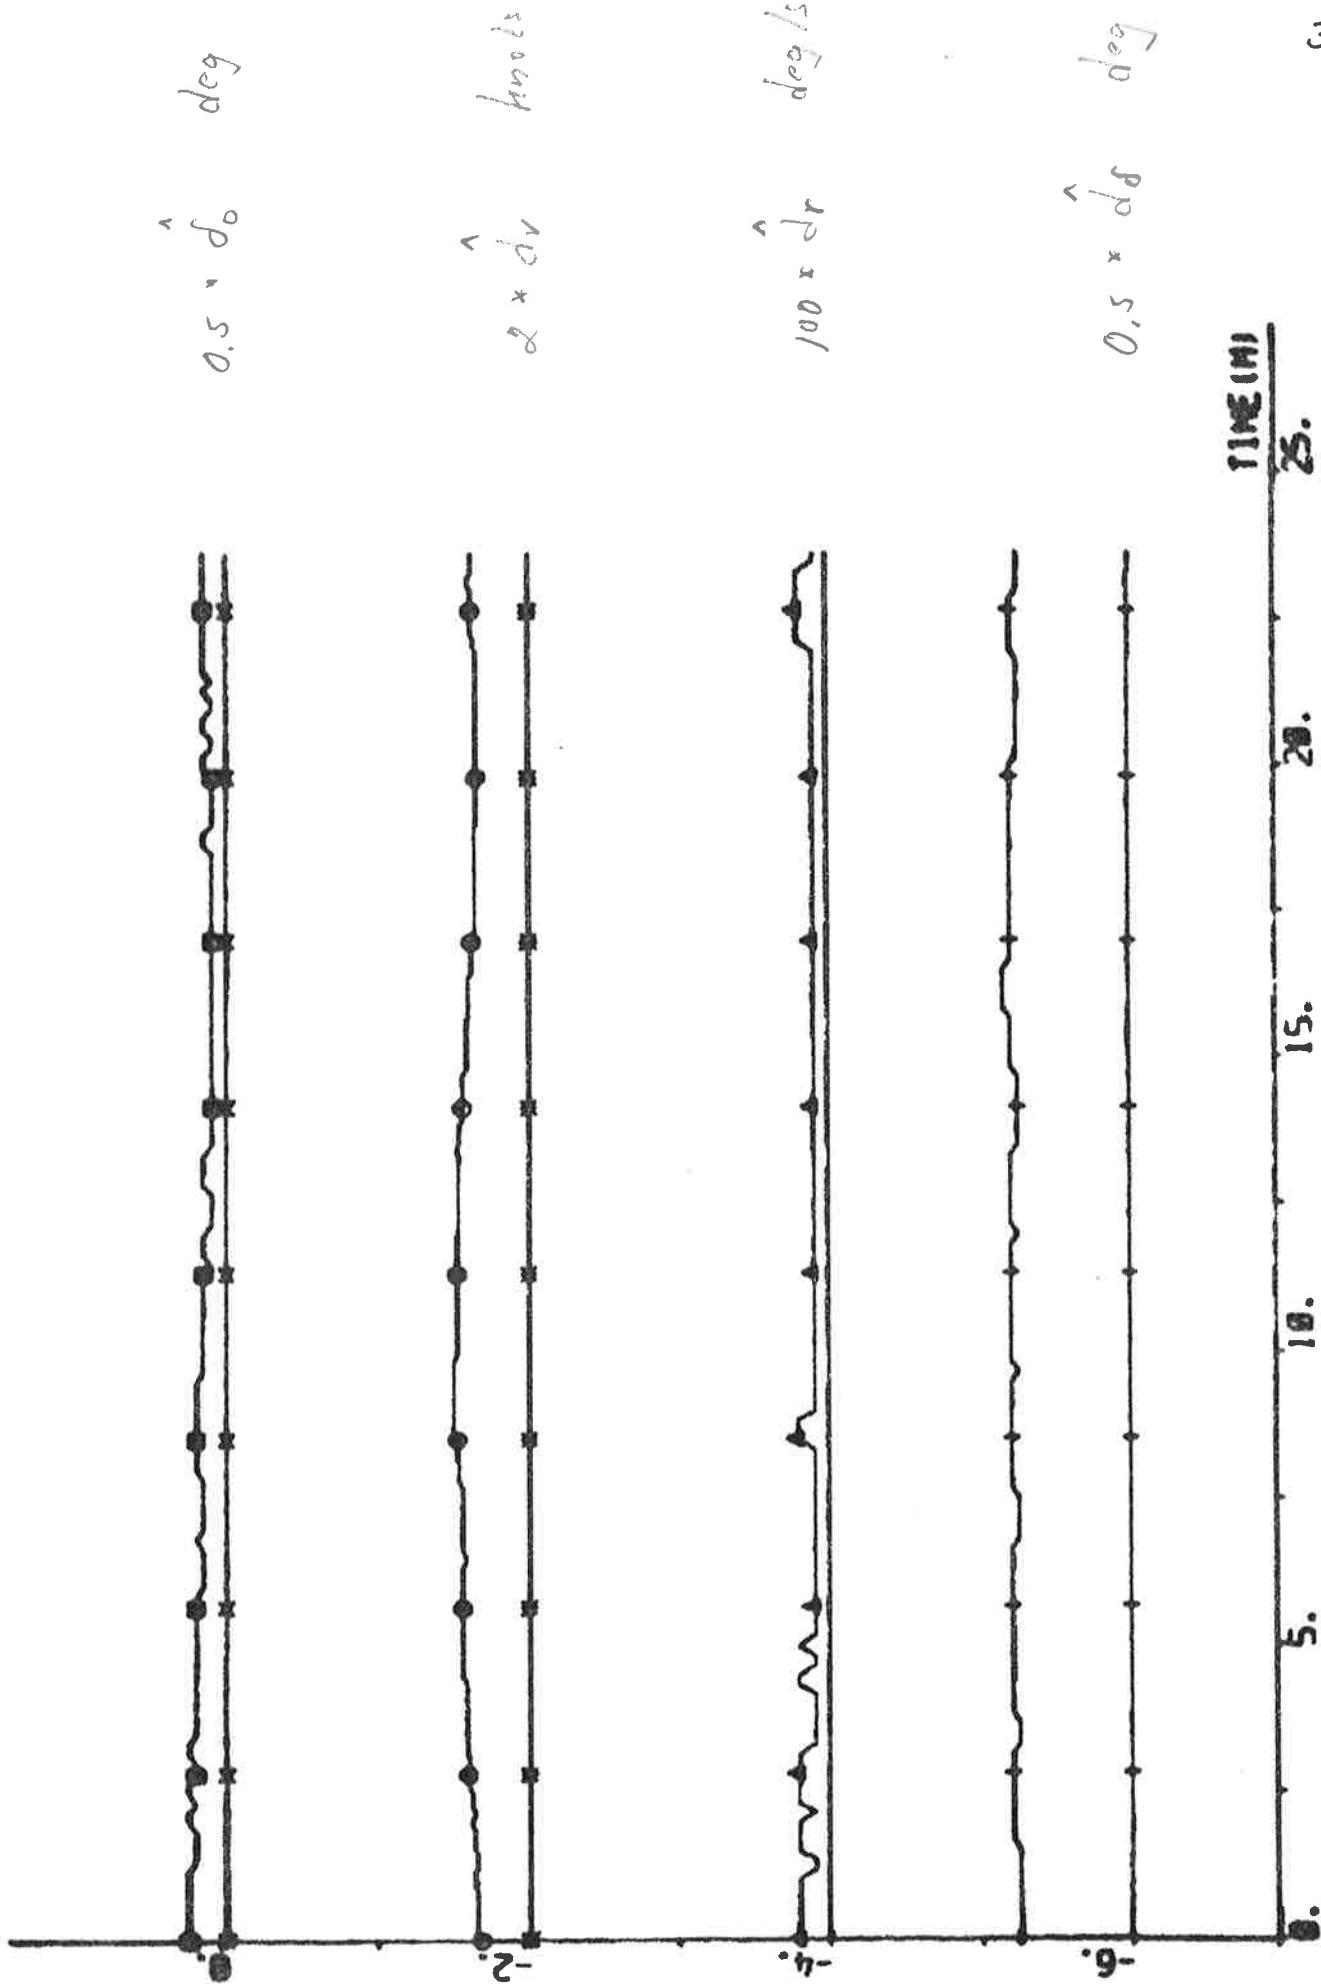

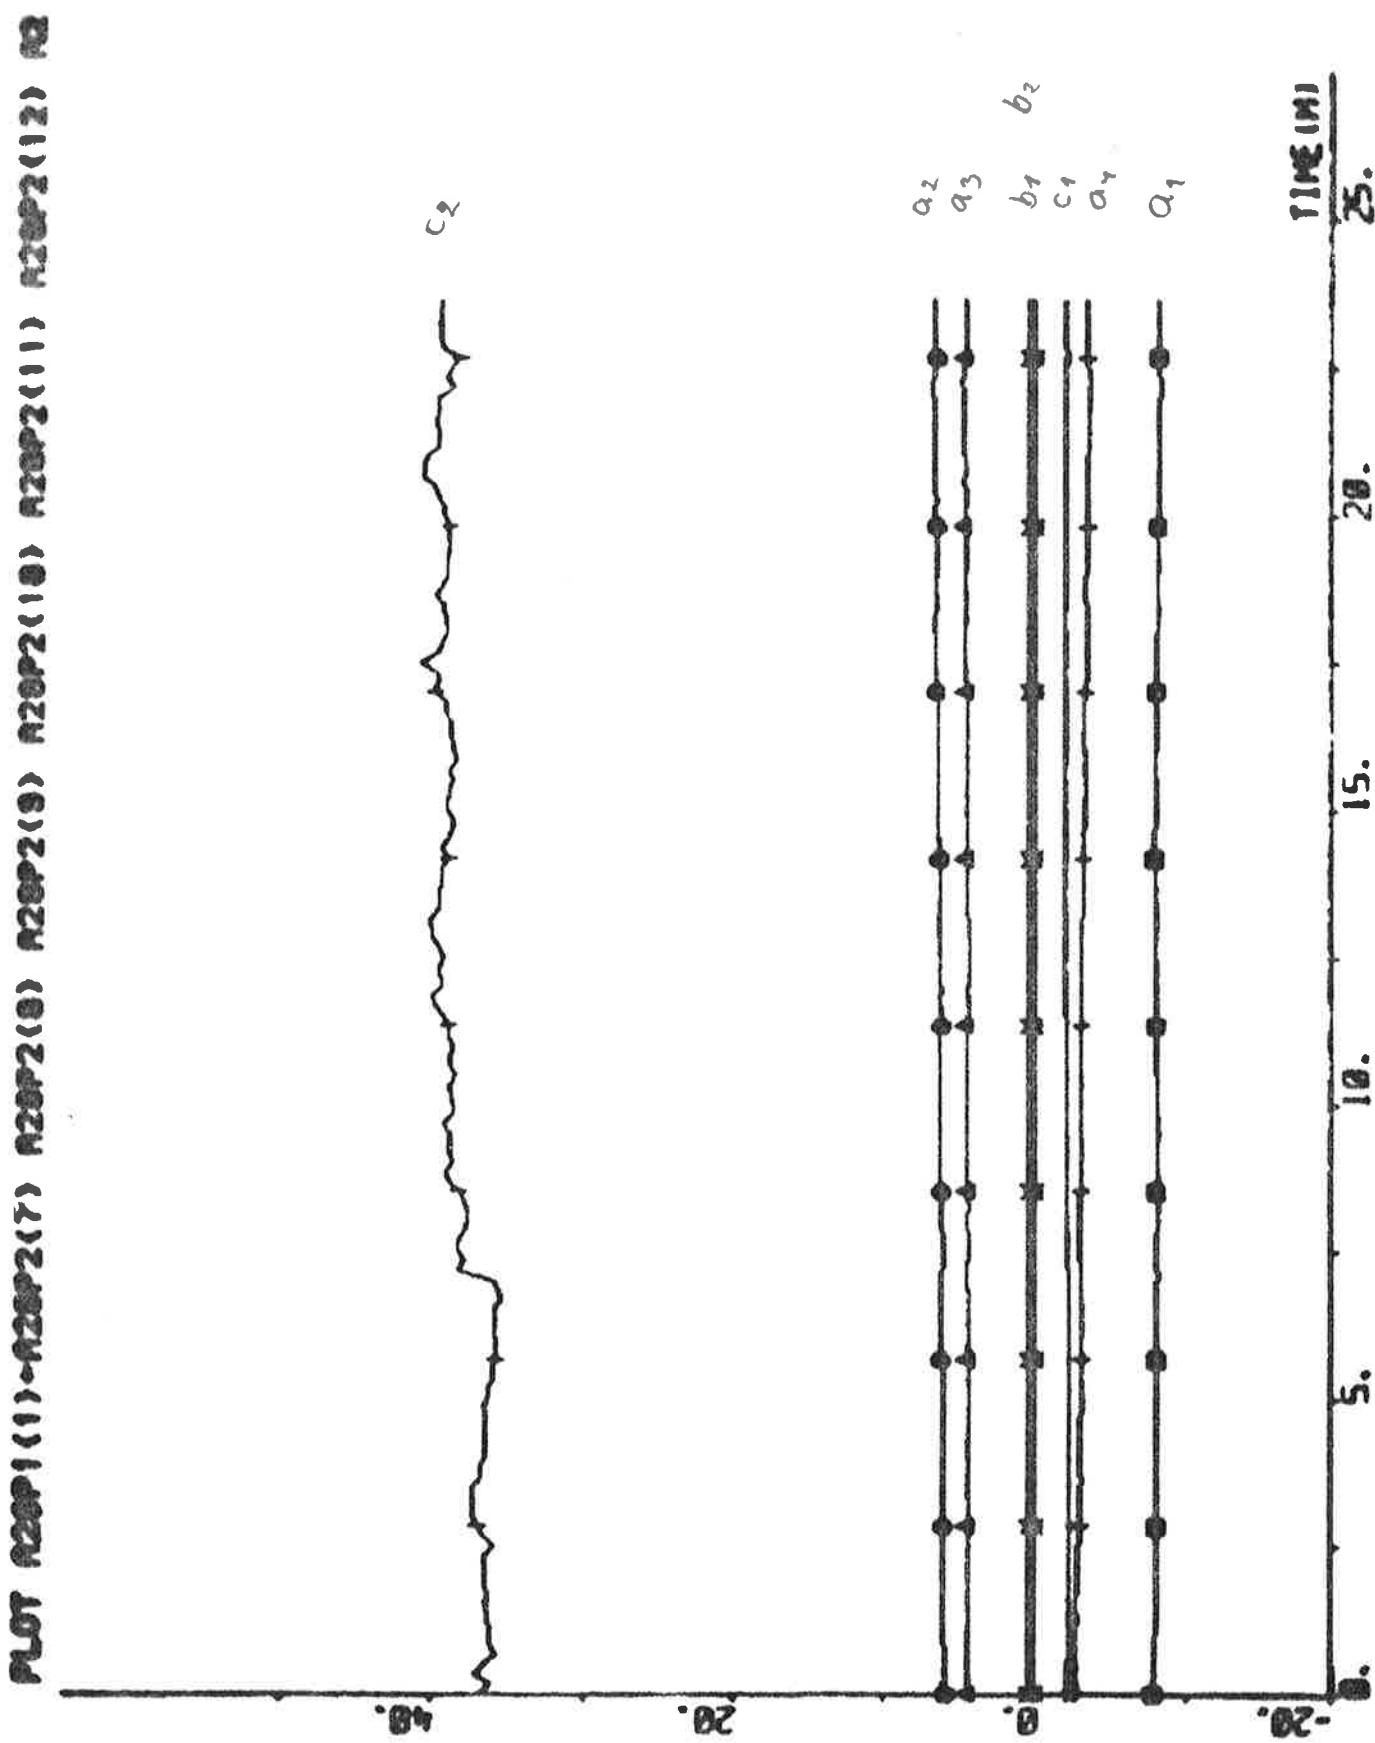

EXPERIMENT A29

| | | | |
|--------------|-------------------|-----------------|----------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 13.58 | Aft draught | 12.9 m |
| Duration | 24 min | Wind direction | SE (1; see App. A) |
| Position | S 06°18' W 06°24' | Wind velocity | 3 m/s (light breeze) |
| ψ_{ref} | 143 deg | Wave height | - |

Self-tuning regulator using non-filtered measurements

Tuning time before the experiment started: 30 min.

NC1 = 0 NC2 = 0 k = 7 q = 0
 Ts = 10 s V0 = 6 m/s IVVC = 1


Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \end{bmatrix} = \begin{bmatrix} -9.74 \\ 8.98 \\ 6.22 \\ -5.25 \\ 0.29 \\ -0.06 \end{bmatrix} \quad P = \begin{bmatrix} 1.46 & & & & & \\ -1.98 & 6.56 & & & & \\ -0.10 & -5.46 & 10.48 & & & \\ 0.85 & 0.59 & -5.04 & 4.00 & & \\ -0.01 & -0.34 & 0.47 & -0.11 & 0.05 & \\ 0.07 & -0.07 & -0.30 & 0.33 & 0.00 & 0.04 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = 0.21$$

$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.17 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.6 \text{ deg}$$


Statistics (mean value and standard deviation)

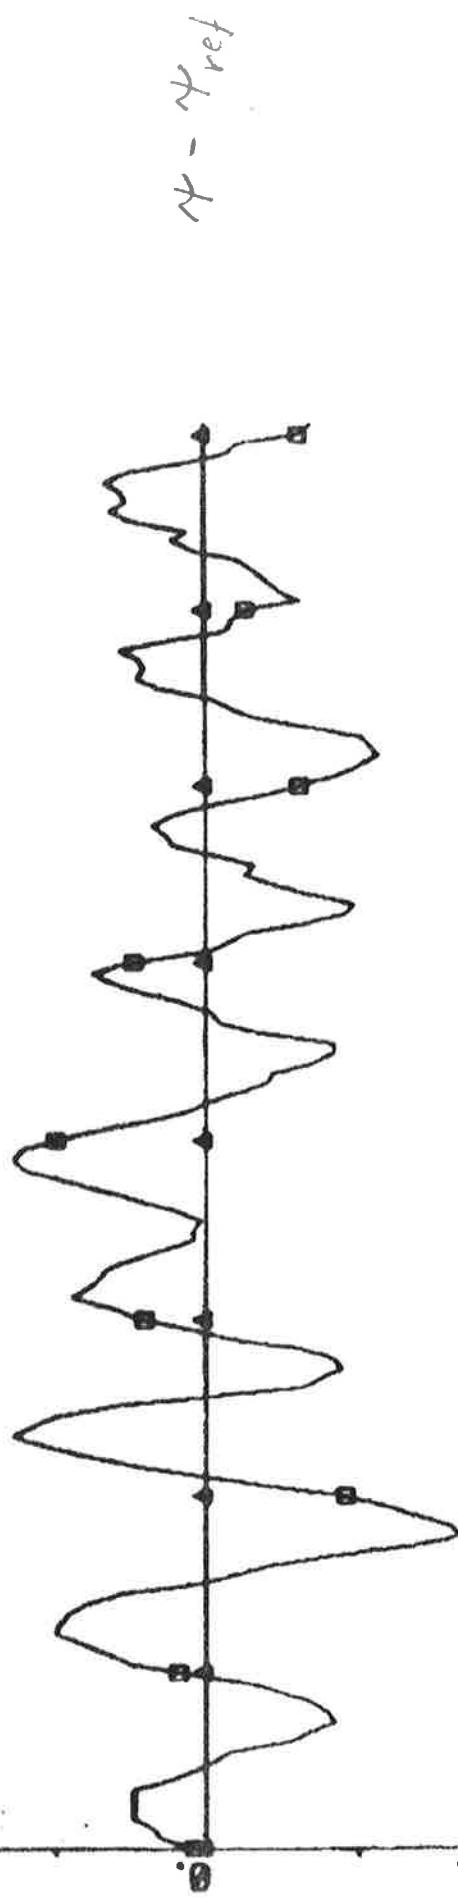


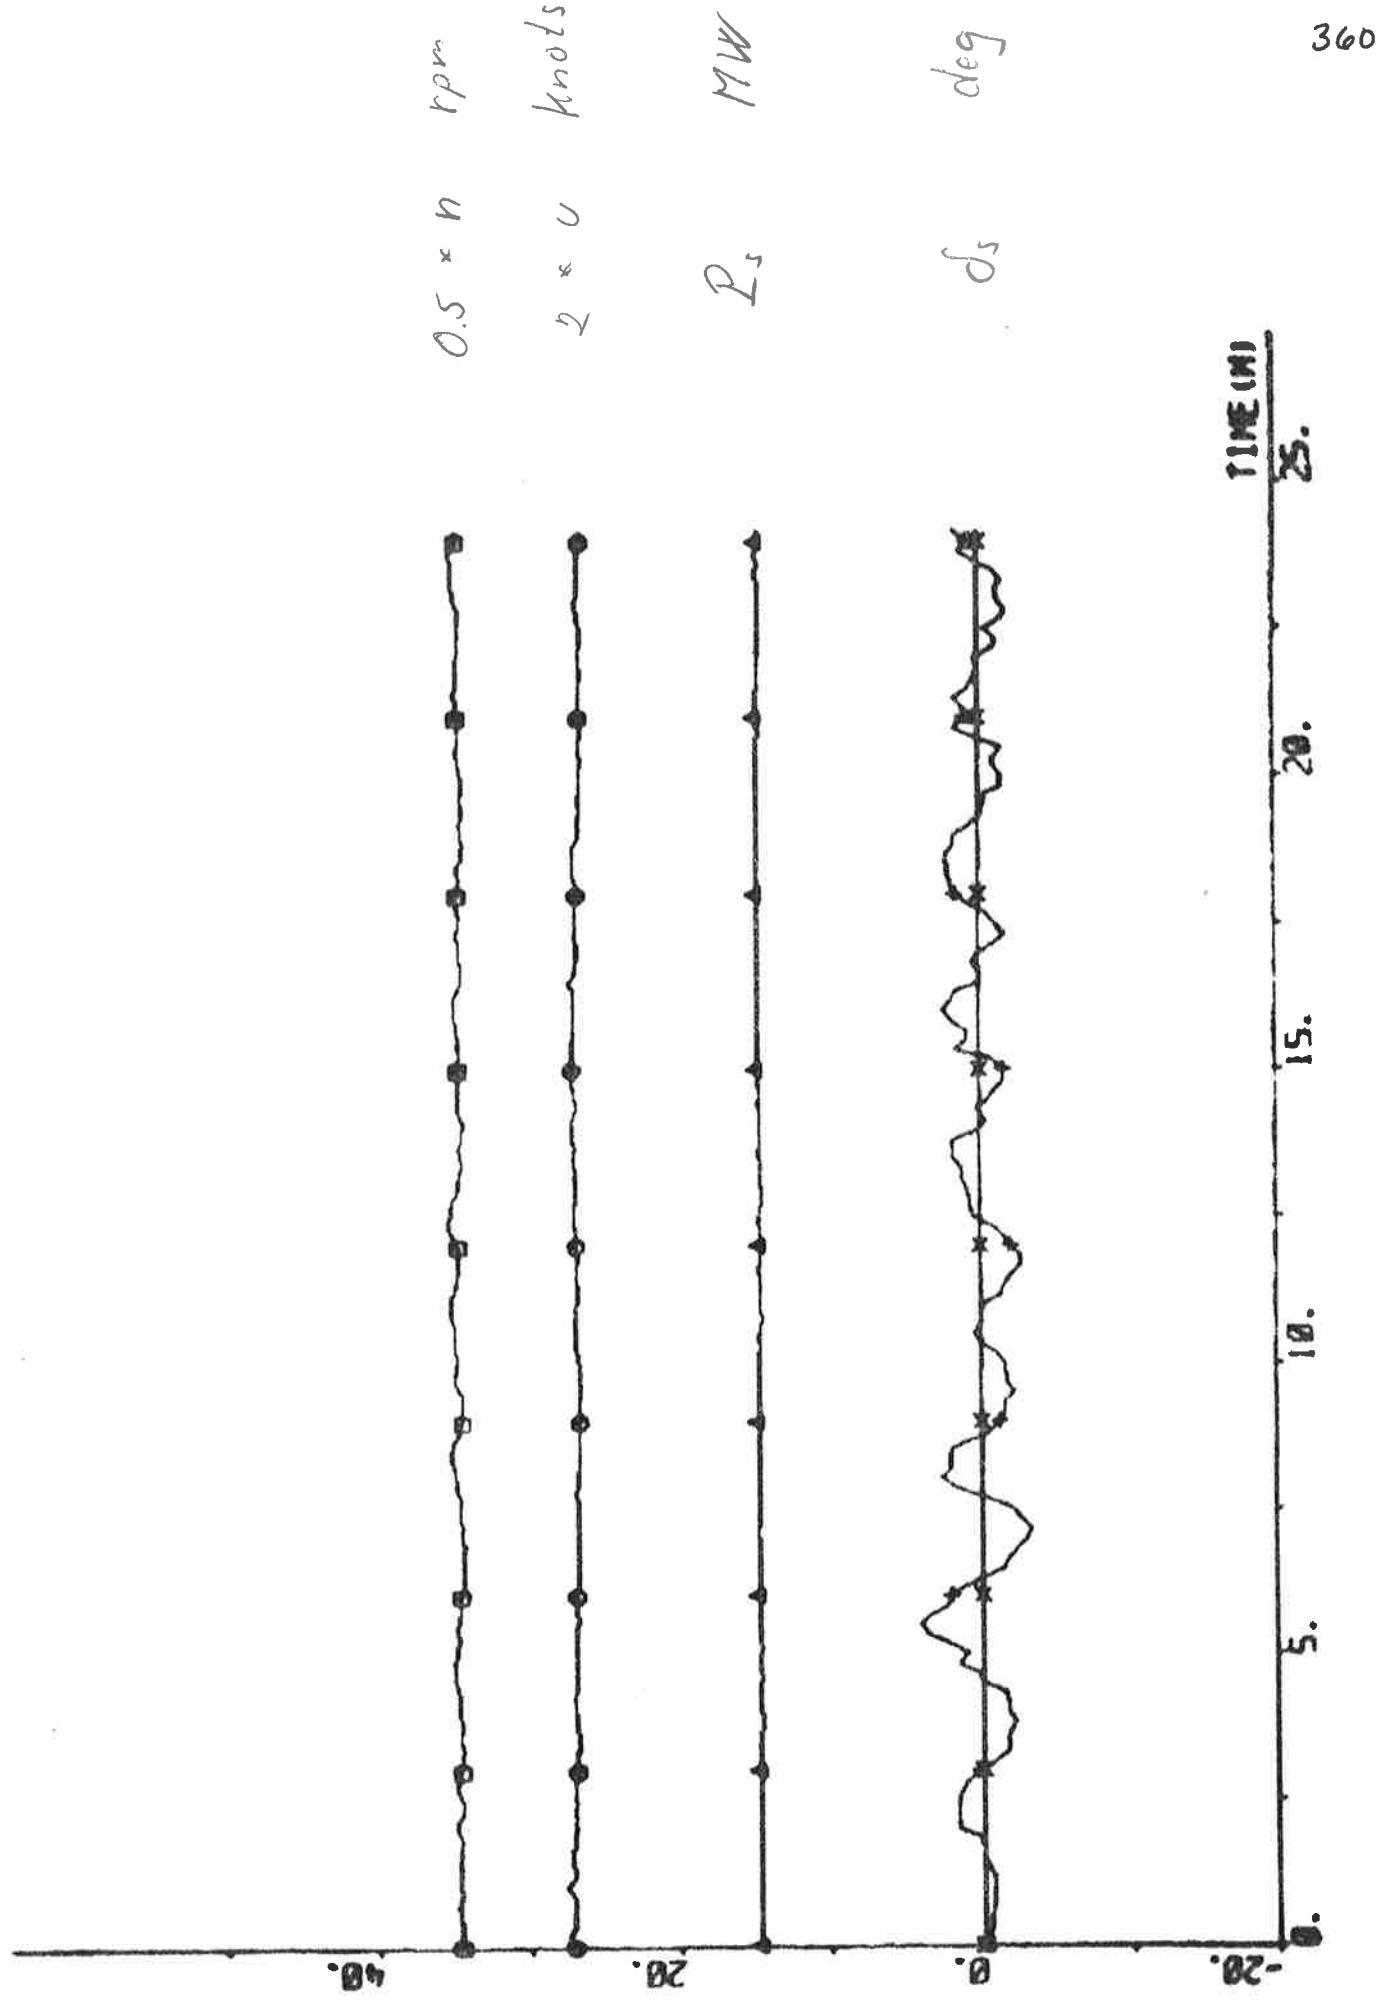



NIST Reference Database (14) NIST Reference Database (14)

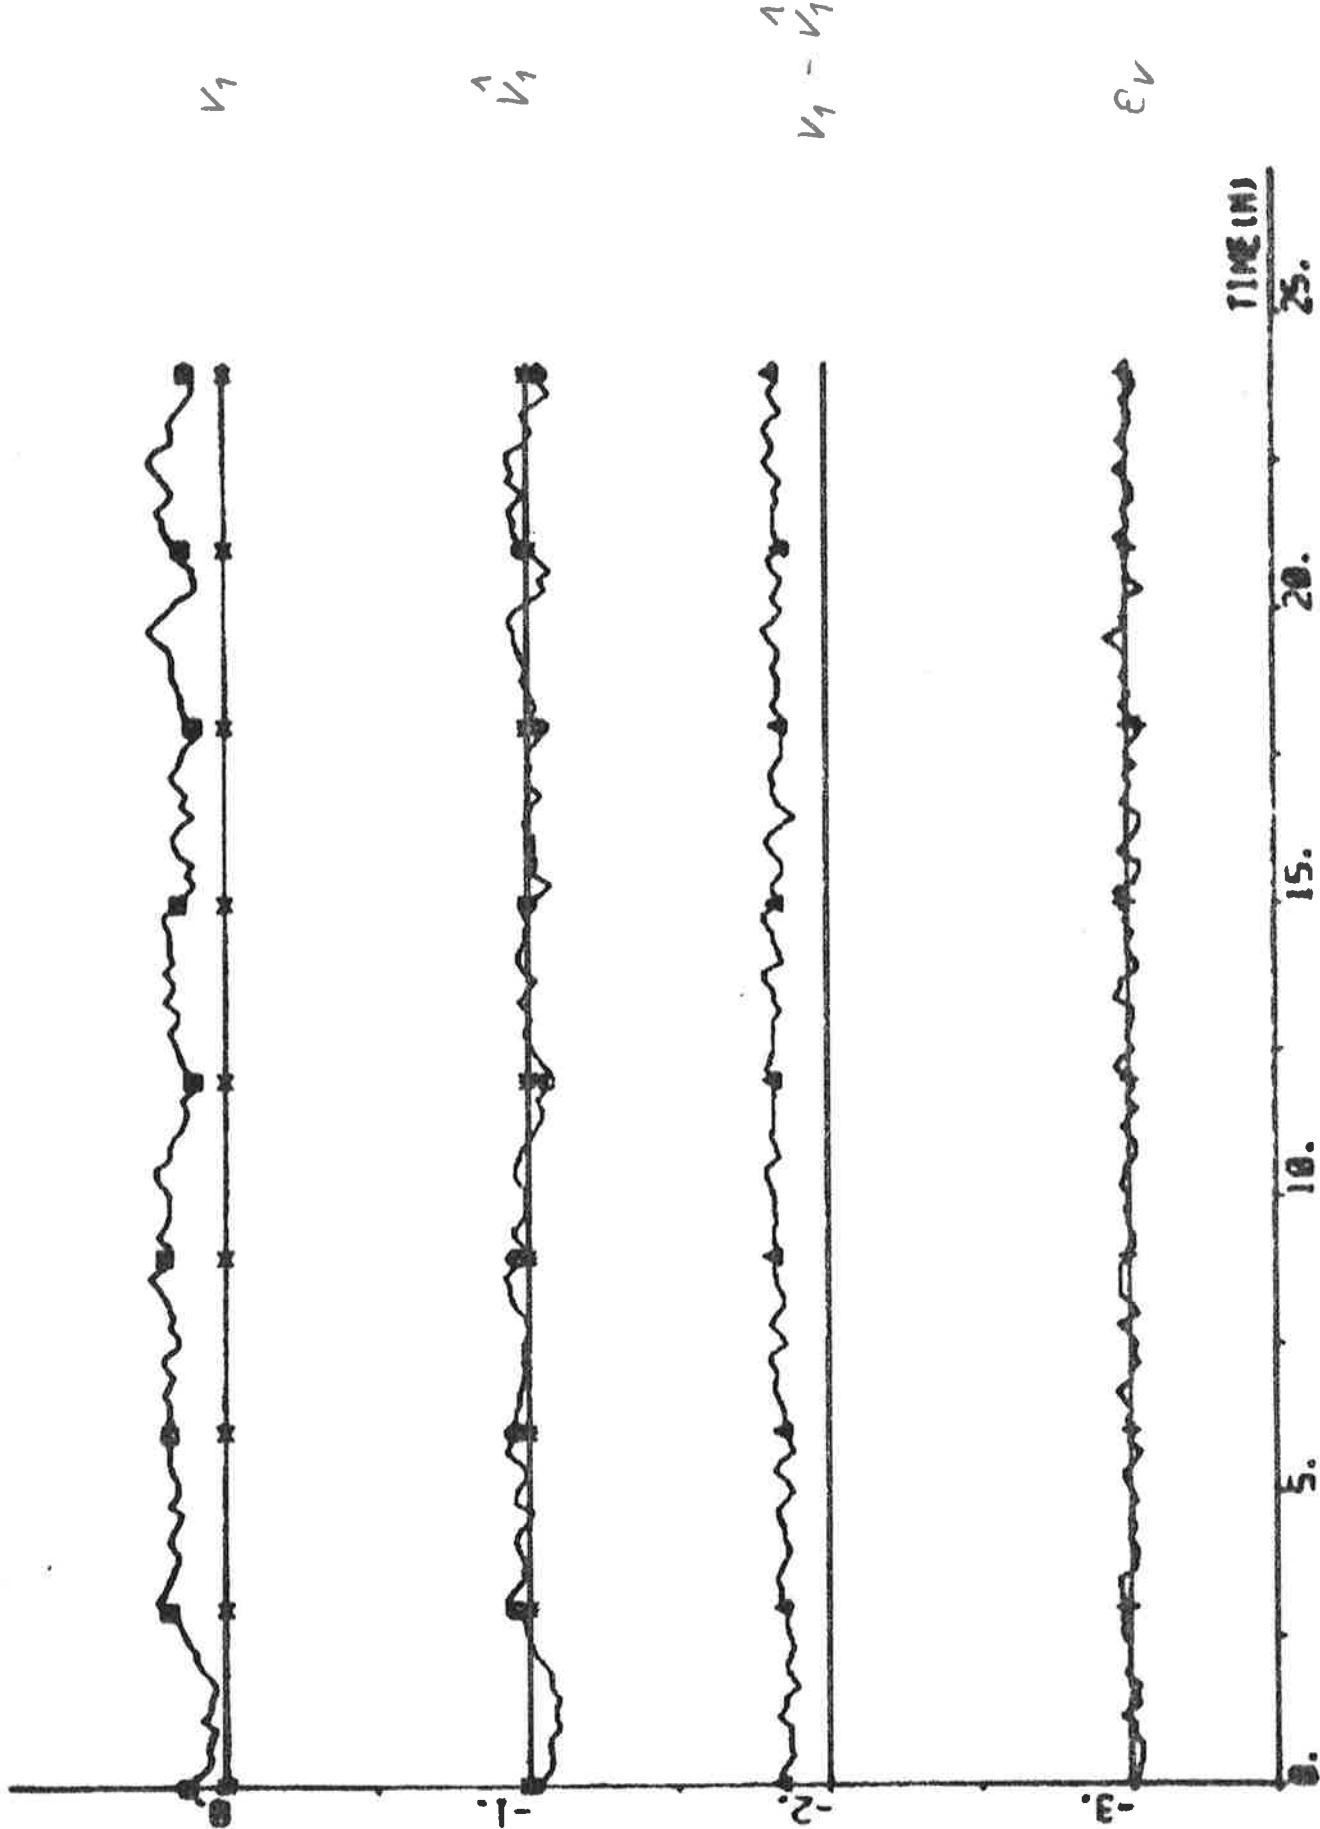


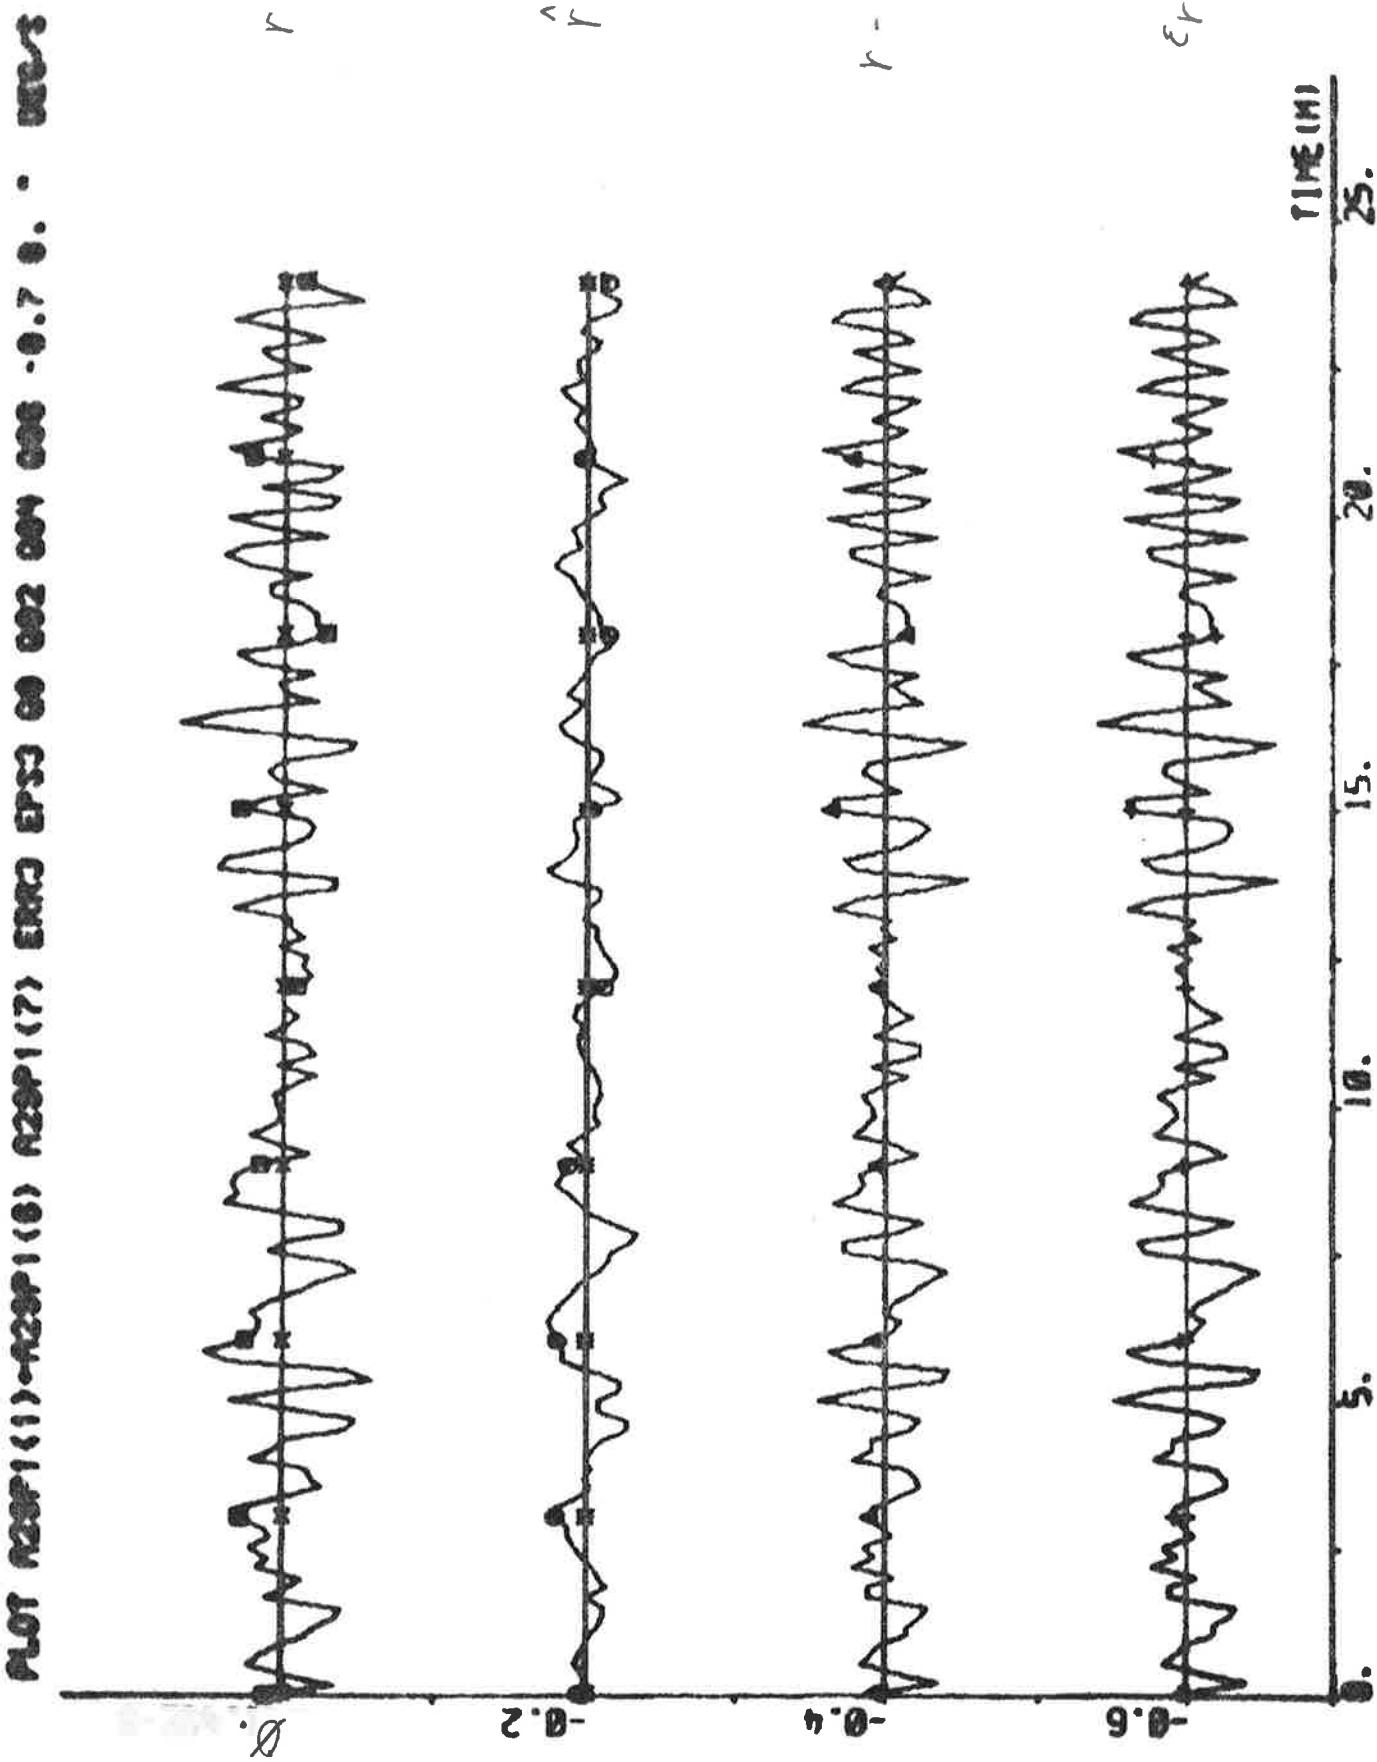

TIME (m) 114. 25. 20. 15. 10. 5.




$\nu_1 - \nu_{14}$

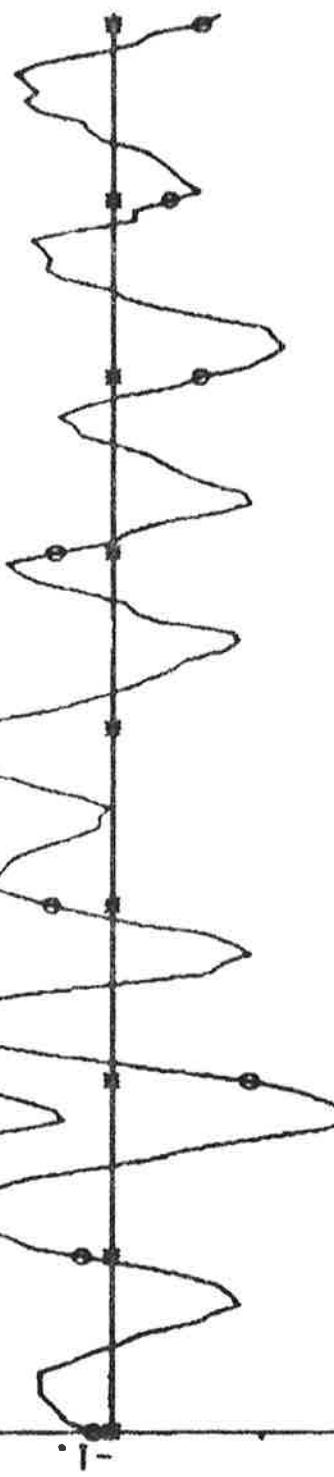


$\nu_1 - \nu_{14f}$



MUR R22P1(1) - R22P1(2) R22P1(3) E221 E220 E220 E221 E220

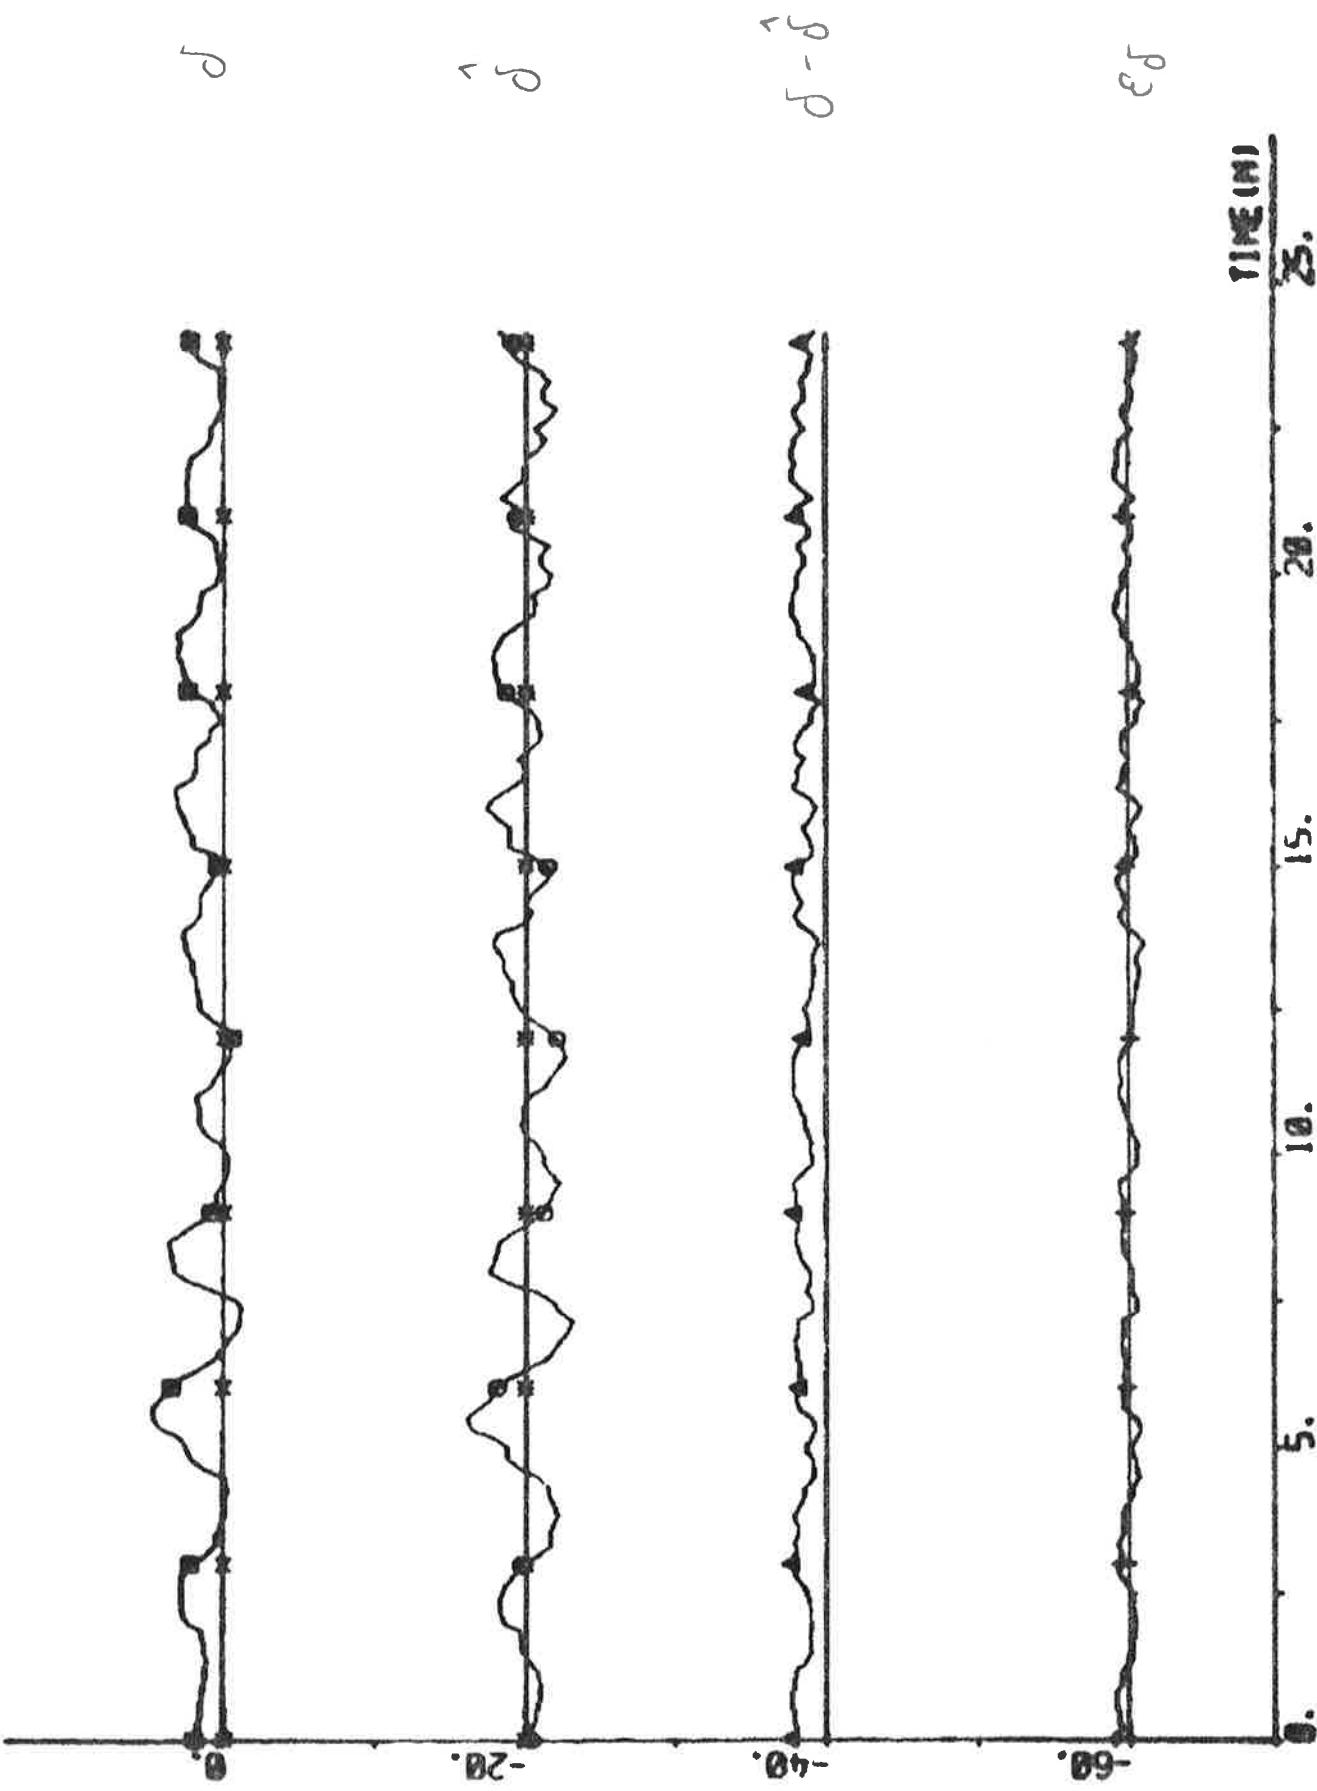

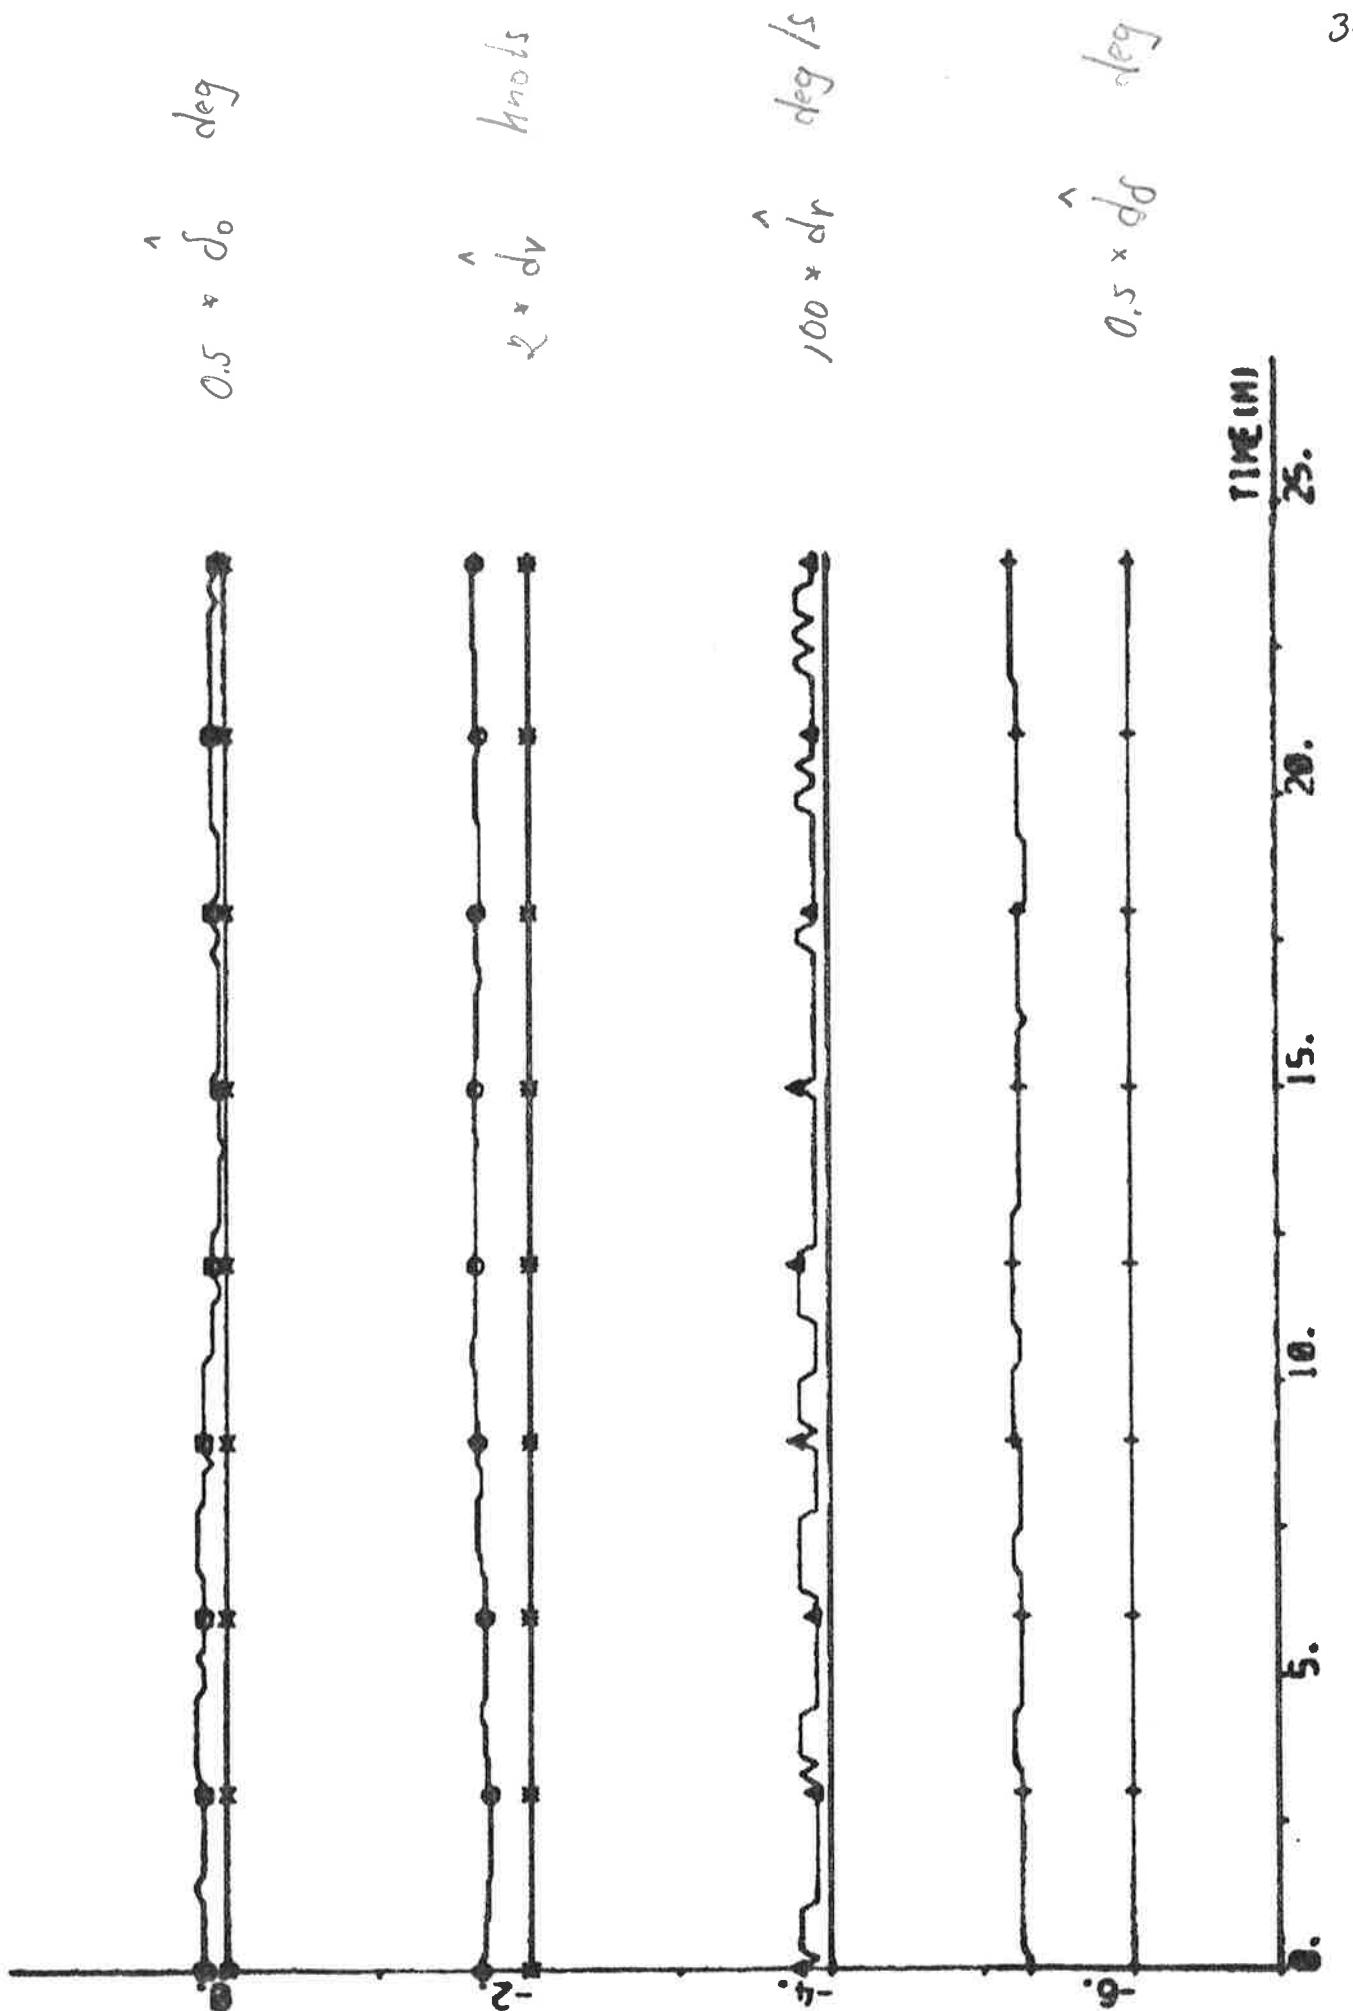



EXPERIMENT A30

| | | | |
|--------------|-------------------|-----------------|-----------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 15.12 | Aft draught | 12.9 m |
| Duration | 25 min | Wind direction | SE (1; see App. A) |
| Position | S 06°32' W 06°13' | Wind velocity | 5 m/s (gentle breeze) |
| ψ_{ref} | 143 deg | Wave height | - |

PID-regulator using estimates from the Kalman filter.

$$k_P = 3 \quad k_D = 120 \text{ s} \quad k_I = 0.02 \text{ l/s}$$

$$T_s = 10 \text{ s} \quad V_0 = 6 \text{ m/s} \quad IVVC = 1$$

The parameters were manually tuned before the experiment started.



Final values:

$$\hat{\delta}_0 = 0.0 \text{ deg} \quad \hat{d}_v = 0.16 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)

| | | | |
|---------------------|------------------------|-------------------|-----------------------|
| δ_c | -0.10 \pm 0.89 deg | P_s | 14.6 \pm 0.1 MW |
| δ | 1.44 \pm 0.71 deg | ϵ_v | 0.00 \pm 0.02 knots |
| $\psi - \psi_{ref}$ | -0.026 \pm 0.256 deg | ϵ_r | 0.00 \pm 0.02 deg/s |
| n | 69.6 \pm 0.4 rpm | ϵ_ψ | 0.00 \pm 0.03 deg |
| u | 13.5 \pm 0.1 knots | ϵ_δ | 0.0 \pm 0.5 deg |
| V_1 | = 0.132 | | |

PLOT NO. 111-1000 (10) MARCH 31 - 1968

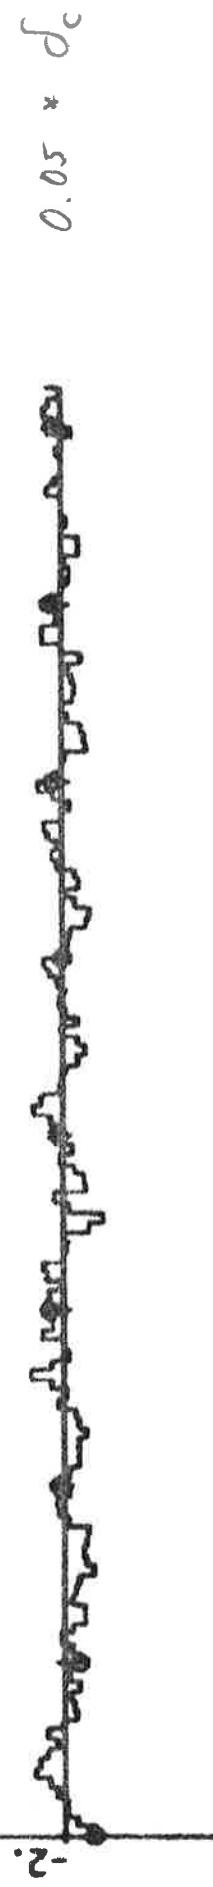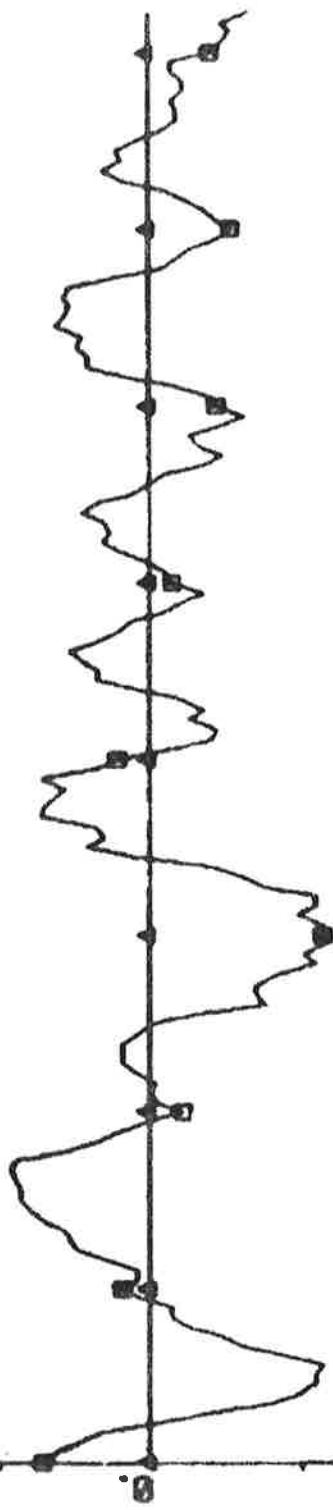

369

370



59

5


MW
P_s

200 knots


0.5 < n < 1.5


MST Paper I (1) - Adder I (13) Mst Paper I (12) Mst Paper I (14) Mst Paper I (11)


not record(1), record(2), ERS5 00 01 02 -3.4.0.0 - 0015

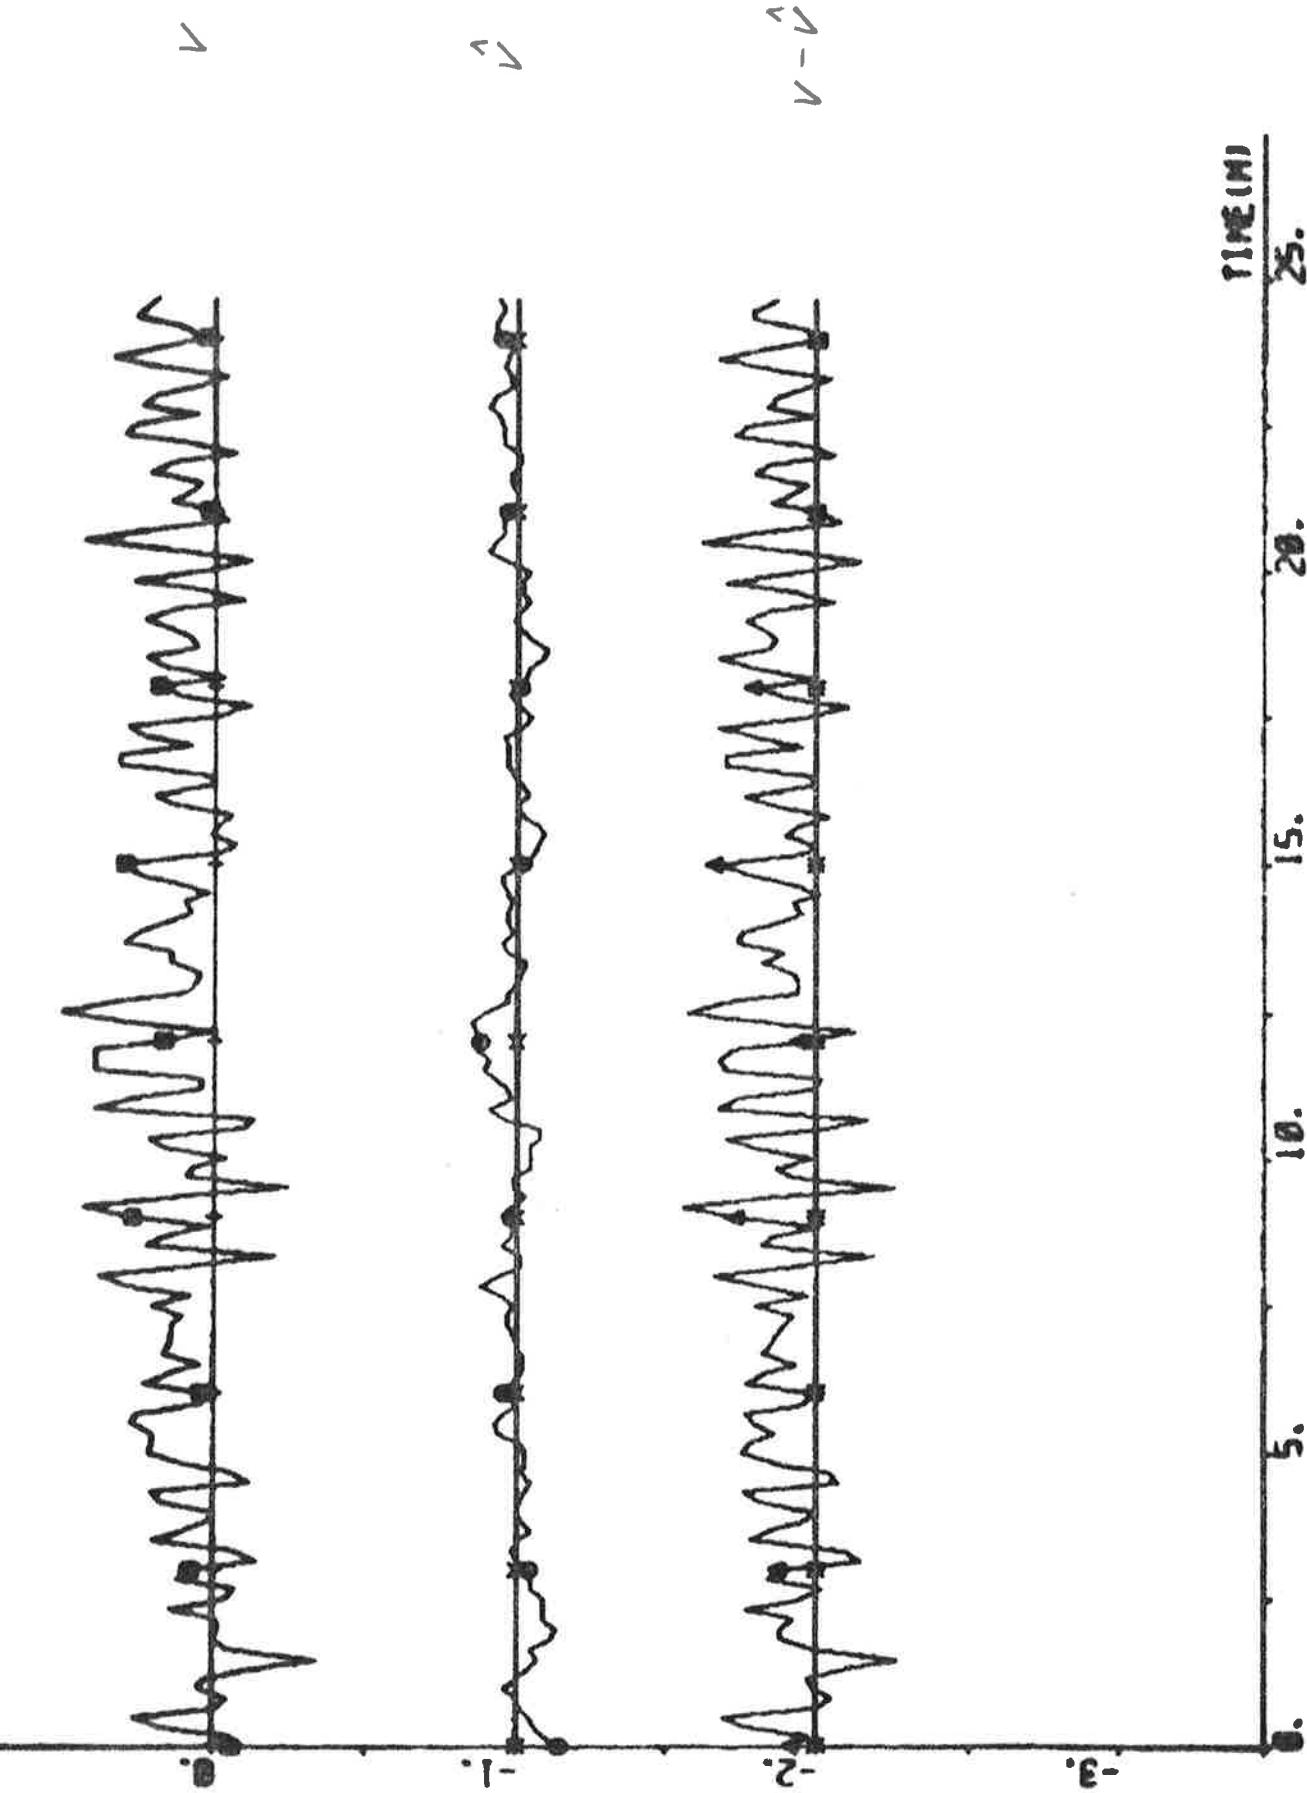


Mar 2001 (11) - 2001 (14) 42001 (5) ER2 ER2 00 01 02 03 - 3.4 3.3 .

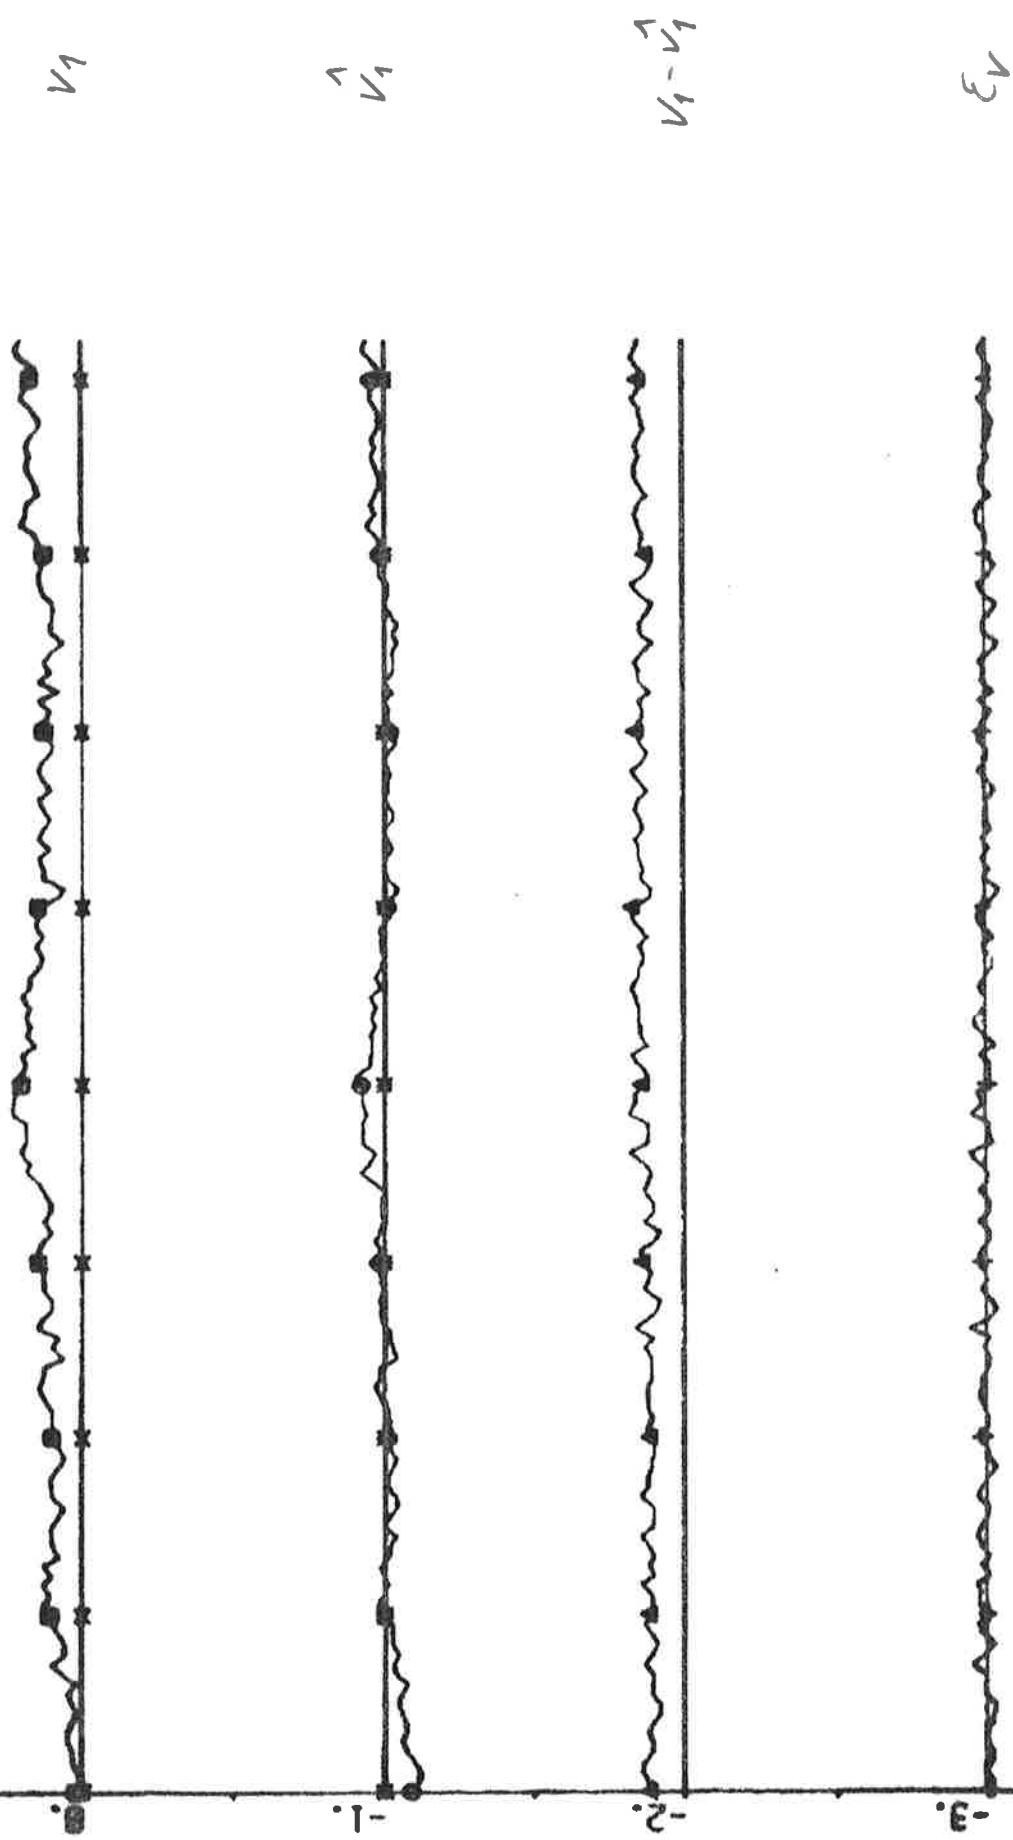

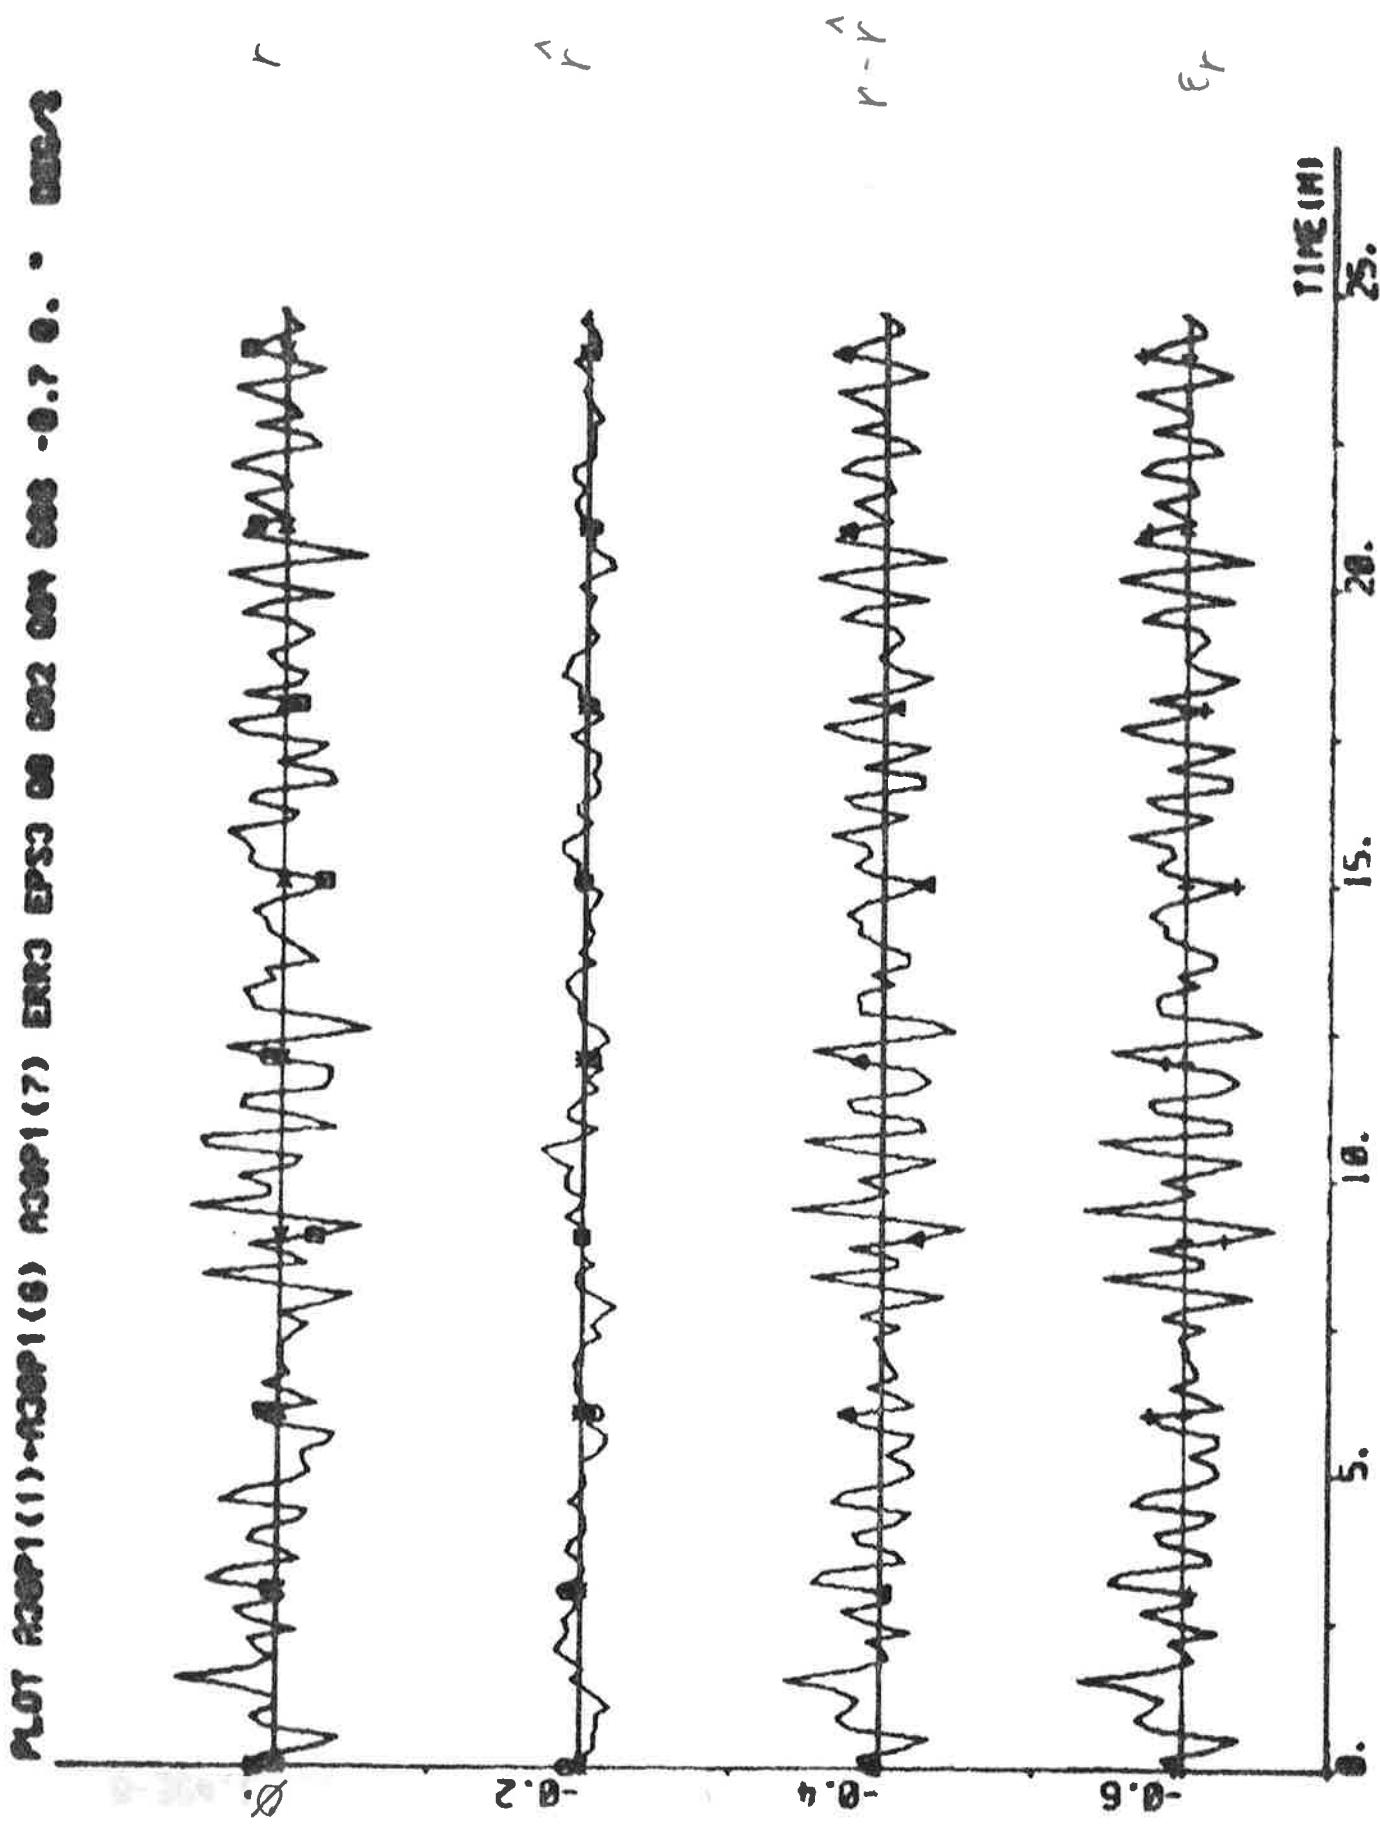

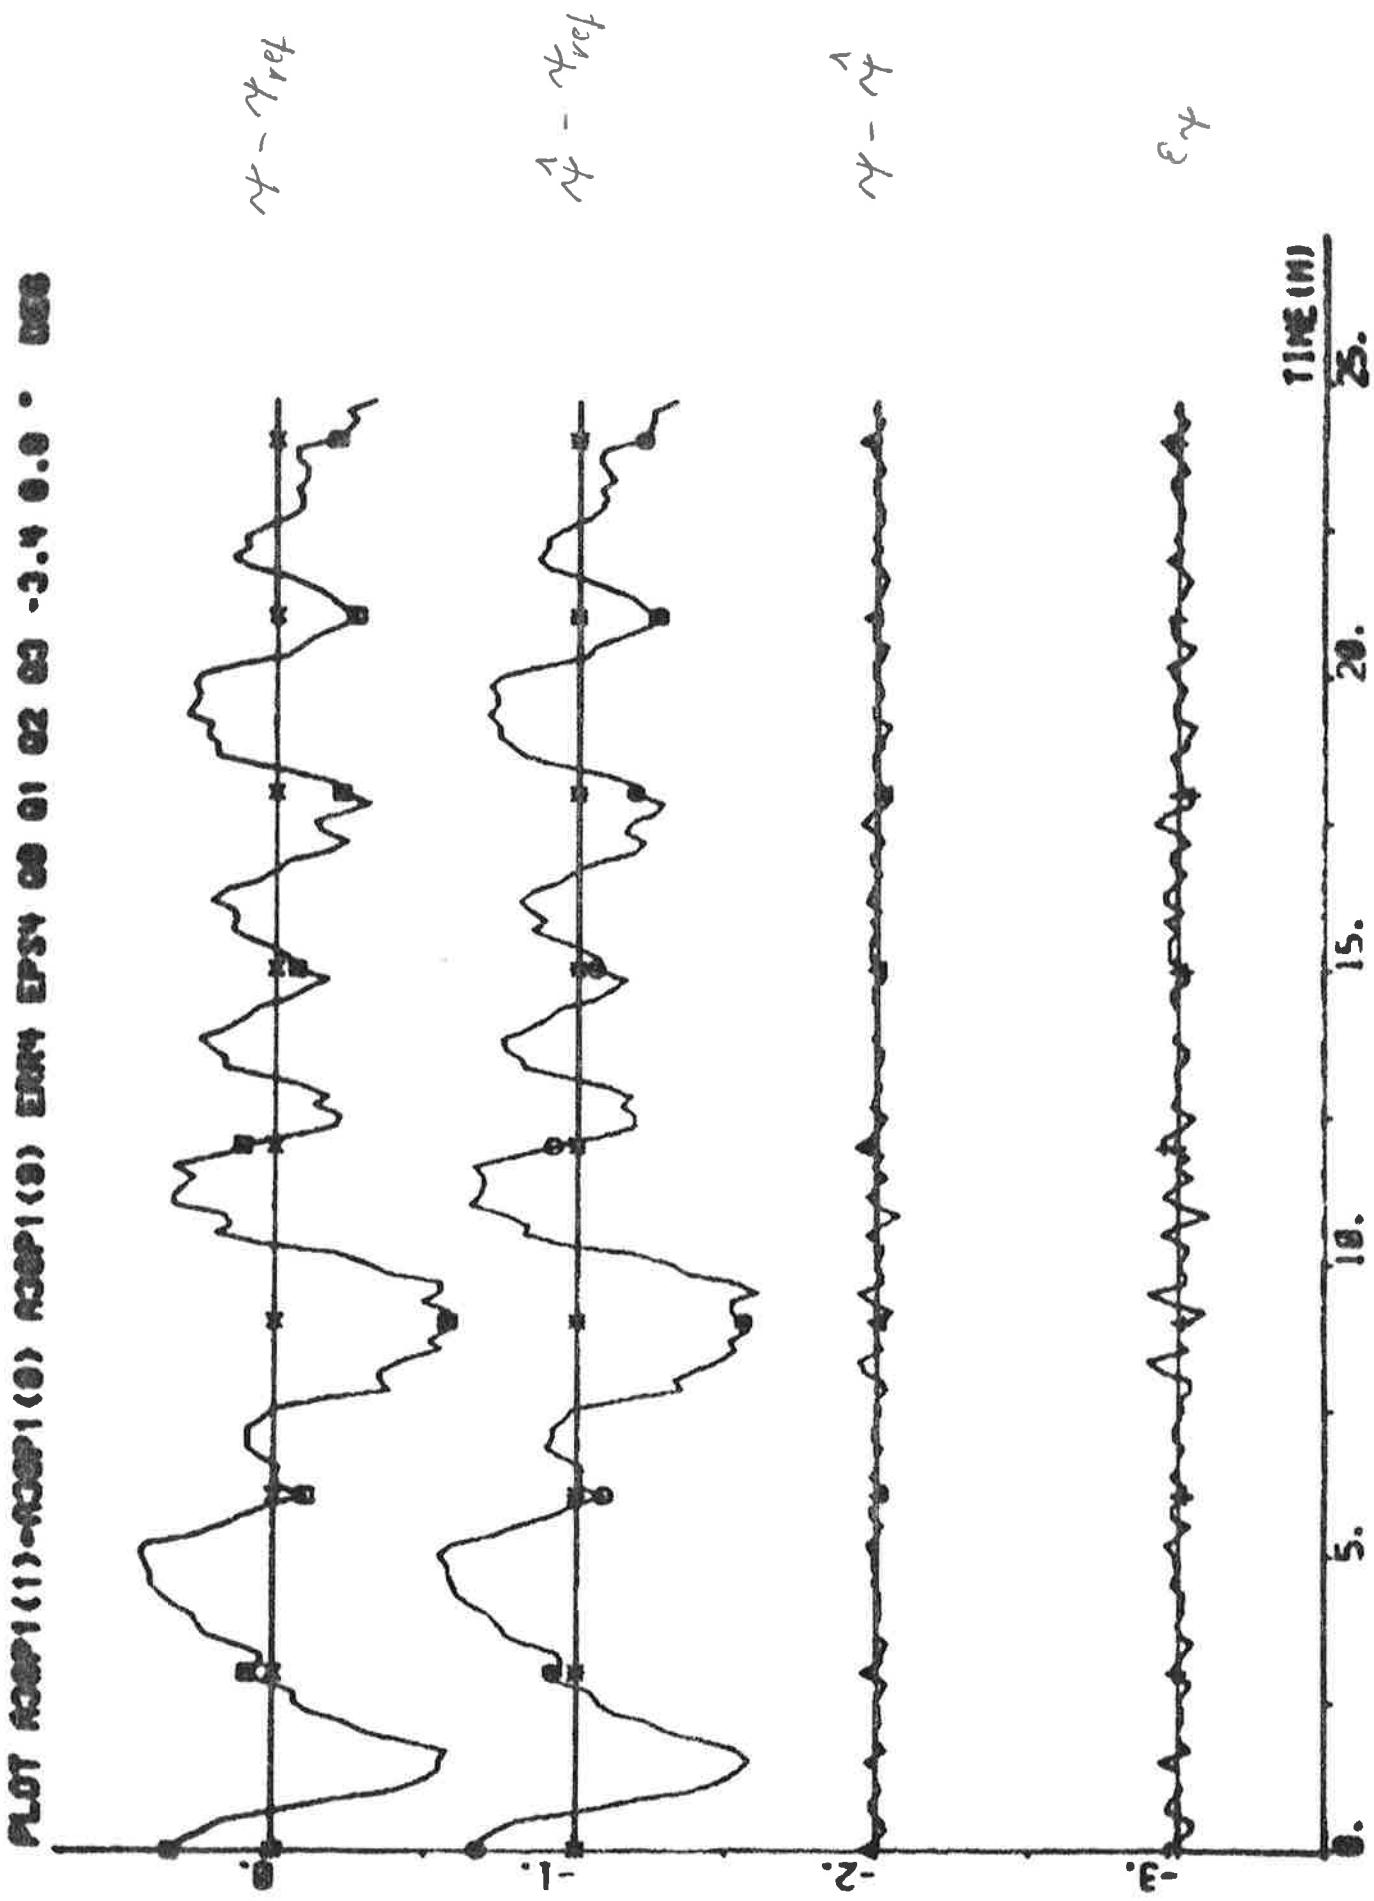

• 31. 28. 25. 22. 19. 16. 13. 10. 7. 4. 1.

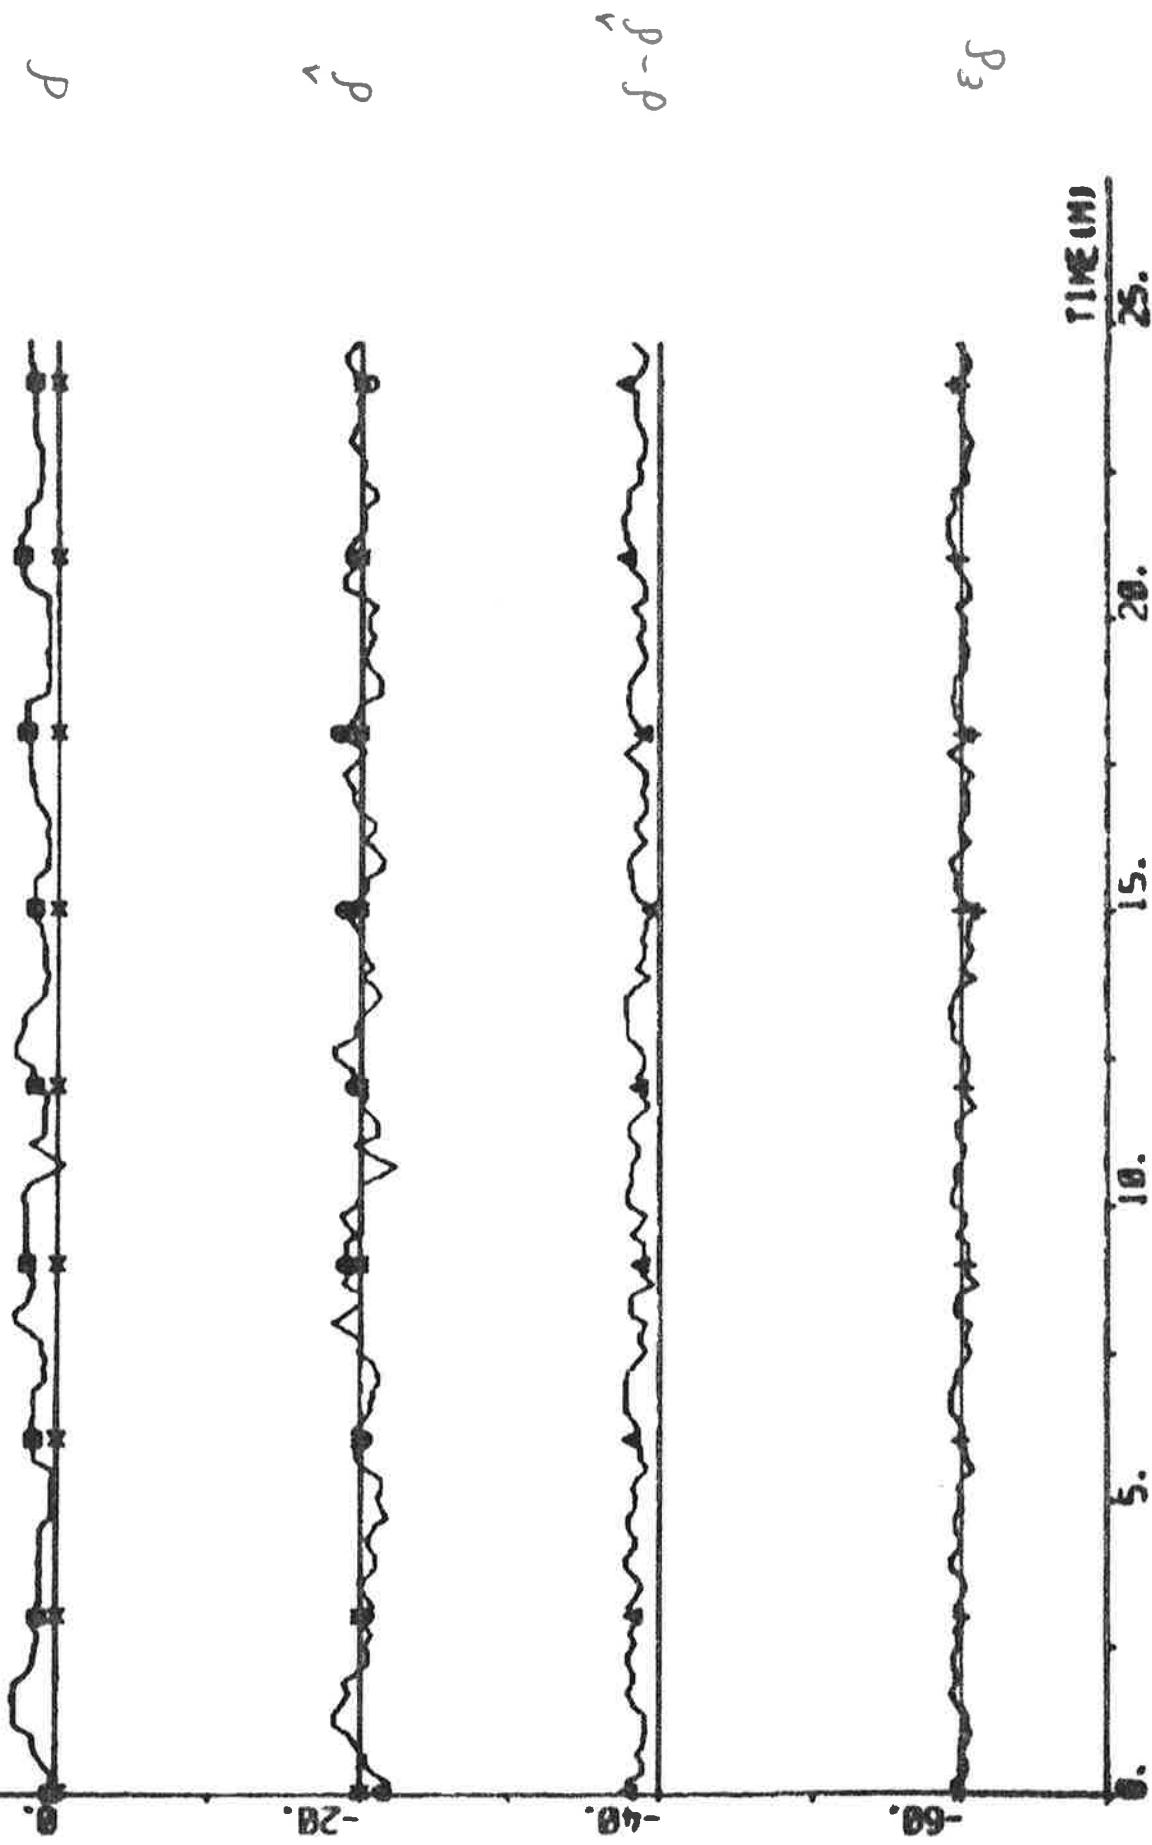



EXPERIMENT A31

| | | | |
|--------------|-------------------|-----------------|----------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 16.05 | Aft draught | 12.9 m |
| Duration | 24 min | Wind direction | SE (1; see App. A) |
| Position | S 06°42' W 06°06' | Wind velocity | 3 m/s (light breeze) |
| ψ_{ref} | 143 deg | Wave height | - |

PID-regulator using non-filtered measurements.


$$\begin{array}{lll} k_P = 2 & k_D = 100 \text{ s} & k_I = 0.02 \text{ l/s} \\ T_s = 10 \text{ s} & v_0 = 6 \text{ m/s} & IVVC = 1 \end{array}$$

The parameters were manually tuned before the experiment started.


Final values:

$$\hat{\delta}_0 = 0.0 \text{ deg} \quad \hat{d}_v = 0.11 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_{\delta} = 1.5 \text{ deg}$$


Statistics (mean value and standard deviation)

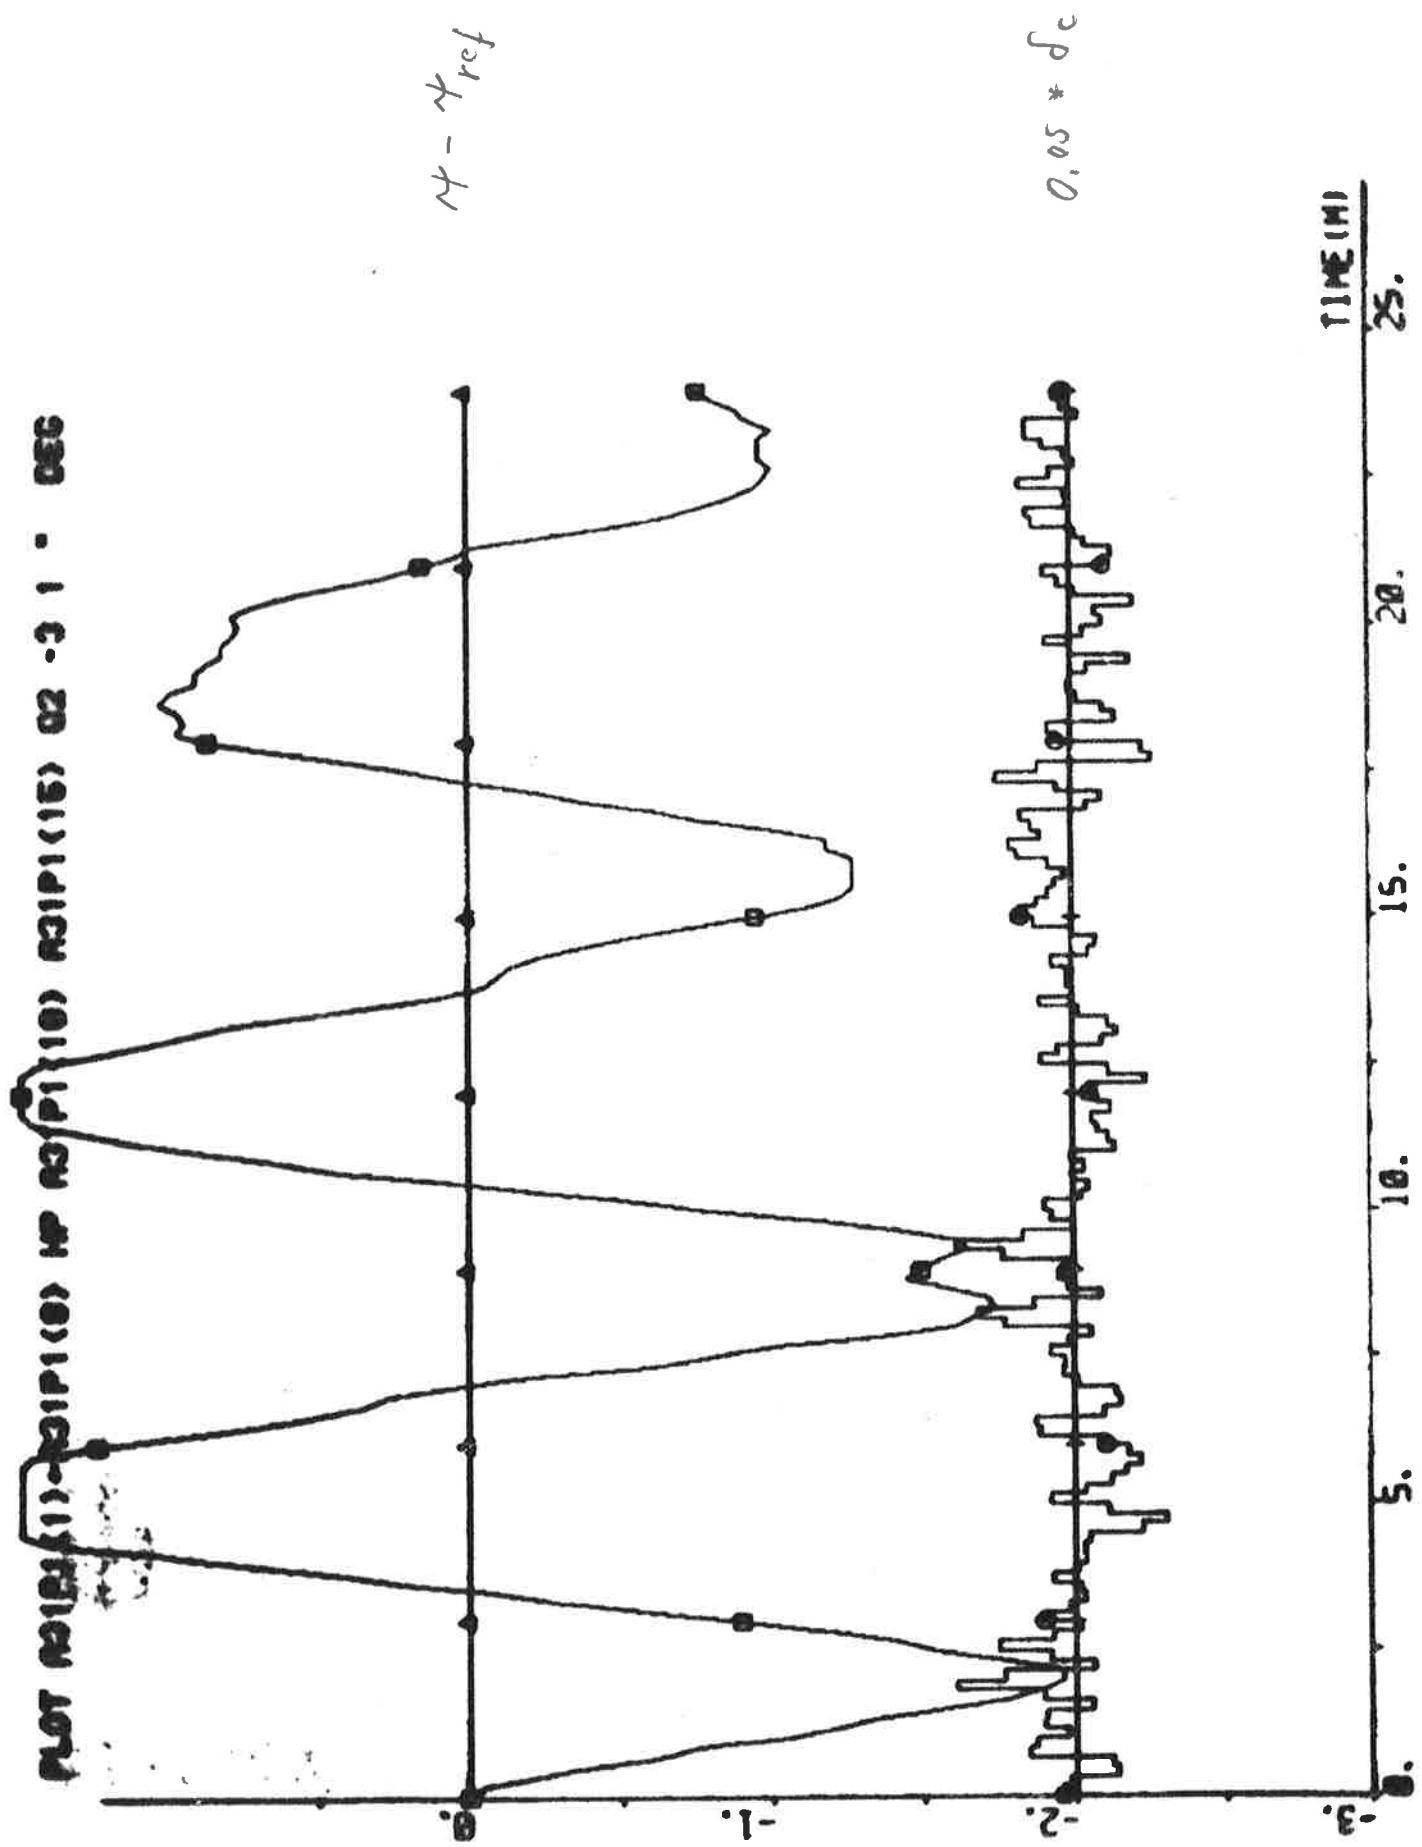


NOTE: (1) $\Delta\theta = 10^\circ$, (2) $\Delta\theta = 12^\circ$, (3) $\Delta\theta = 14^\circ$

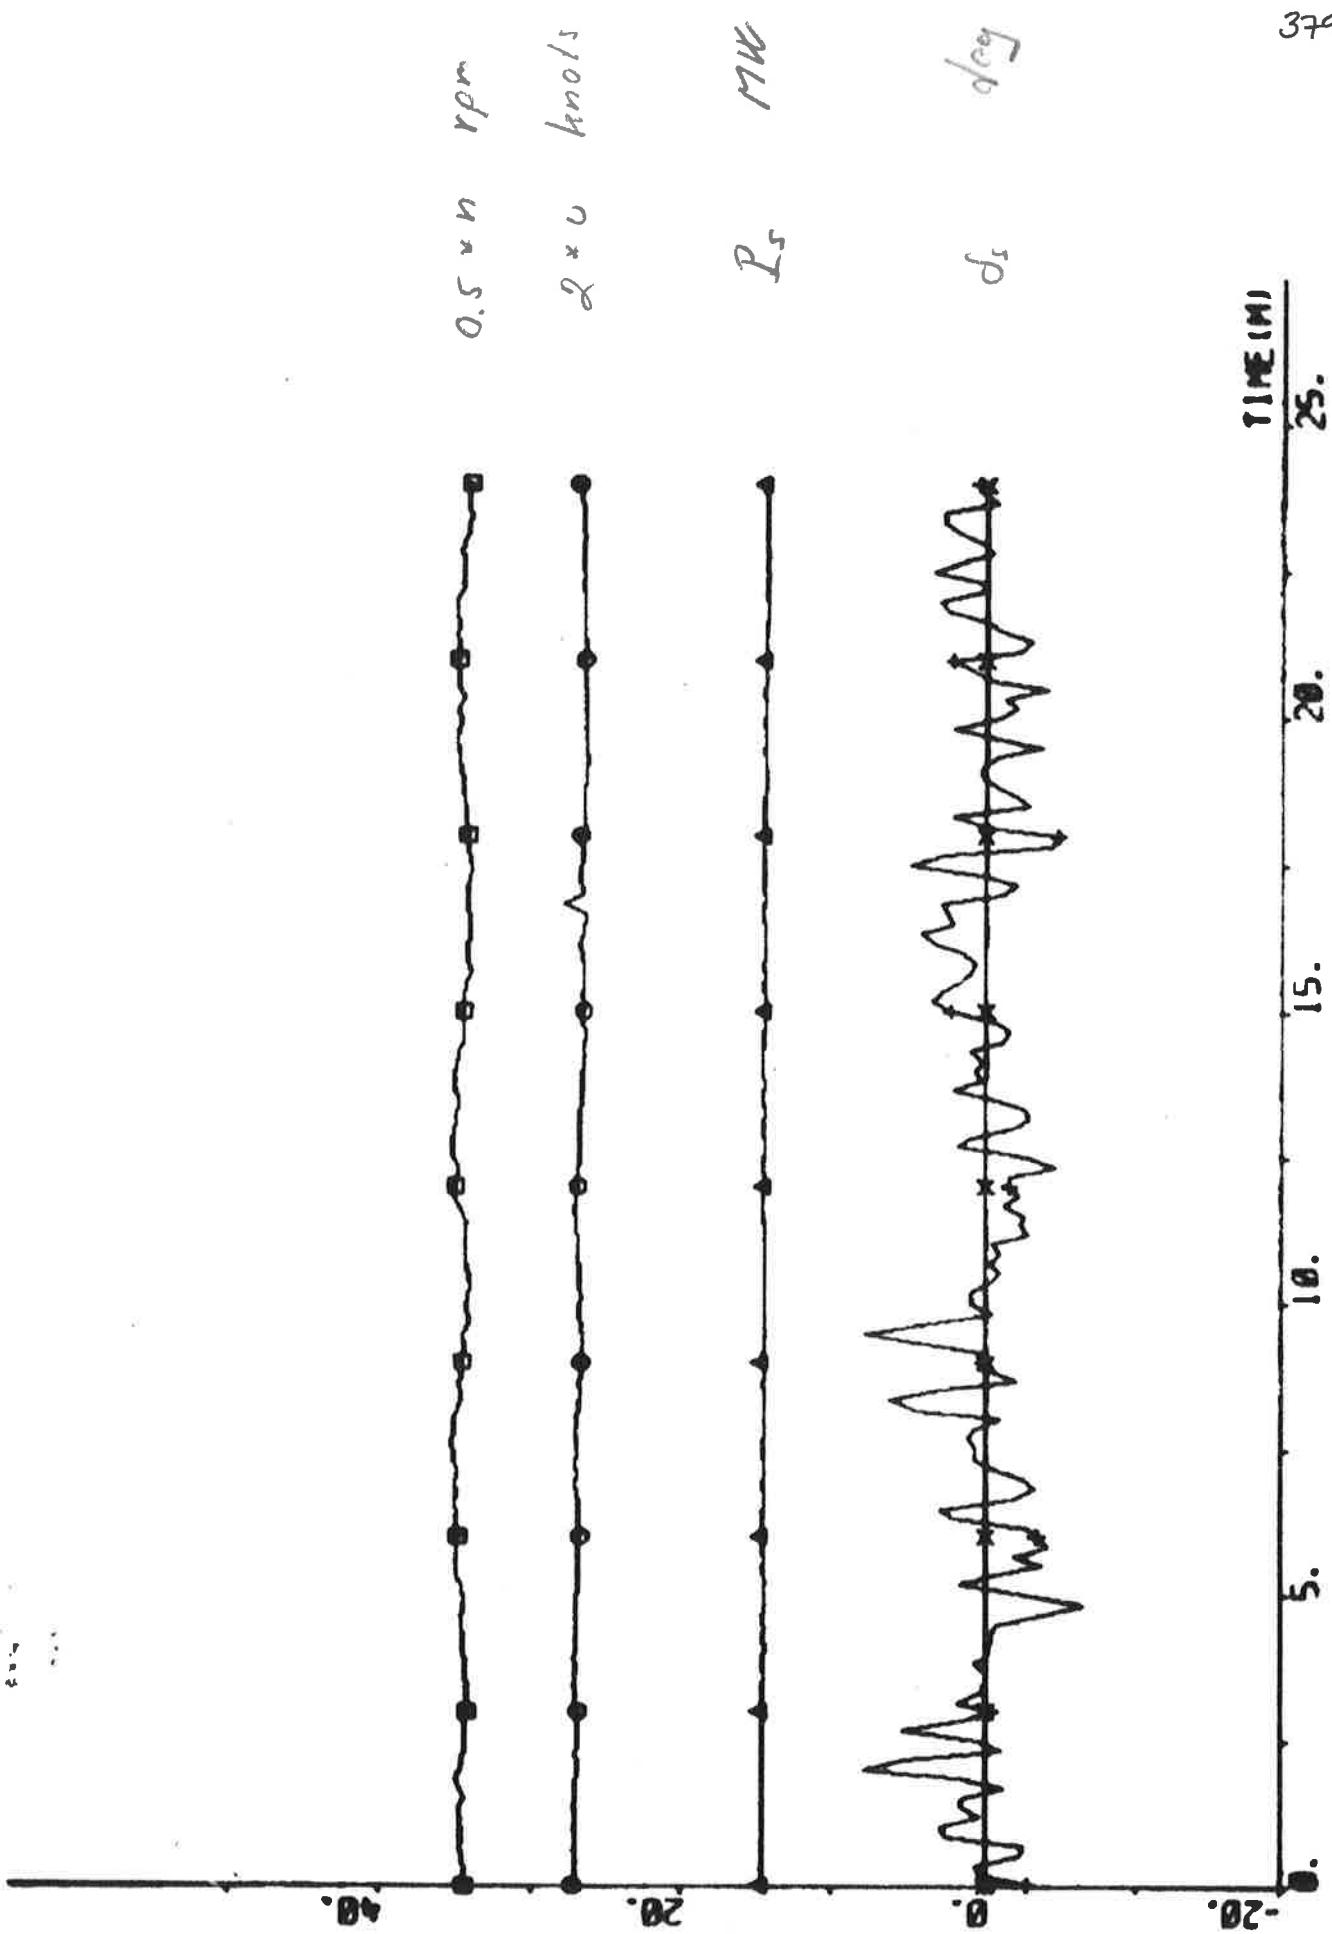


2000 - 1000 - 500 - 0 - 500 - 1000 - 1500 - 2000 - 2500

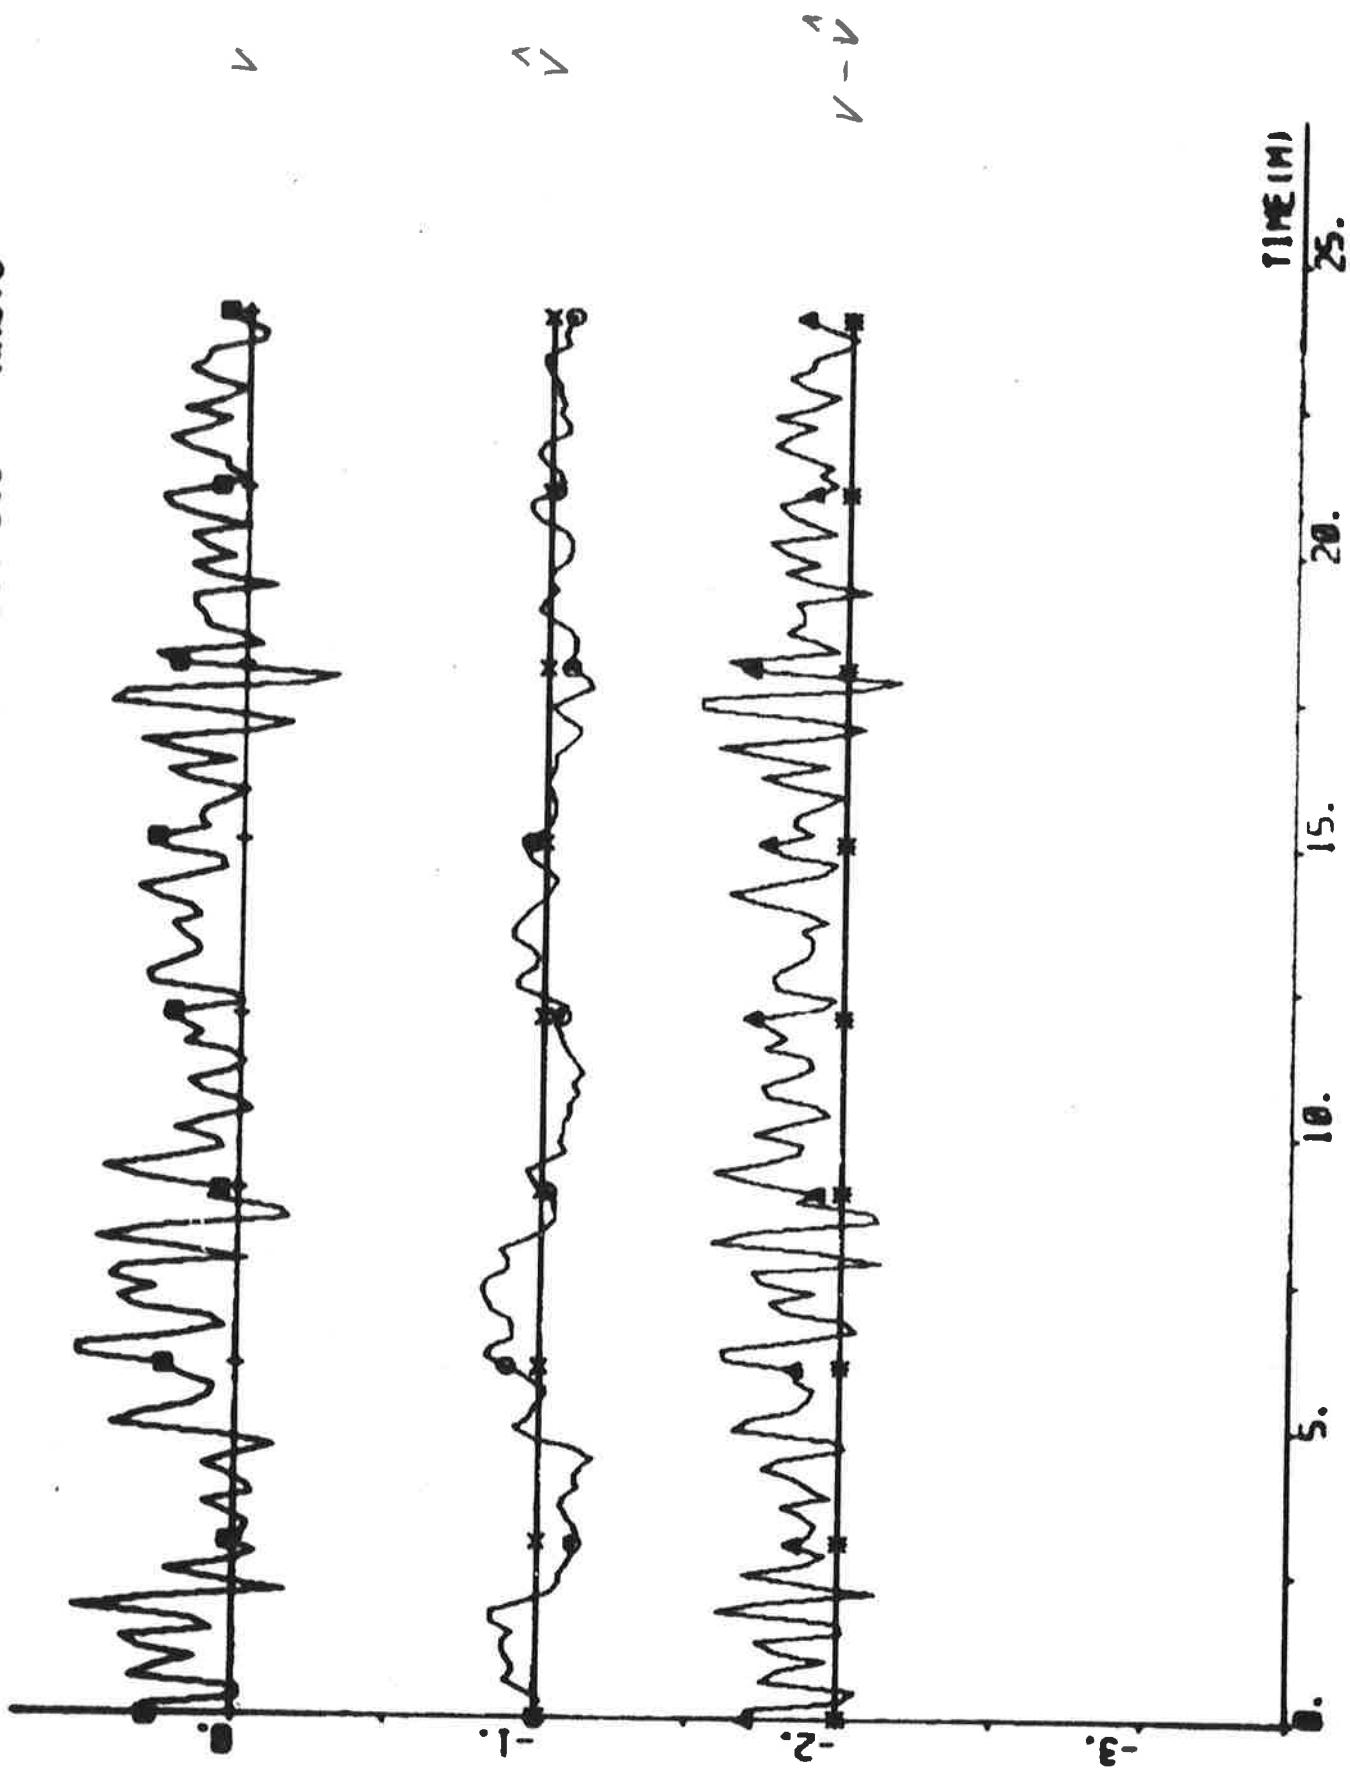

NET MPP(1)-MPP(4) EPP2 00 01 02 03 -3.4 0.0 • dmmes

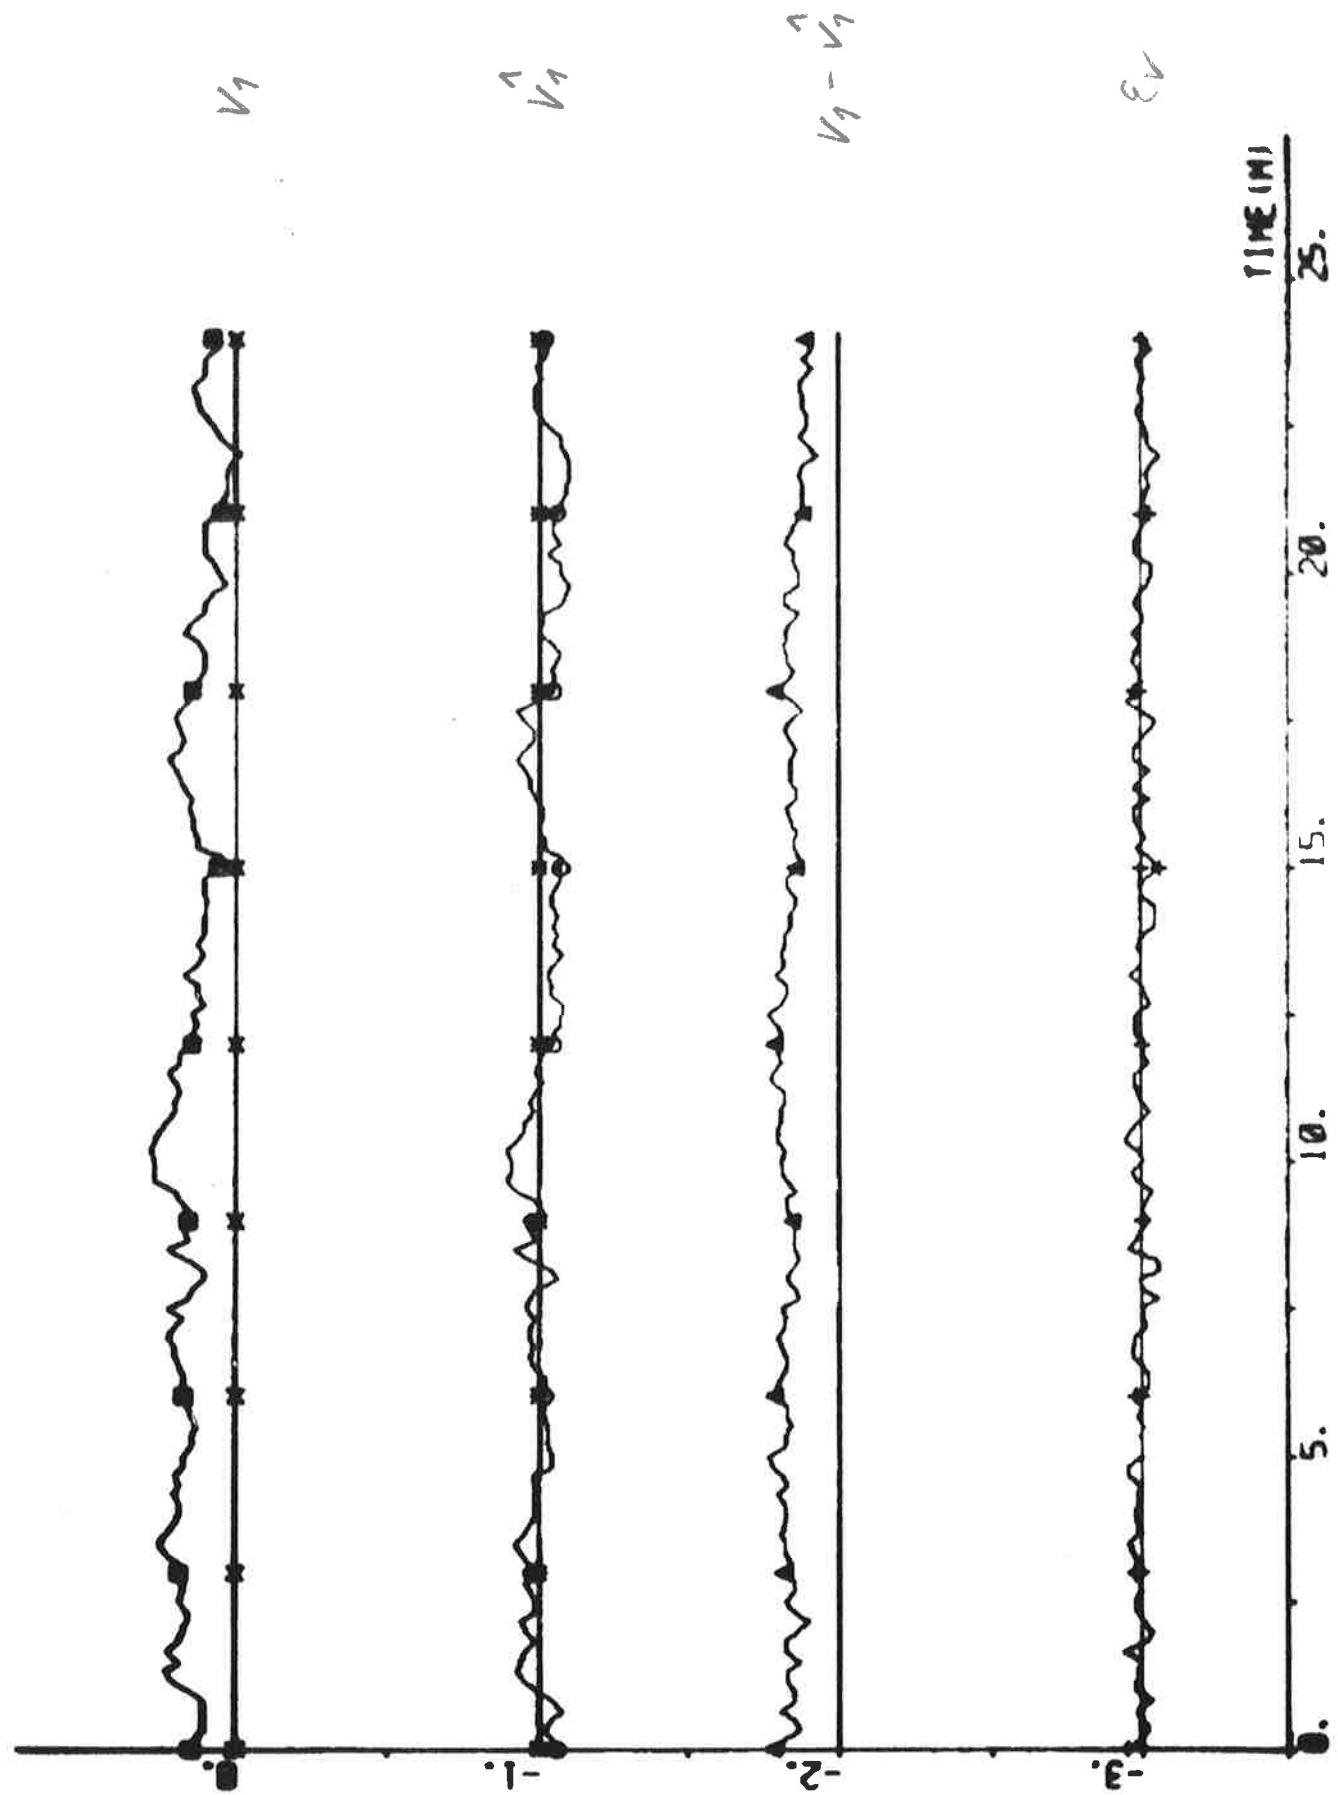

ALOT M1PI(1)-M1PI(8) EADS E33 00 002 000 000 -0.7 0. . . .

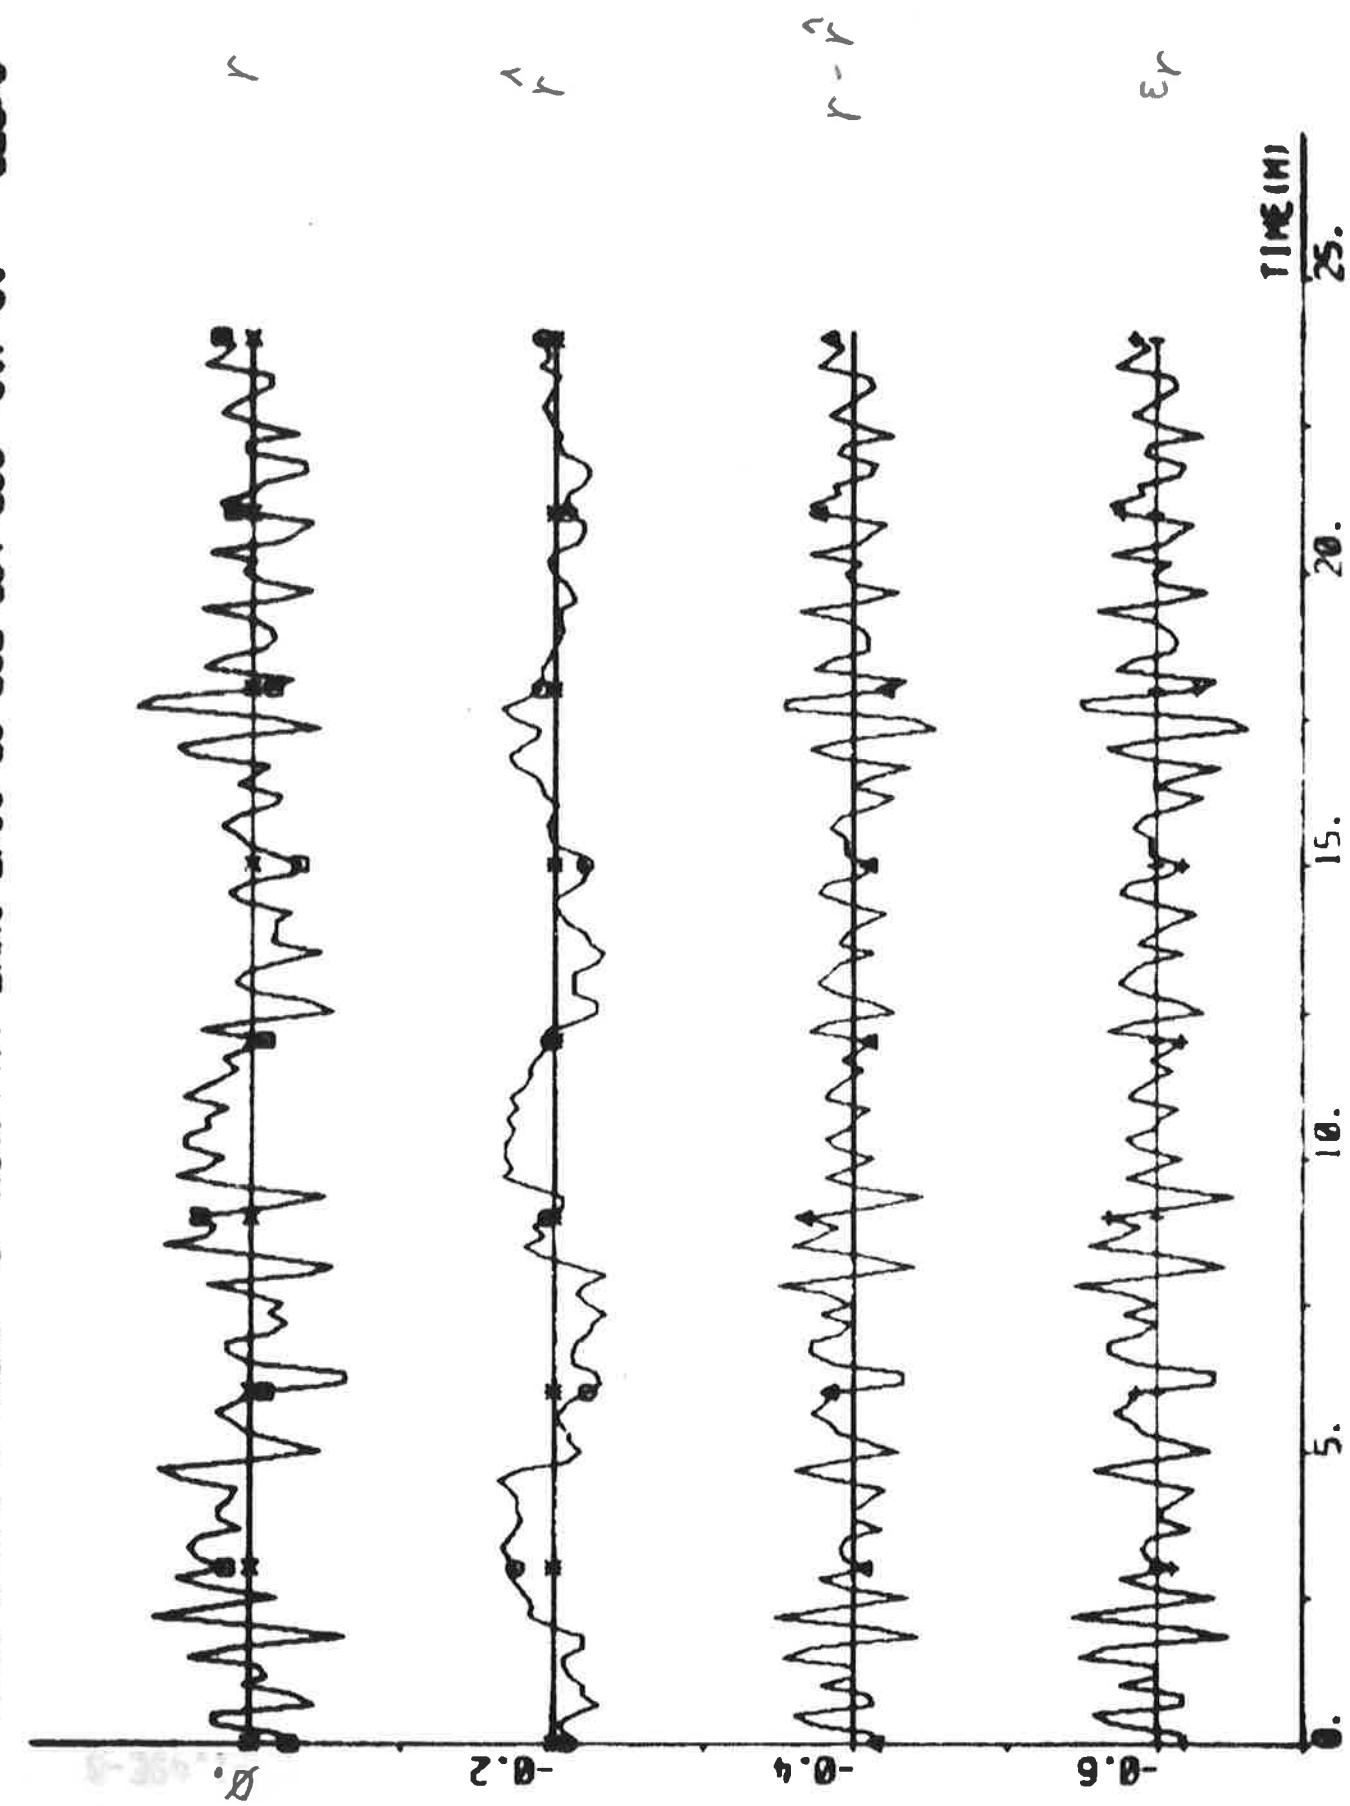



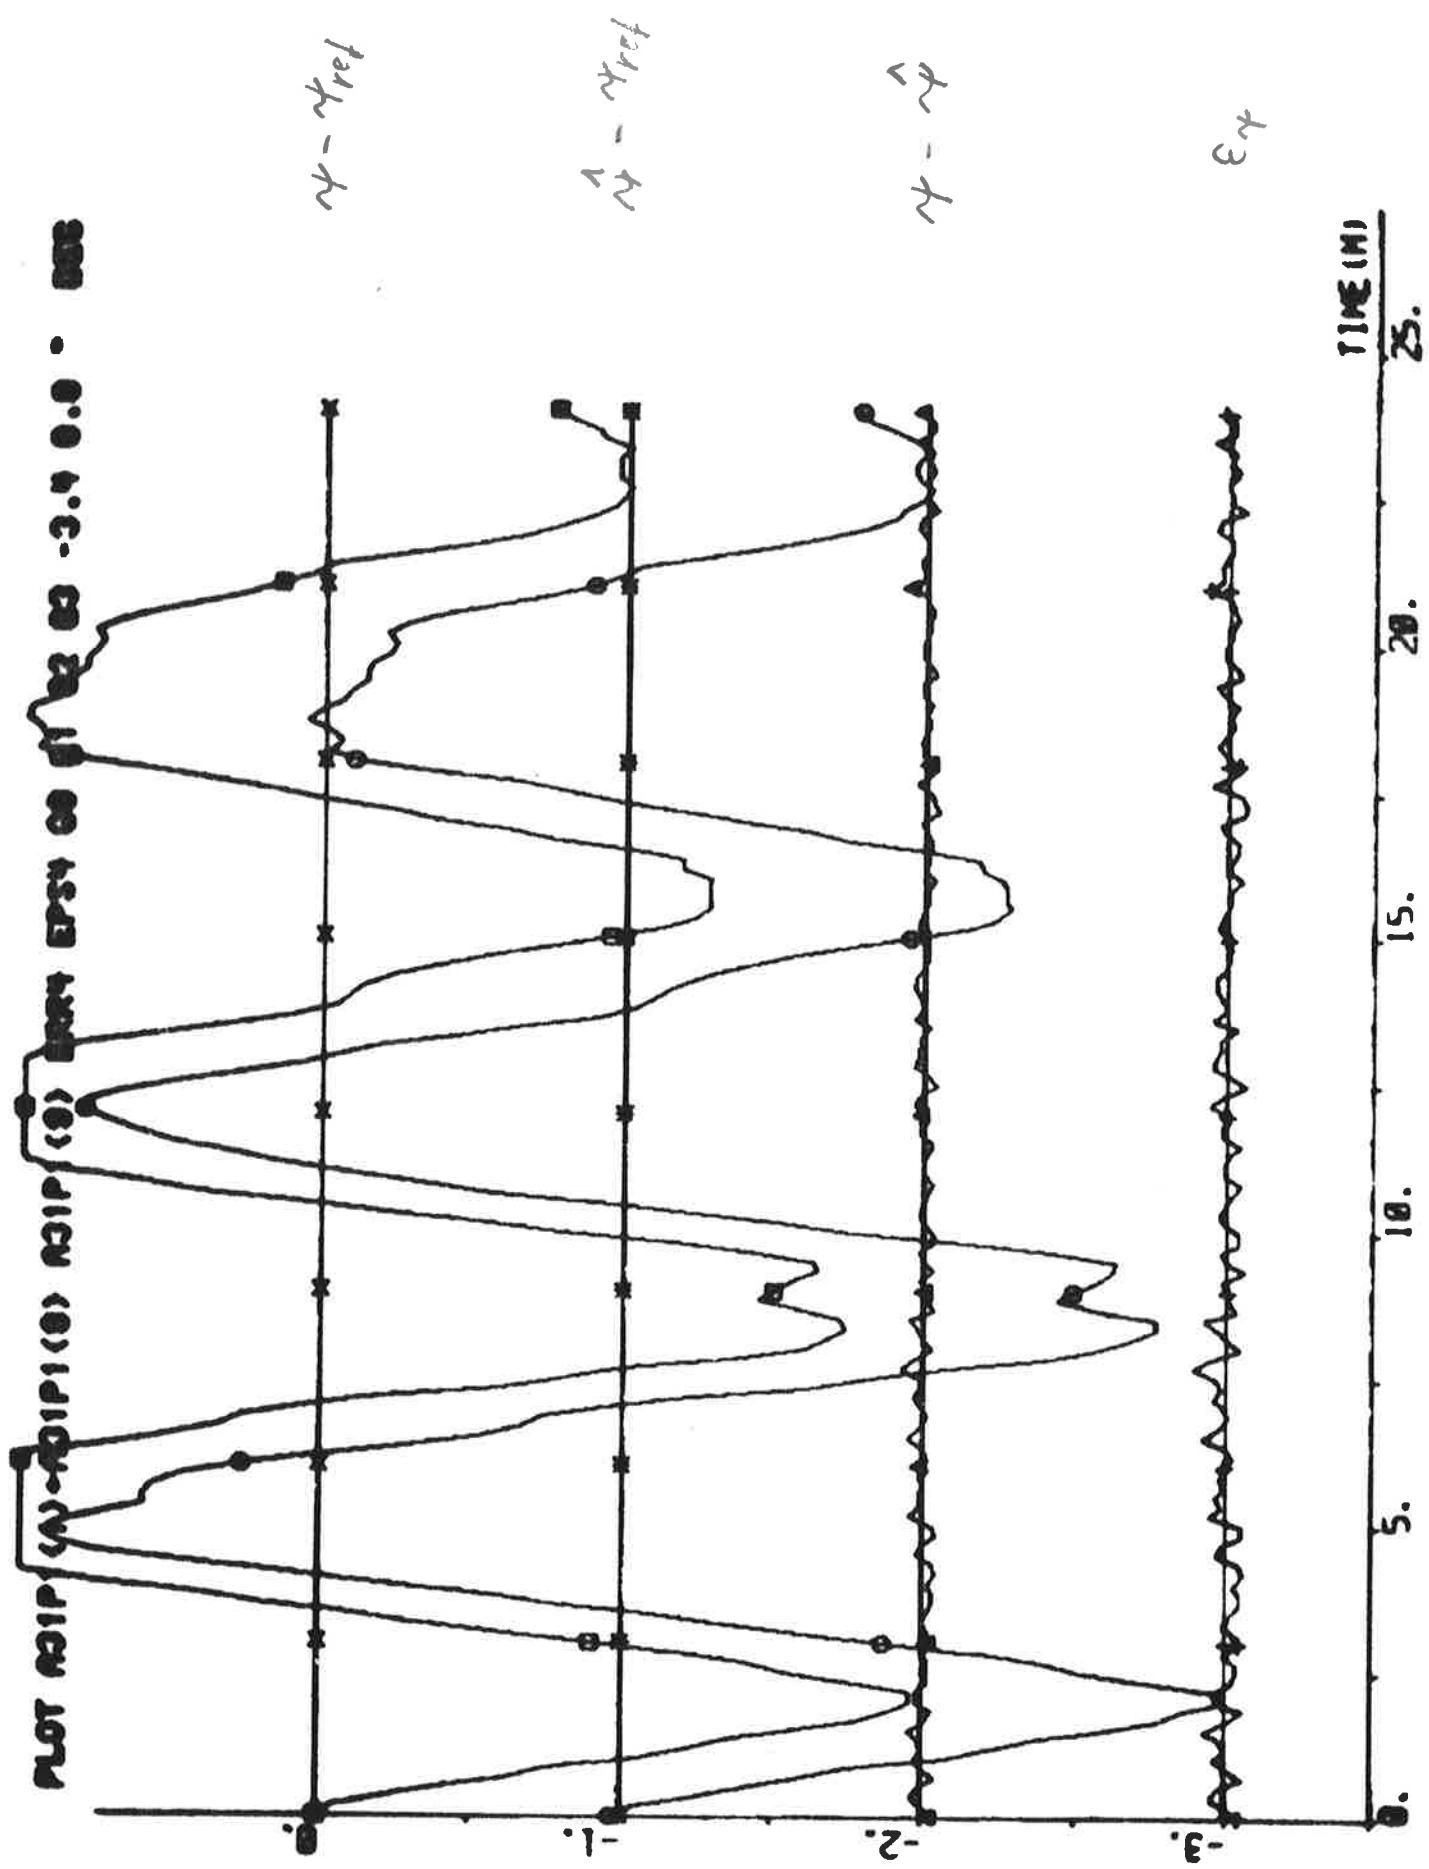


PLATE 111 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16)

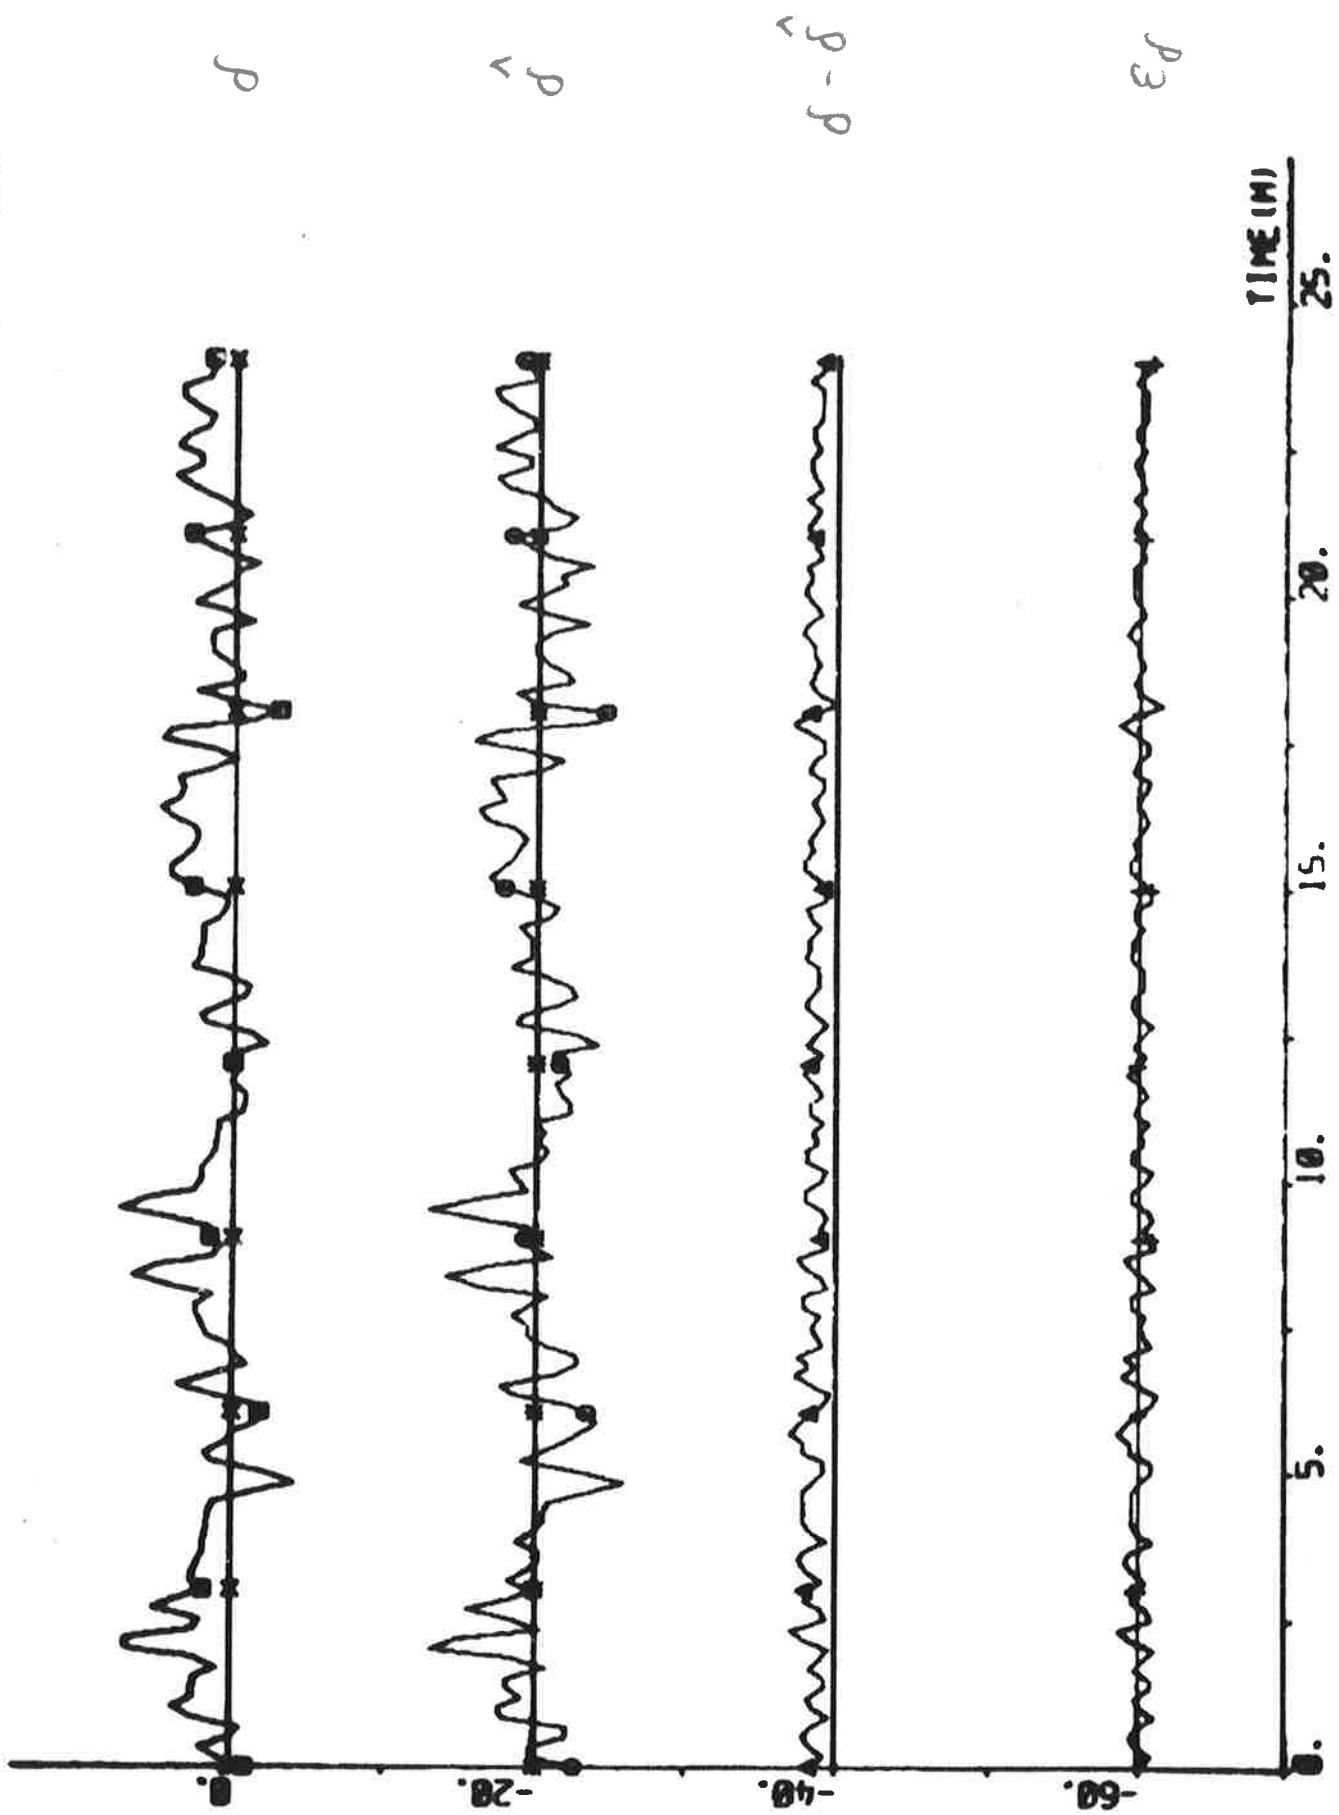

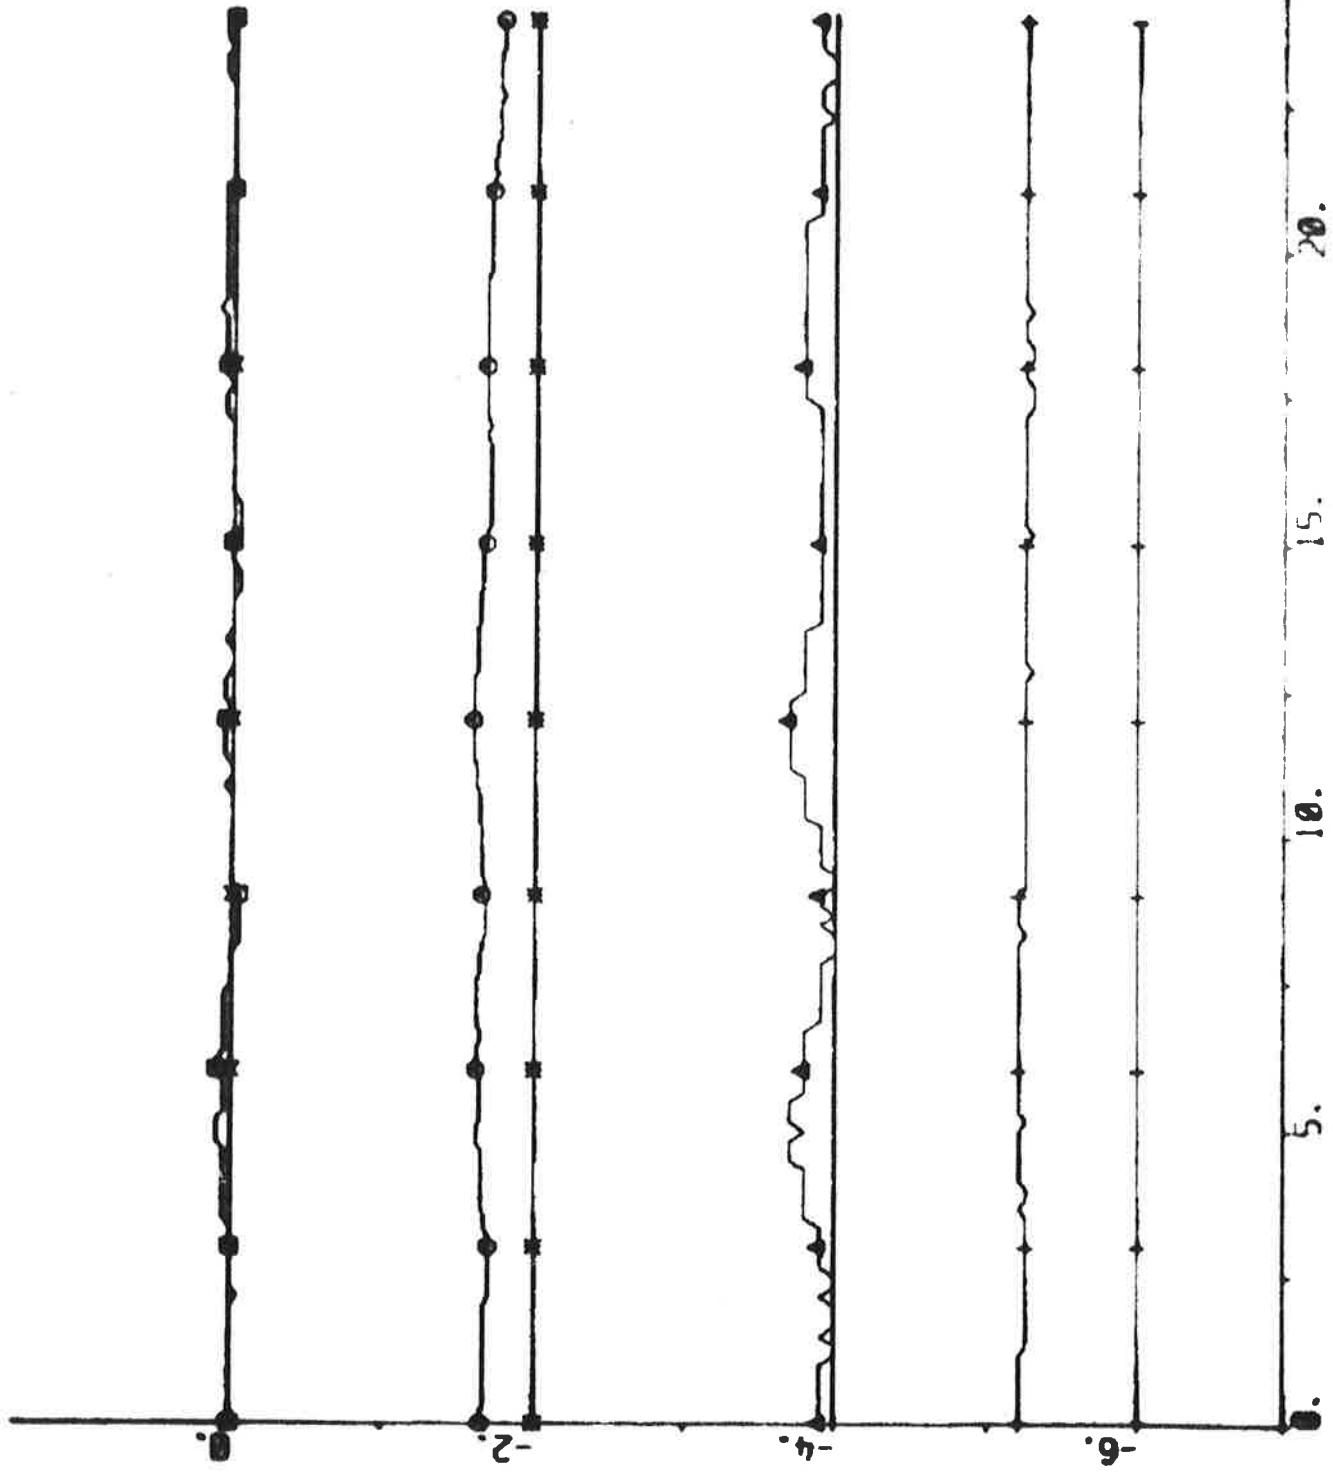

EXPERIMENT A32

| | | | |
|--------------|-------------------|-----------------|----------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 19.31 | Aft draught | 12.9 m |
| Duration | 25 min | Wind direction | S (1; see App. A) |
| Position | S 07°20' W 05°38' | Wind velocity | 9 m/s (fresh breeze) |
| ψ_{ref} | 142 deg | Wave height | - |

Self-tuning regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 120 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -10.51 \\ 9.96 \\ 4.86 \\ -4.33 \\ 0.49 \\ 0.12 \\ -0.69 \\ 70.44 \end{bmatrix} \quad P = \begin{bmatrix} 6.87 \\ -13.89 & 43.74 \\ 8.32 & -44.87 & 64.19 \\ -0.76 & 14.64 & -27.68 & 14.46 \\ 0.26 & -1.20 & 1.50 & -0.55 & 0.05 \\ -0.03 & 0.26 & -0.52 & 0.31 & -0.01 & 0.02 \\ -0.82 & 1.24 & -0.28 & -0.19 & 0.00 & 0.01 & 0.85 \\ 14.47 & -31.32 & 3.88 & 11.30 & 1.55 & 0.18 & 18.10 & 894.76 \end{bmatrix}$$


$$a_1 + a_2 + a_3 + a_4 = -0.02$$

$$\hat{\delta}_0 = 0.2 \text{ deg} \quad \hat{d}_v = 0.06 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.7 \text{ deg}$$


Statistics (mean value and standard deviation)

| | | | | | | | |
|---------------------|--------|-------------|-------|-------------------|------|------------|-------|
| δ_c | -0.01 | ± 0.98 | deg | P_s | 14.9 | ± 0.1 | MW |
| δ | 1.65 | ± 0.82 | deg | ϵ_v | 0.00 | ± 0.02 | knots |
| $\psi - \psi_{ref}$ | -0.082 | ± 0.223 | deg | ϵ_r | 0.00 | ± 0.02 | deg/s |
| n | 69.9 | ± 0.5 | rpm | ϵ_ψ | 0.00 | ± 0.03 | deg |
| u | 13.6 | ± 0.1 | knots | ϵ_δ | 0.1 | ± 0.5 | deg |
| V_1 | 0.136 | | | | | | |


NOT REPRODUCED - 100% REDUCTION

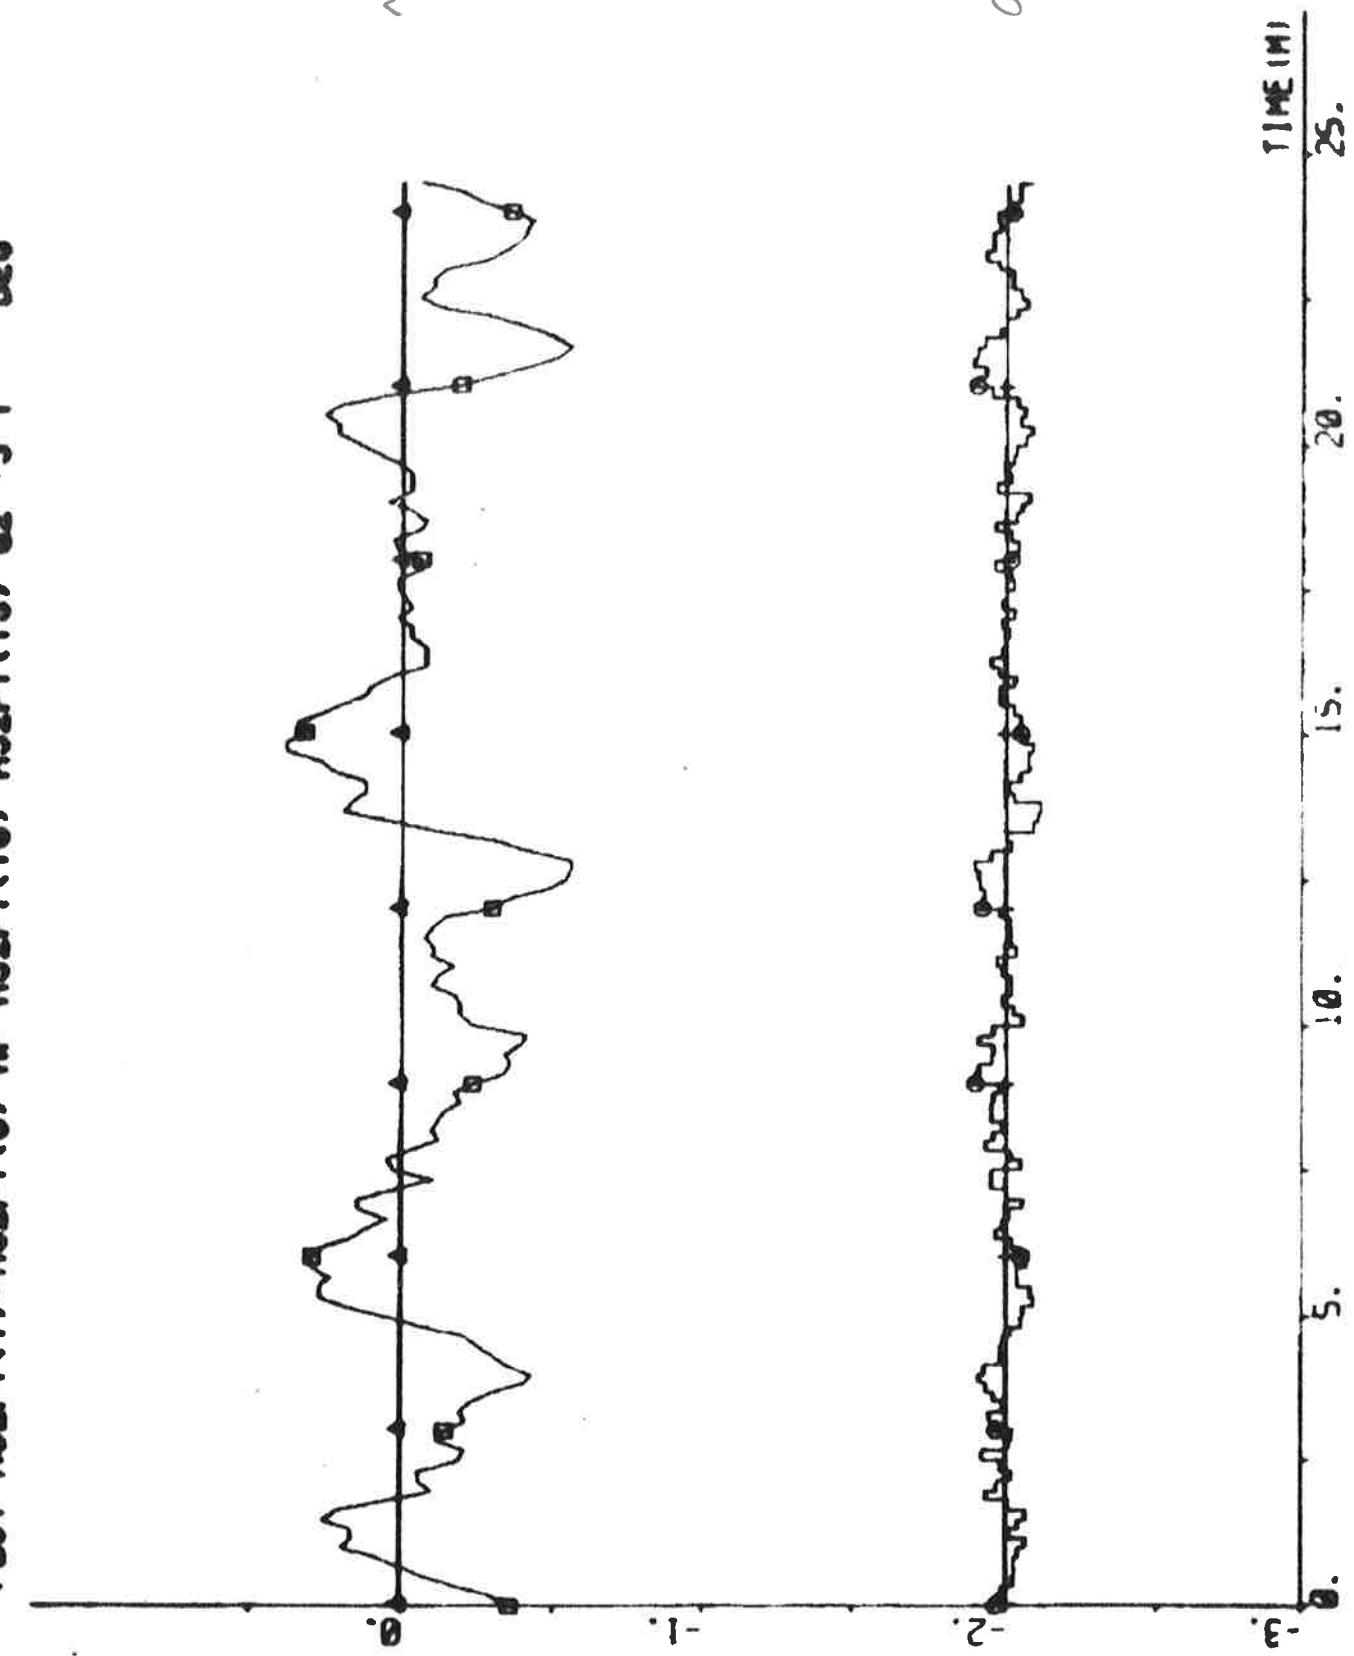


NOTE NO 221(1) - 221(12) - 221(13) - 221(14) - 221(15)

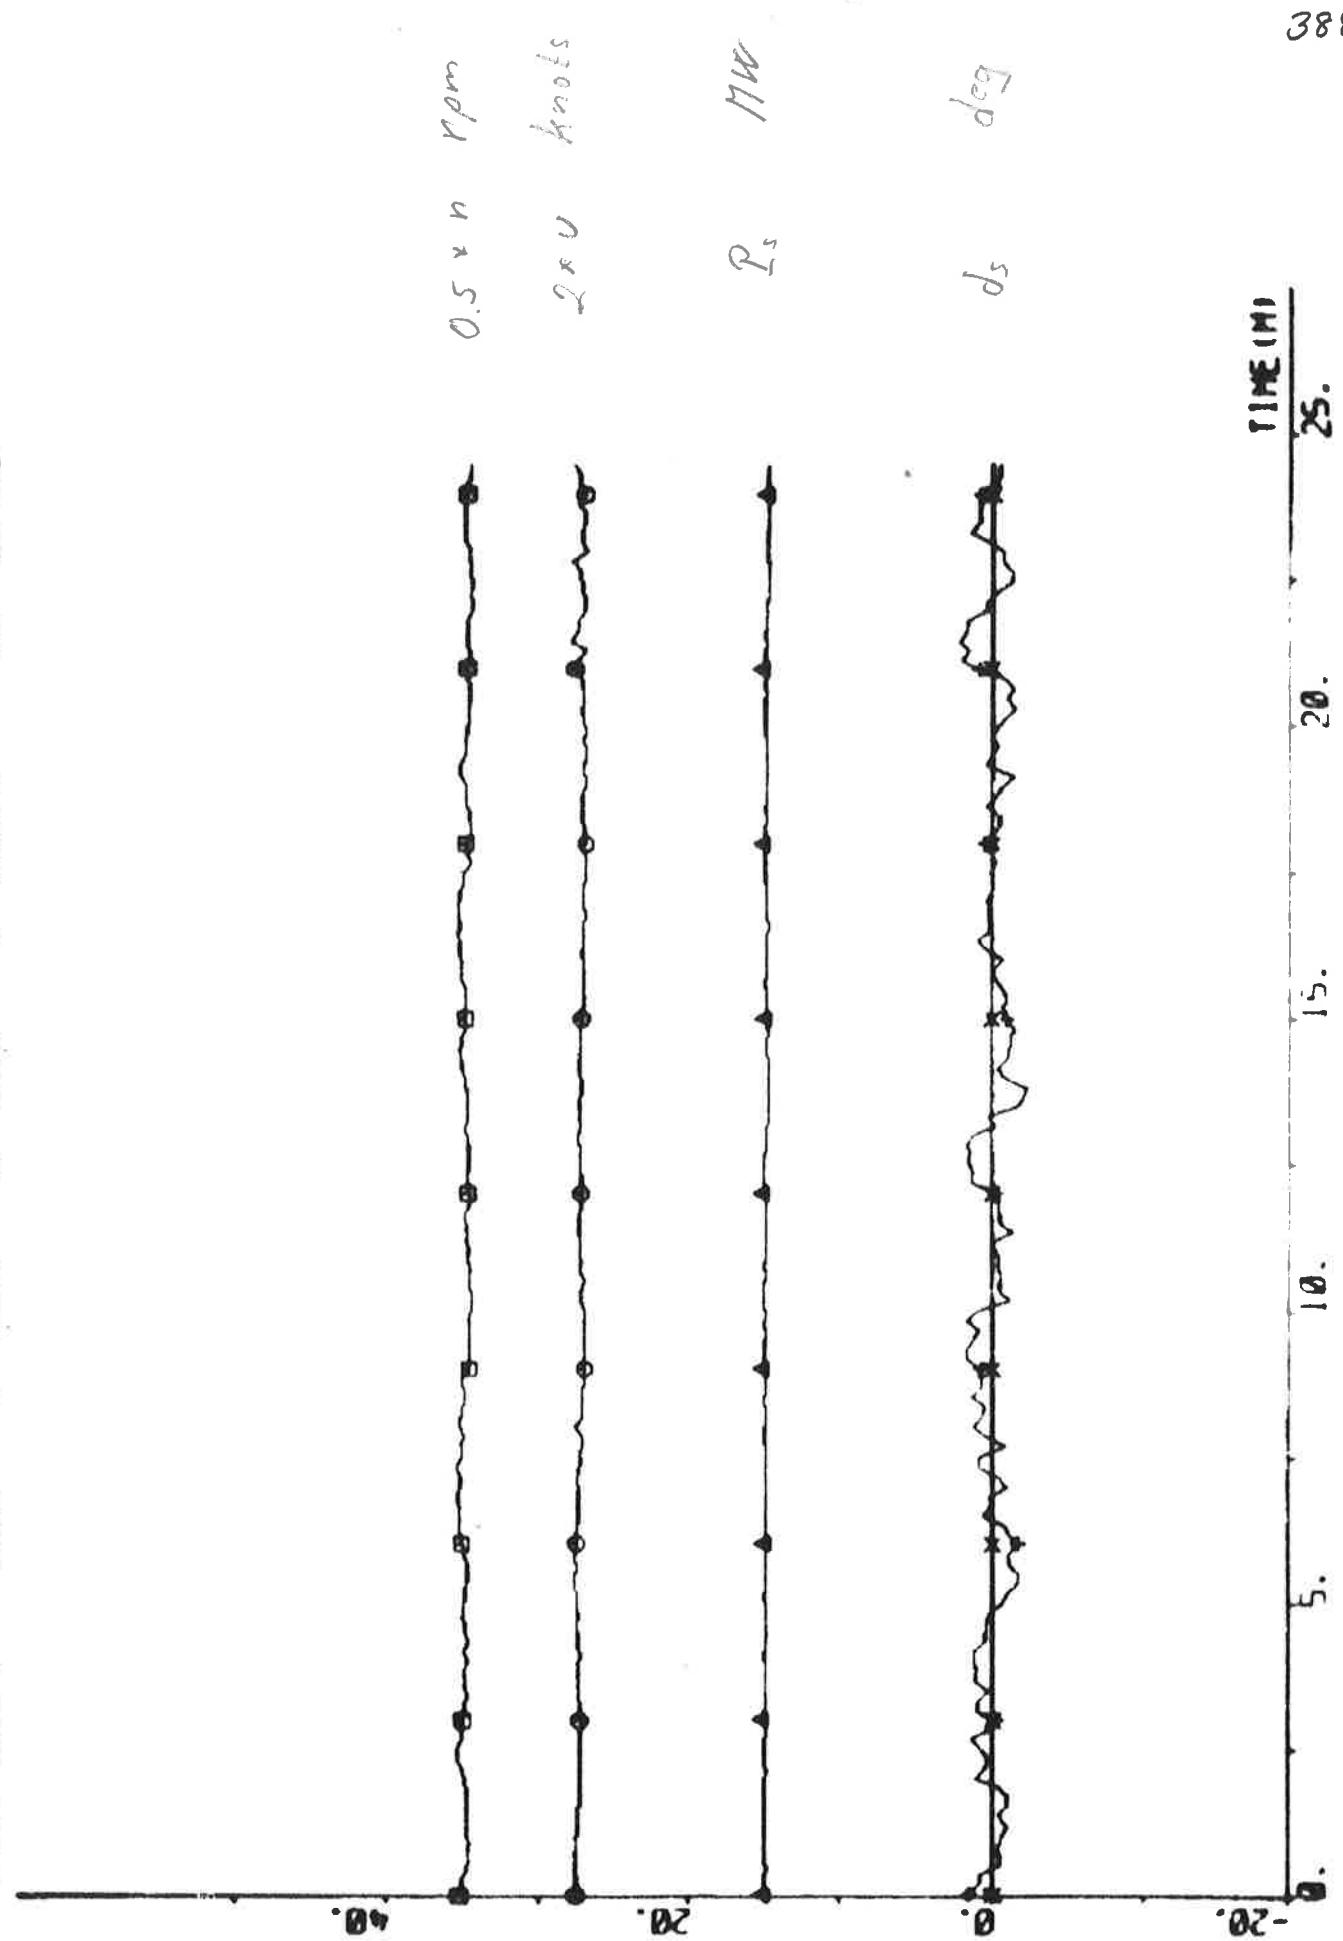


NOT M221(1)-M222(1) ENDS ON 01 22-3.4 0.3 - REAR

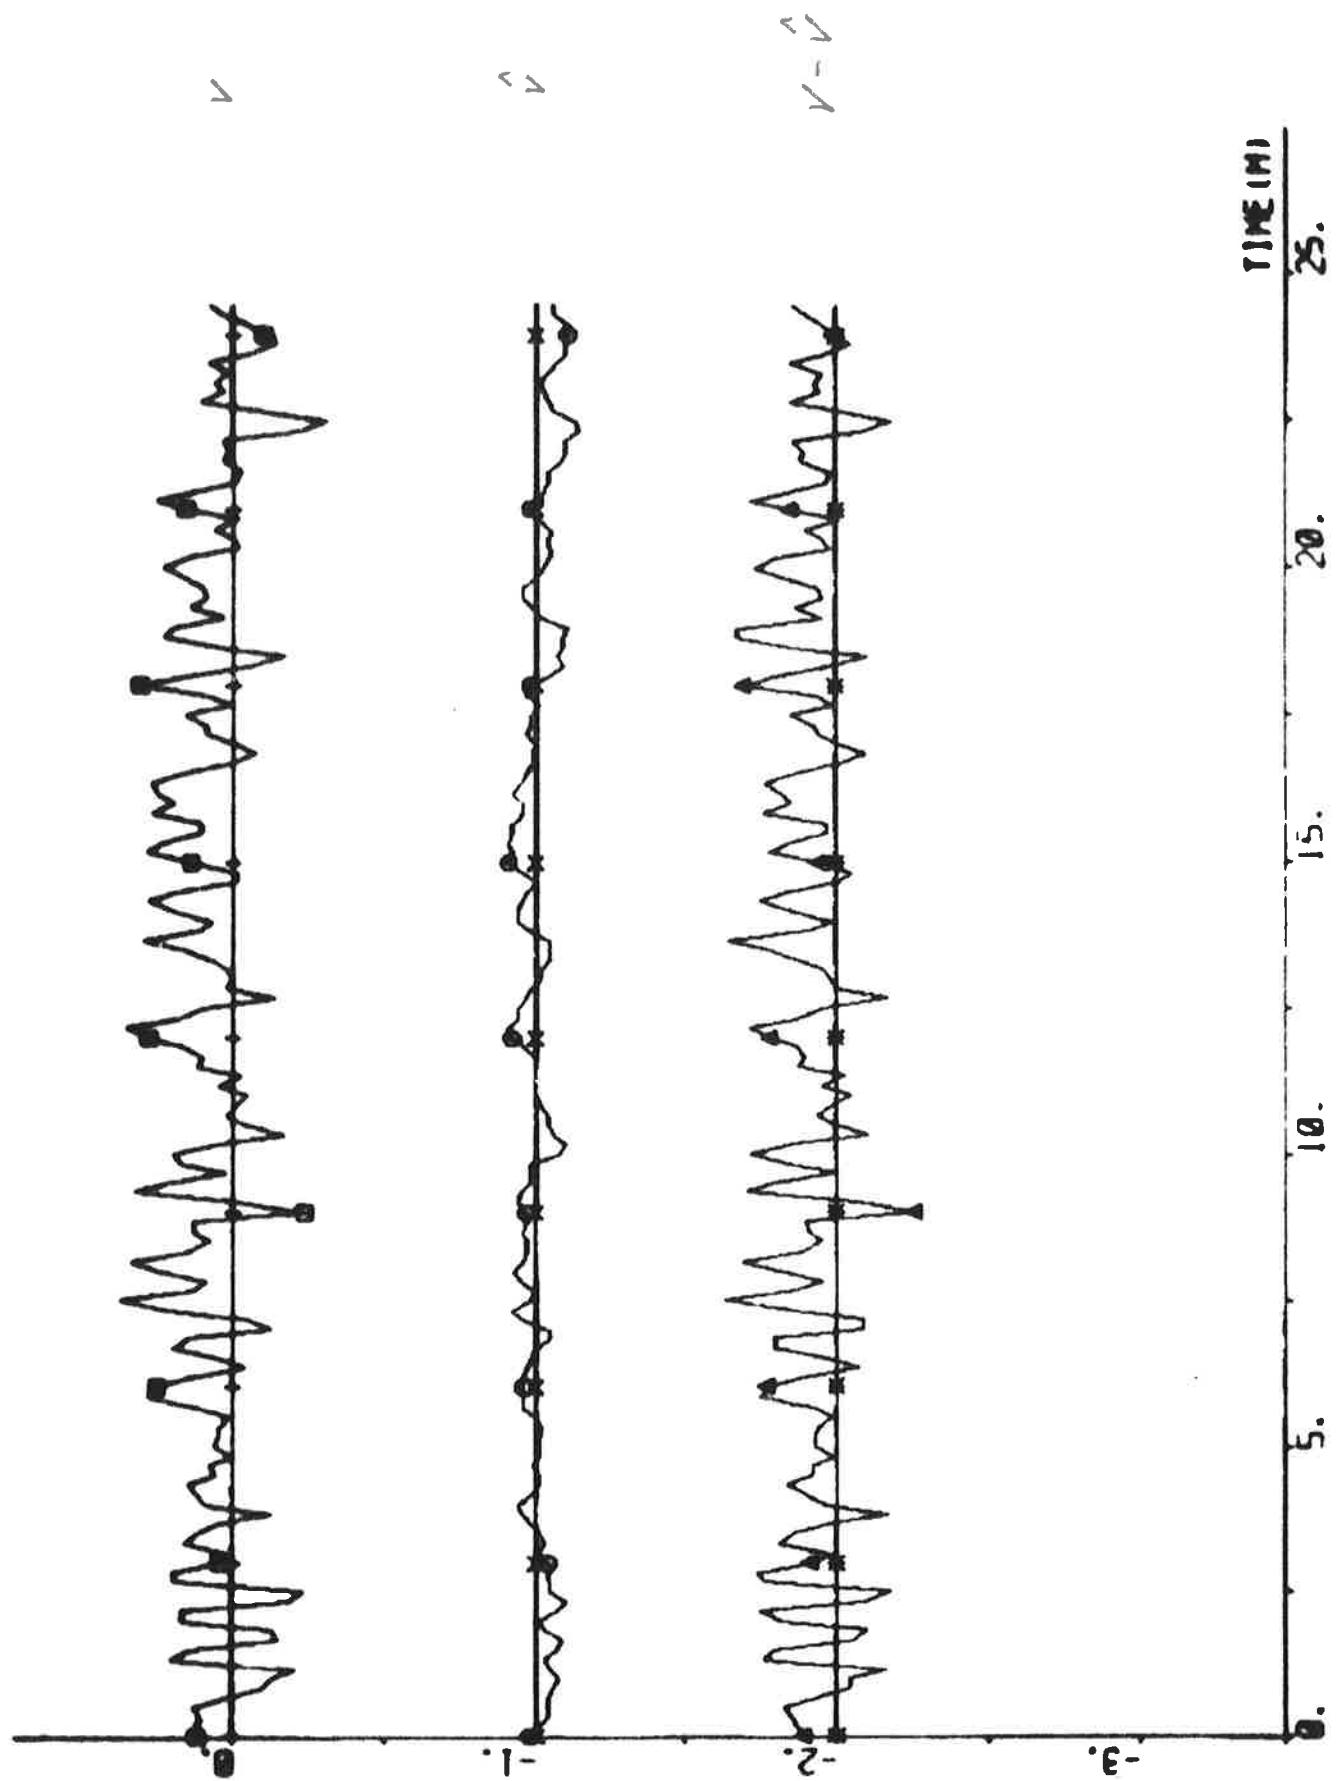


NET 2201(1)-2201(4) 2201(5) 2202 01 02 03 - 3.1.0.0 - means

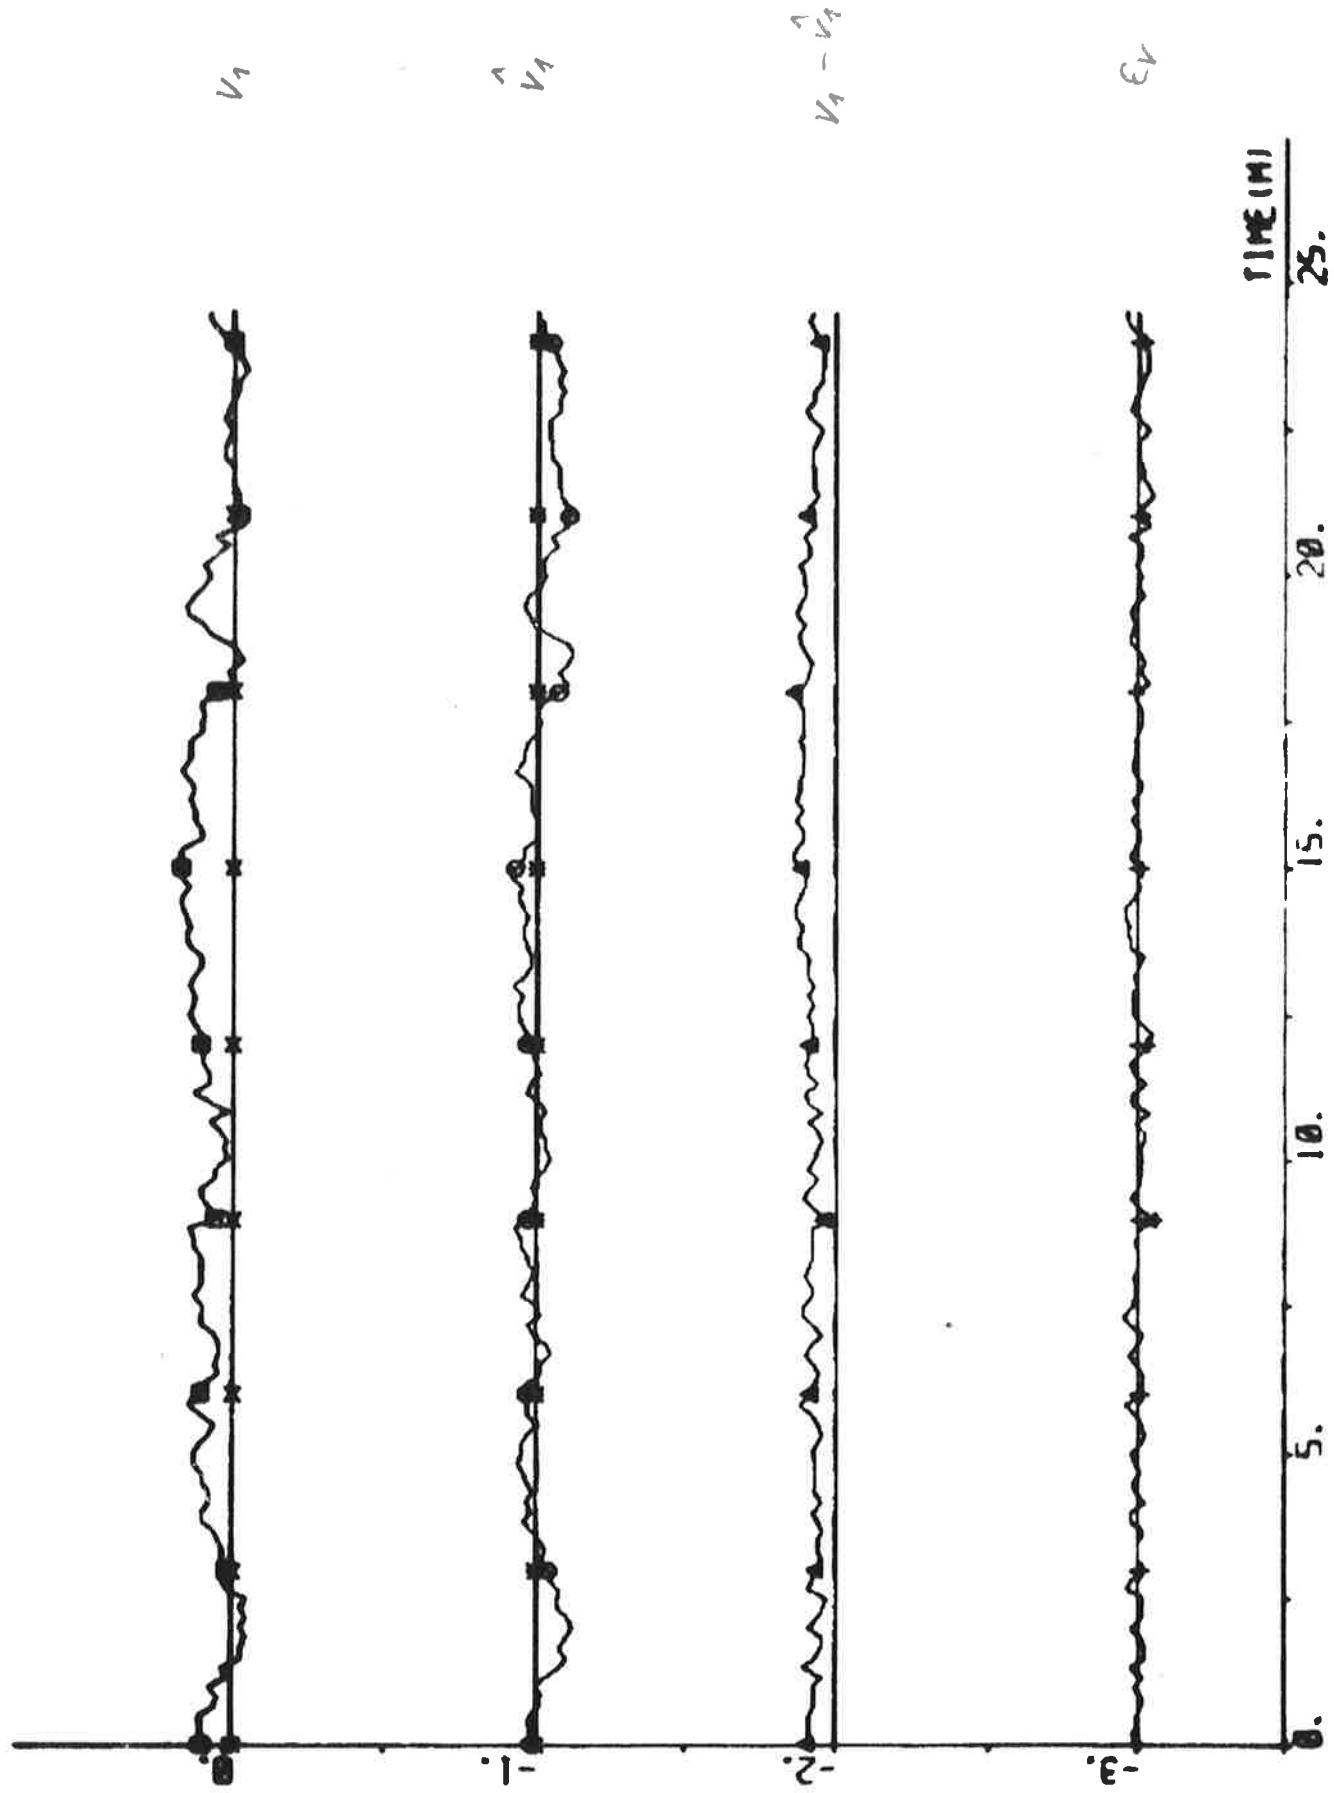


motor response (1) - 1921 (1) time 0.70. - 0.70. - 0.70. - 0.70.

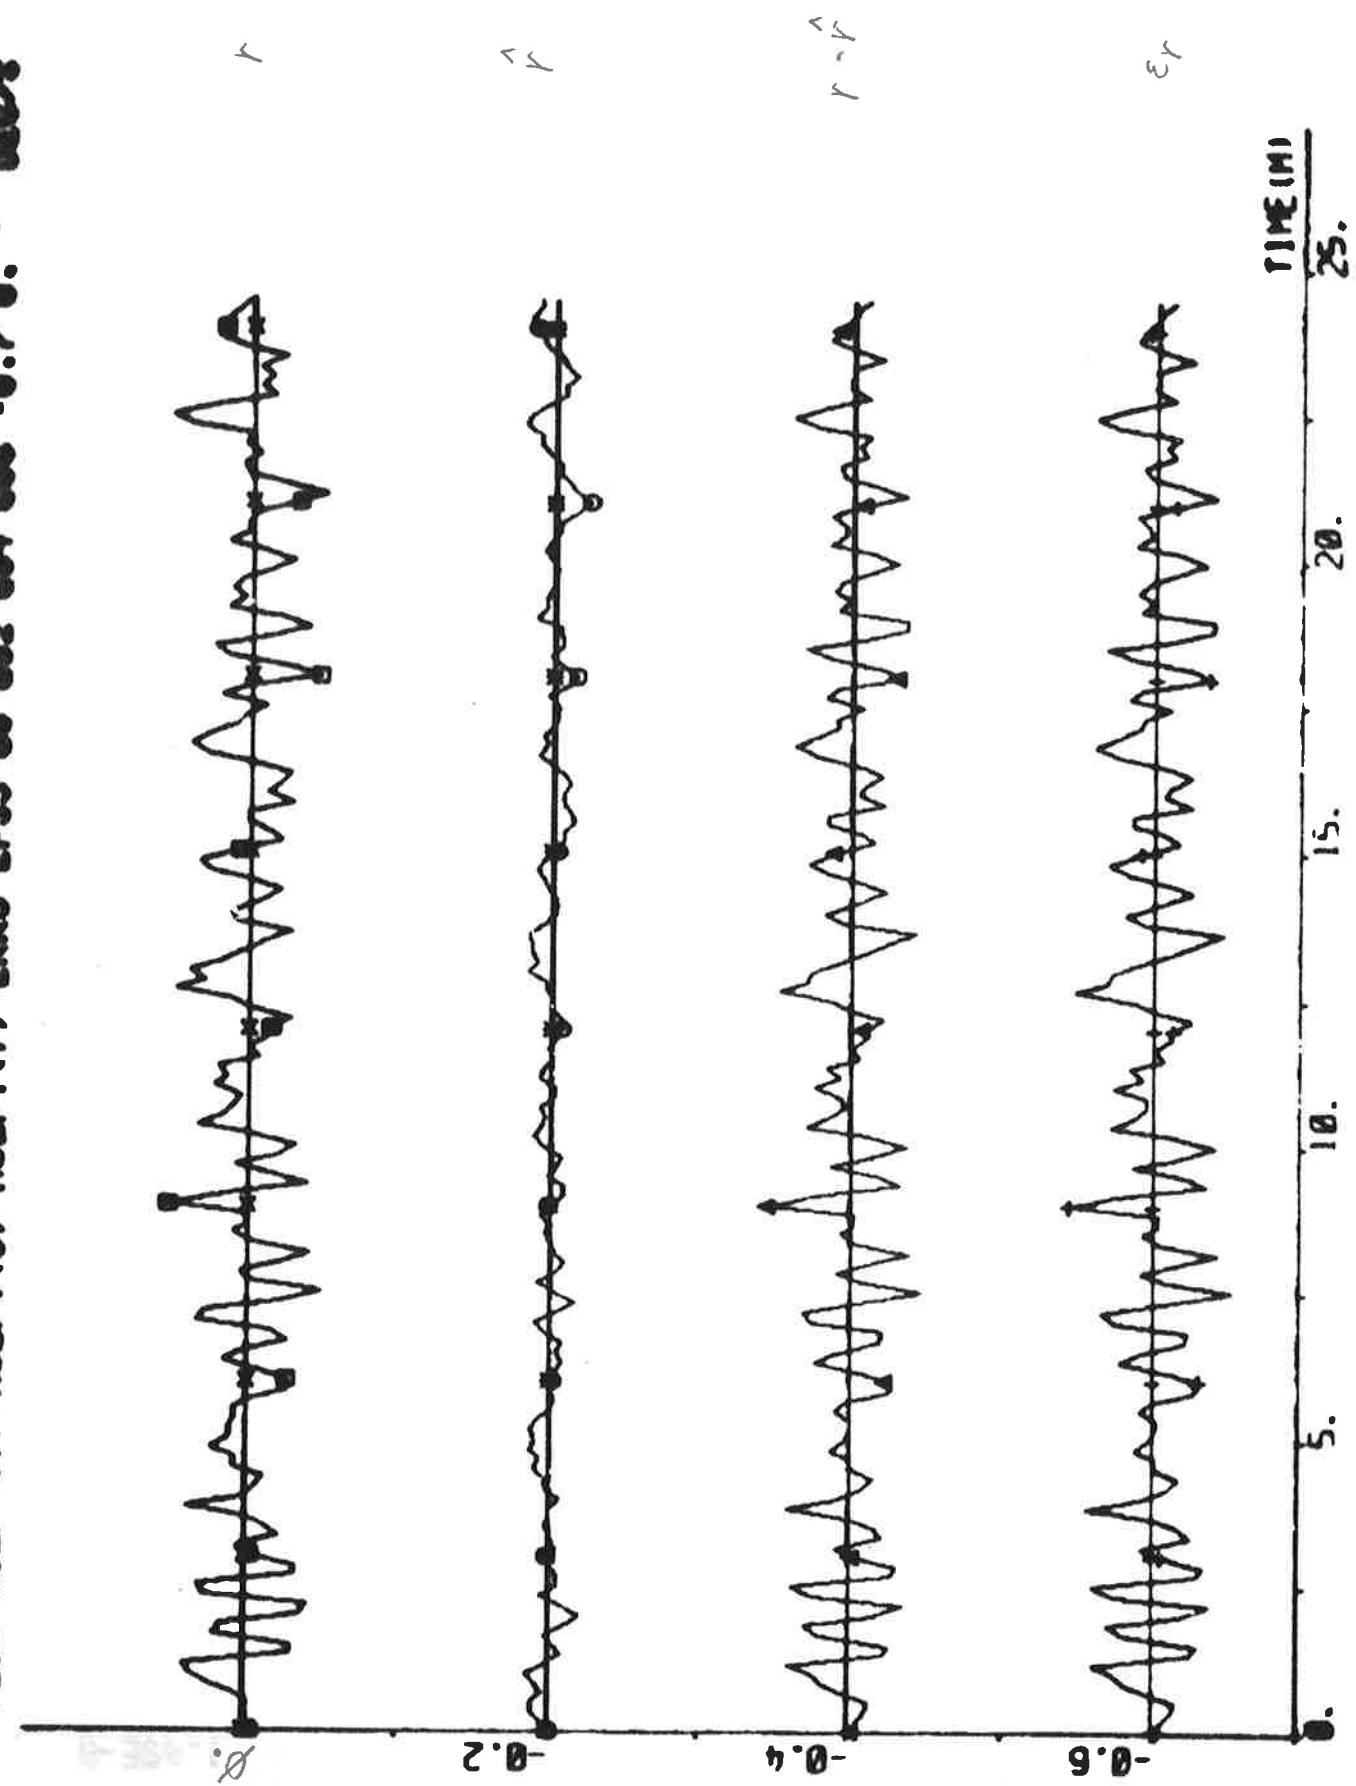


plot 3221(1)-3221(0) 3221(0) 3221(1) 3221(0) 3221(1) 3221(0) 3221(1)

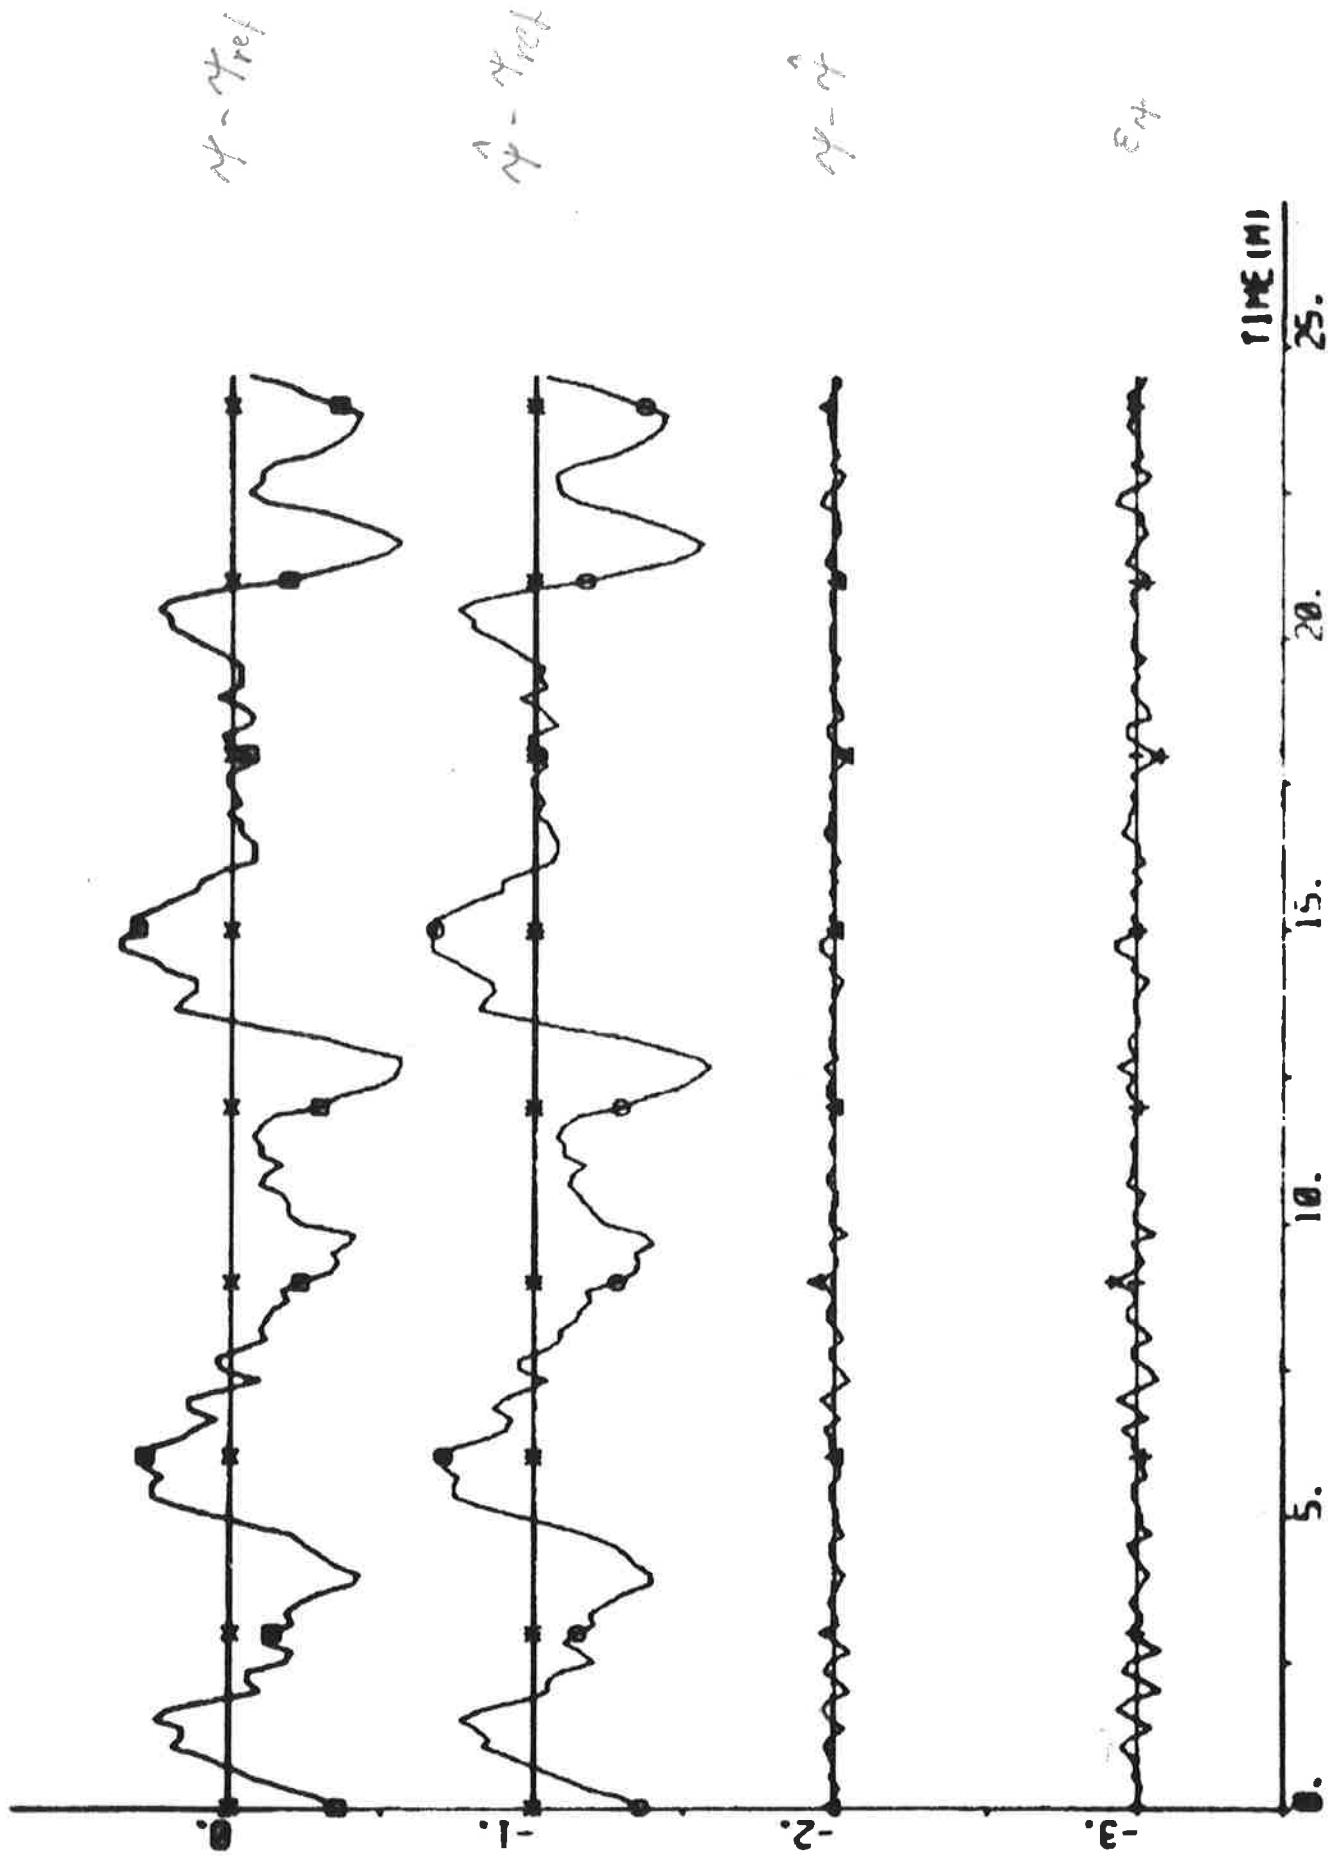


NOTE NUMBER (11) - 10221 (2) ERI 10221 (3) ERI 10221 (3)

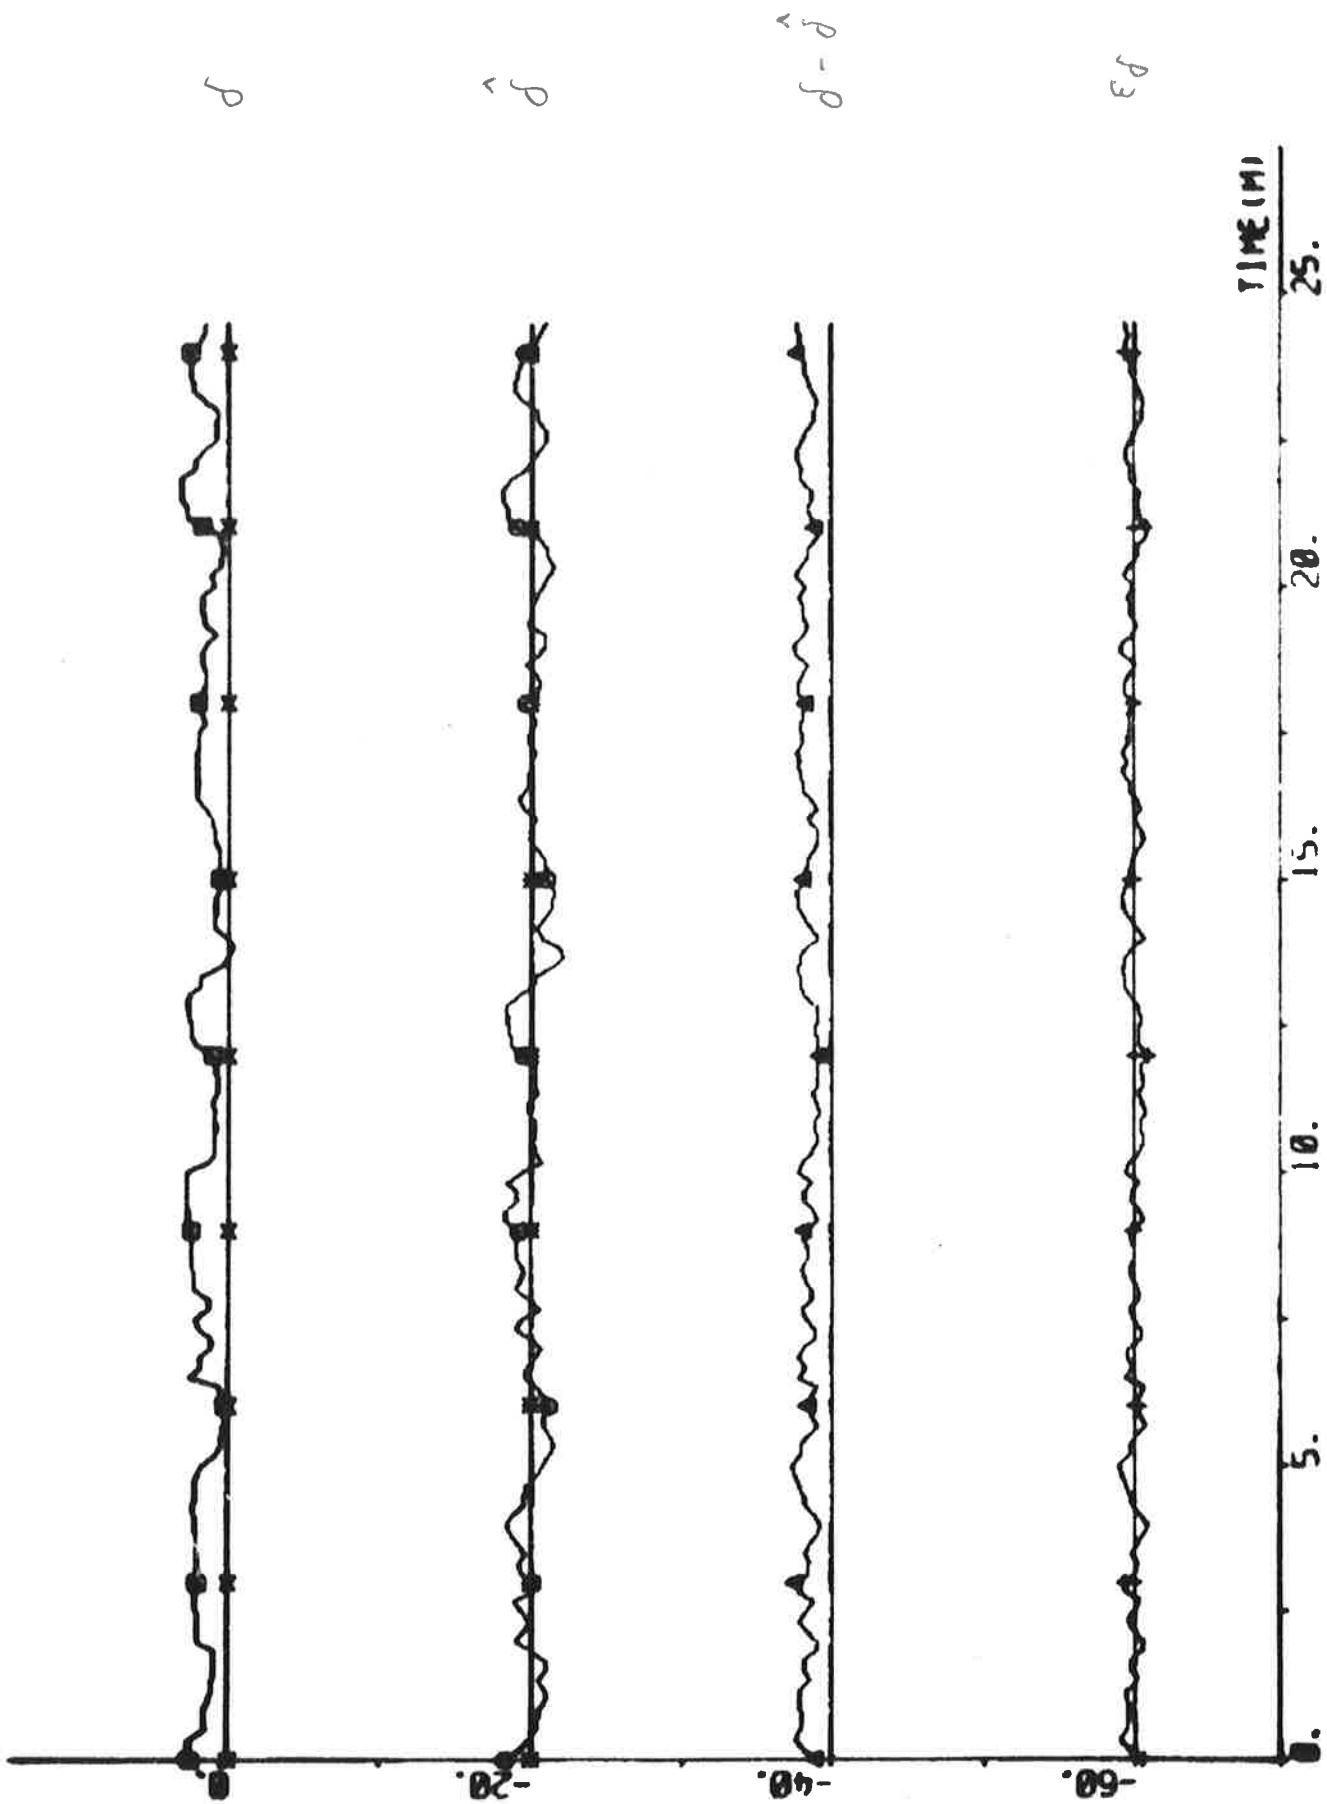

Plot M22P1(1)-M22P2(3) M22P2(4) M22P2(5) M22P2(6) M22P2(7) M22P2(8)

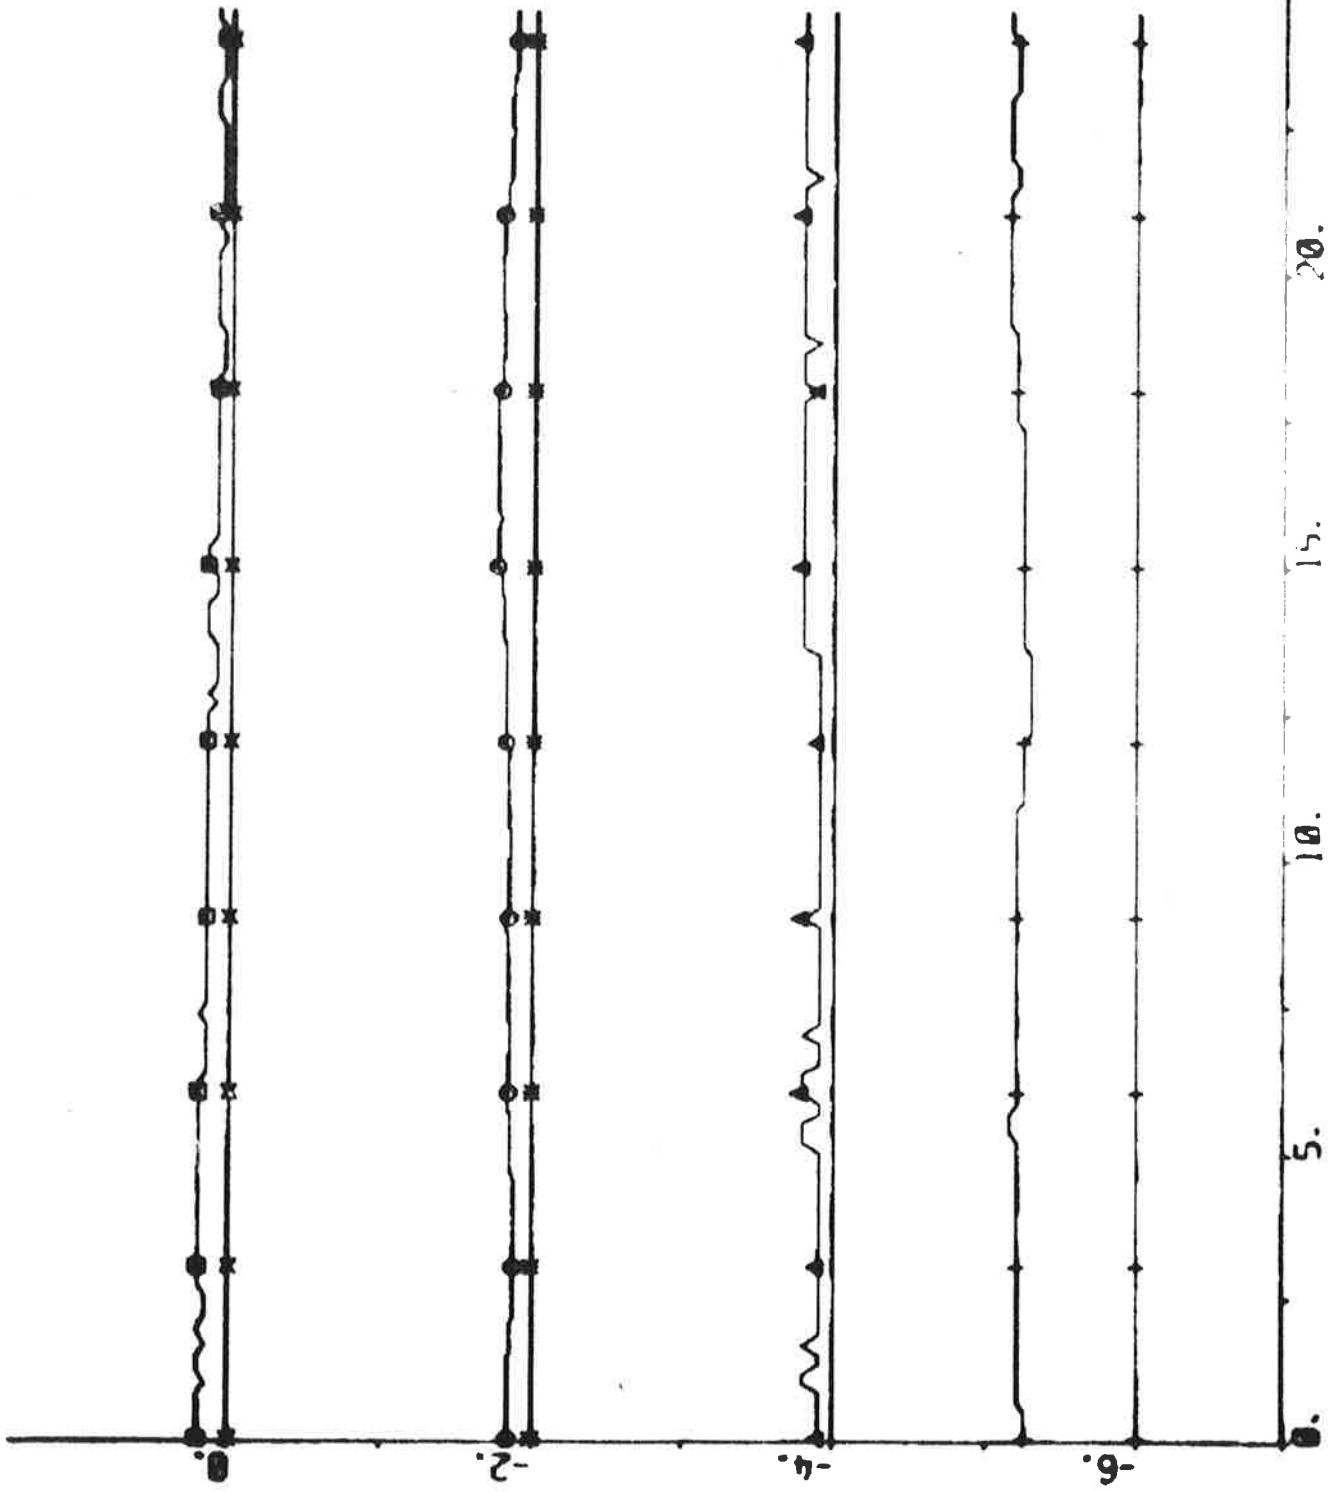

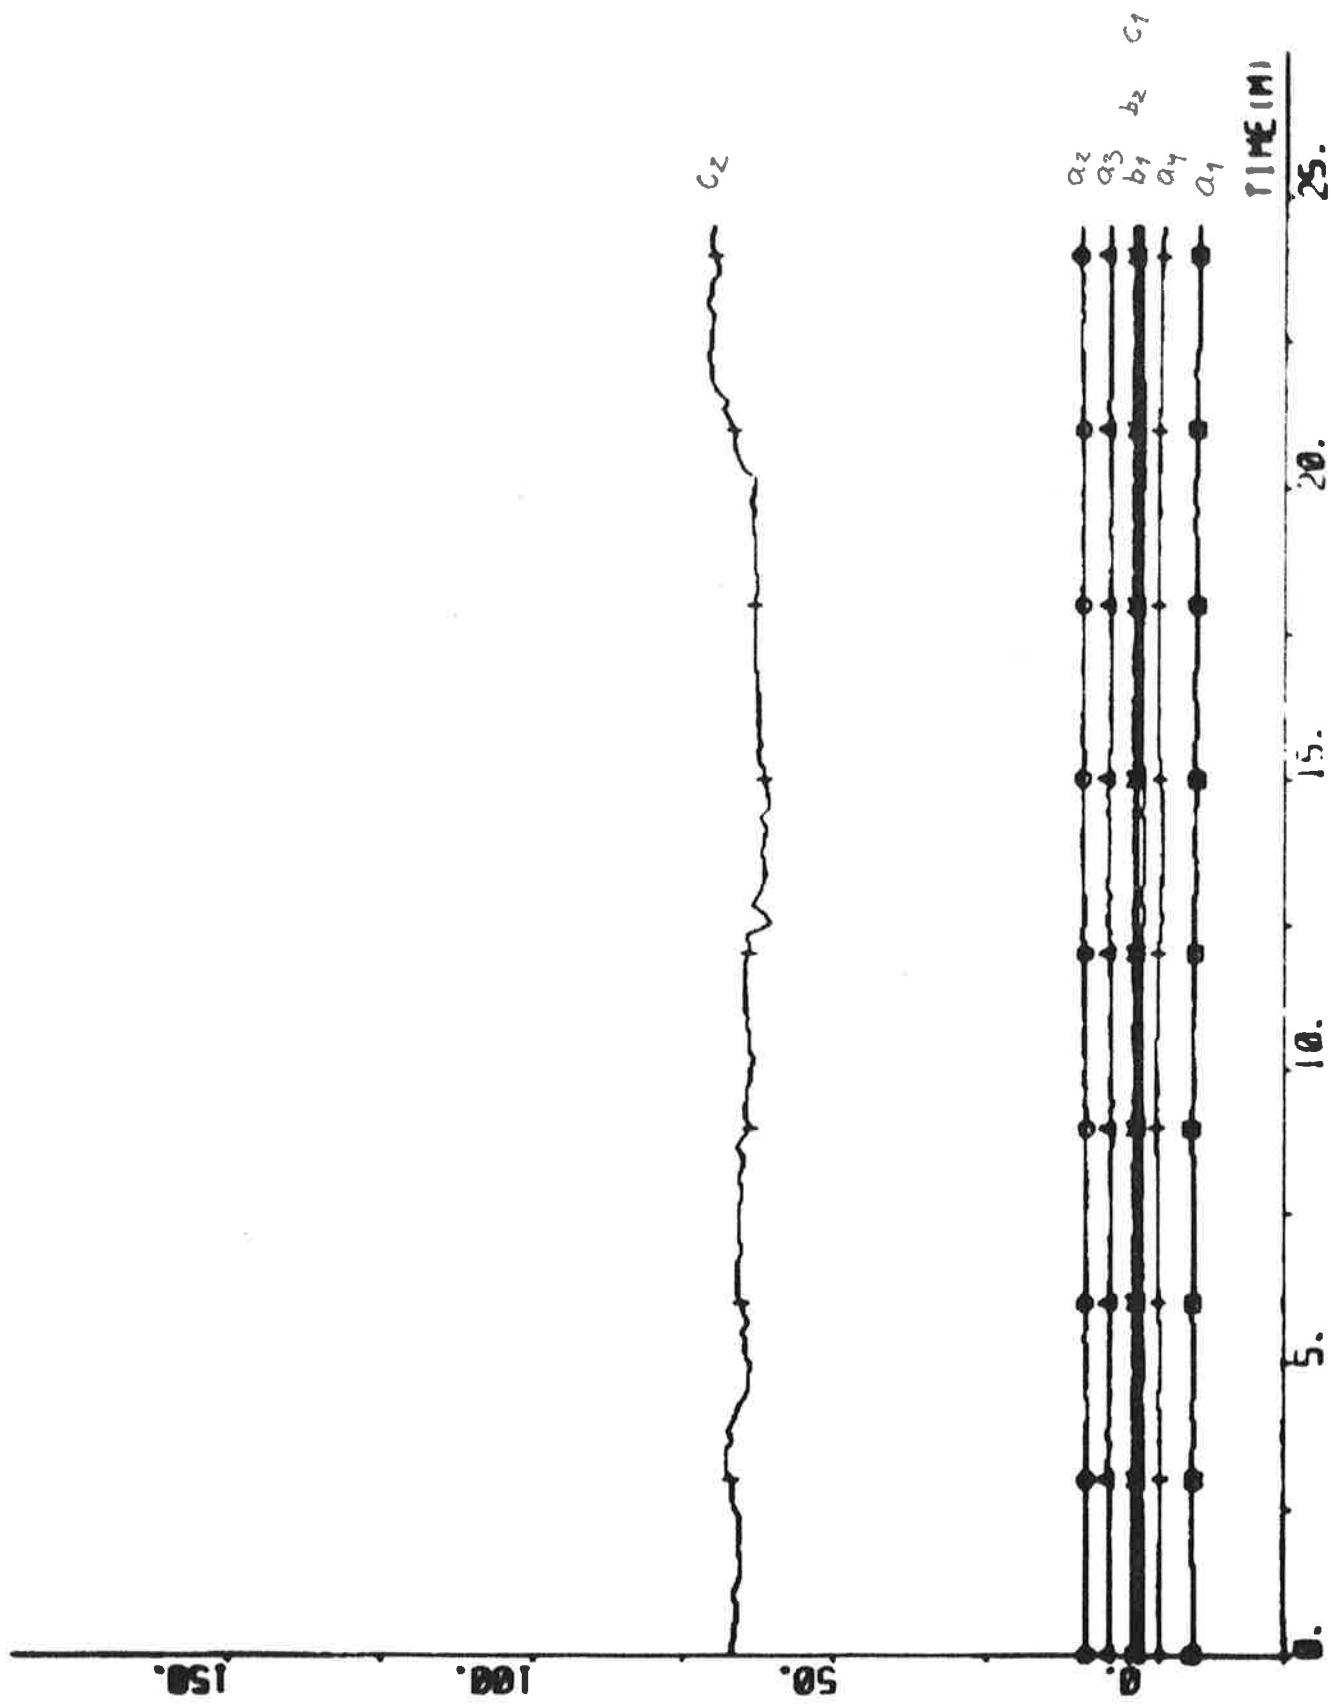

EXPERIMENT A33

| | | | |
|--------------|-------------------|-----------------|-----------------------|
| Date | 1976-04-27 | Forward draught | 10.9 m |
| Time | 09.34 | Aft draught | 12.9 m |
| Duration | 51 min | Wind direction | SE (1; see App. A) |
| Position | S 09°39' W 03°51' | Wind velocity | 10 m/s (fresh breeze) |
| ψ_{ref} | 145 deg | Wave height | - |

Self-tuning regulator using estimates from the Kalman filter

Tuning time before the experiment started: > 120 min

NC1 = 1 NC2 = 1 k = 7 q = 0
 T_s = 10 s V₀ = 6 m/s IVVC = 1

Final values:


$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -13.33 \\ 16.86 \\ -2.60 \\ -1.14 \\ 0.41 \\ 0.23 \\ -0.39 \\ 100.94 \end{bmatrix} \quad P = \begin{bmatrix} 8.89 \\ -16.40 & 51.67 \\ 8.49 & -54.21 & 81.12 \\ -0.17 & 18.64 & -36.86 & 19.72 \\ 0.22 & -1.14 & 1.51 & -0.59 & 0.04 \\ 0.01 & 0.12 & -0.38 & 0.27 & 0.00 & 0.01 \\ -1.92 & 2.54 & 0.28 & -1.08 & -0.02 & -0.01 & 1.31 \\ -1.67 & 4.54 & -13.71 & 11.25 & 0.63 & 0.25 & 21.26 & 887.07 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.21$$


$$\hat{\delta}_0 = -0.3 \text{ deg} \quad \hat{d}_V = 0.11 \text{ knots} \quad \hat{d}_r = 0.003 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)


0.06
-3 - 2 - 1 - 0.05

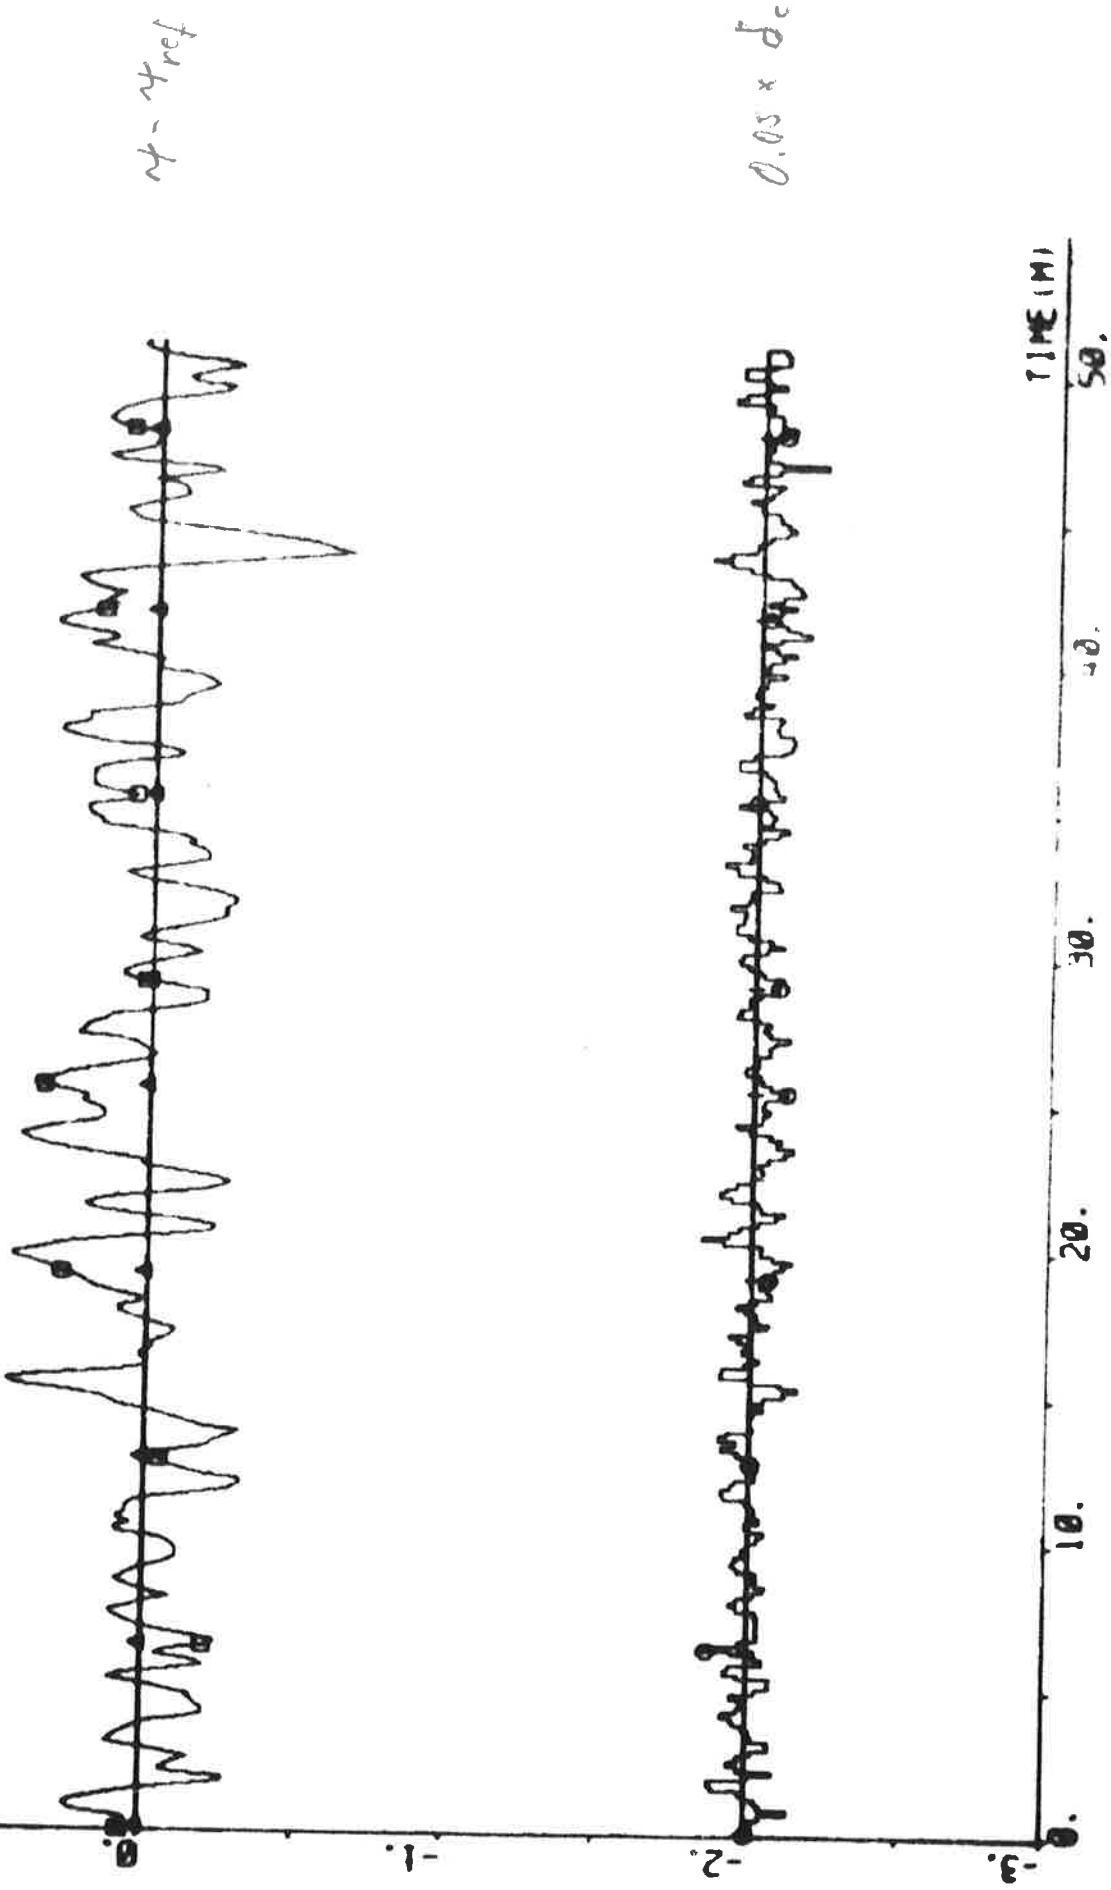

398

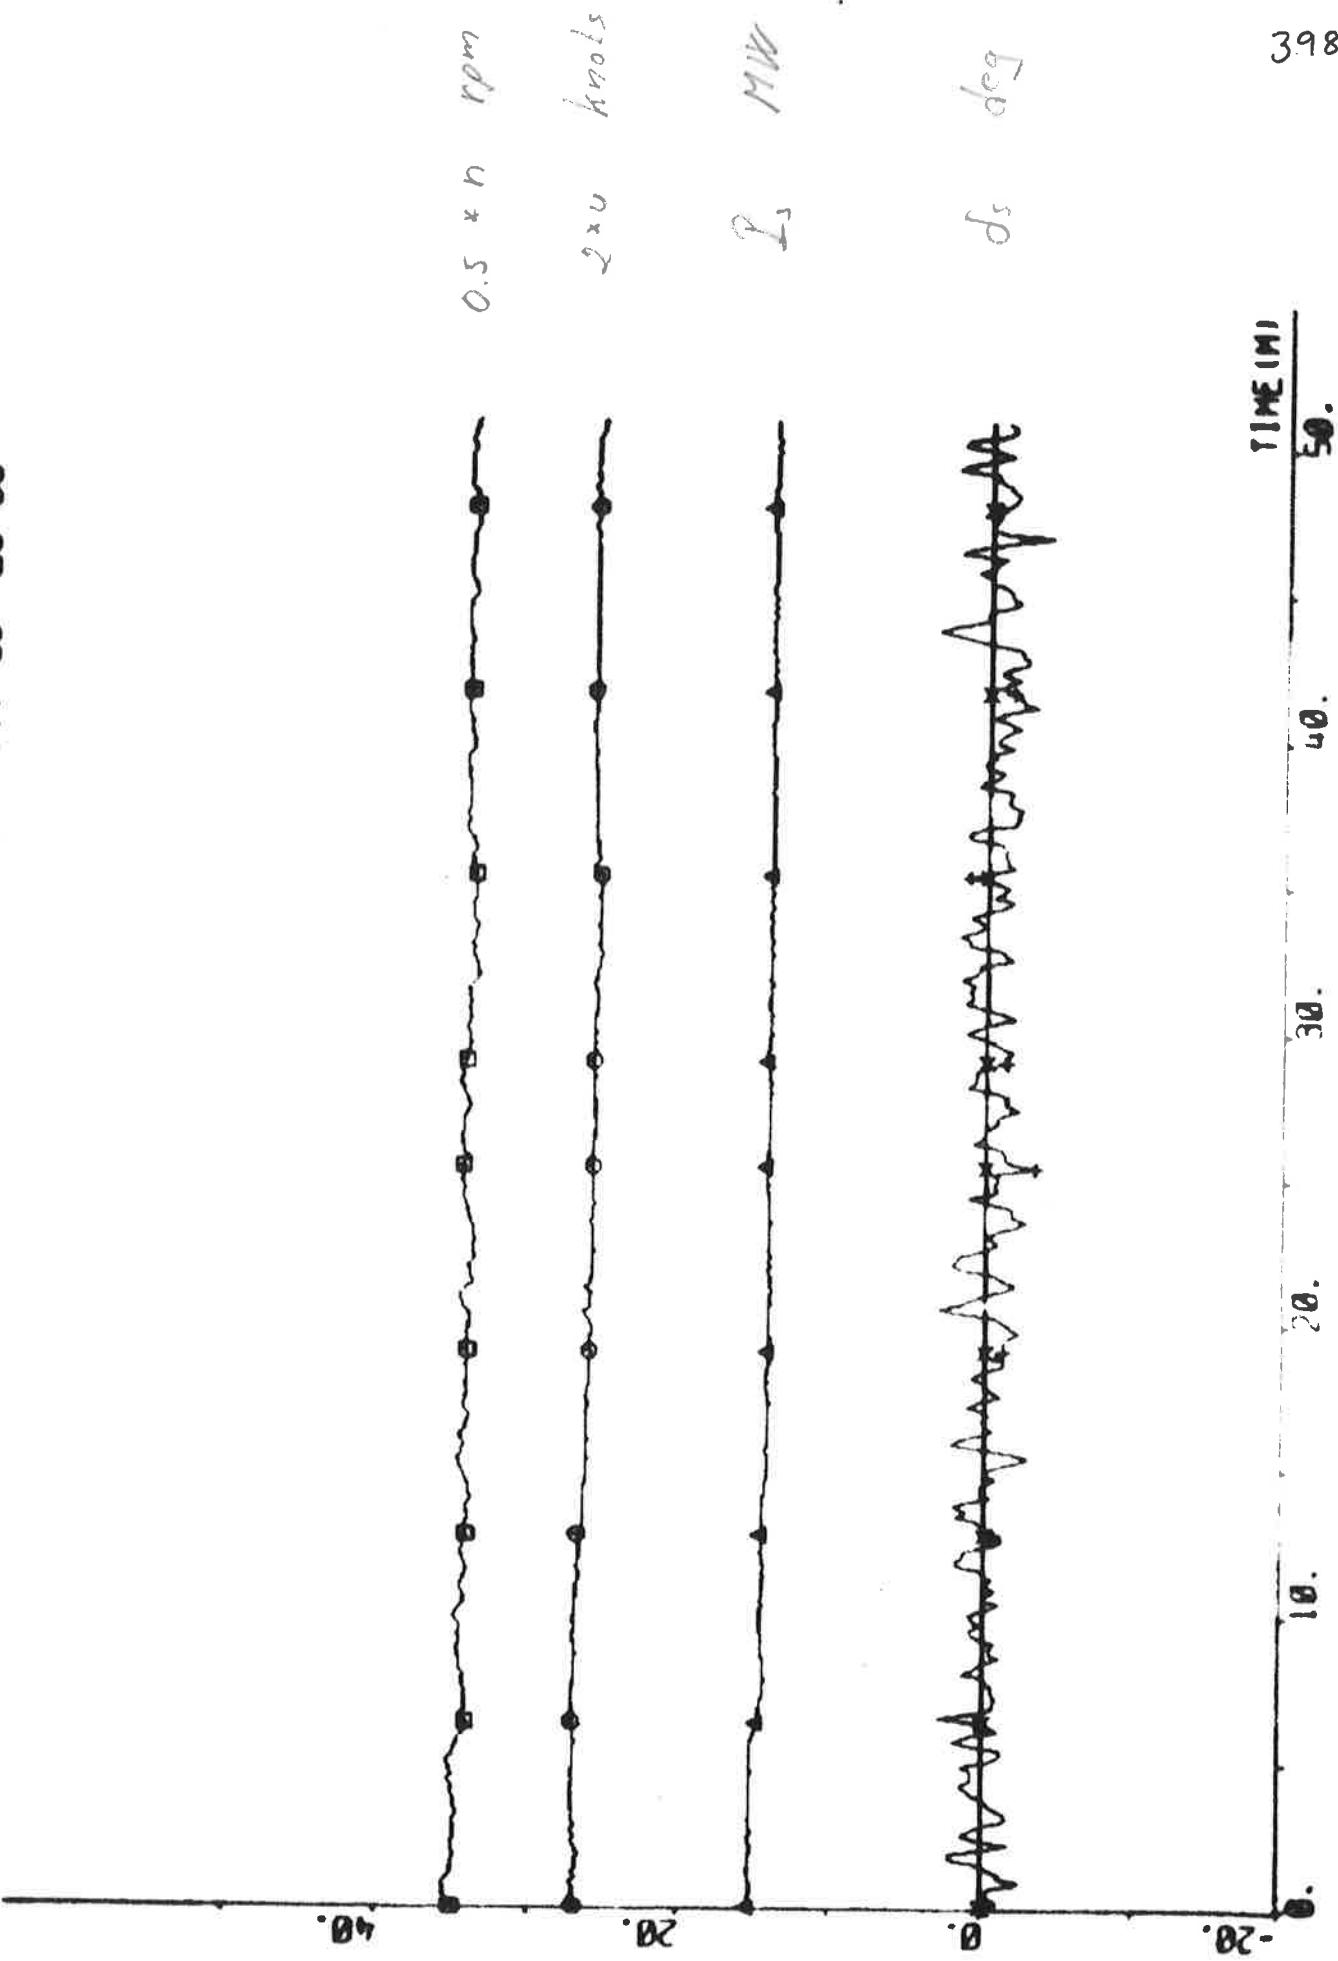

NOT ACCORDING TO SPECIFICATION

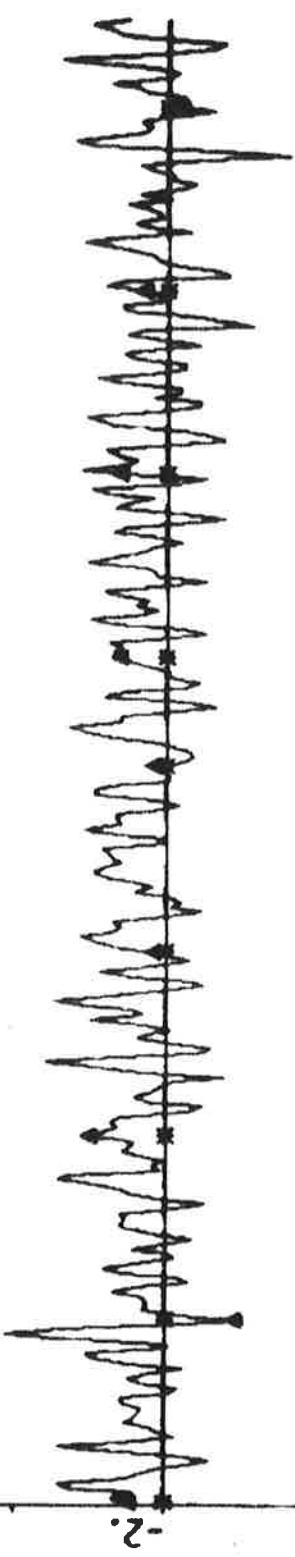

TIME(M)

30.

20.

10.


0.

-3.


-2.

-1.


NOT 33P1 (1) - 33P1 (4) 33P1 (5) ER2 ER2 ER2 ER2 ER2 ER2 ER2 ER2 ER2 ER2

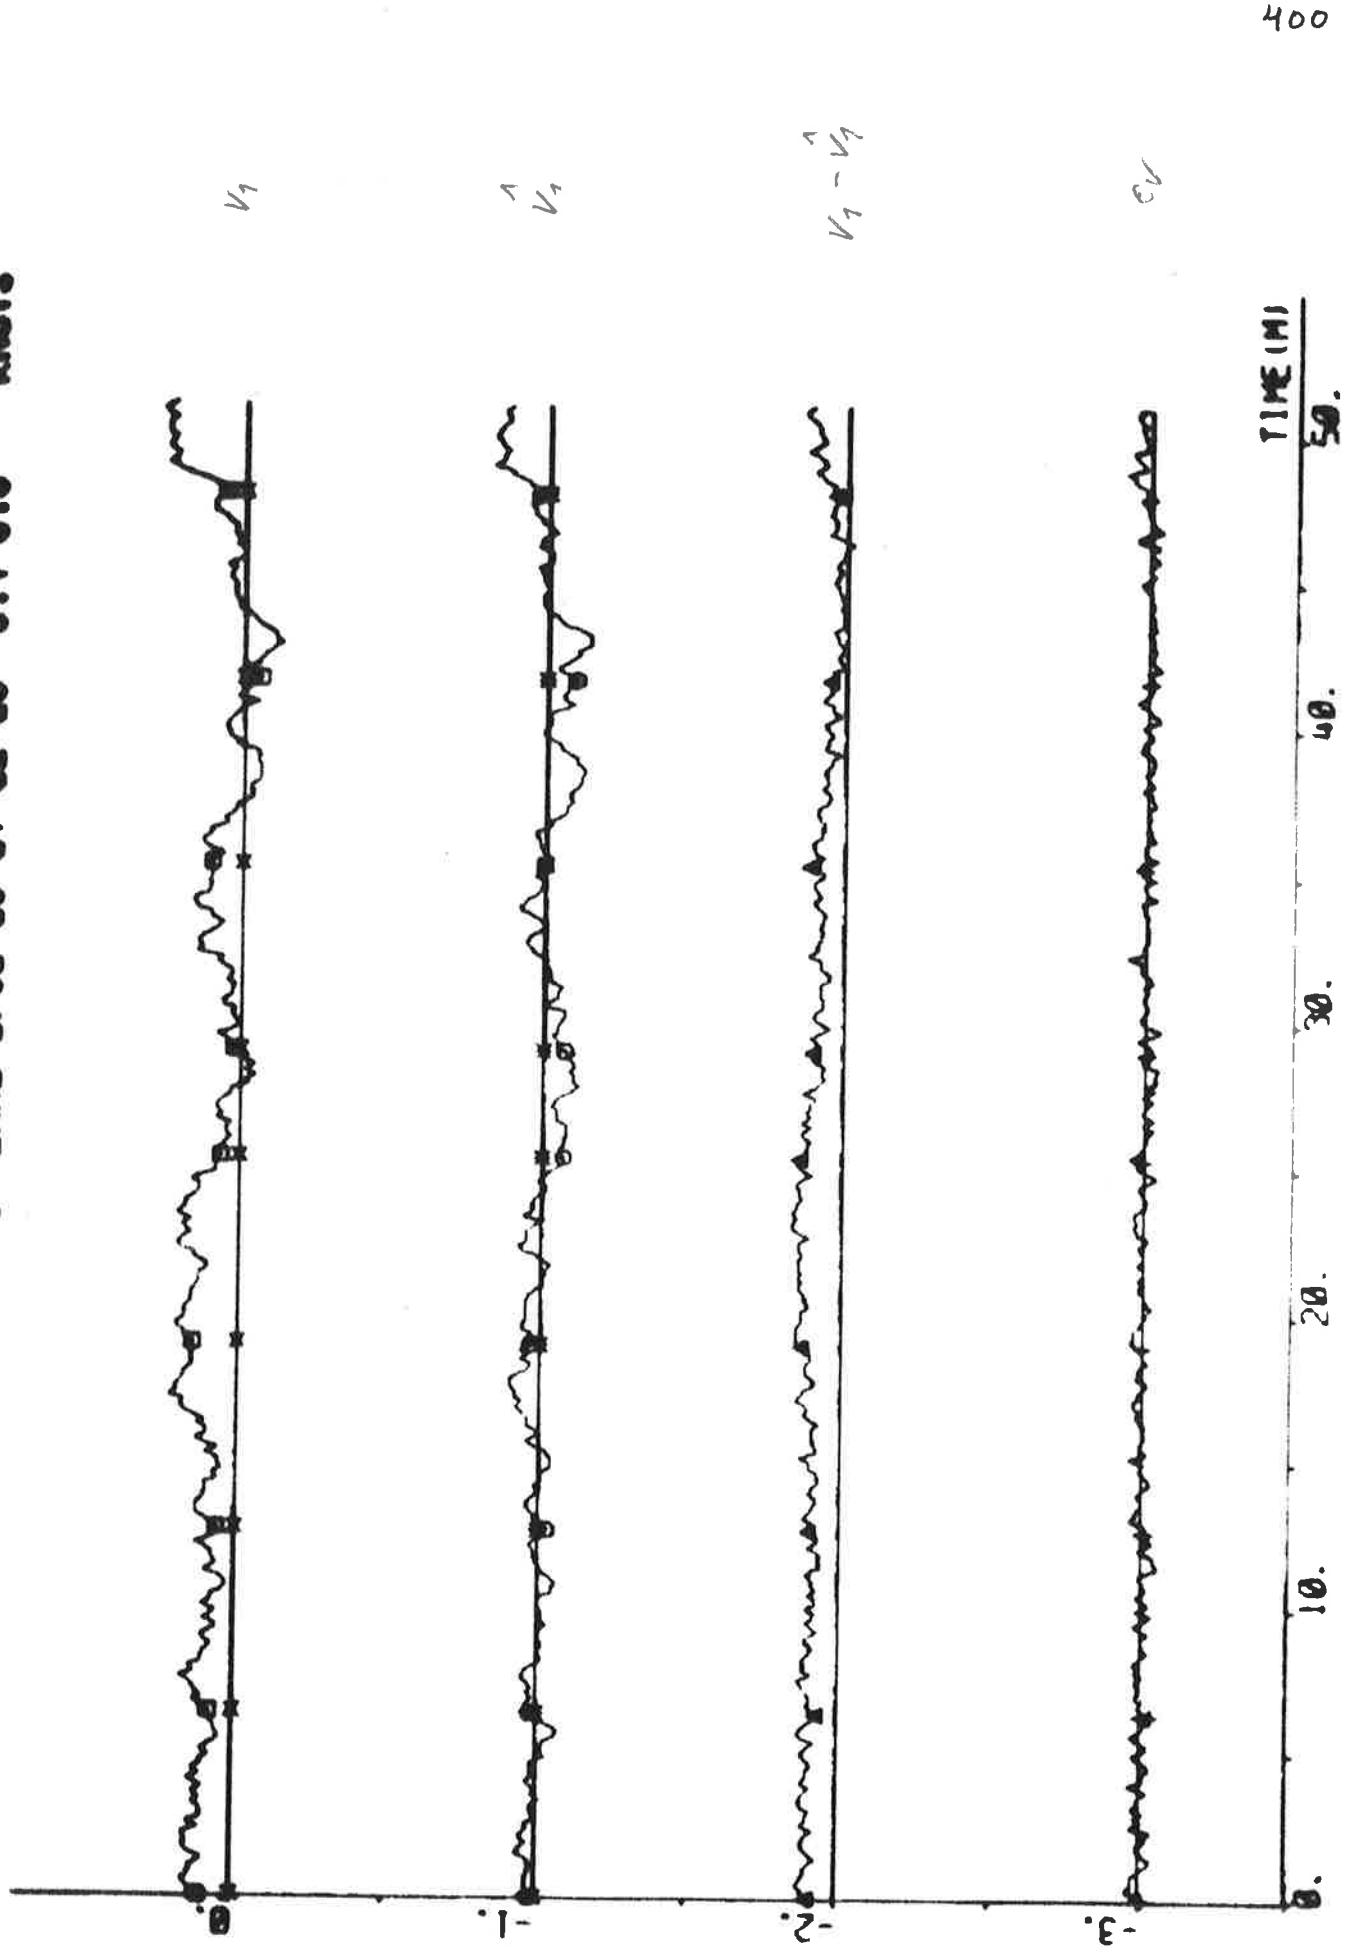


not acci (1) - acci (6) acci (7) acci (8)

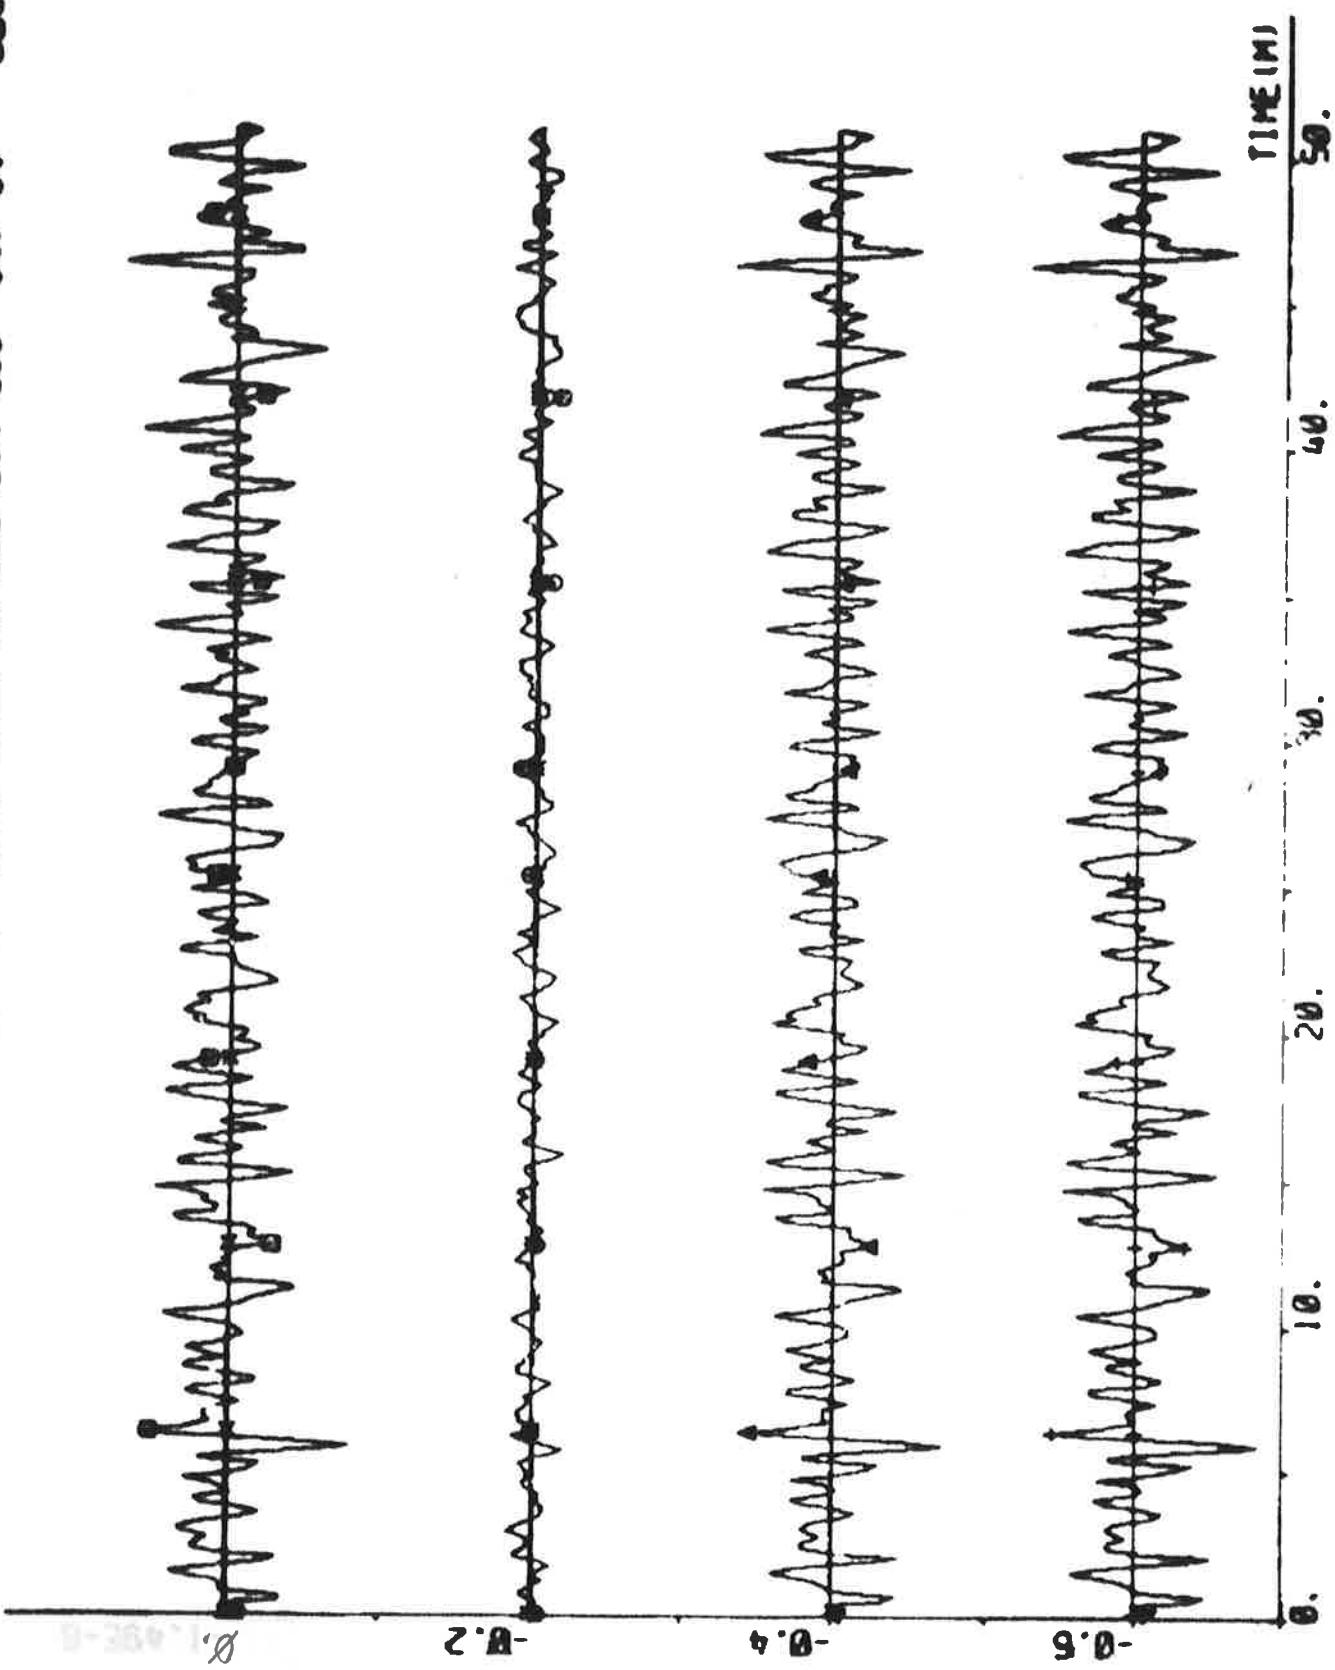


LOT NUMBER EIGHTY-THREE - 3.14.0.0.

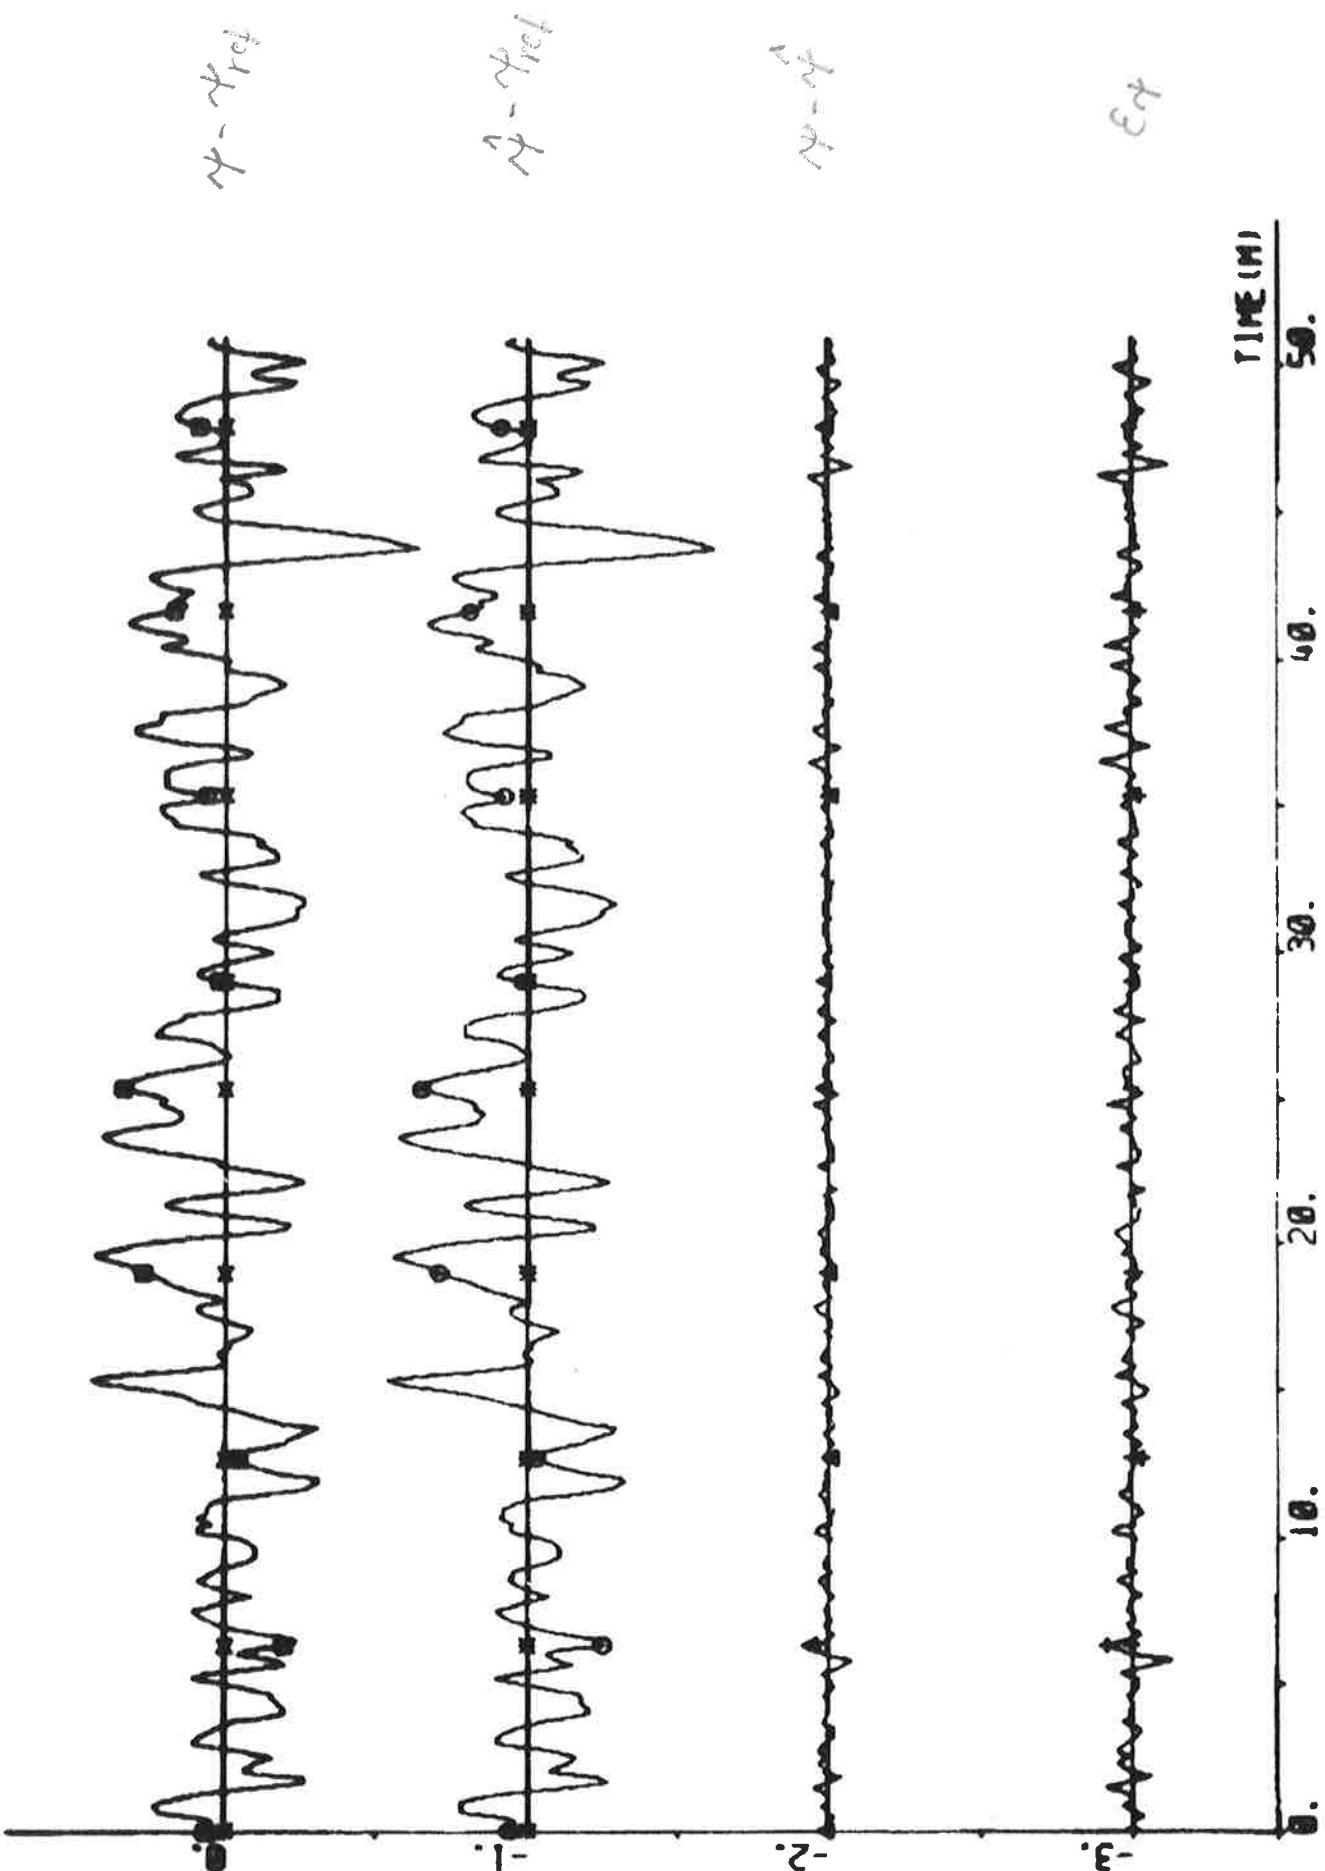


NOTE RECORDED (11) - REC'D (12) REC'D (13) REC'D (14)

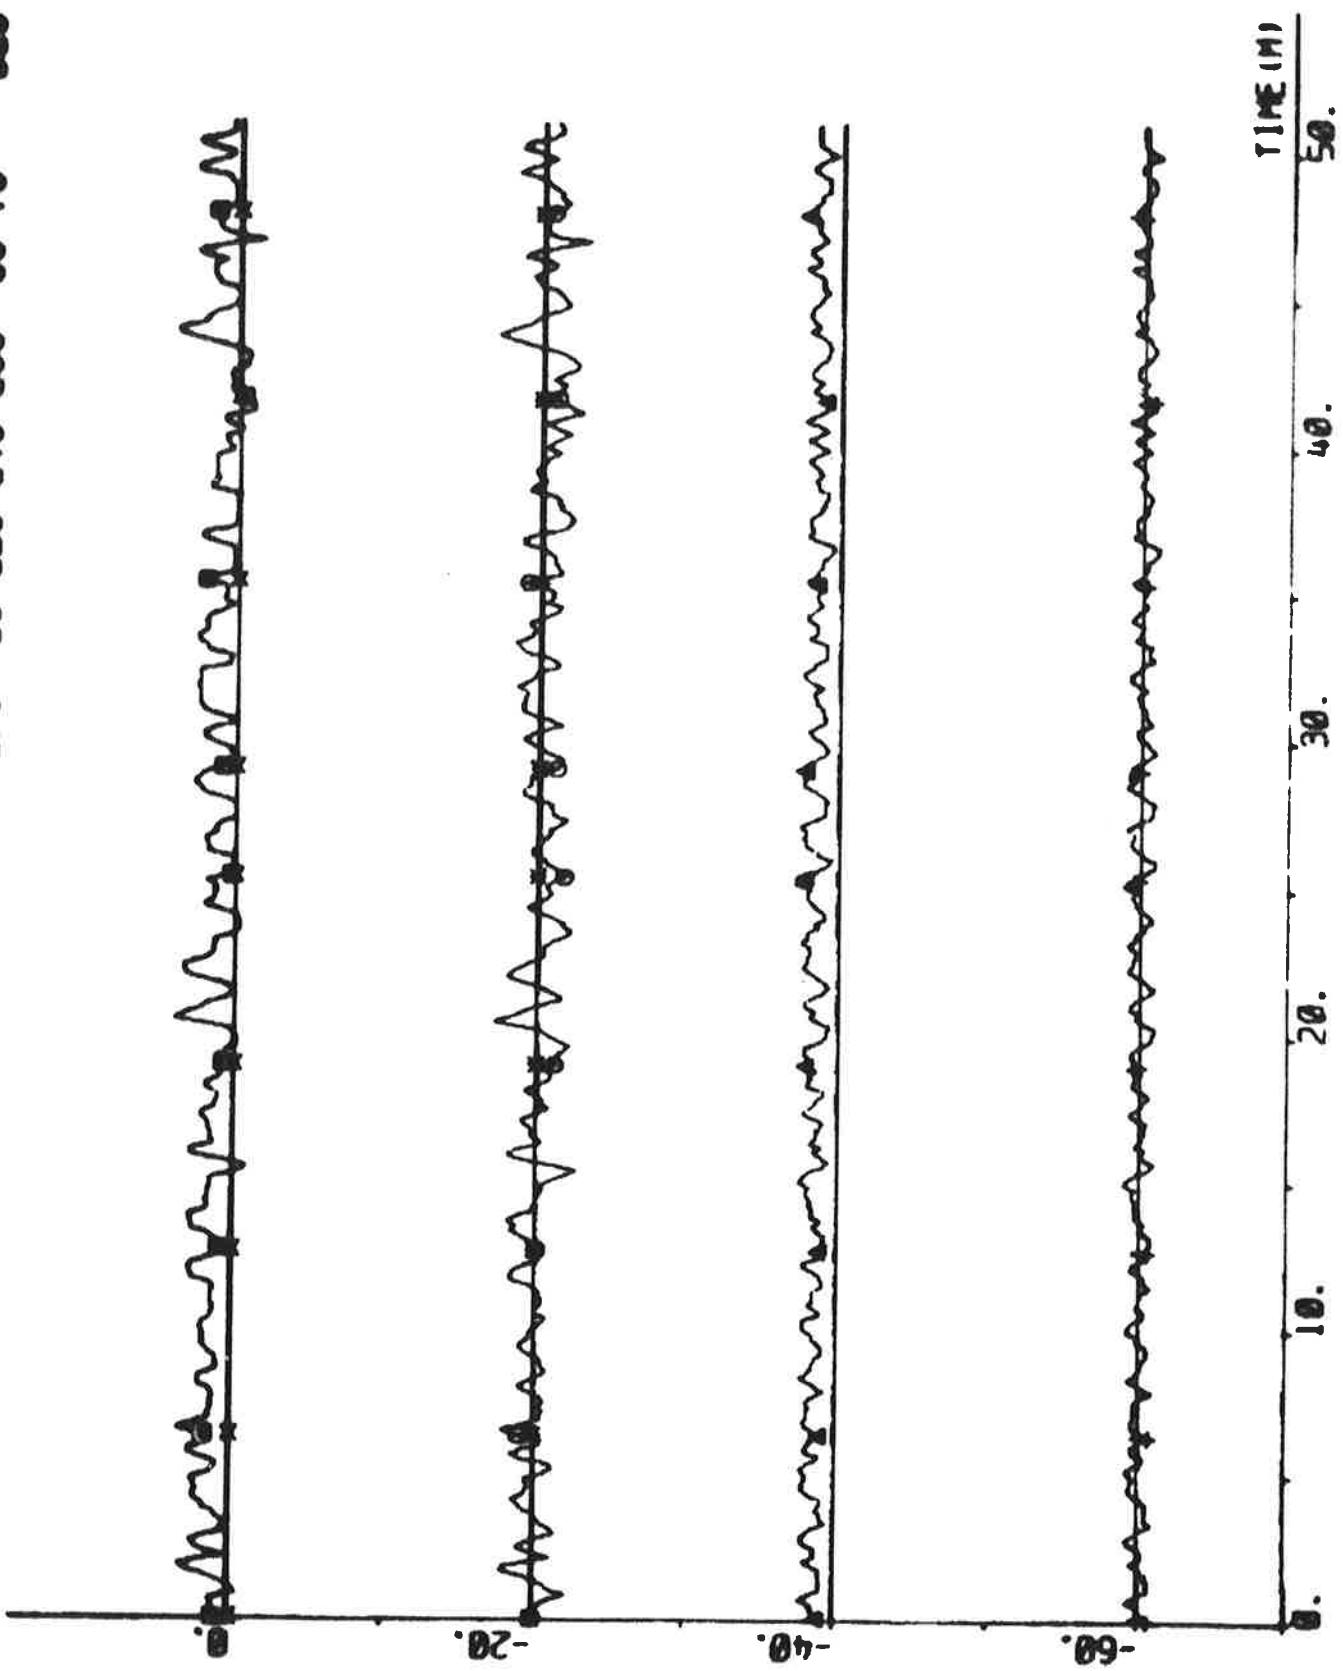

Plot 404 (1) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)

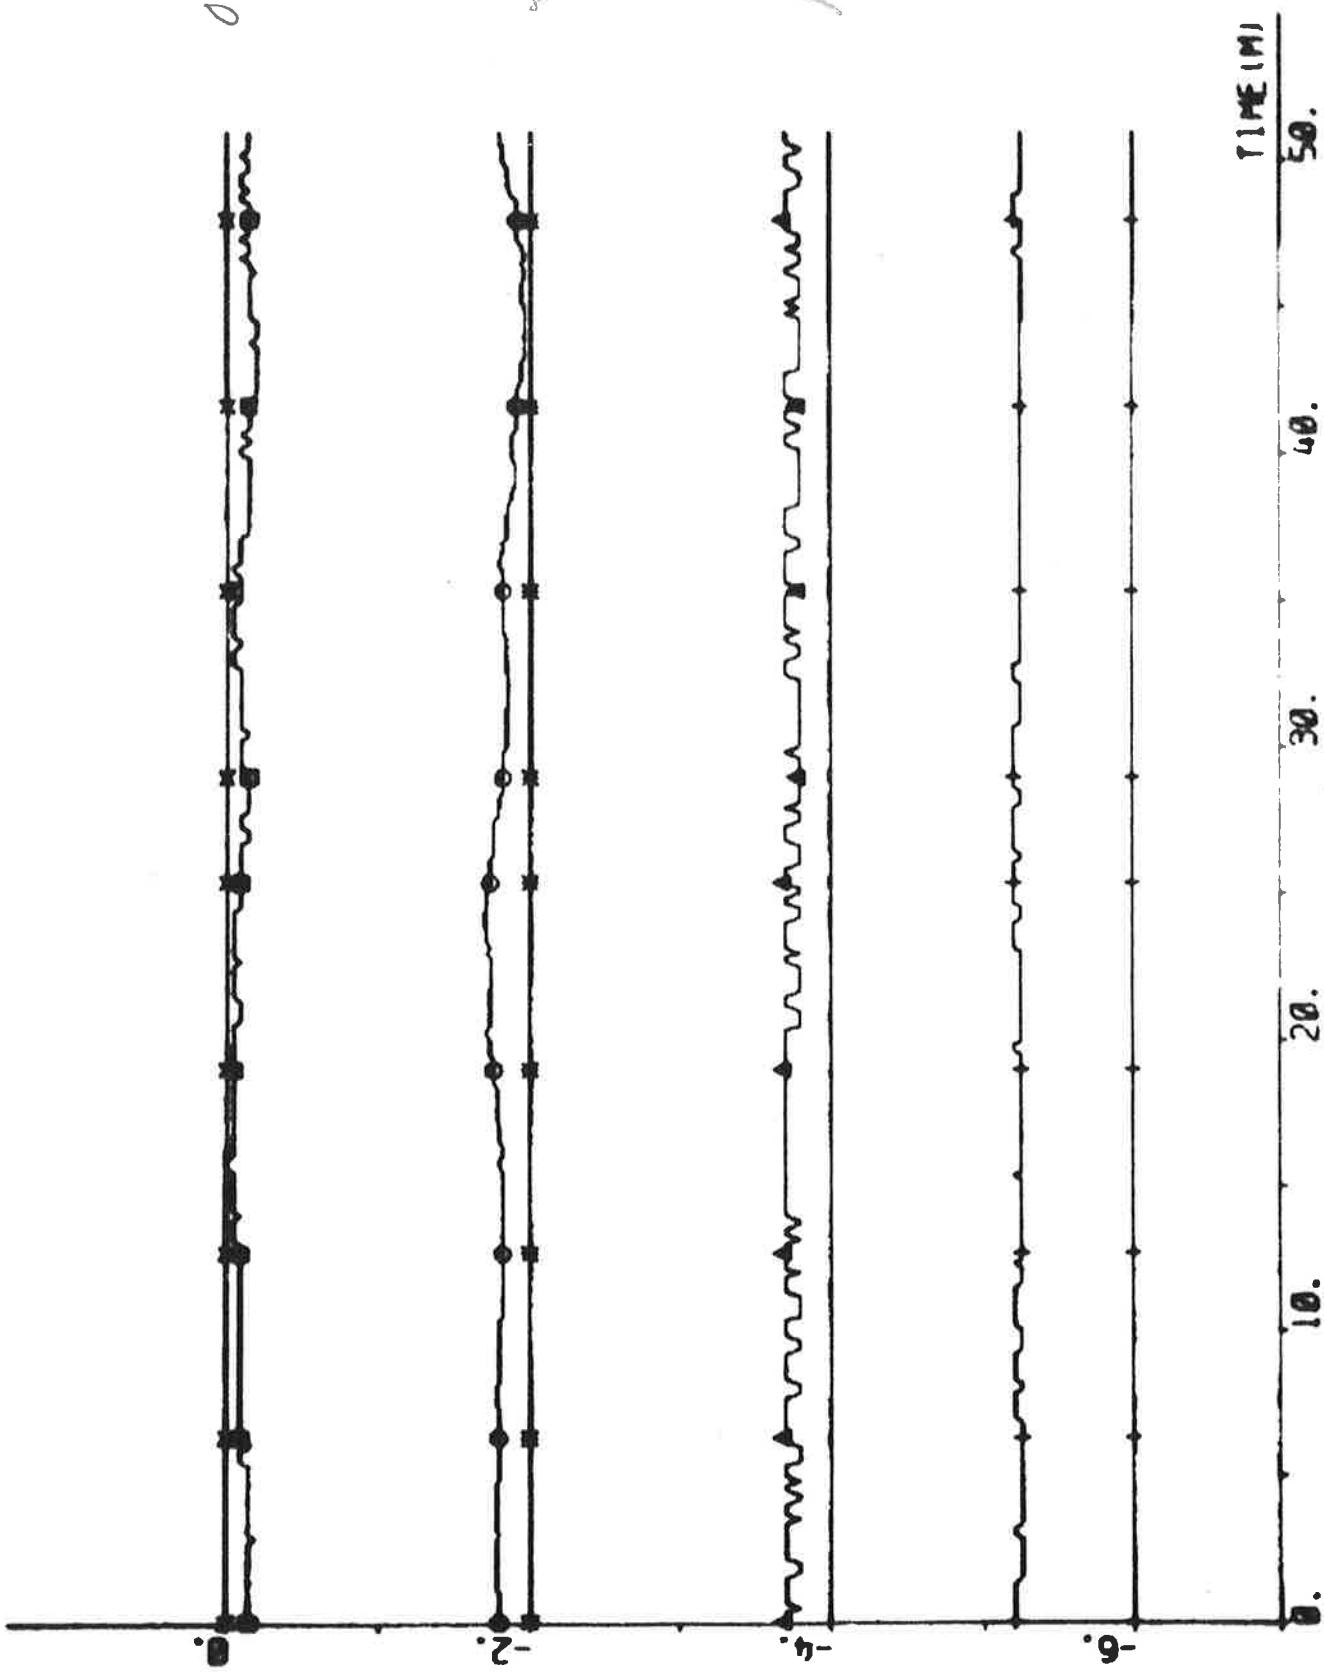

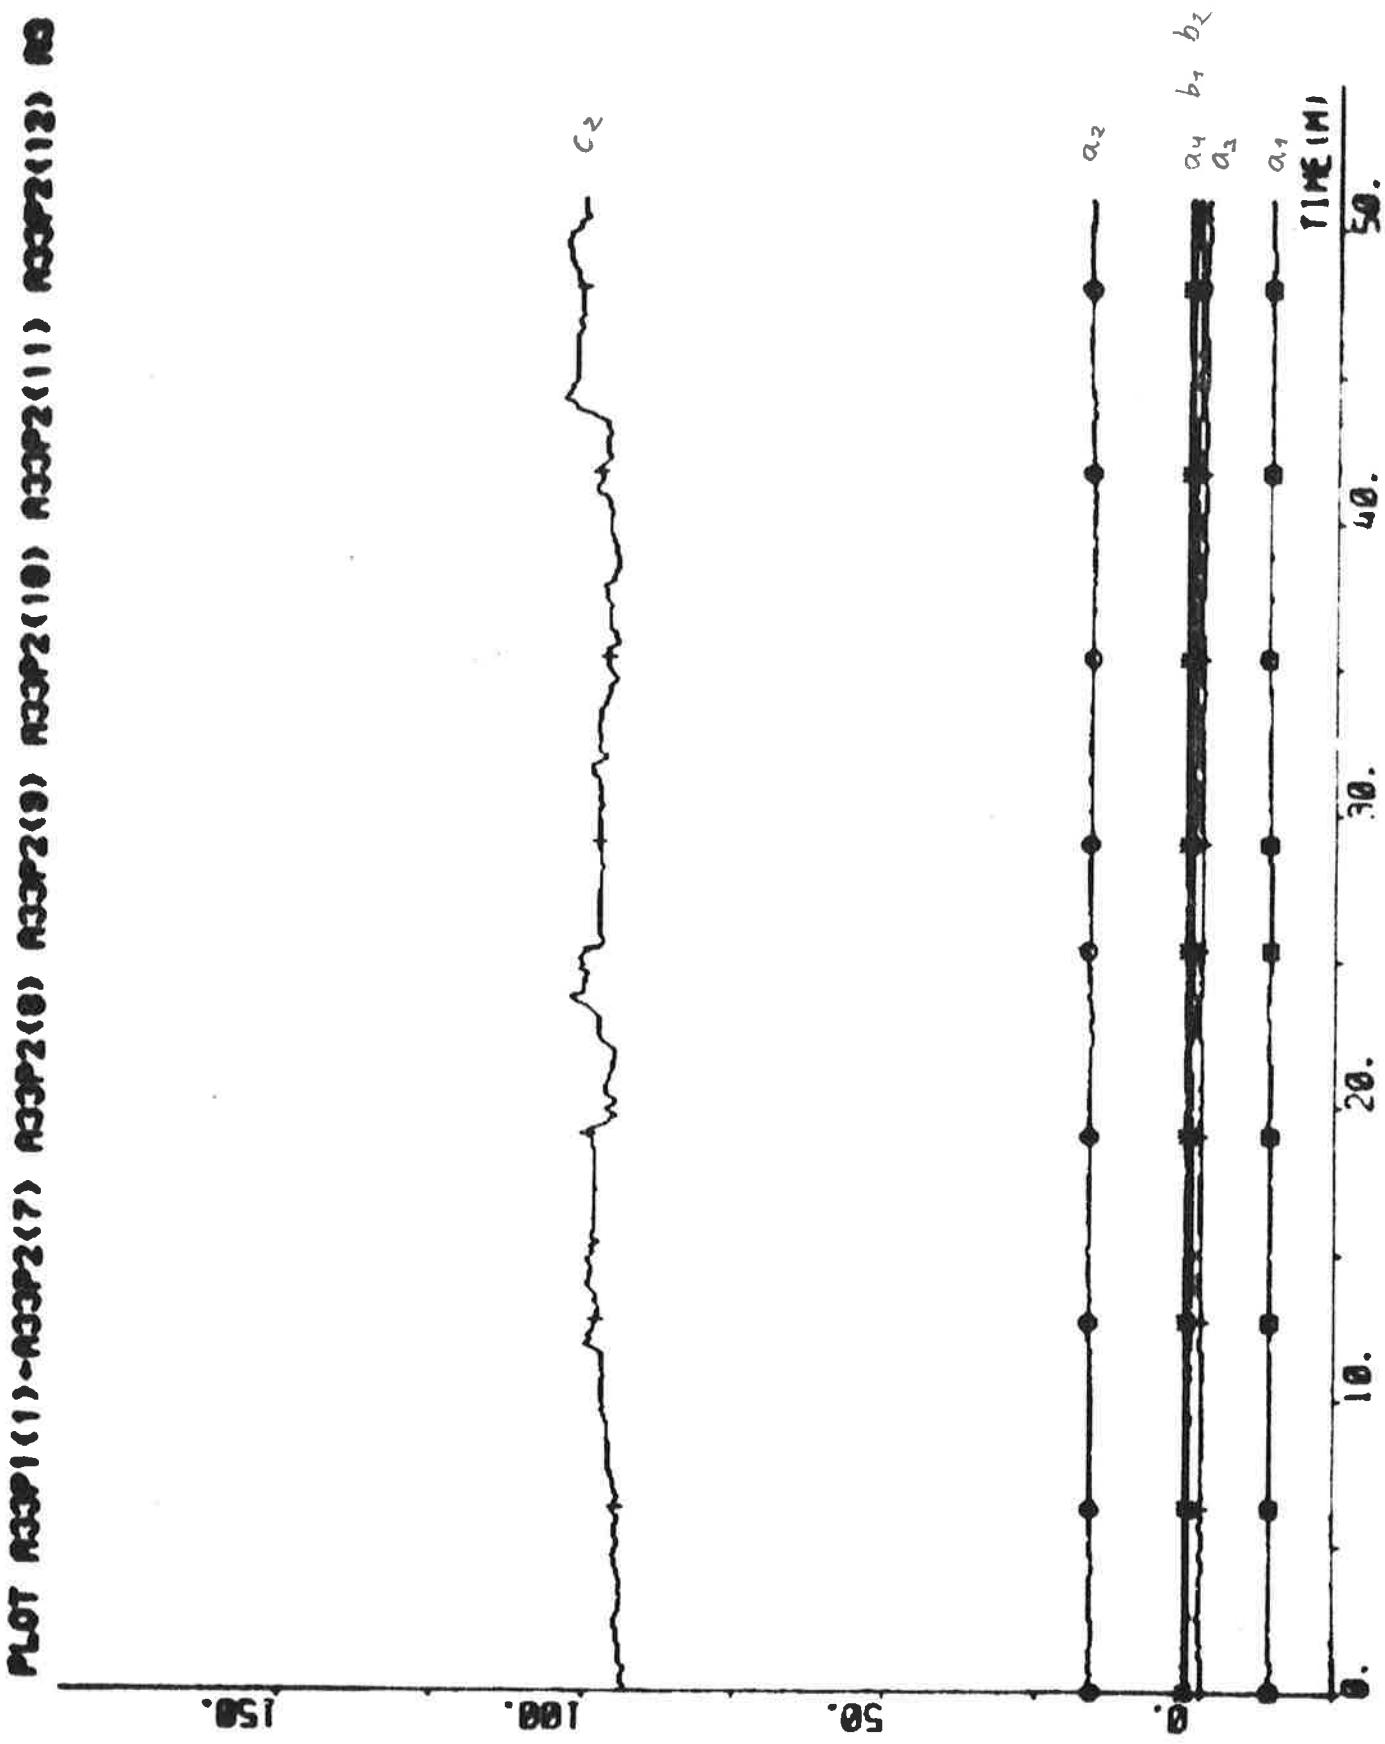

EXPERIMENT A34

| | | | |
|--------------|-------------------------------------|-----------------|-----------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 11.04 | Aft draught | 12.9 m |
| Duration | 48 min | Wind direction | SE (1; see App. A) |
| Position | S $17^{\circ}41'$ E $04^{\circ}42'$ | Wind velocity | 10 m/s (fresh breeze) |
| ψ_{ref} | 148 deg | Wave height | High sea from SE |

Self-tuning regulator using estimates from the Kalman filter

Tuning time before the experiment started: \geq 120 min

NC1 = 1 NC2 = 1 k = 7 q = 0
 Ts = 10 s V0 = 6 m/s IVVC = 1

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -9.25 \\ 10.23 \\ -0.26 \\ -0.85 \\ 0.48 \\ 0.21 \\ -0.03 \\ 103.99 \end{bmatrix} \quad P = \begin{bmatrix} 4.73 \\ -8.55 & 25.21 \\ 4.03 & -23.61 & 32.40 \\ 0.20 & 6.87 & -13.42 & 6.92 \\ 0.03 & -0.49 & 0.74 & -0.30 & 0.02 \\ 0.00 & -0.11 & 0.13 & -0.02 & 0.01 & 0.01 \\ -0.61 & 1.02 & -0.14 & -0.27 & -0.01 & 0.00 & 0.41 \\ 10.91 & -15.66 & 2.62 & 3.53 & -0.02 & -0.15 & 7.18 & 447.56 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.13$$


$$\hat{\delta}_0 = -0.3 \text{ deg} \quad \hat{d}_v = 0.17 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)


407
101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116

$\Delta t - \Delta t_{ref}$


$0.05 \times d_c$

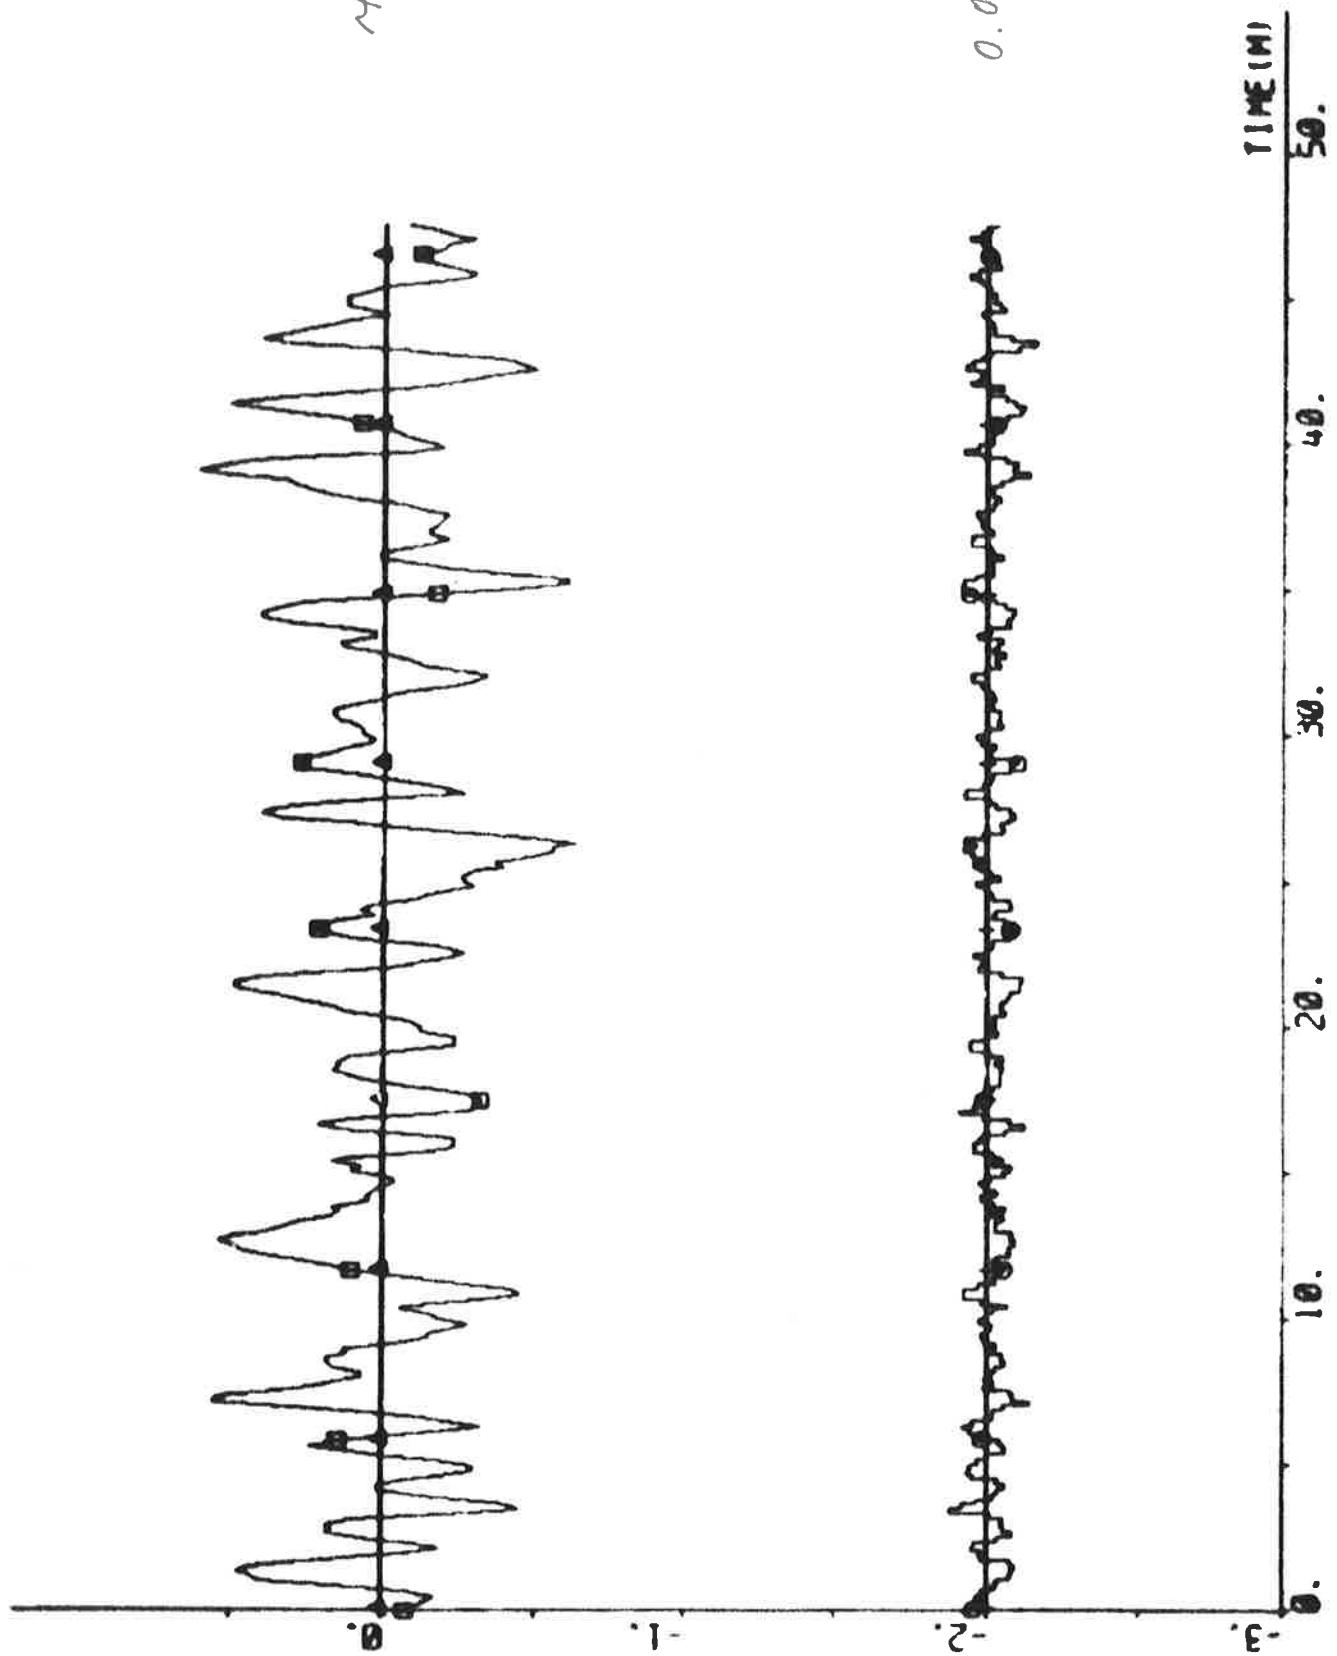


NOT READING (11) WHICH READS (12) WHICH READS (13)

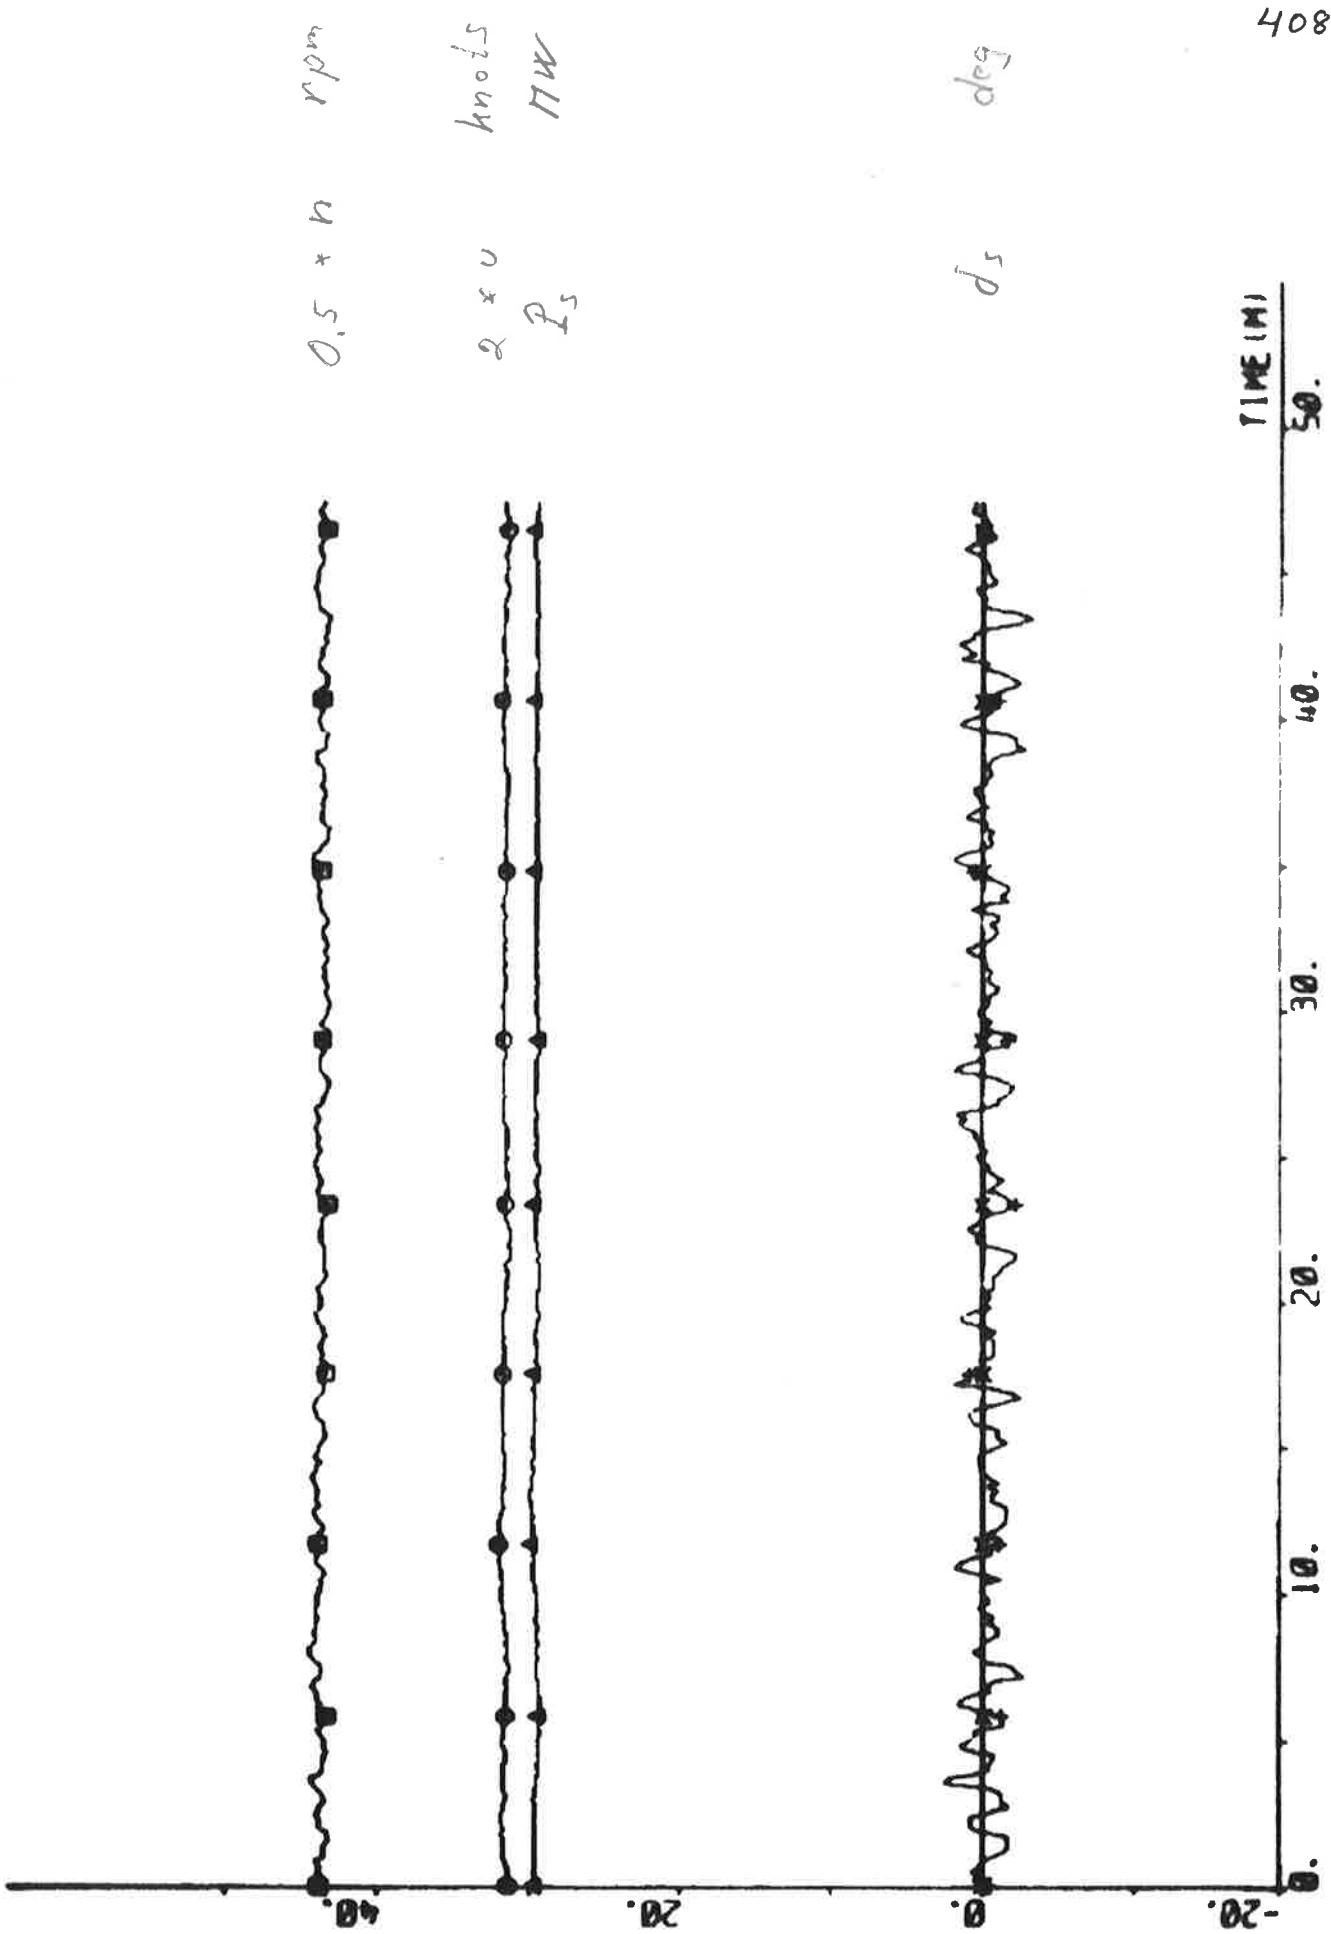


NOT RECORDED (1) - RECORD (2) ERREAS 00 01 02 - 3.4 0.3 - DATES

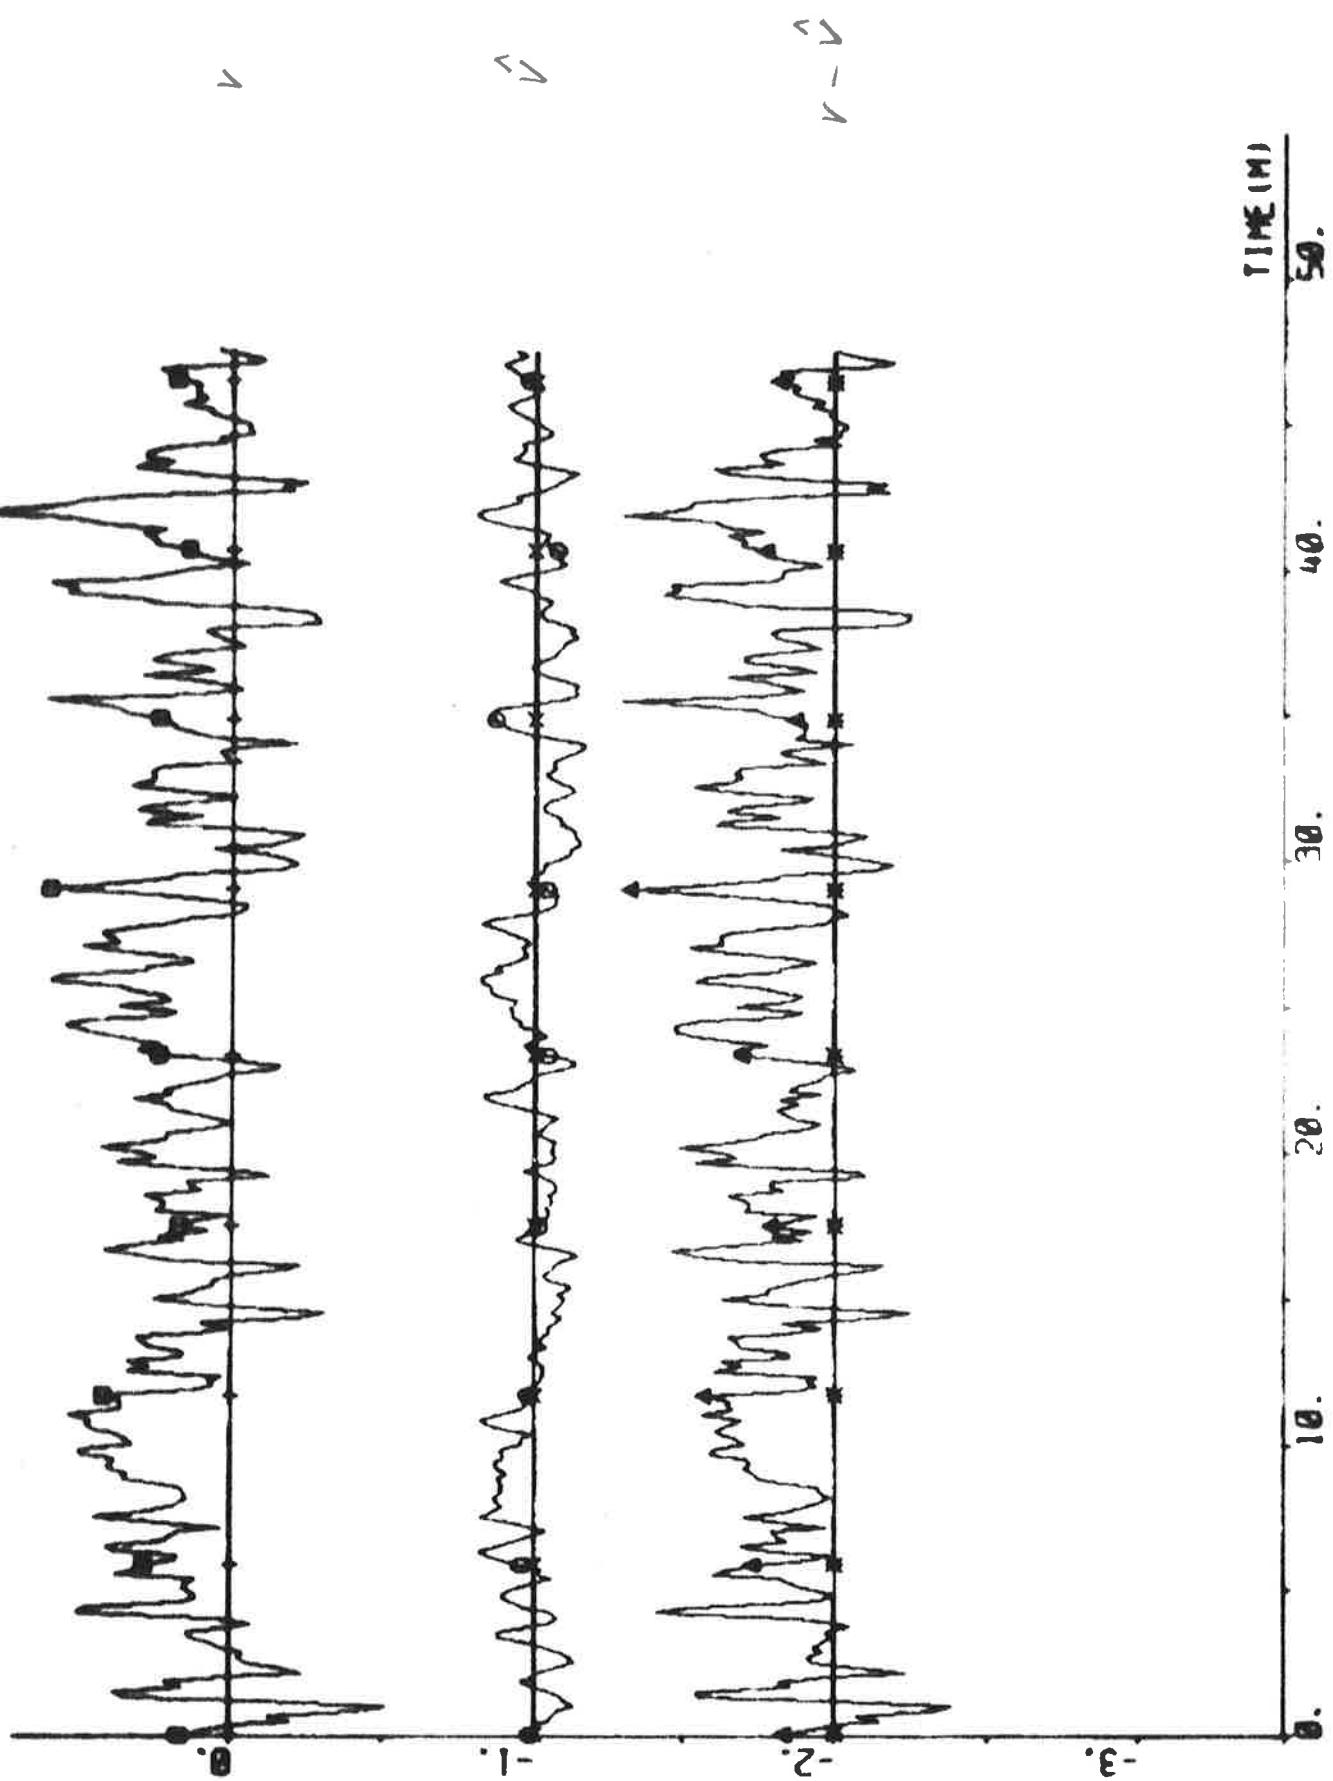


NOTATION (1) (4) (5) (6) ERS ESS 01 02 03 04 05 - waves

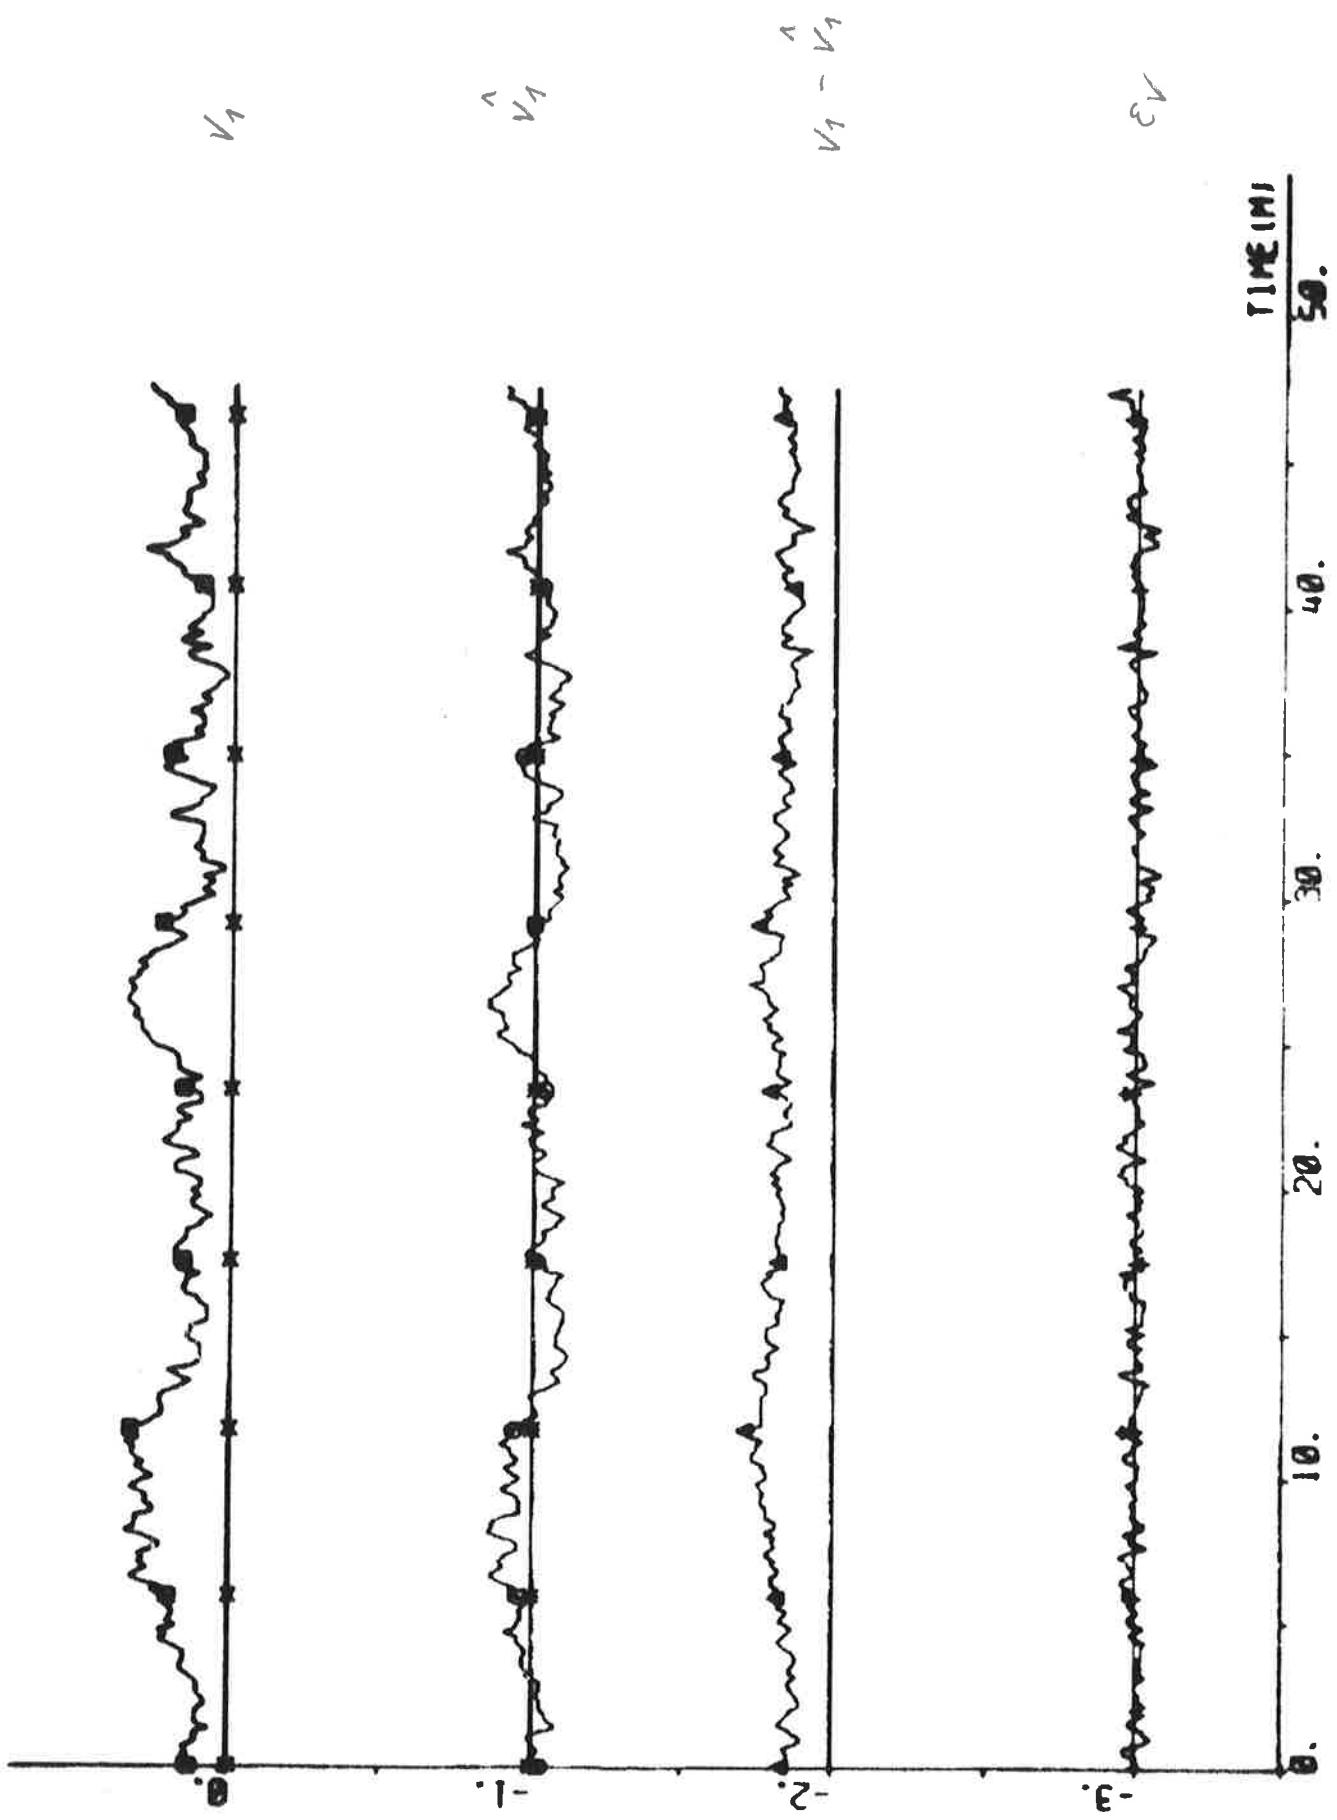

ROT sample (1) - ADP1 (8) sample (7) ends EDS as 002 sec -0.70. -

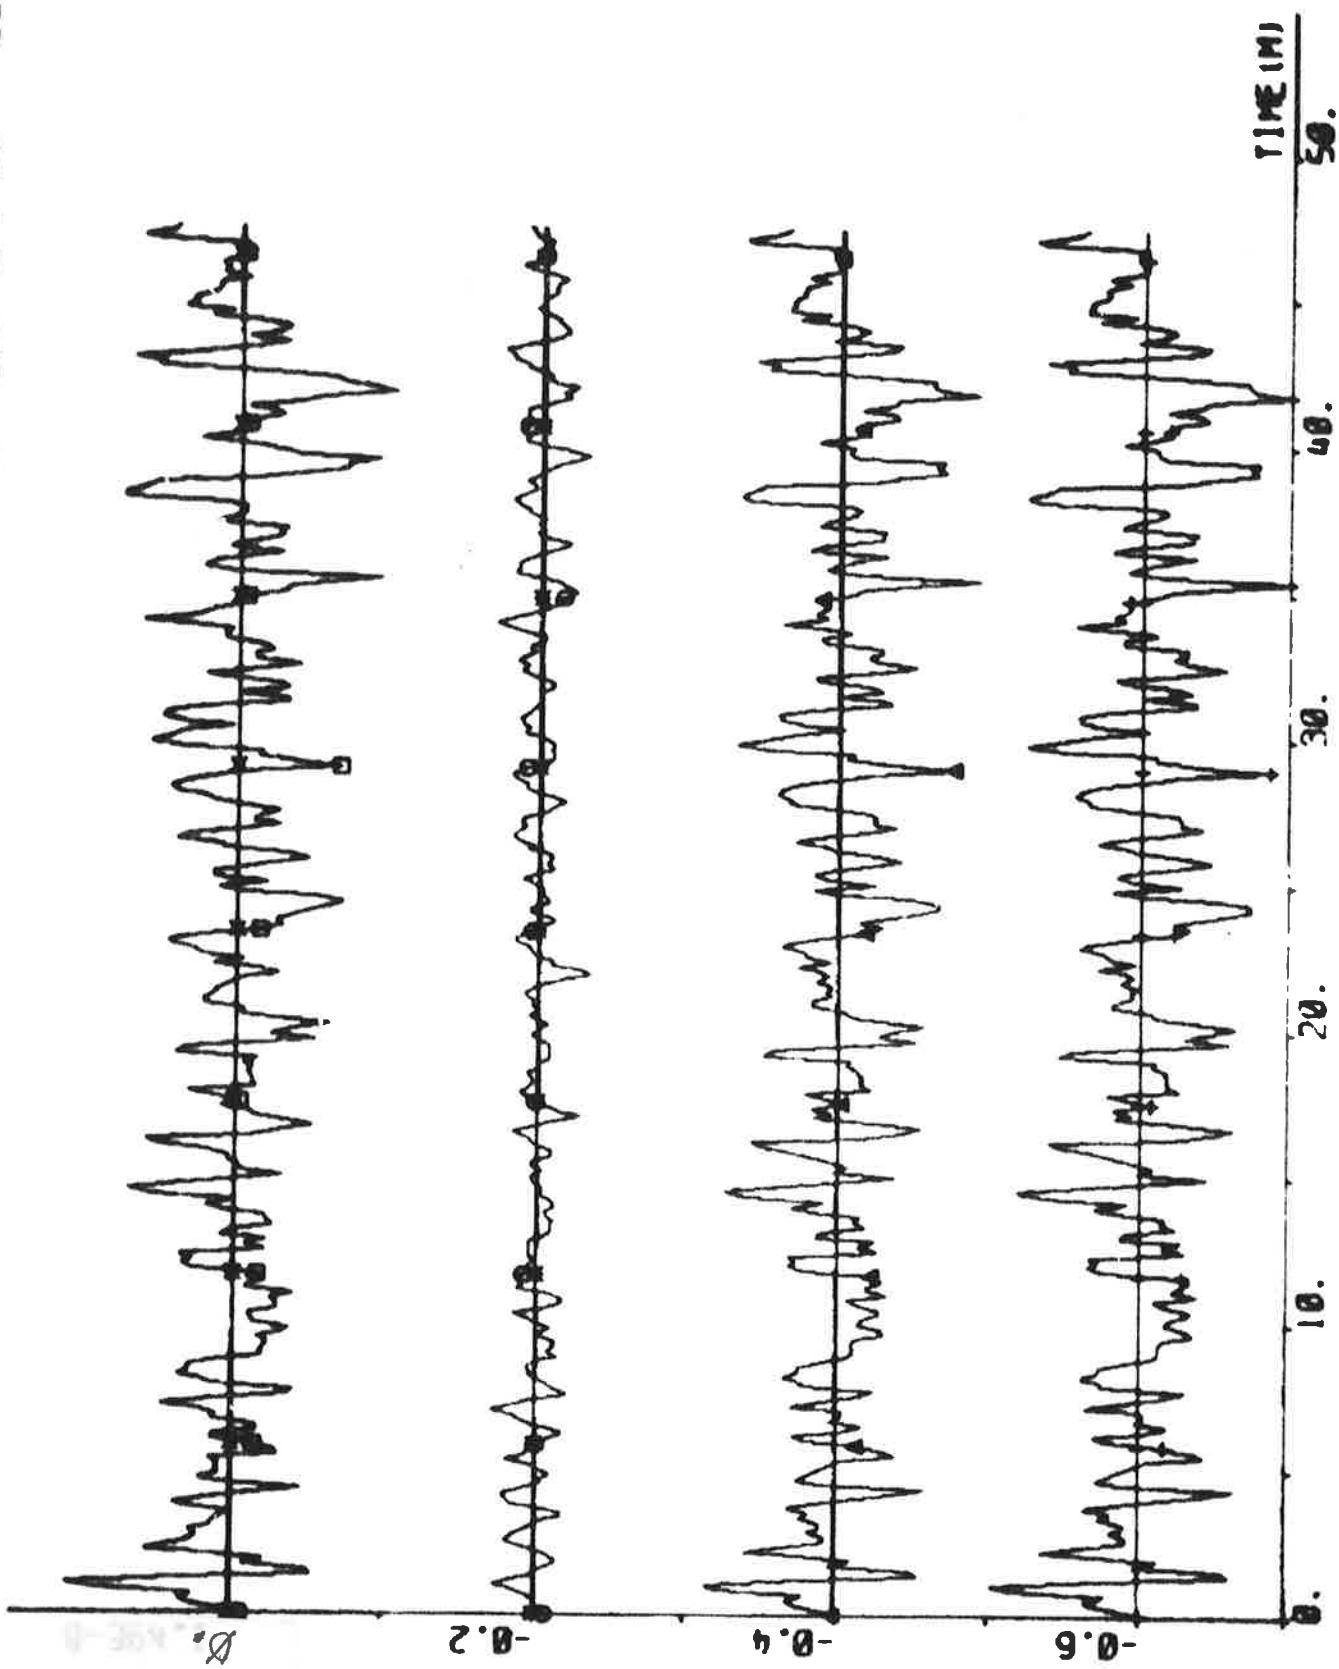

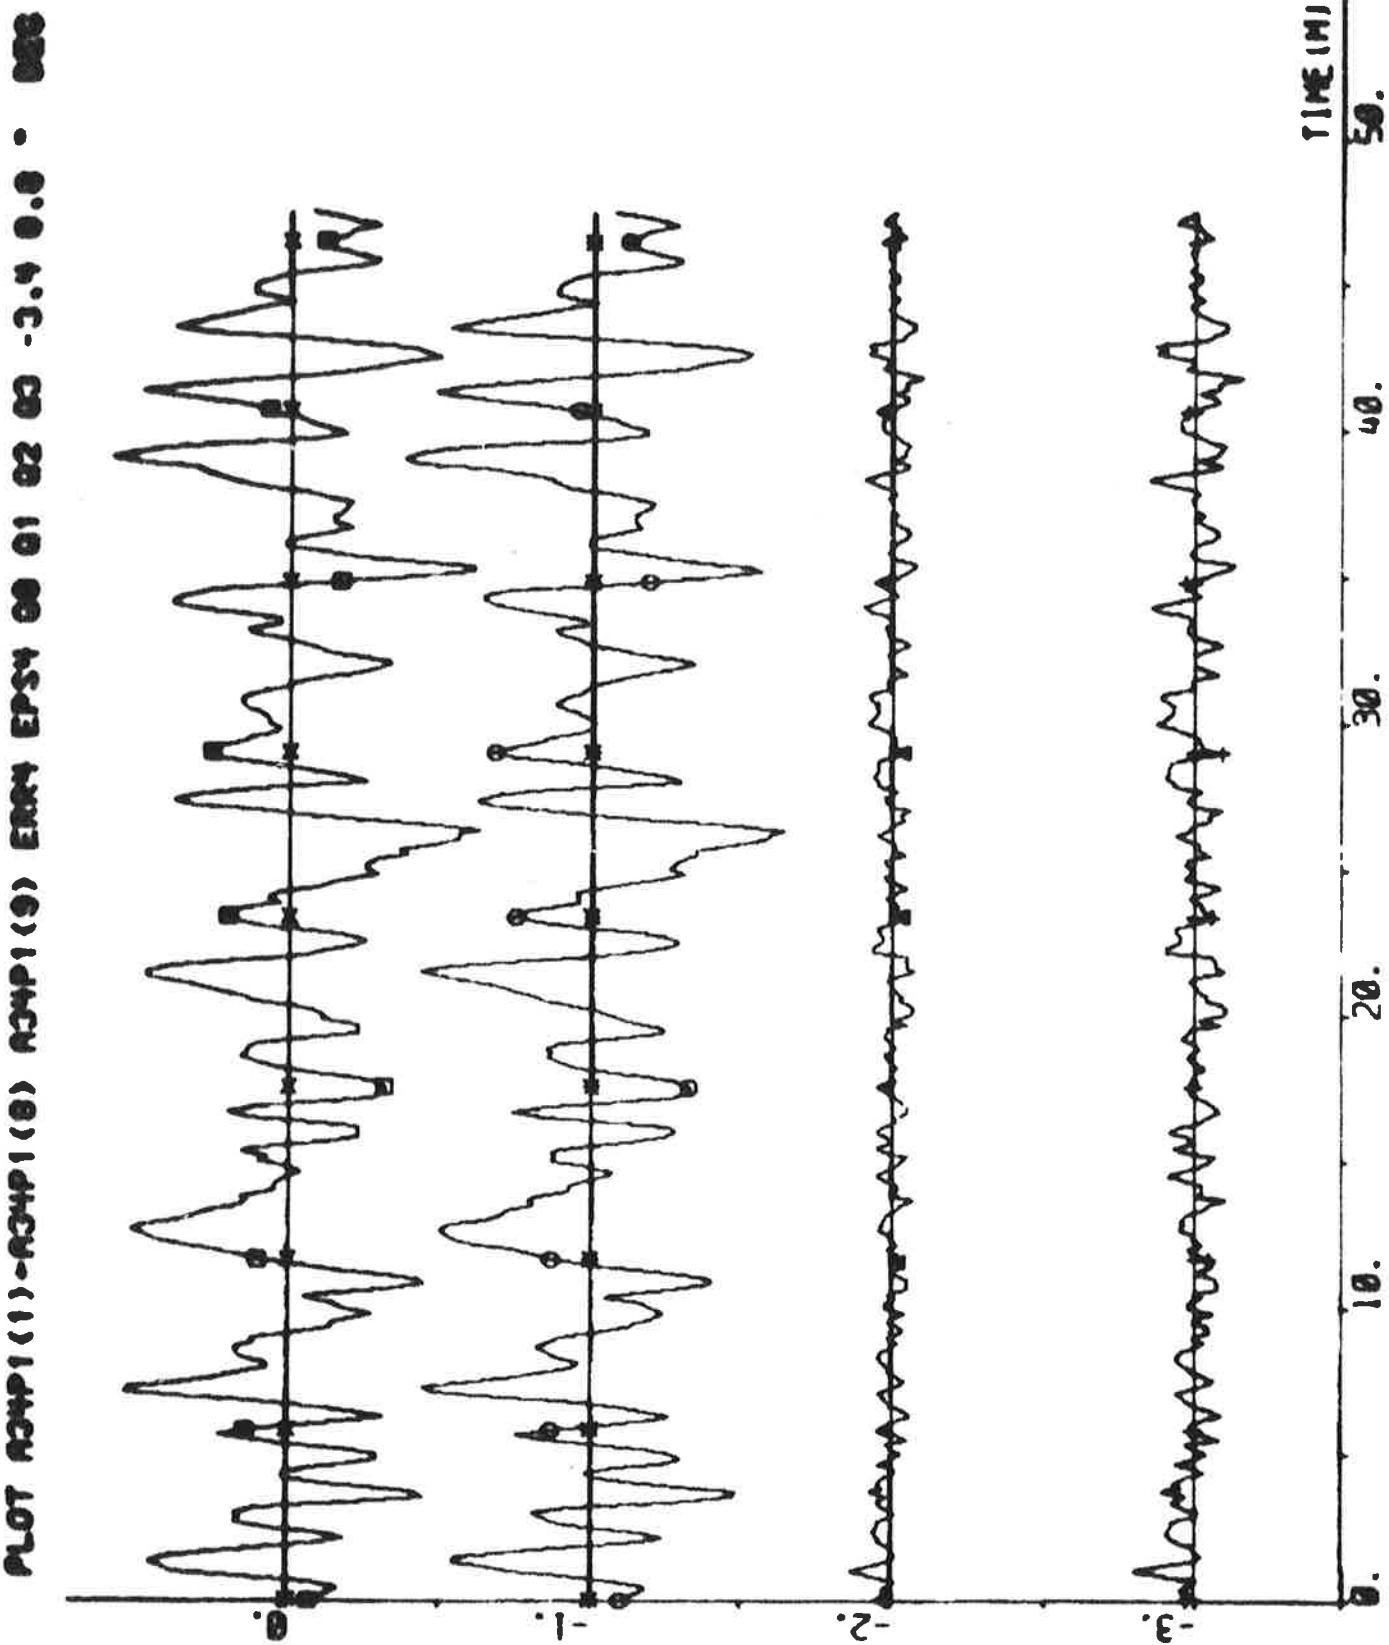

TIME (m)

30.

20.

10.

0.

ε_d

δ - δ



δ

-20.

δ




-60.

NOT NICE! (1) - NICE! (2) - EPI! (3) EPI!



$0.5 \times 10^{\deg}$

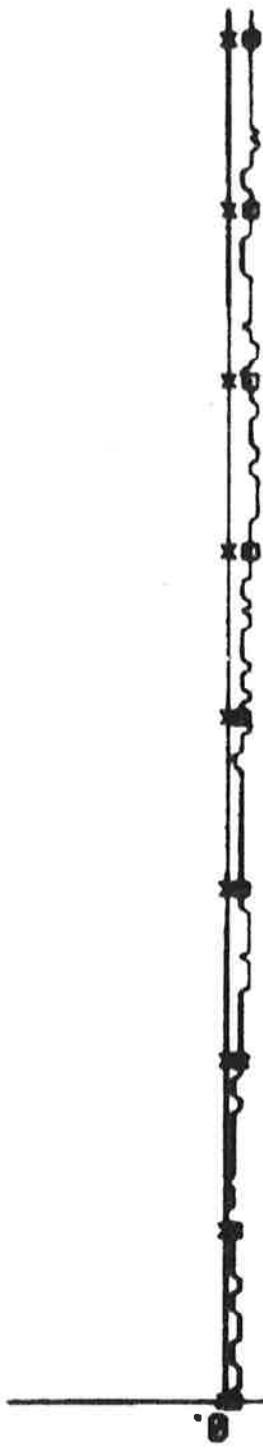


knows



$$\text{deg}/\text{s}$$




$$0.5 \times d^{\circ}$$

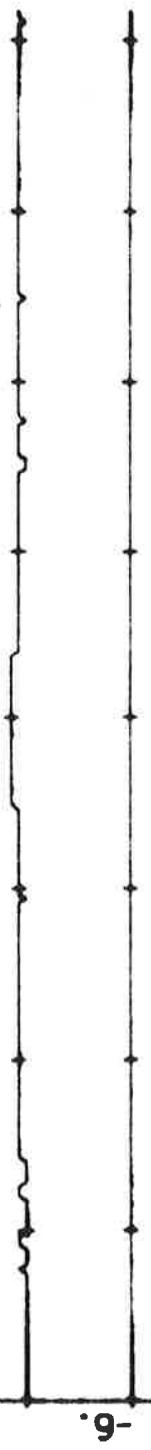

9. 10. 20. 30. 40. 50. 11ME(MI)

PLATE XXXII (1) - 3342(7) 3342(8) 3342(9) 3342(10) 3342(11) 3342(12)

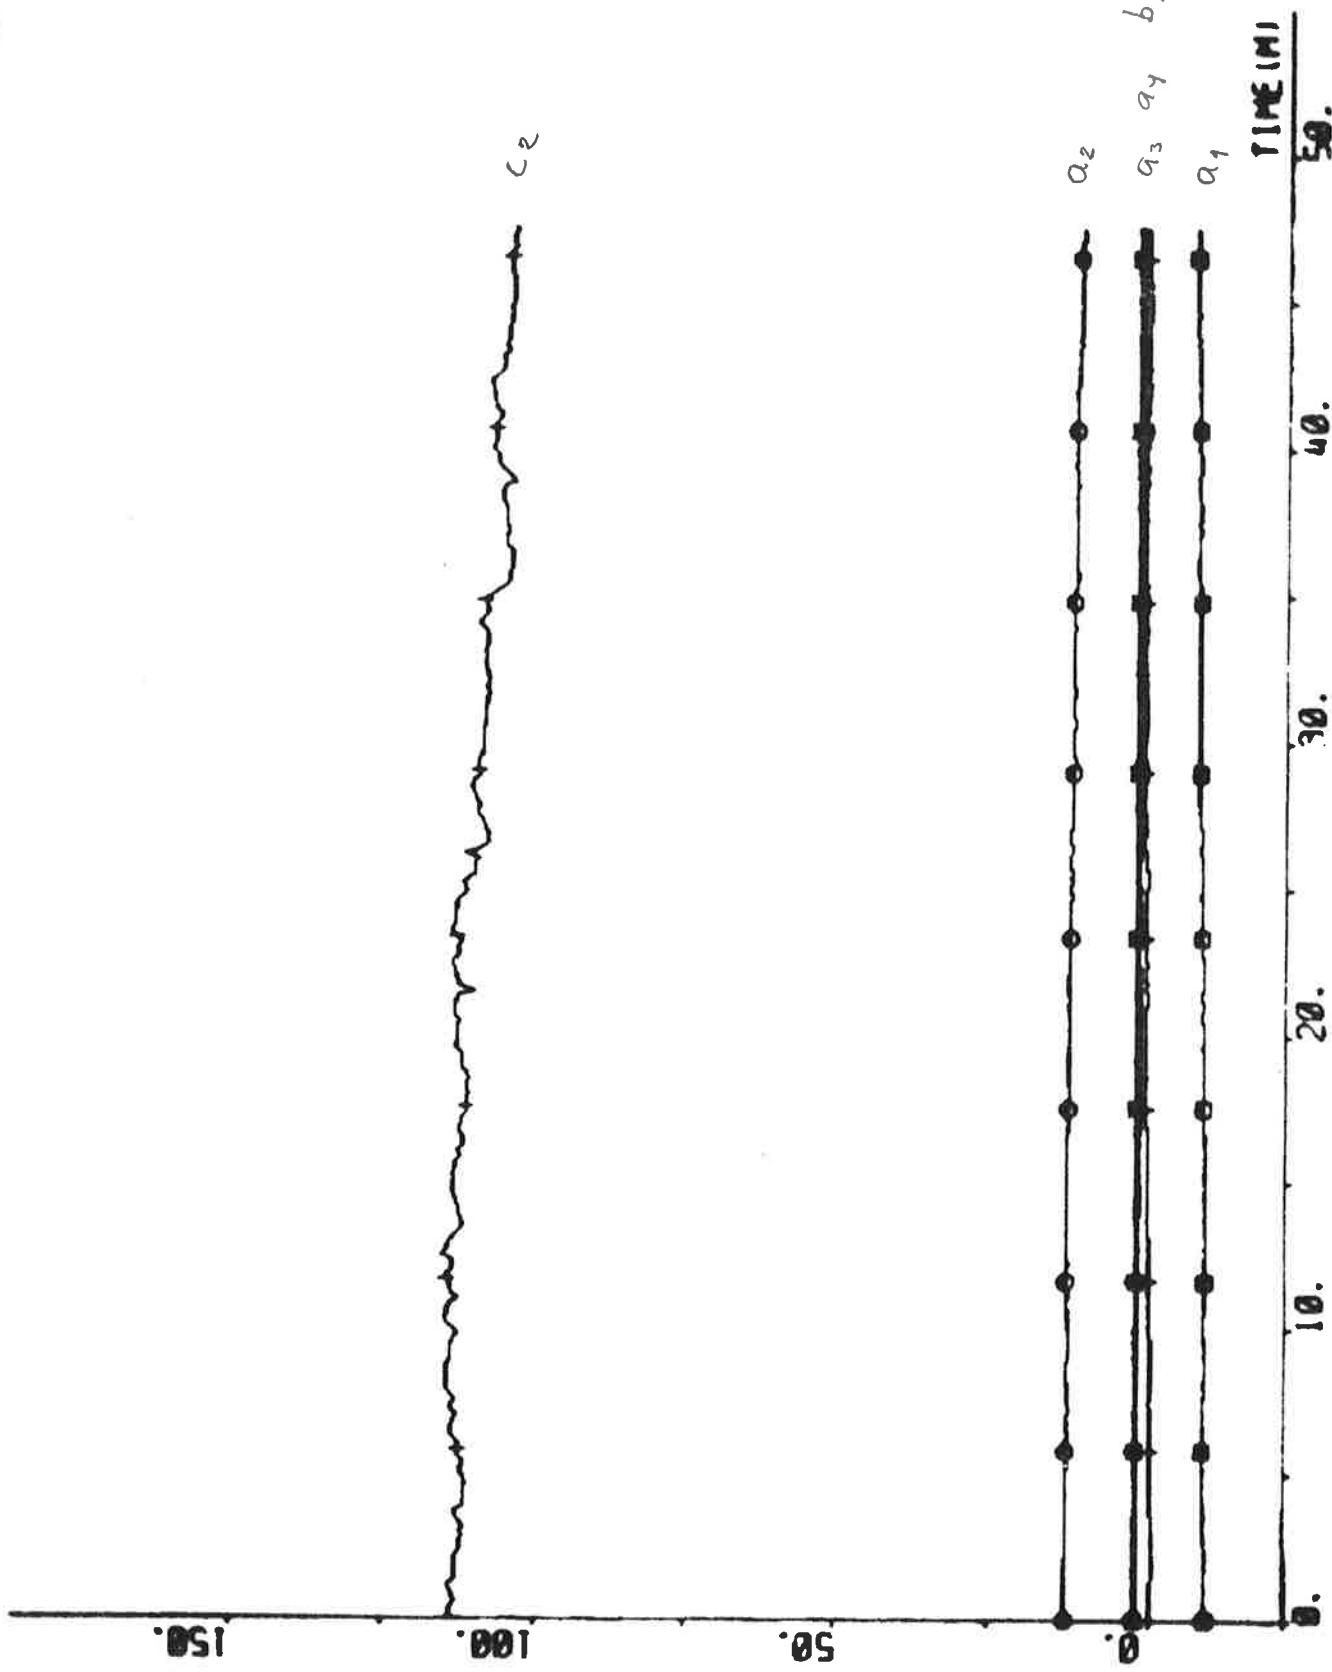

EXPERIMENT A35

| | | | |
|--------------|-------------------------------------|-----------------|------------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 14.45 | Aft draught | 12.9 m |
| Duration | 45 min | Wind direction | SE (1; see App. A) |
| Position | S $18^{\circ}30'$ E $05^{\circ}15'$ | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 143 deg | Wave height | High sea from SE |

PID-regulator using estimates from the Kalman filter

$$\begin{array}{lll} k_P = 3 & k_D = 140 \text{ s}^{-1} & k_I = 0.02 \text{ l/s} \\ T_s = 10 \text{ s} & v_0 = 6 \text{ m/s} & IVVC = 1 \end{array}$$


The parameters were manually tuned before the experiment started.

Final values:

$$\hat{\delta}_0 = 0.0 \text{ deg} \quad \hat{d}_v = 0.14 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)

PLT ACP 1 (1) - ACP 1 (8) HP ACP 1 (10) ACP 1 (15)

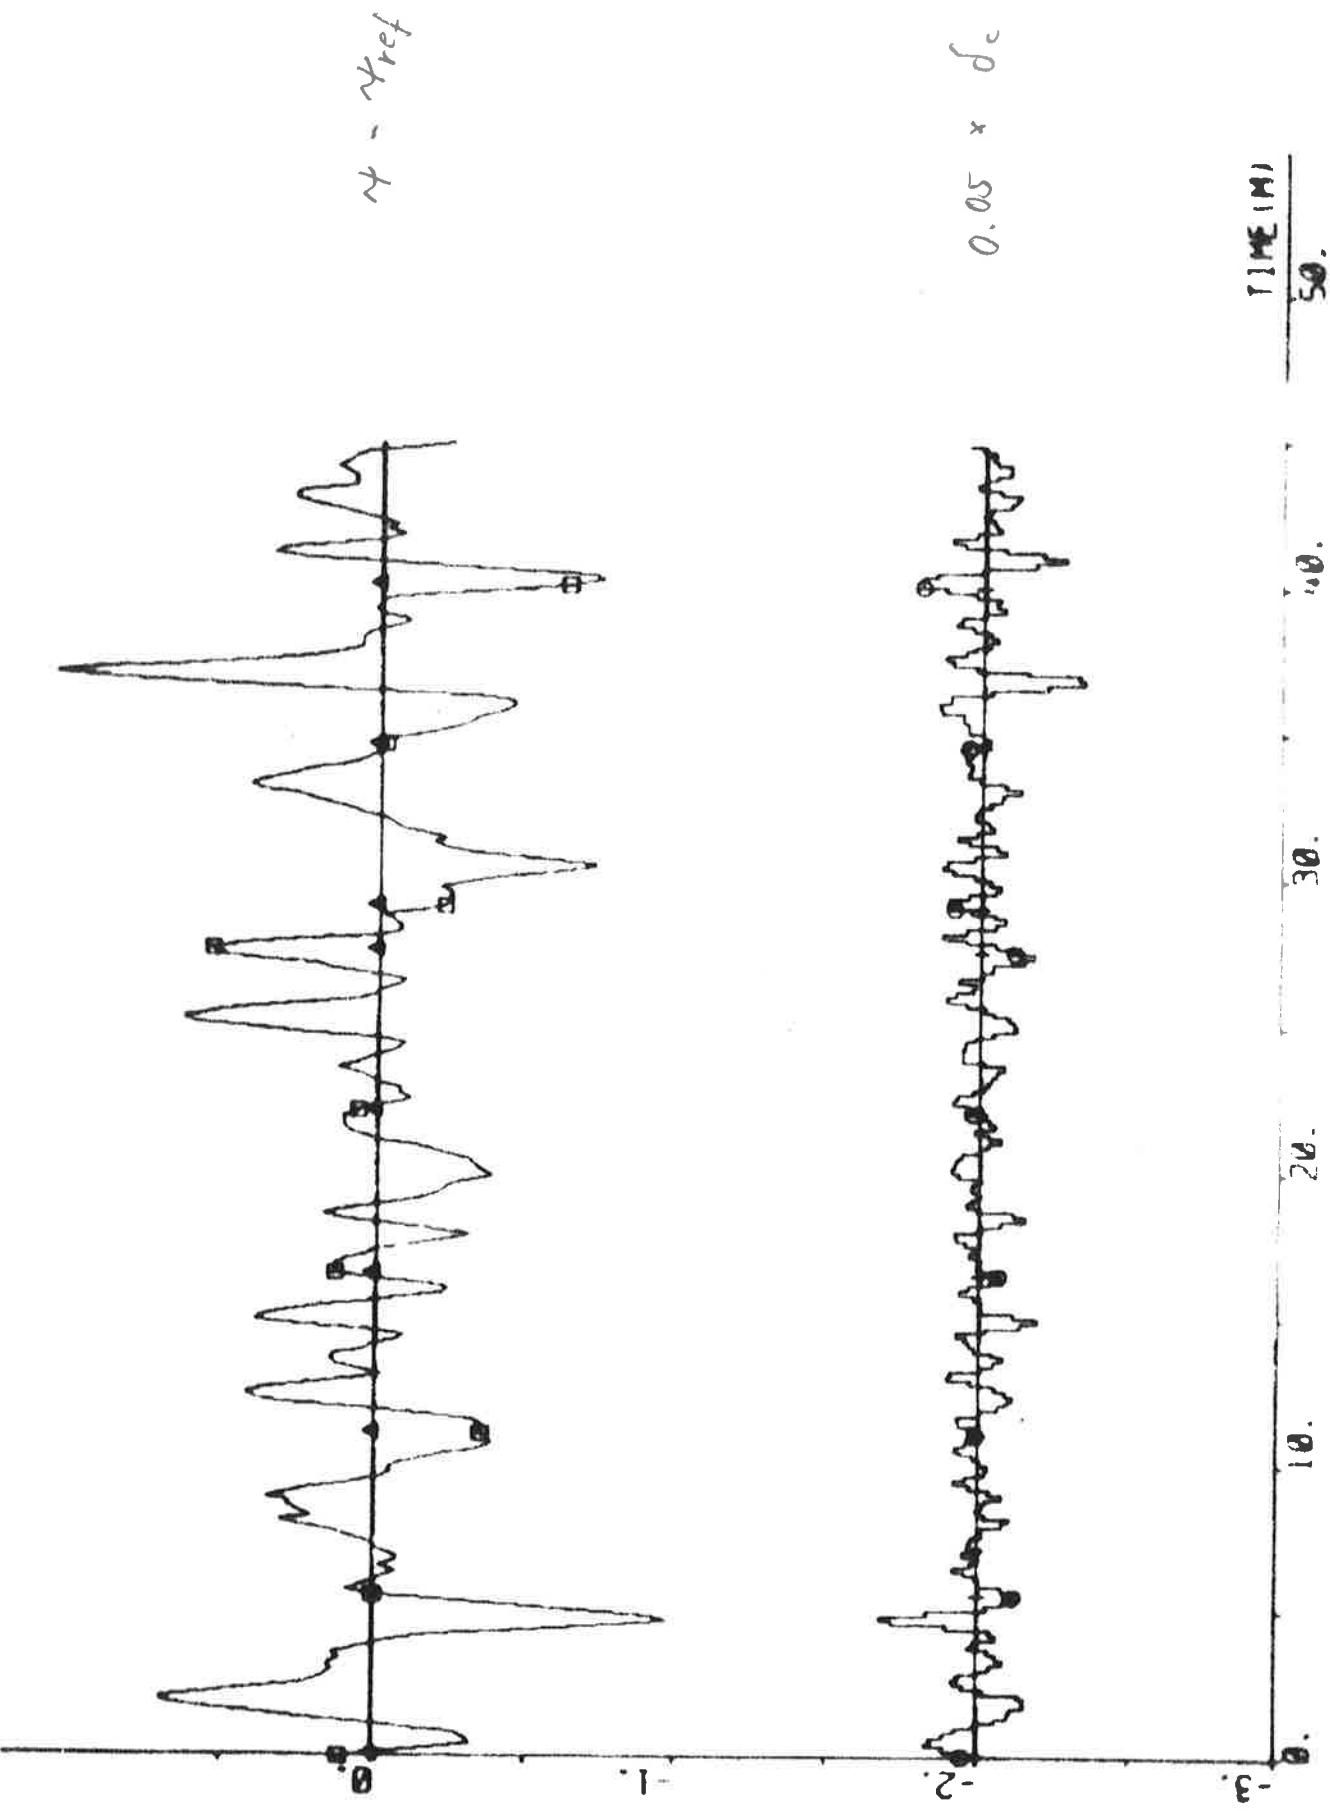

PLATINUM (II) - MERCURY (II) ACETATE (12) - ACETIC ACID - 20 g



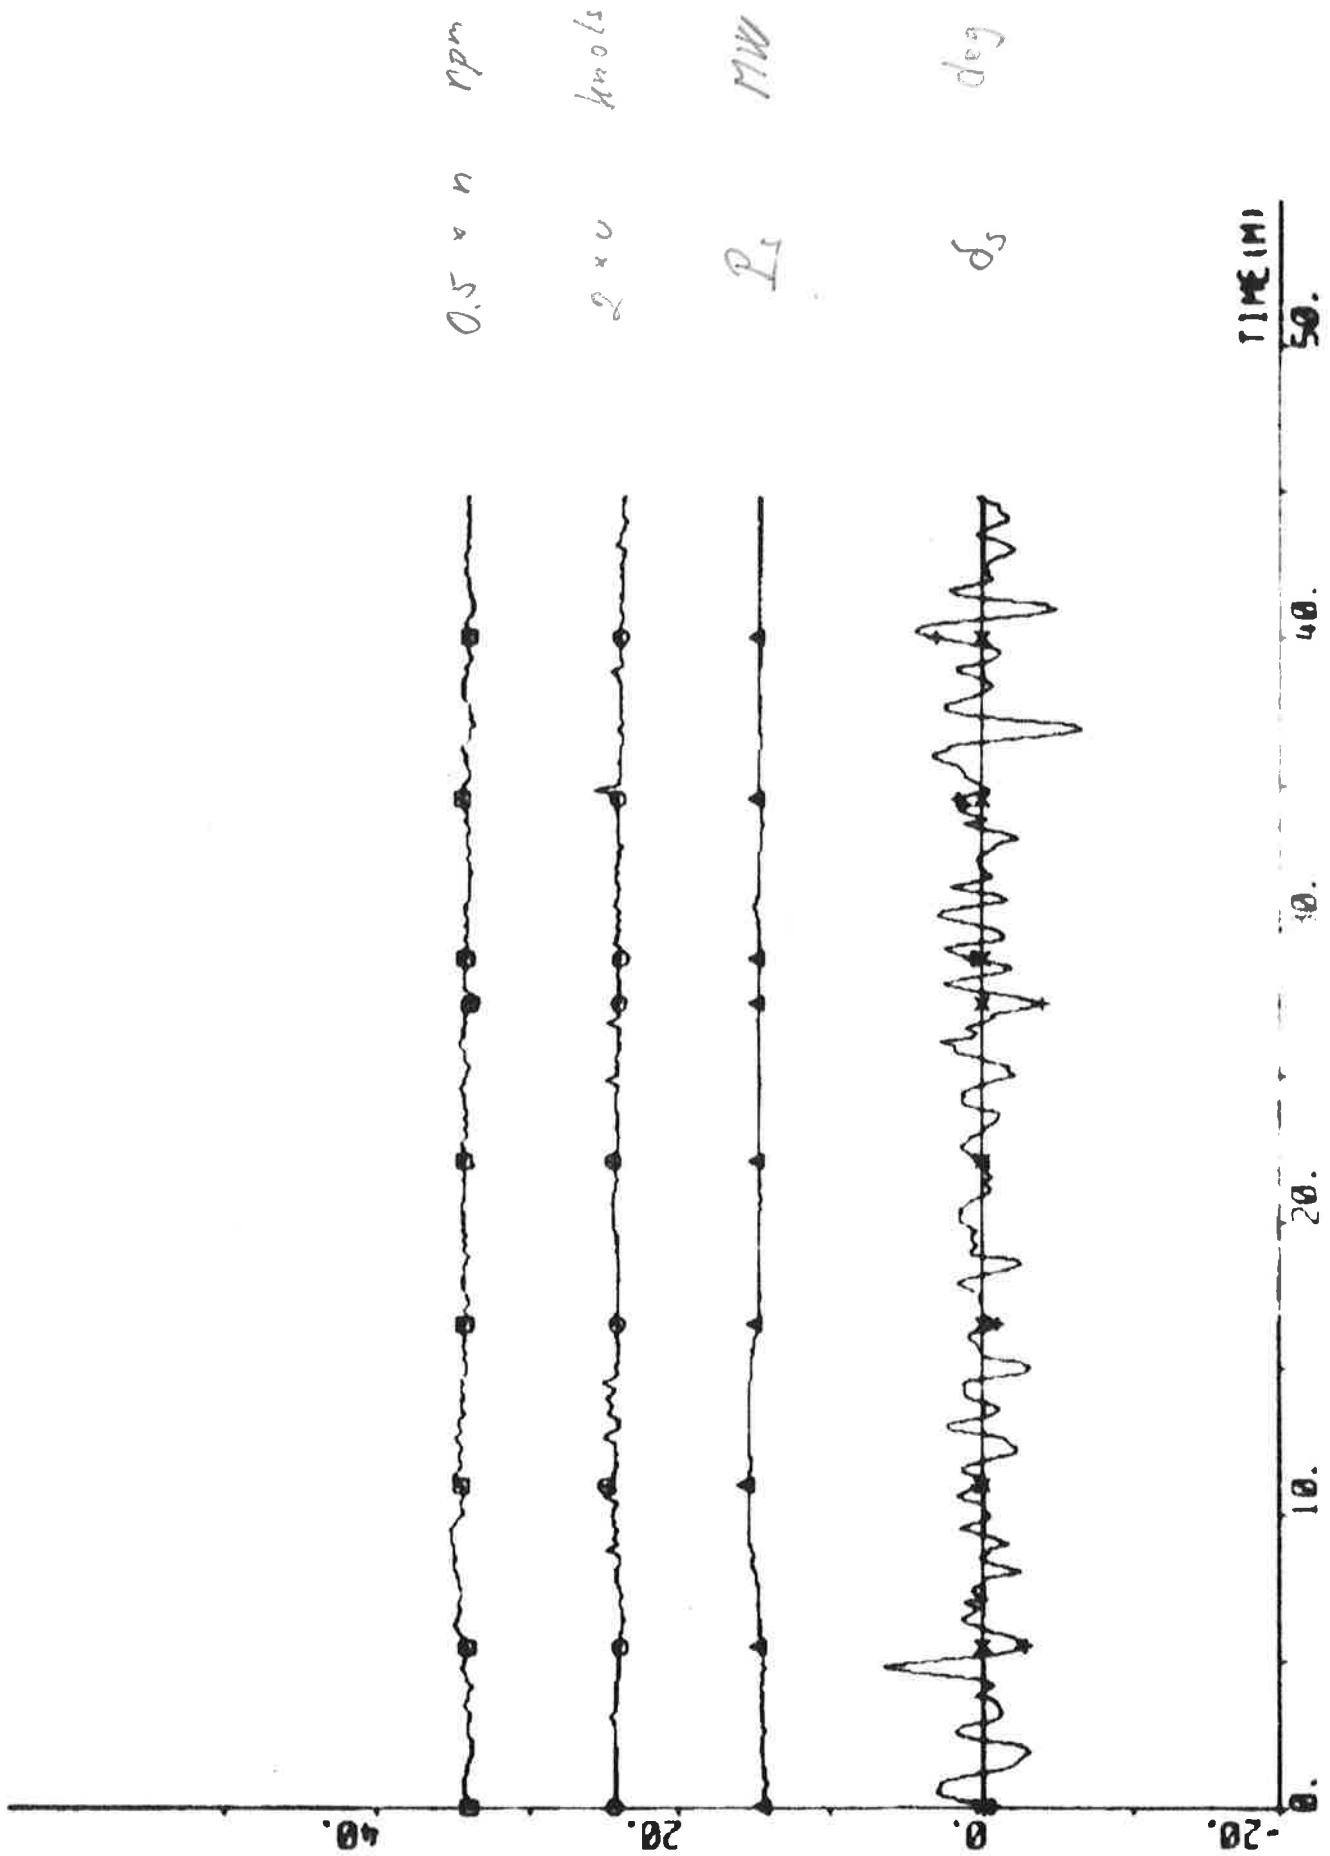



PLATE ACQUA 111 - ACQUA 2(1) HCSR2(2) EARS 00 01 02 - 3.4 0.8 - KNOTS

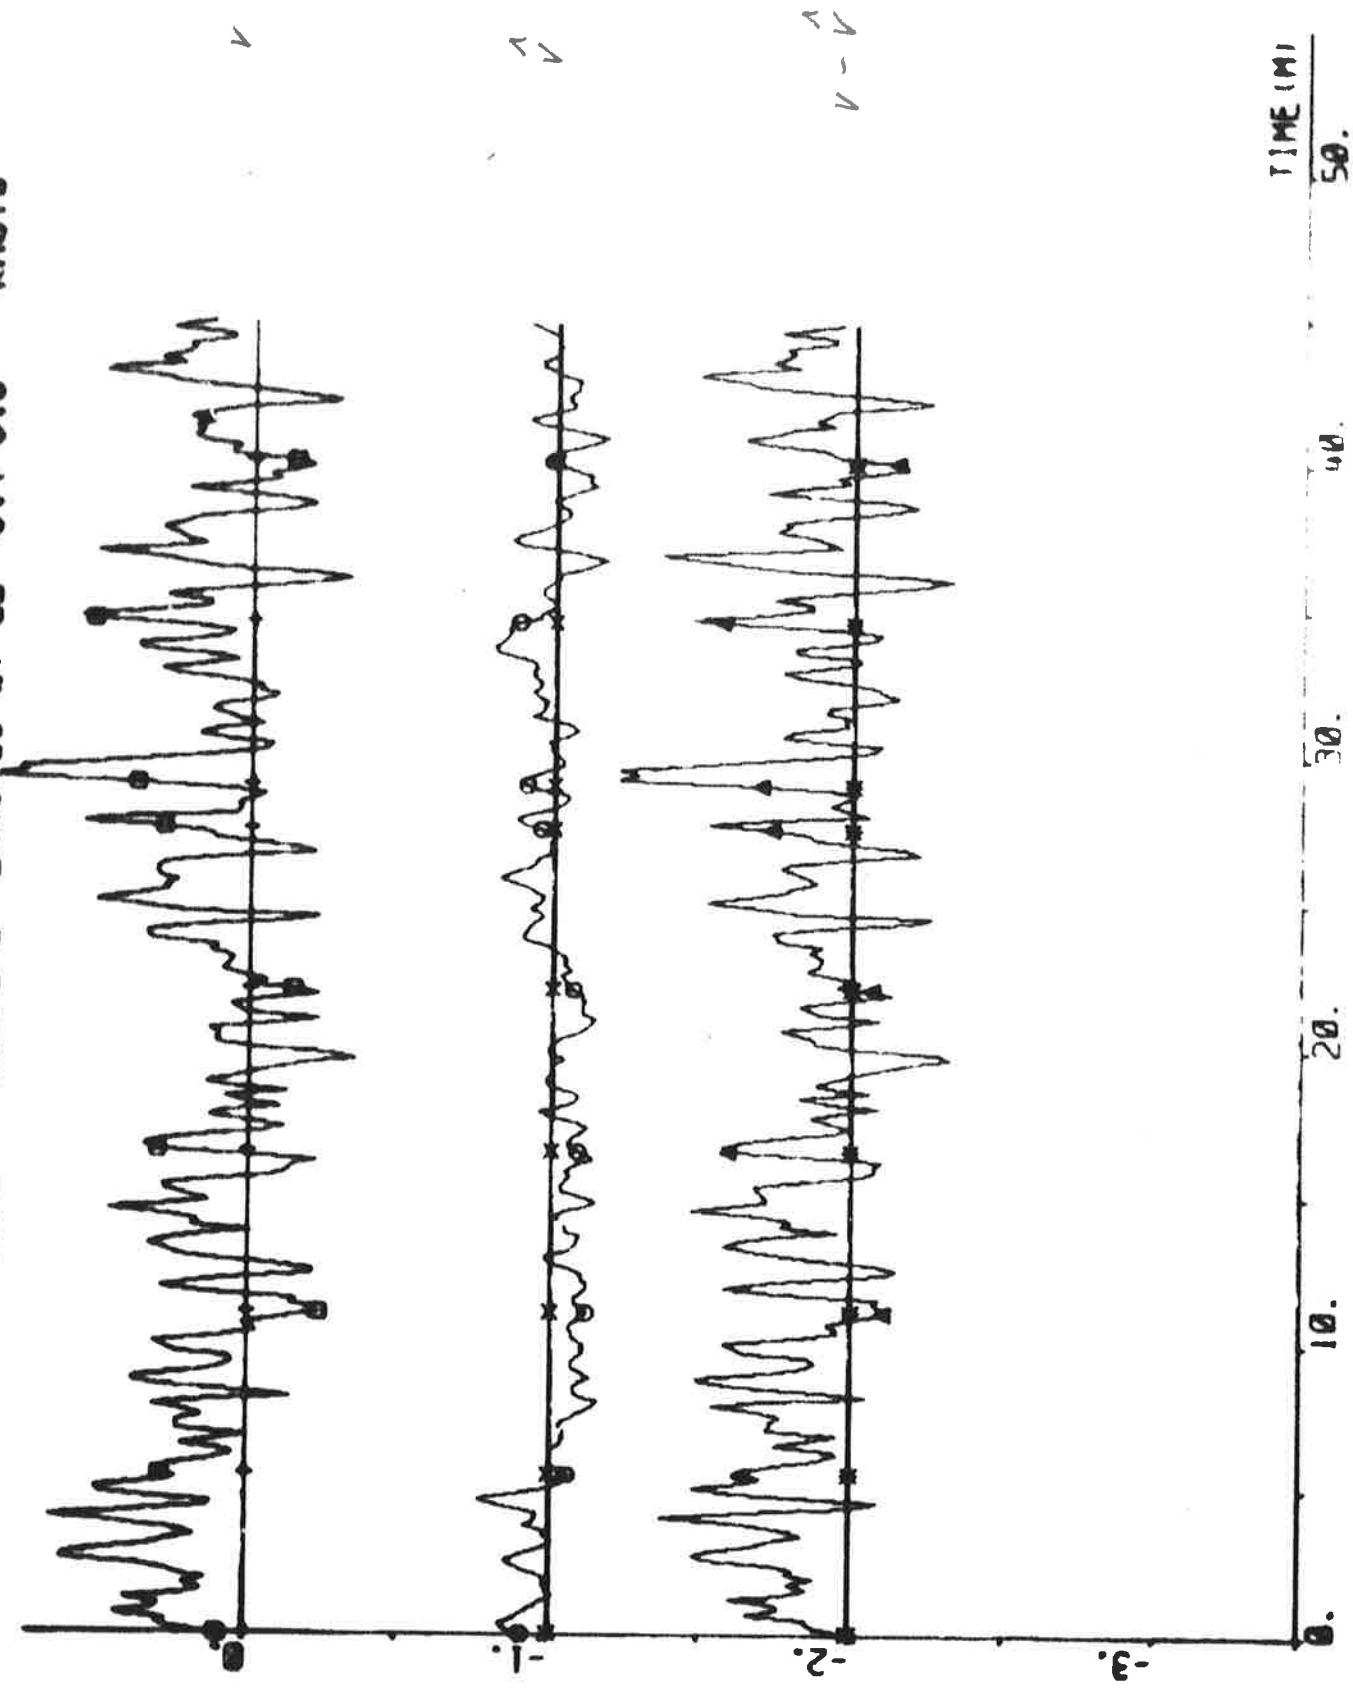



419

PLOT #35P1(1)-#35P1(4) #35P1(5) EP32 EP32 00 01 02 03 - 3.4 0.0 - 1000

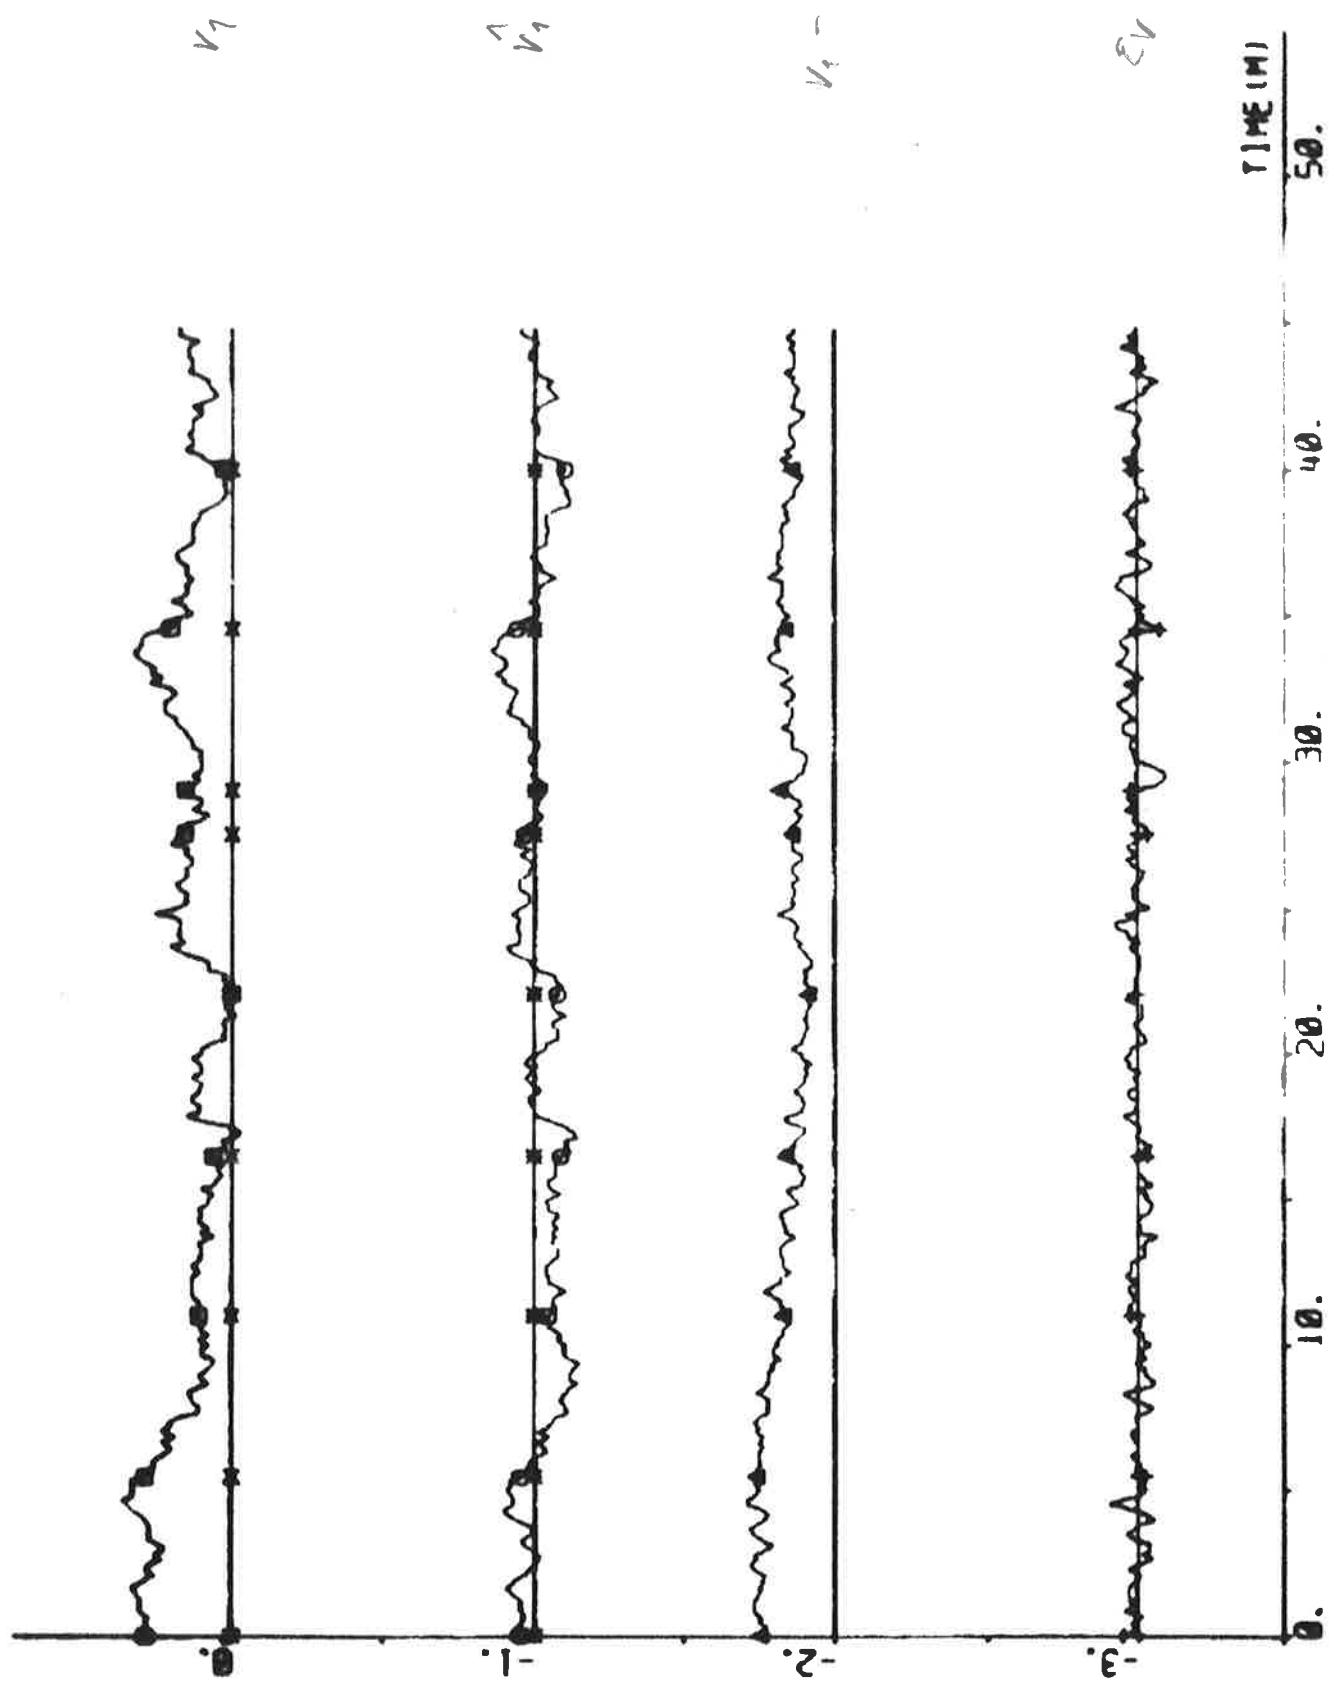


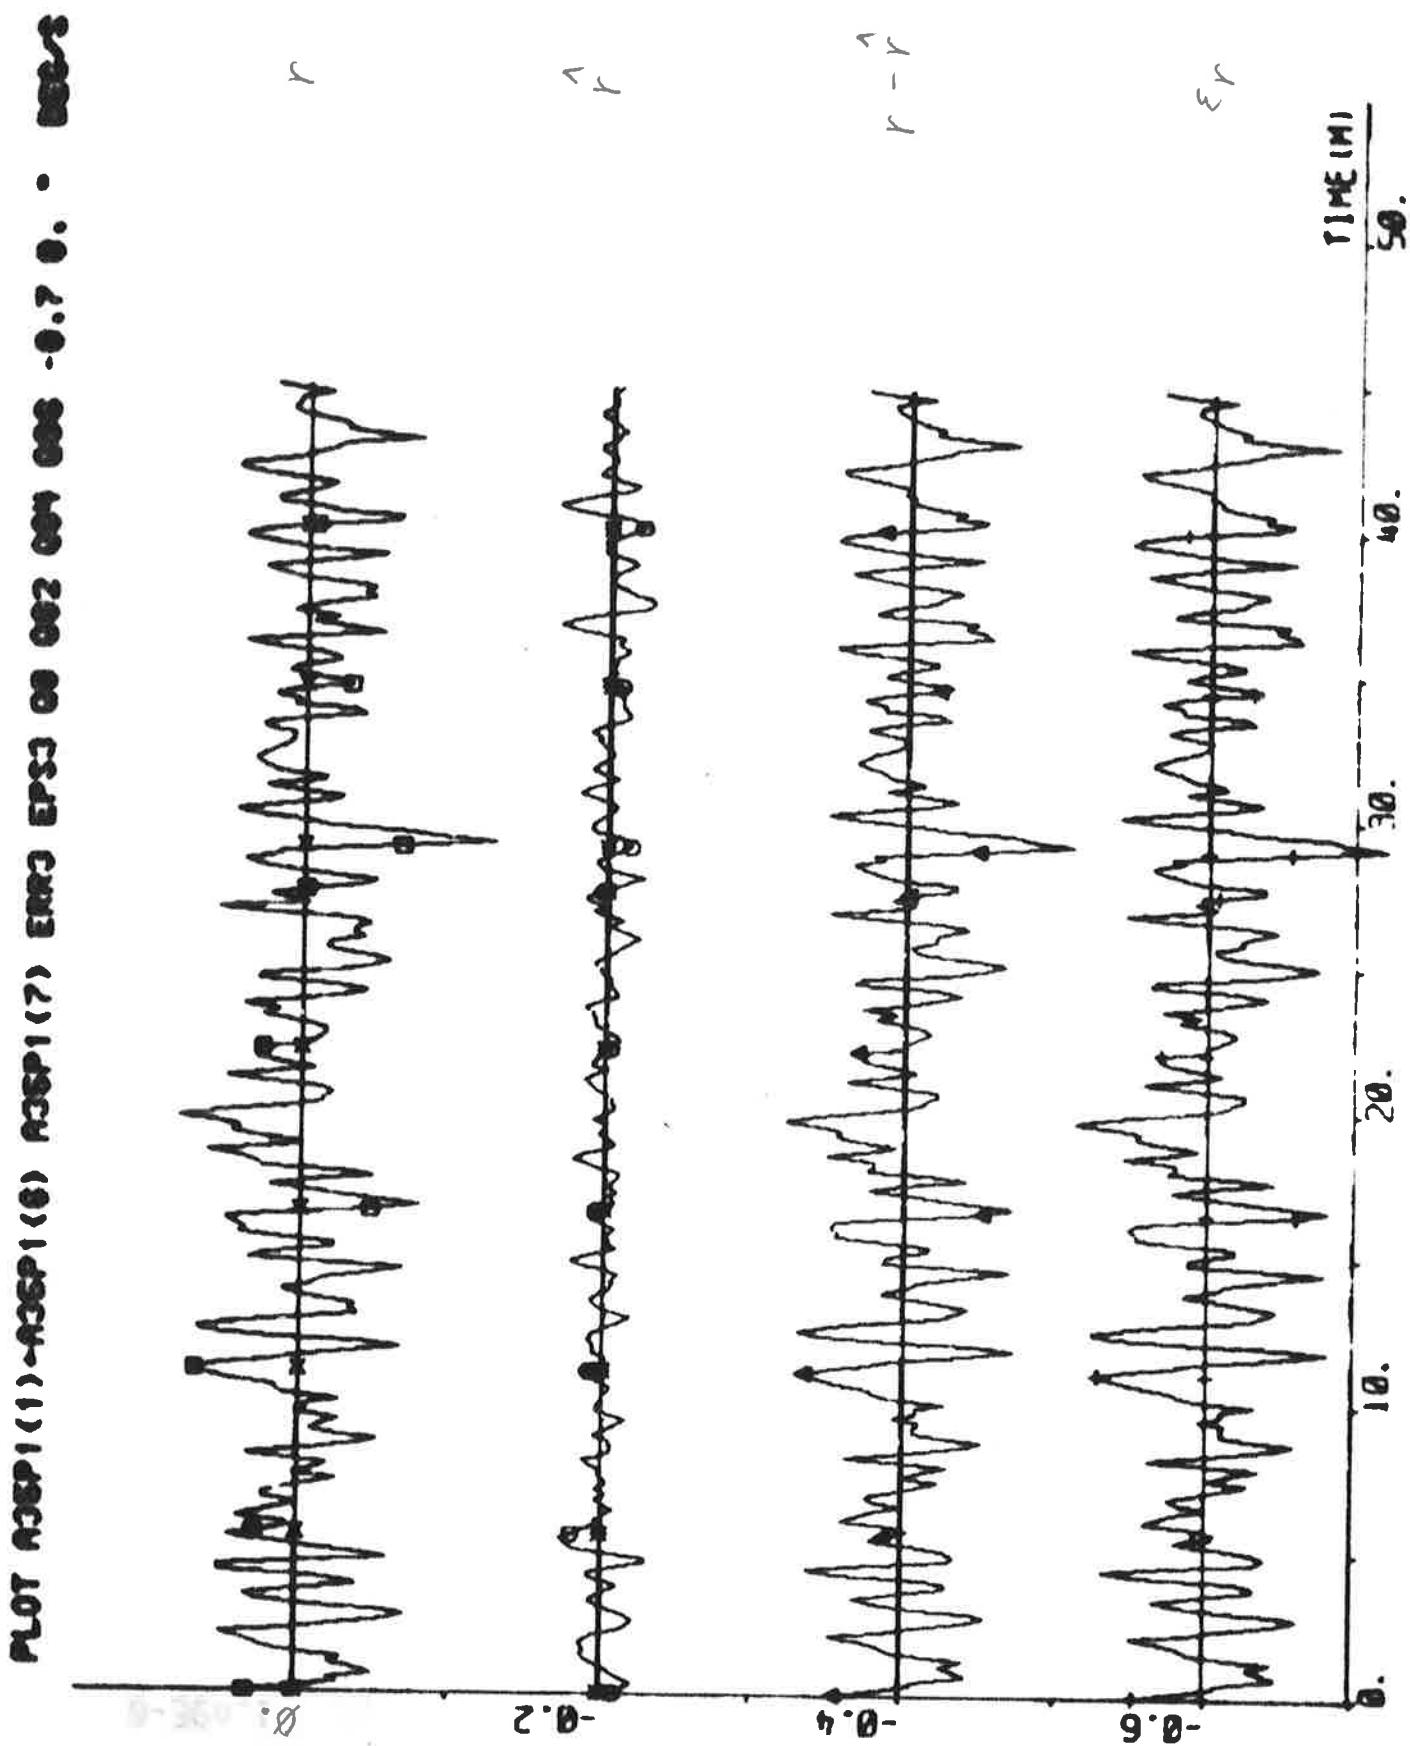

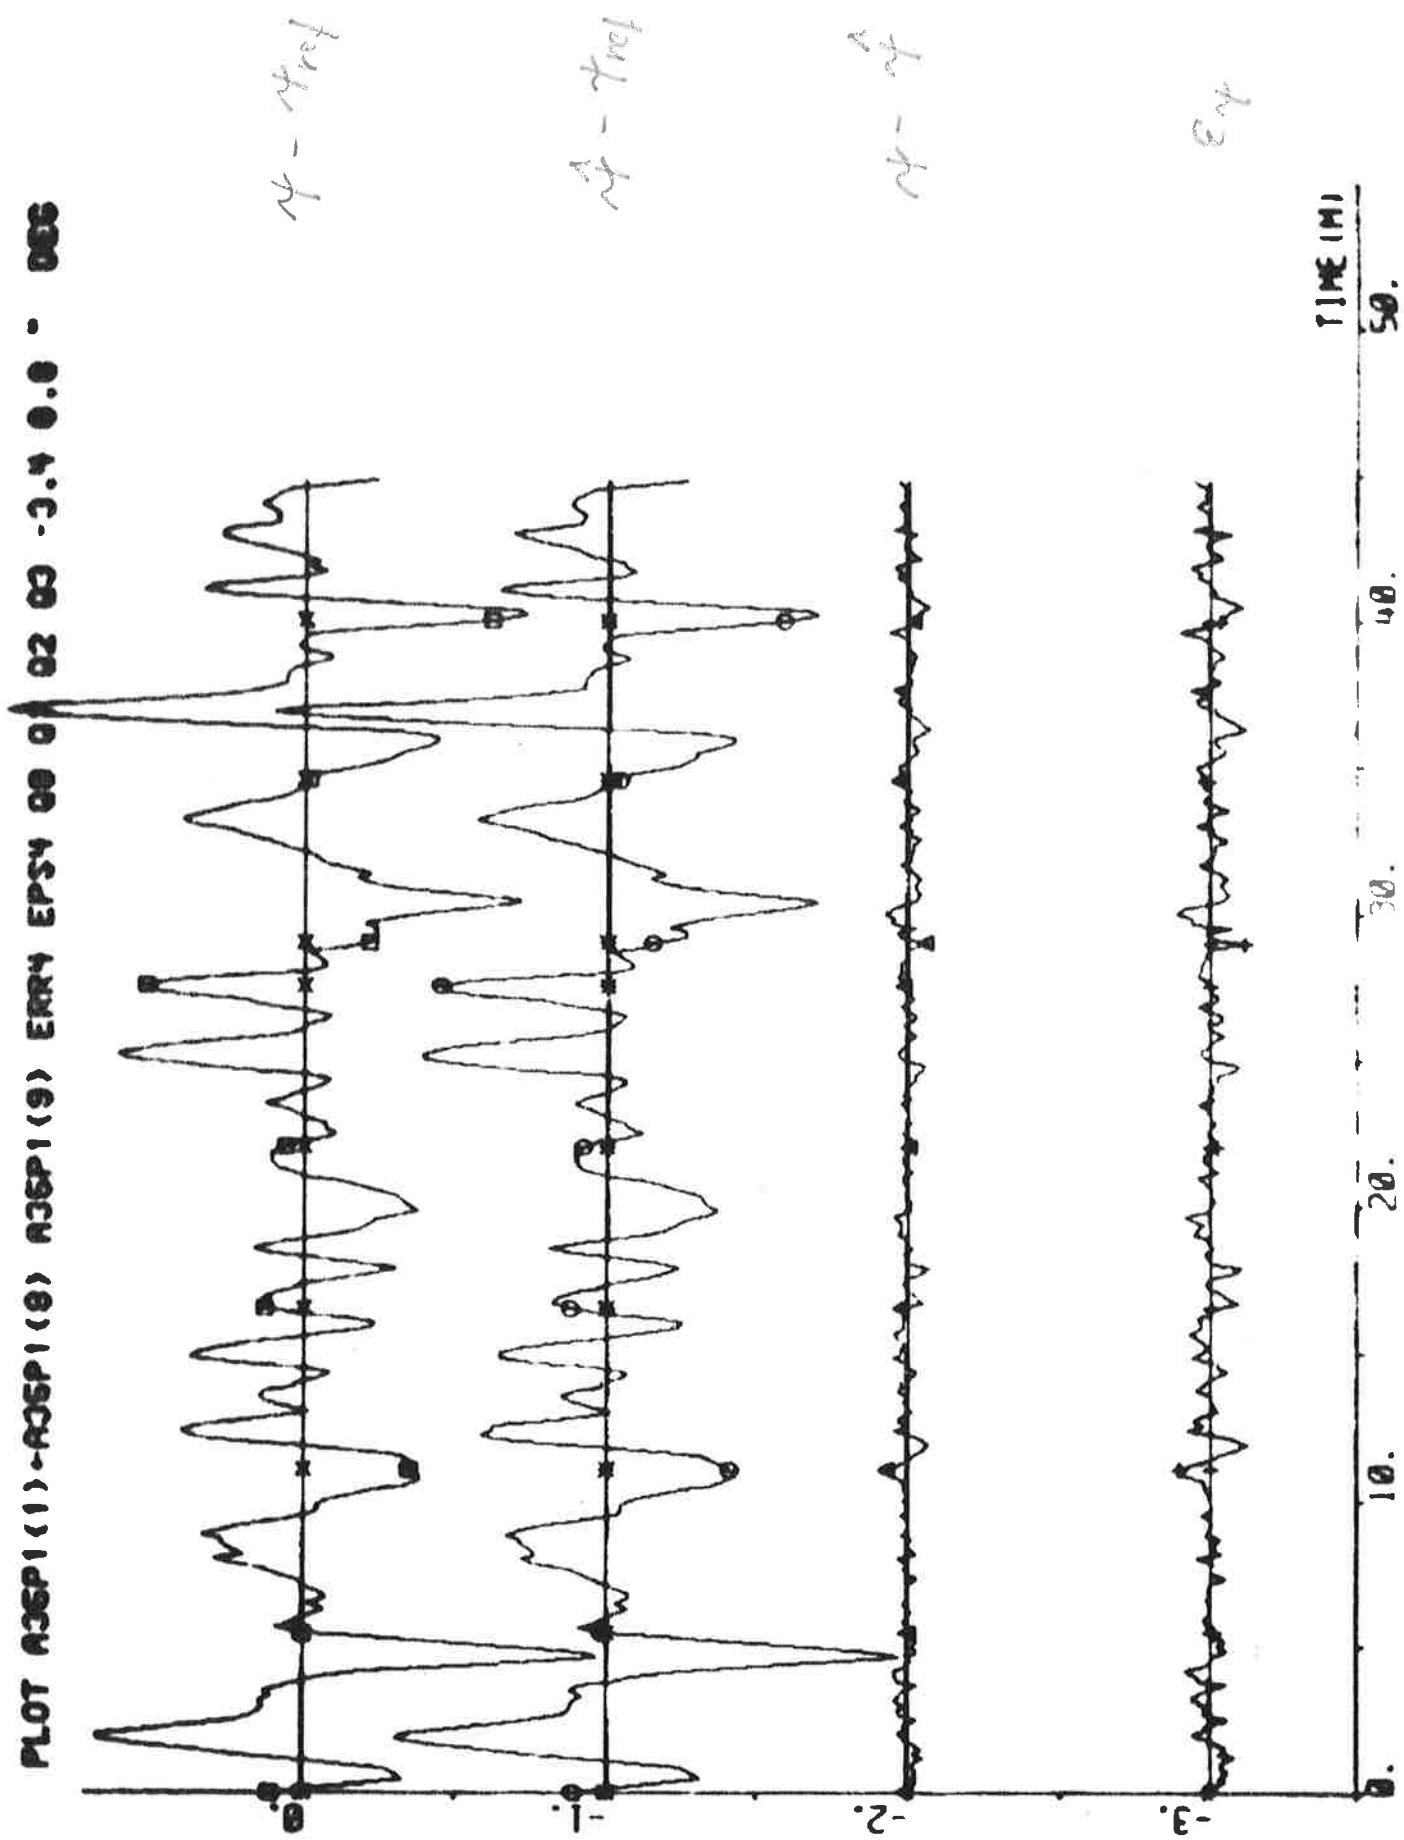

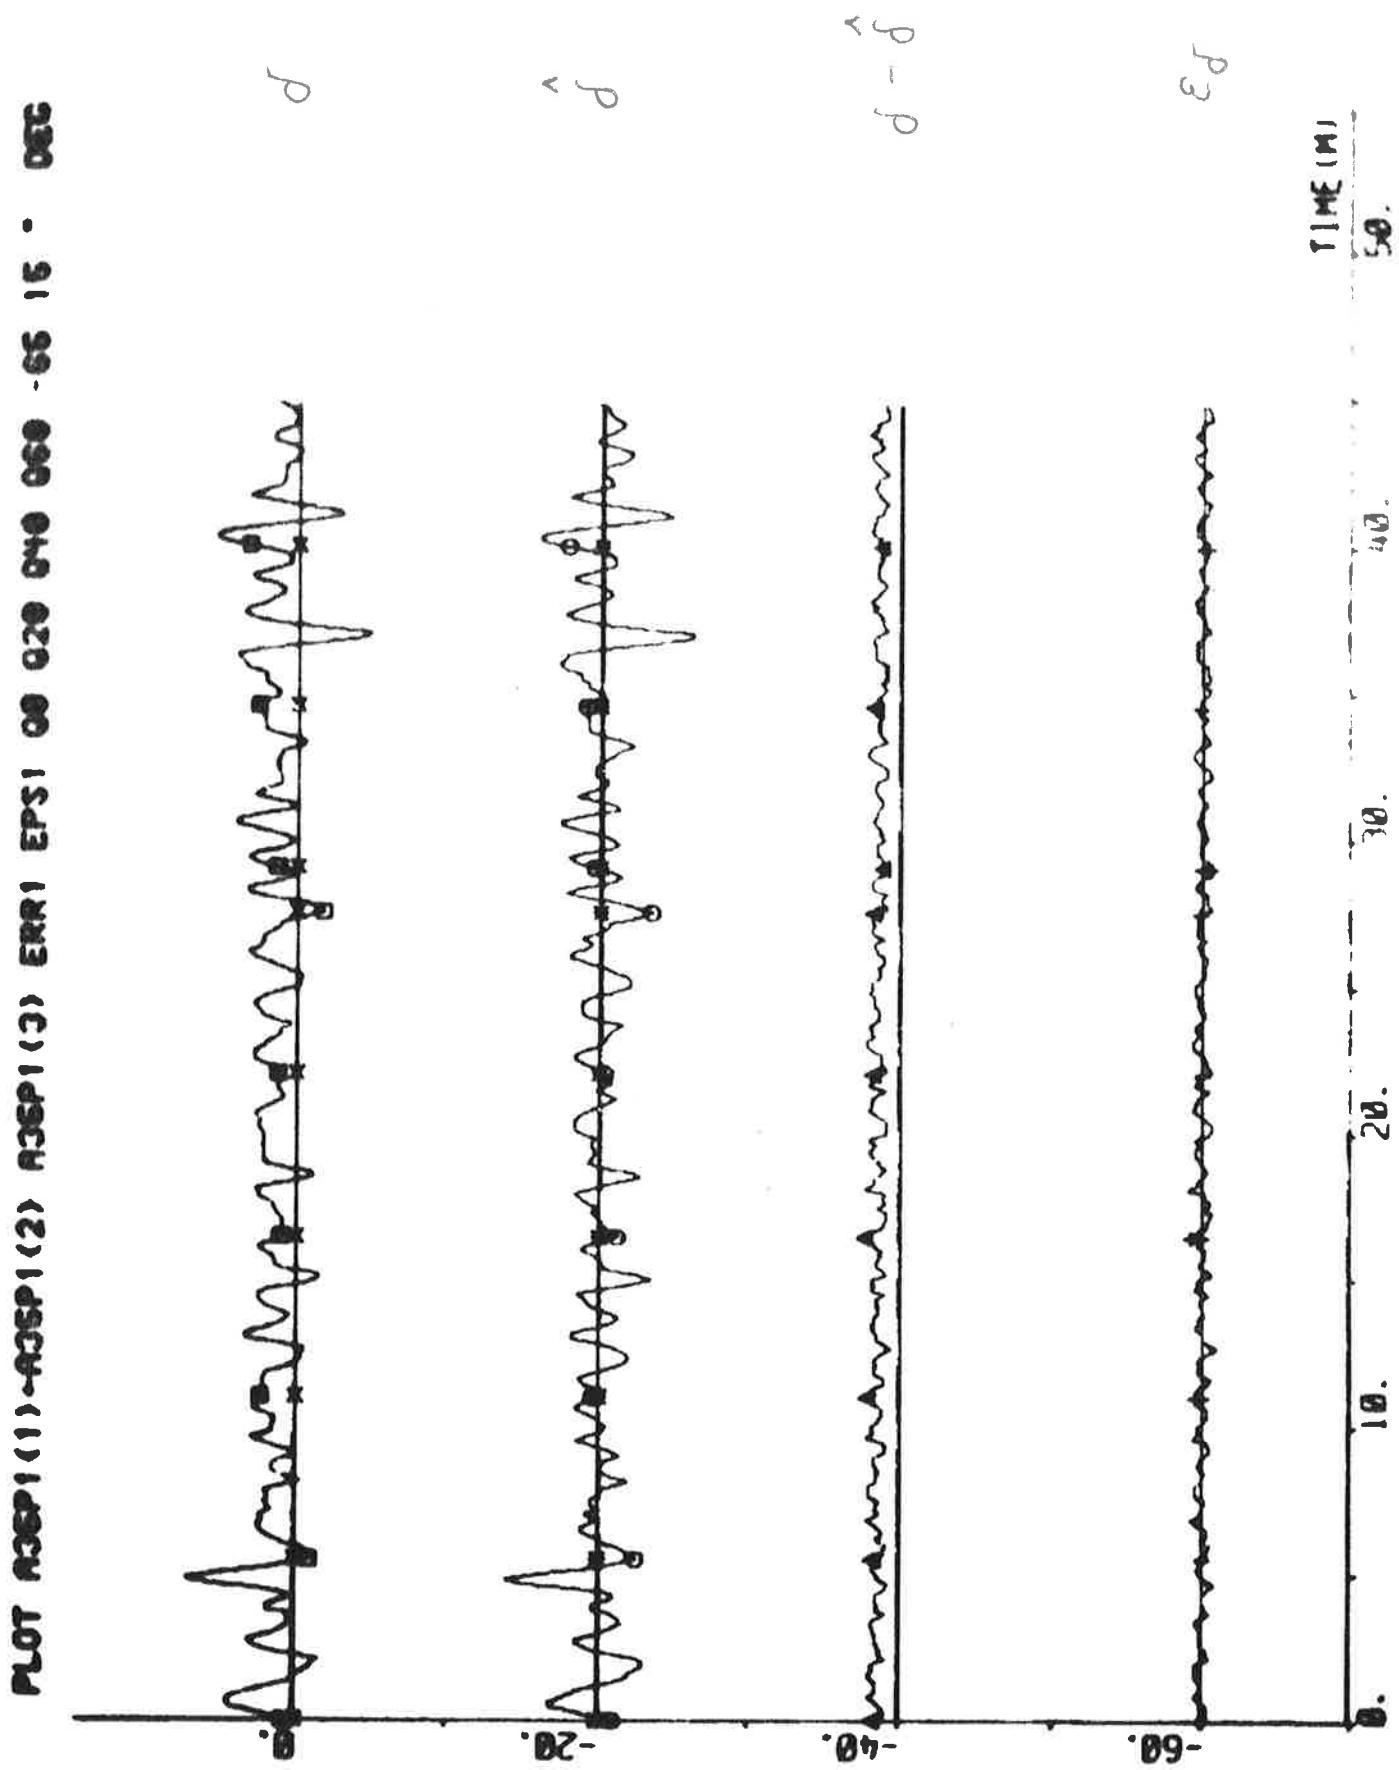

PLOT NO. 59 (1) - 3522(3), 3522(4), 3522(5), 3522(6), 3522(7), 3522(8), 3522(9), 3522(10)

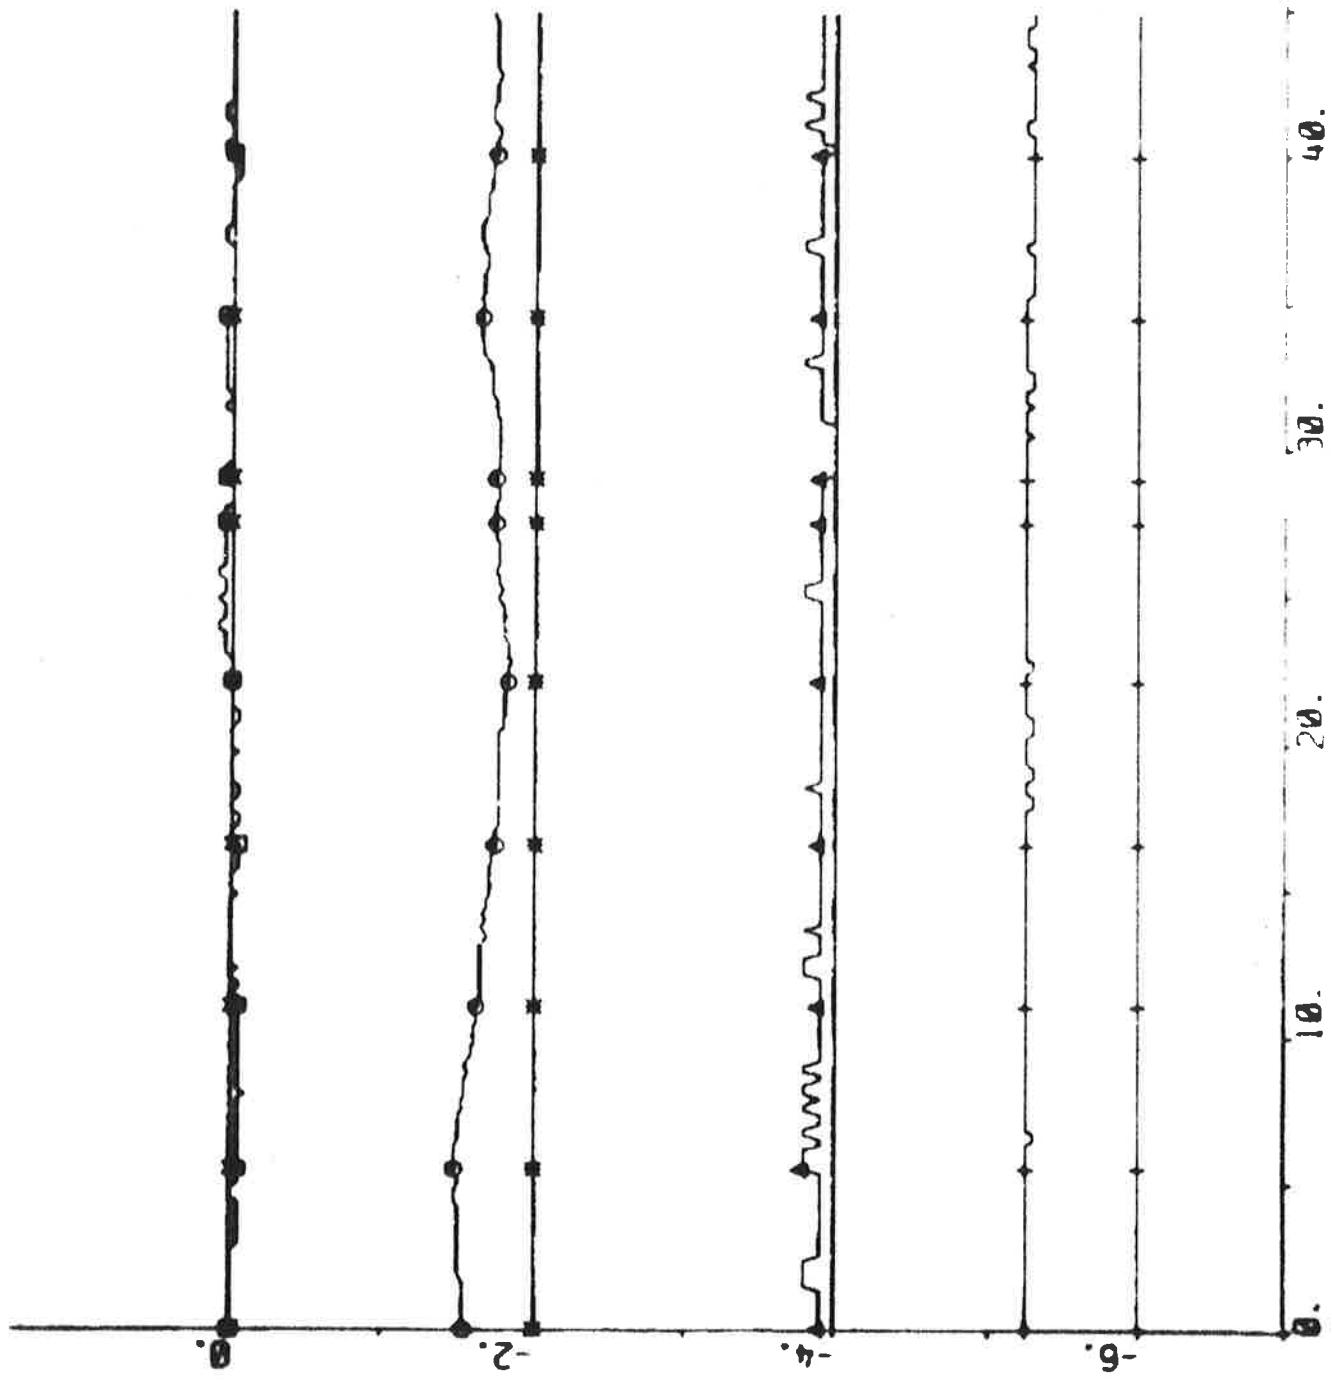

40.

30.

20.

10.

TIME (H)
59.

424

EXPERIMENT A36

| | | | |
|------------------|-------------------|-----------------|------------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 15.54 | Aft draught | 12.9 m |
| Duration | 47 min | Wind direction | SE (1; see App. A) |
| Position | S 18°40' E 05°23' | Wind velocity | 11 m/s (strong breeze) |
| ψ _{ref} | 143 deg | Wave height | High sea from SE |

An incorrect measurement of the yaw rate r was obtained after about 36 min. This measurement was skipped by the Kalman filter.

Self-tuning regulator using estimates from the Kalman filter

Tuning time before the experiment started: > 120 min

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -11.12 \\ 12.52 \\ 1.53 \\ -3.00 \\ 0.59 \\ 0.29 \\ 0.45 \\ 89.21 \end{bmatrix} \quad P = \begin{bmatrix} 6.28 \\ -10.88 & 36.77 \\ 5.02 & -38.68 & 57.22 \\ 0.02 & 12.66 & -23.82 & 11.65 \\ 0.00 & -0.88 & 1.50 & -0.63 & 0.05 \\ 0.01 & -0.28 & 0.37 & -0.09 & 0.01 & 0.02 \\ -0.89 & 1.07 & 0.71 & -0.92 & 0.01 & 0.00 & 1.14 \\ 17.26 & -39.46 & 31.87 & -10.04 & 0.56 & 0.04 & 17.74 & 774.32 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.07$$


$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.08 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics (mean value and standard deviation)


| | | | |
|----------------------|--------------------|----------------|--------------------|
| δ _c | -0.05 ± 1.08 deg | P _s | 14.7 ± 0.1 MW |
| δ | 1.48 ± 1.01 deg | ε _v | -0.01 ± 0.02 knots |
| ψ - ψ _{ref} | -0.058 ± 0.206 deg | ε _r | 0.09 ± 1.49 deg/s |
| n | 68.5 ± 0.3 rpm | ε _ψ | 0.01 ± 0.05 deg |
| u | 12.1 ± 0.1 knots | ε _δ | 0.0 ± 0.4 deg |
| V ₁ | 0.143 | | |

426


PLOT REC#1 ((1))-REF1(0) IN MASS1((10)) MASS1((15)) 02-12-03 SEC

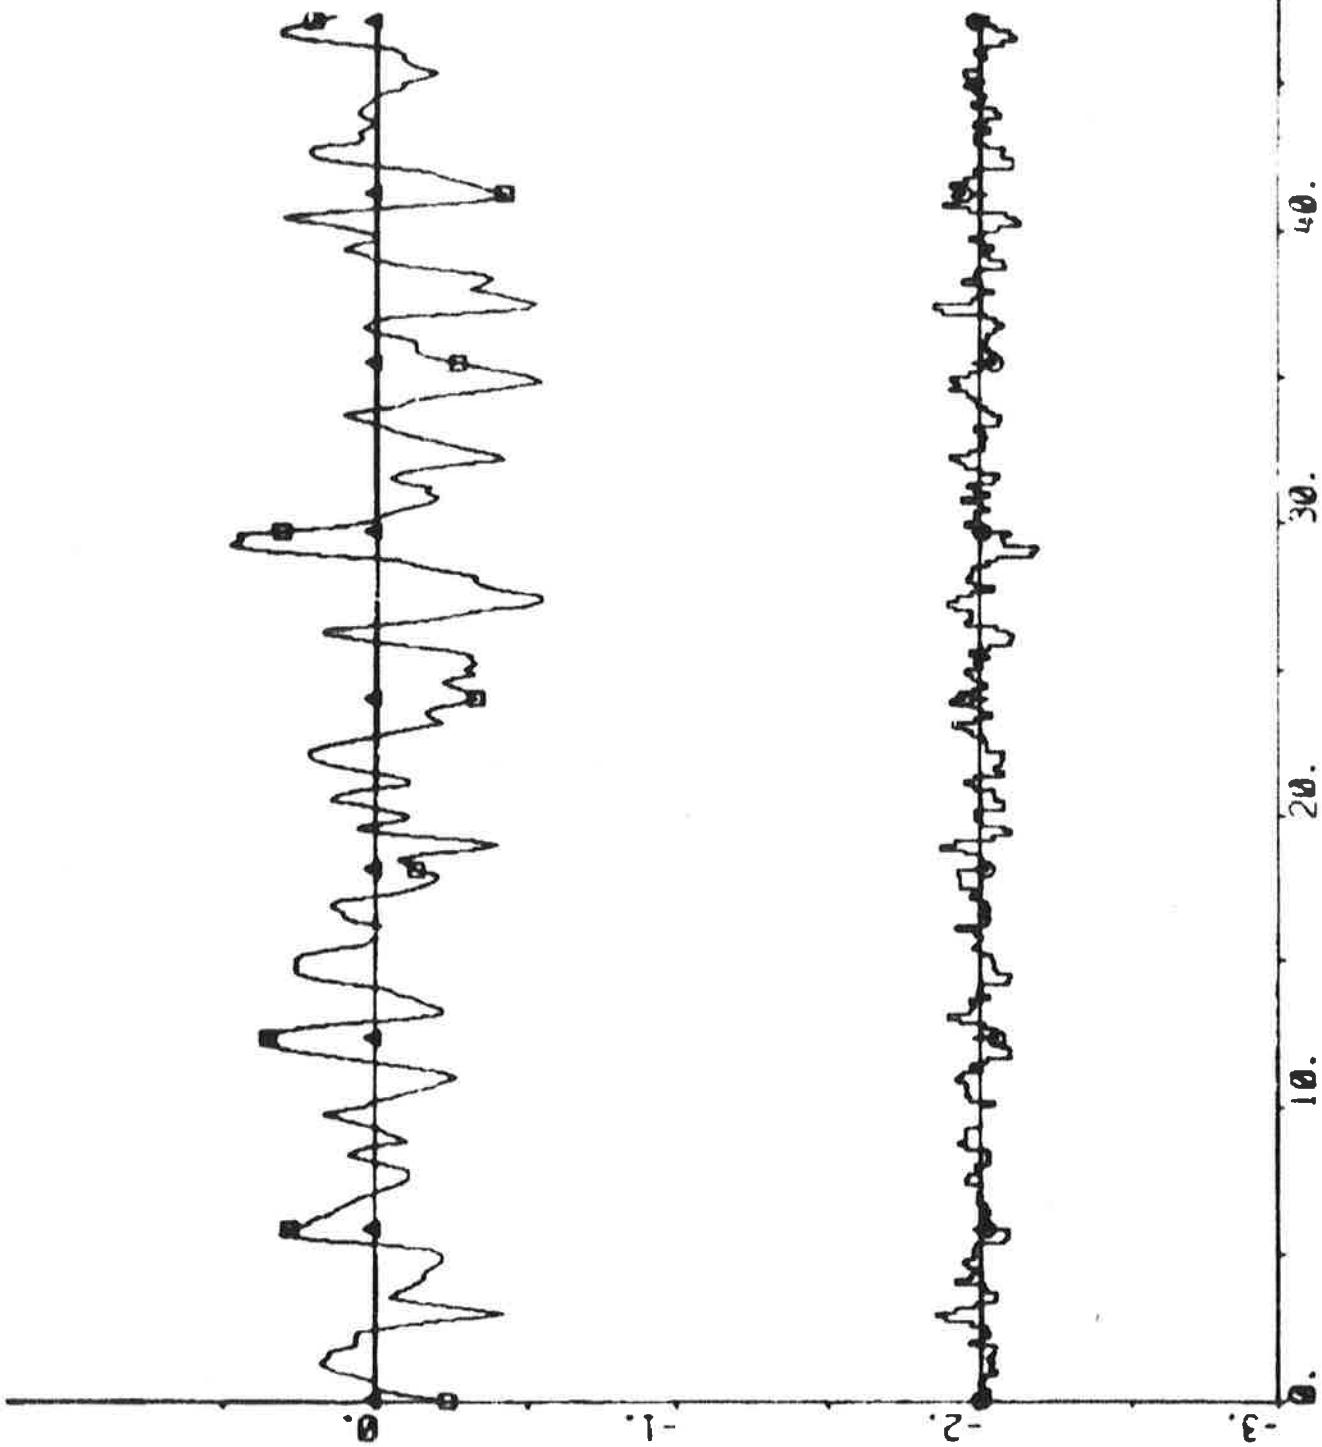 $\gamma - \gamma_{ref}$ 


PLOT NUMBER (1) - Decay (12) page (13) page (14)

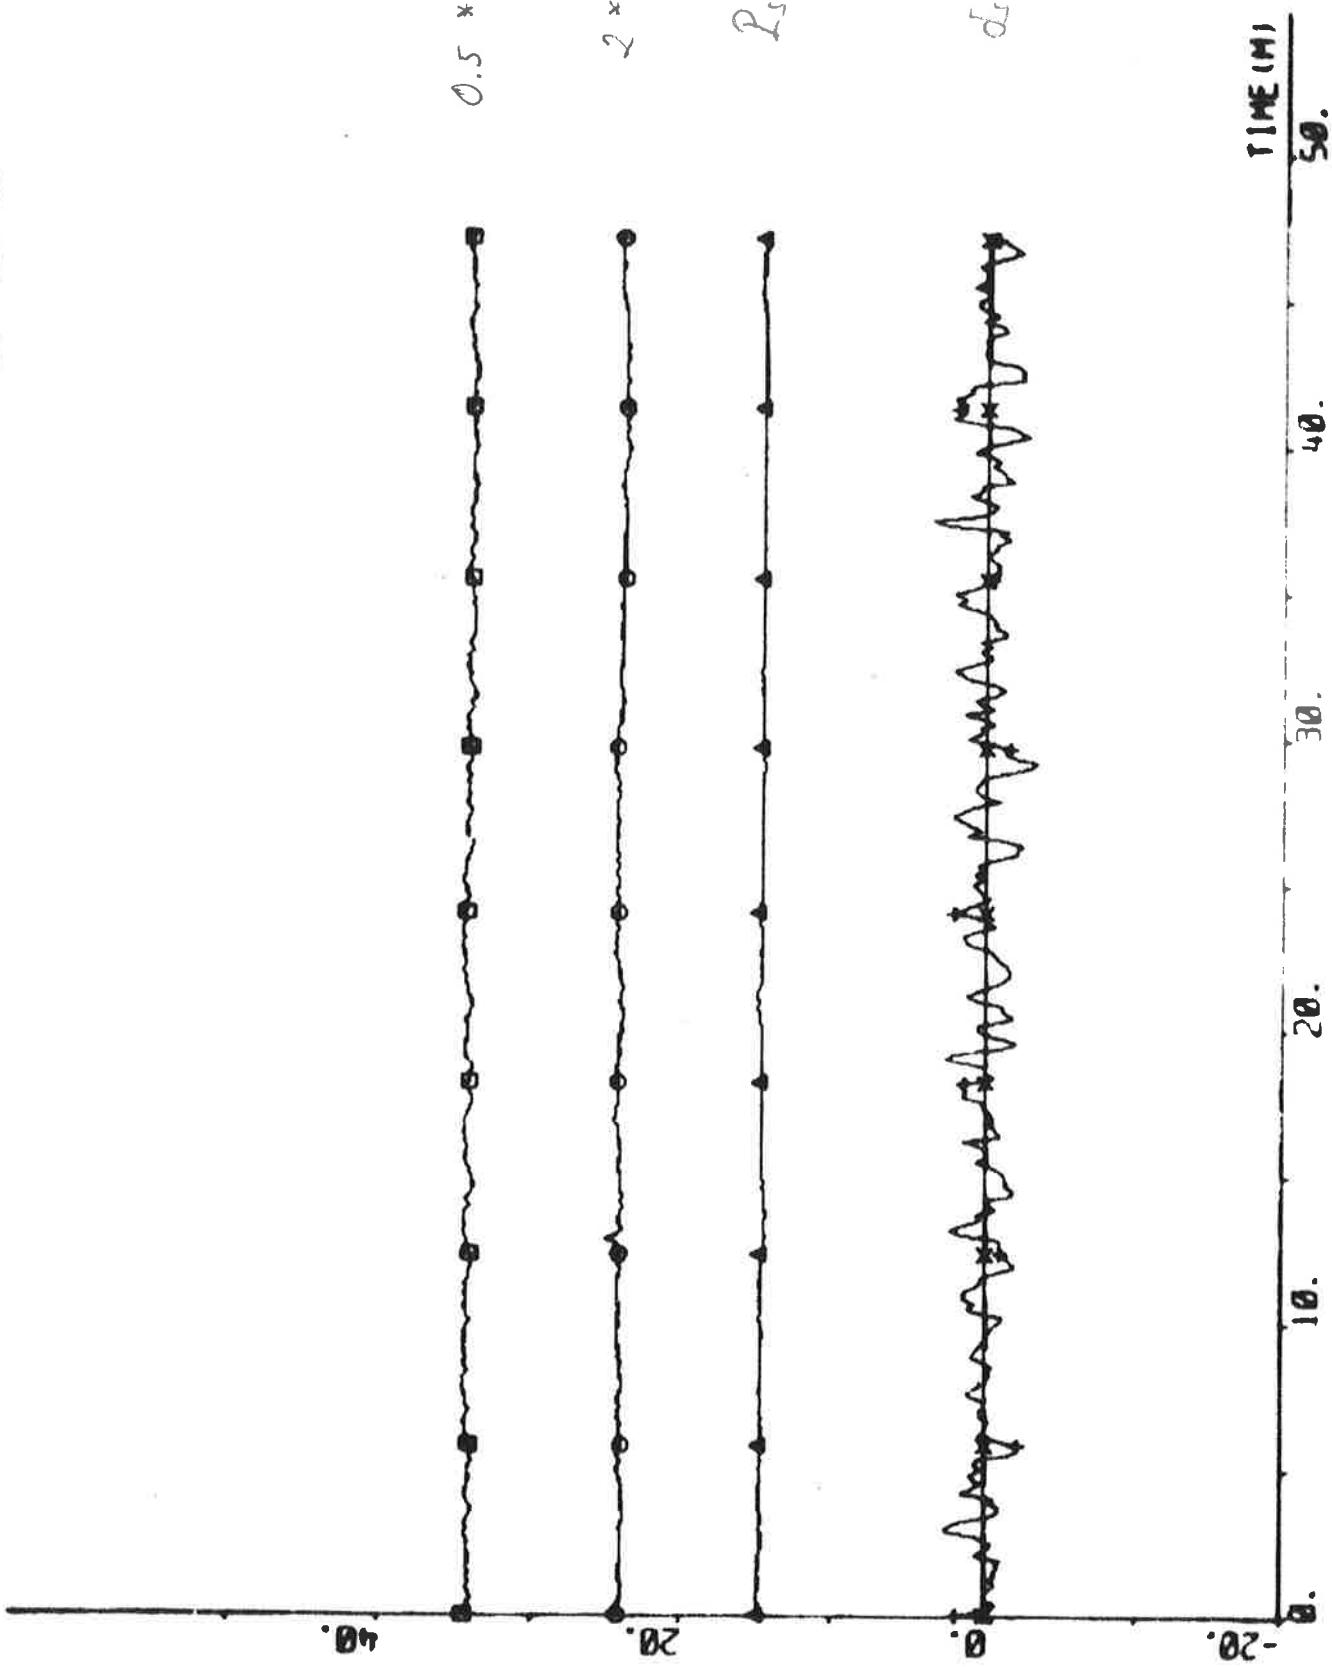



MOT M2P1(1)-M2P2(1) M2P2(2) ER2(2) ER2(3) - MOTS

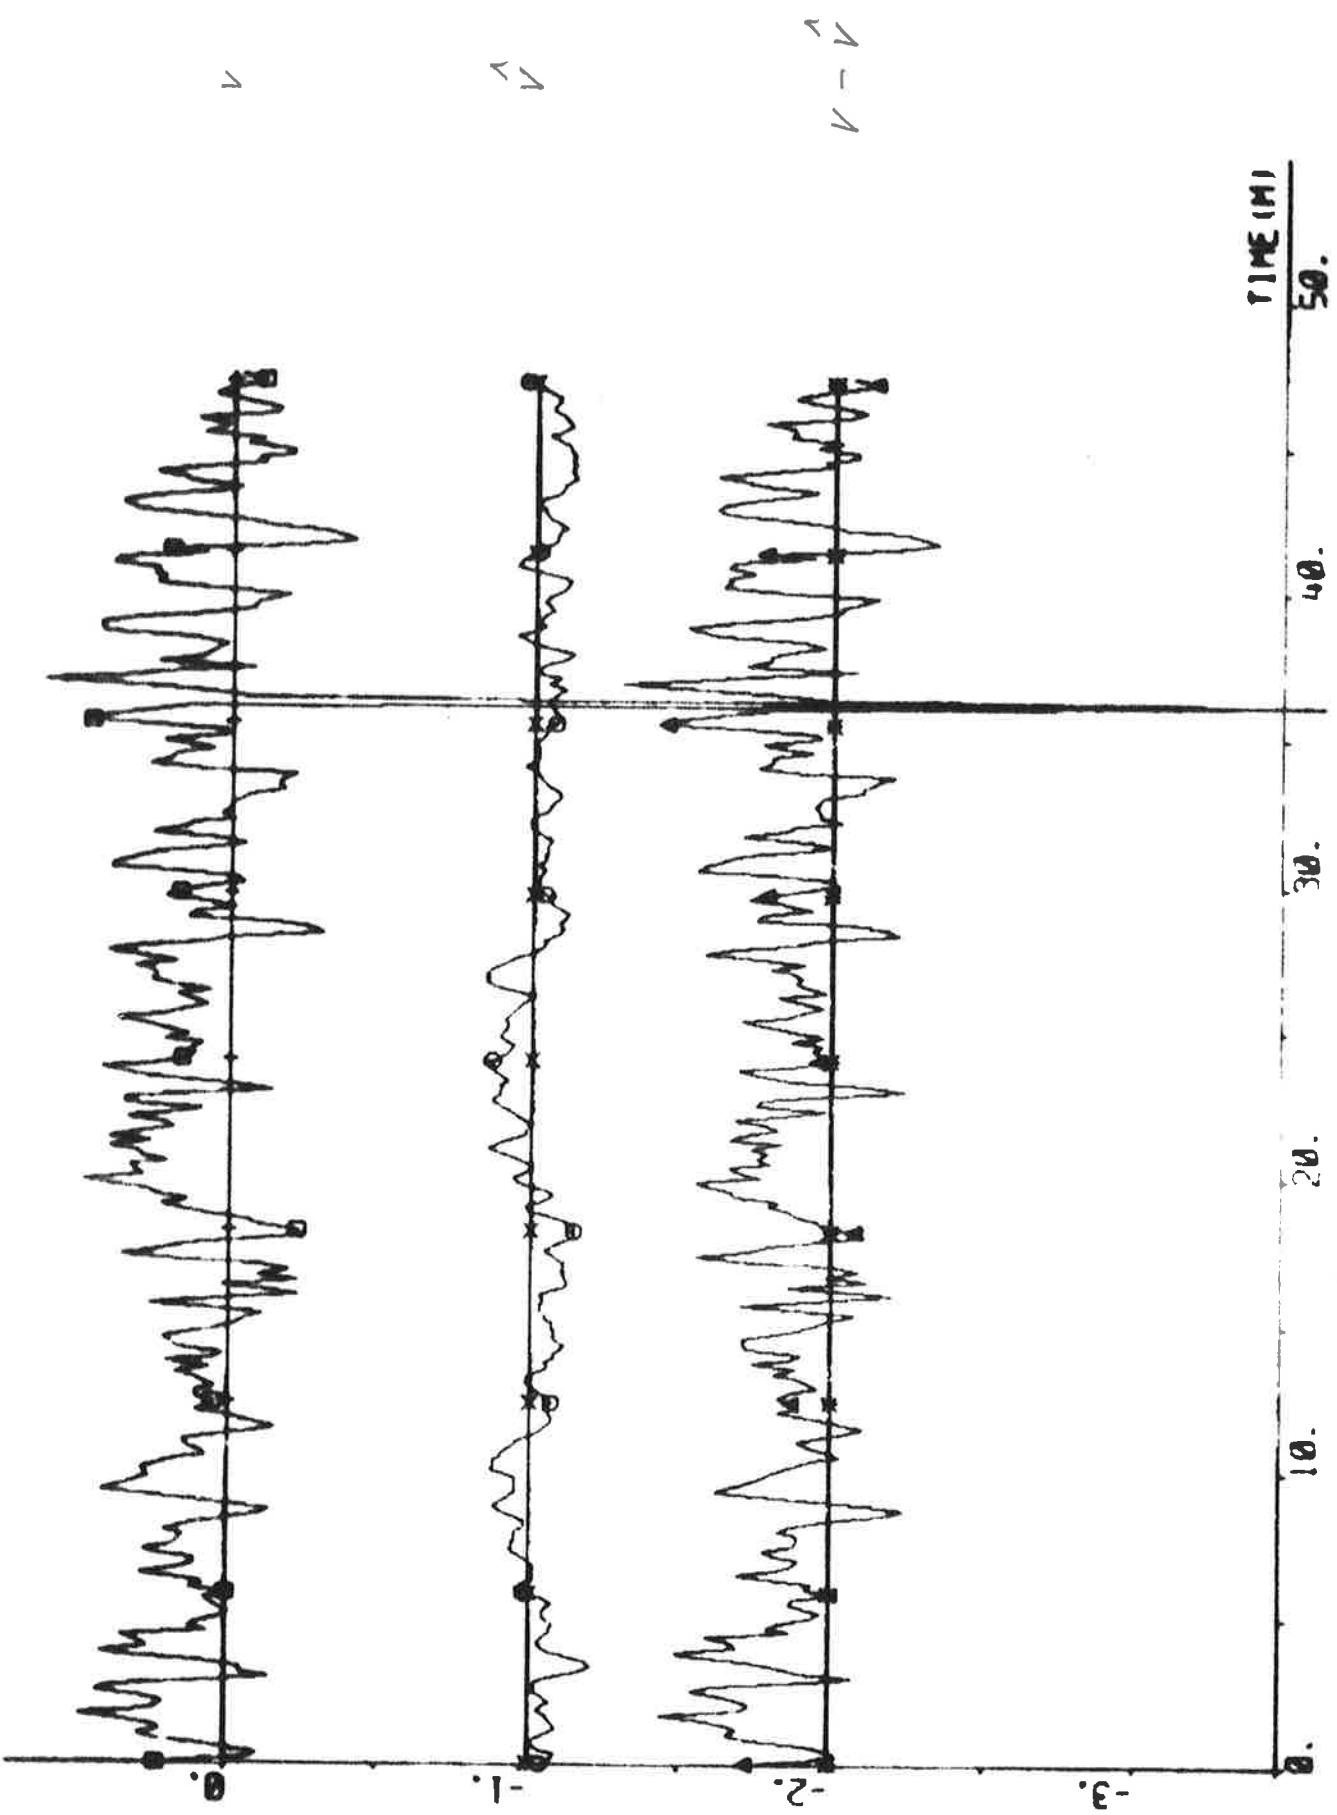


ROTADISC (1) -ADSP1(4) DSPE(1S) ER2203-3.140.0 - DOTS

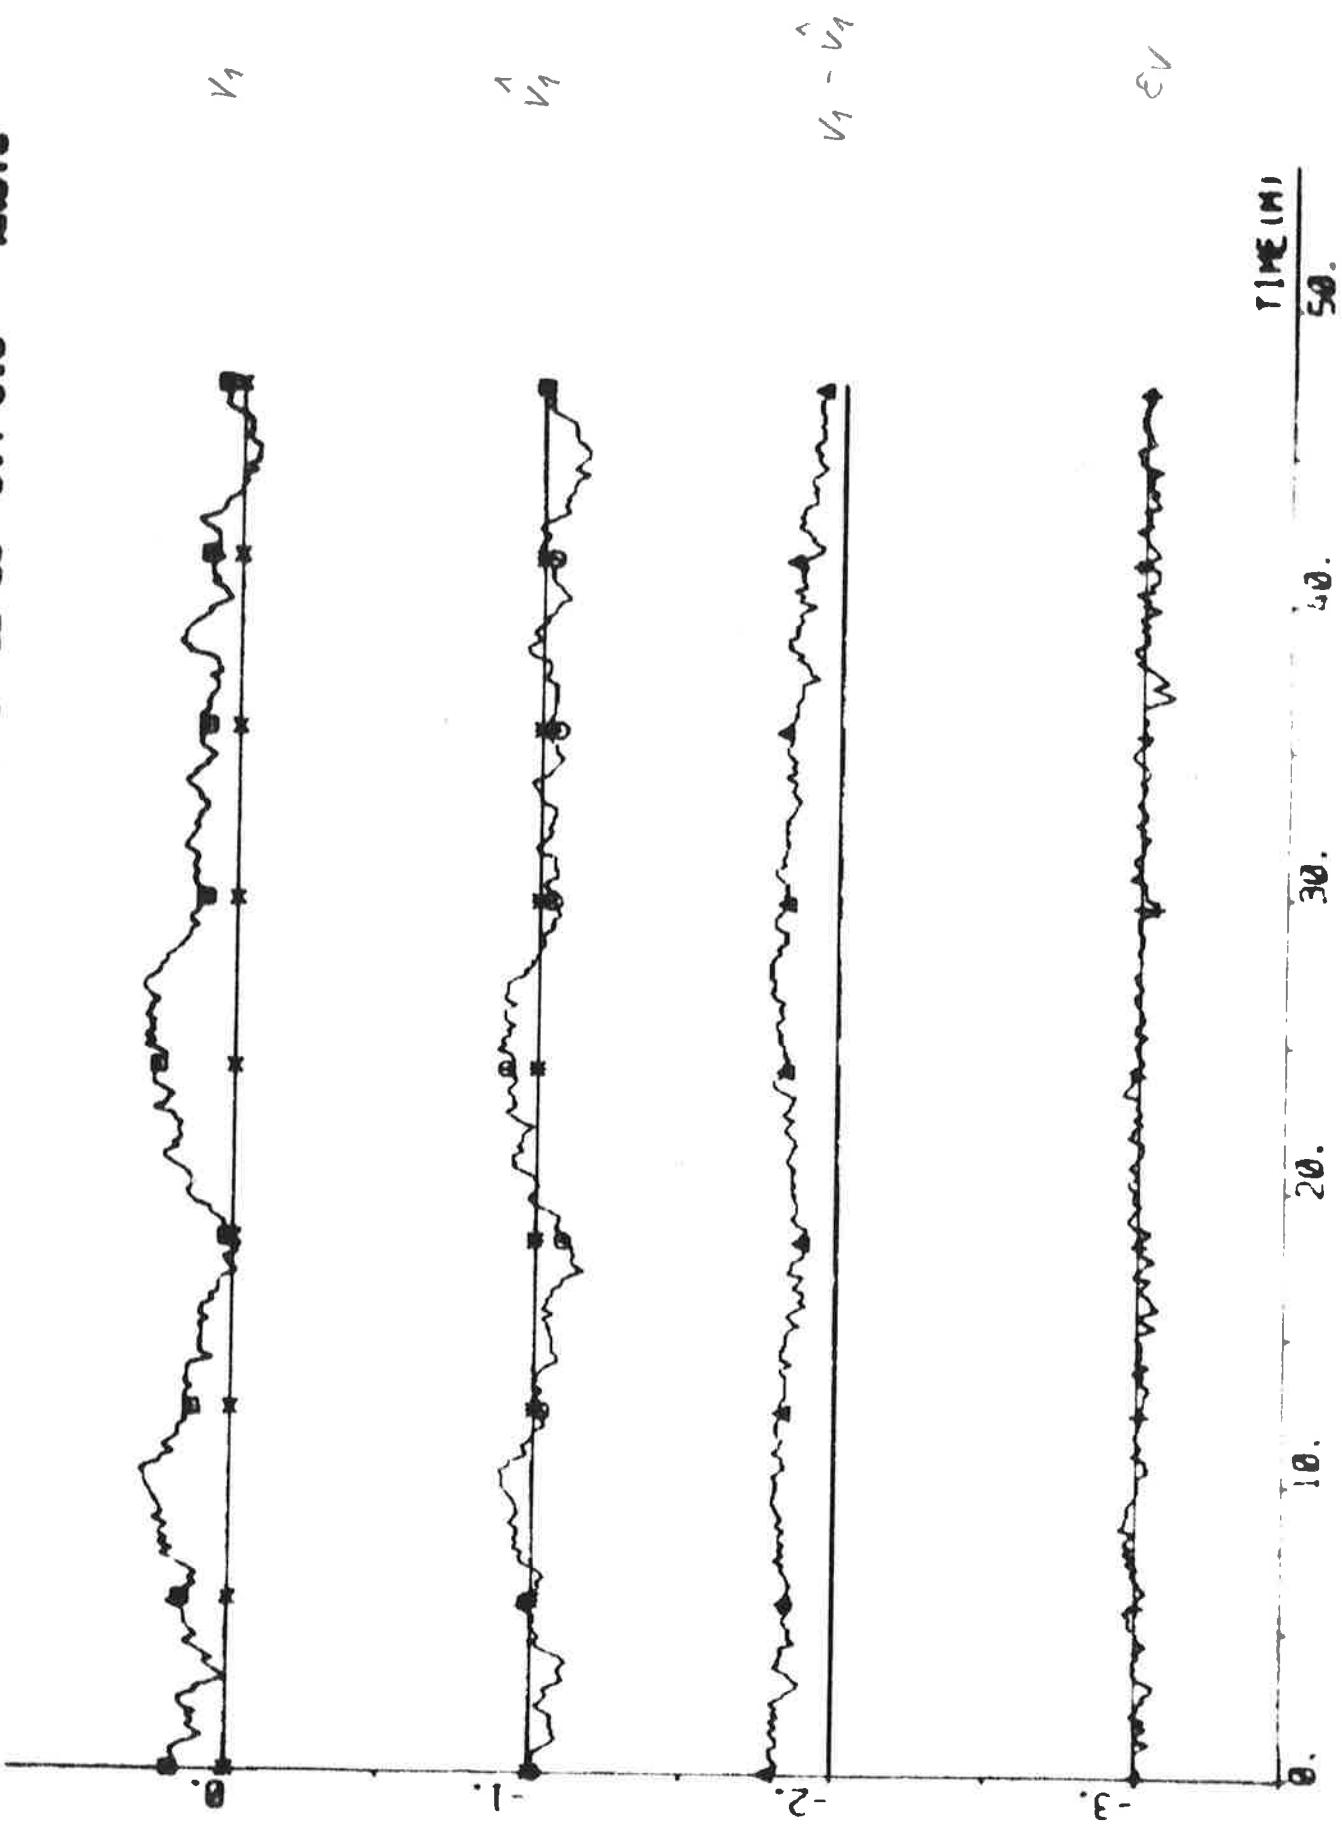

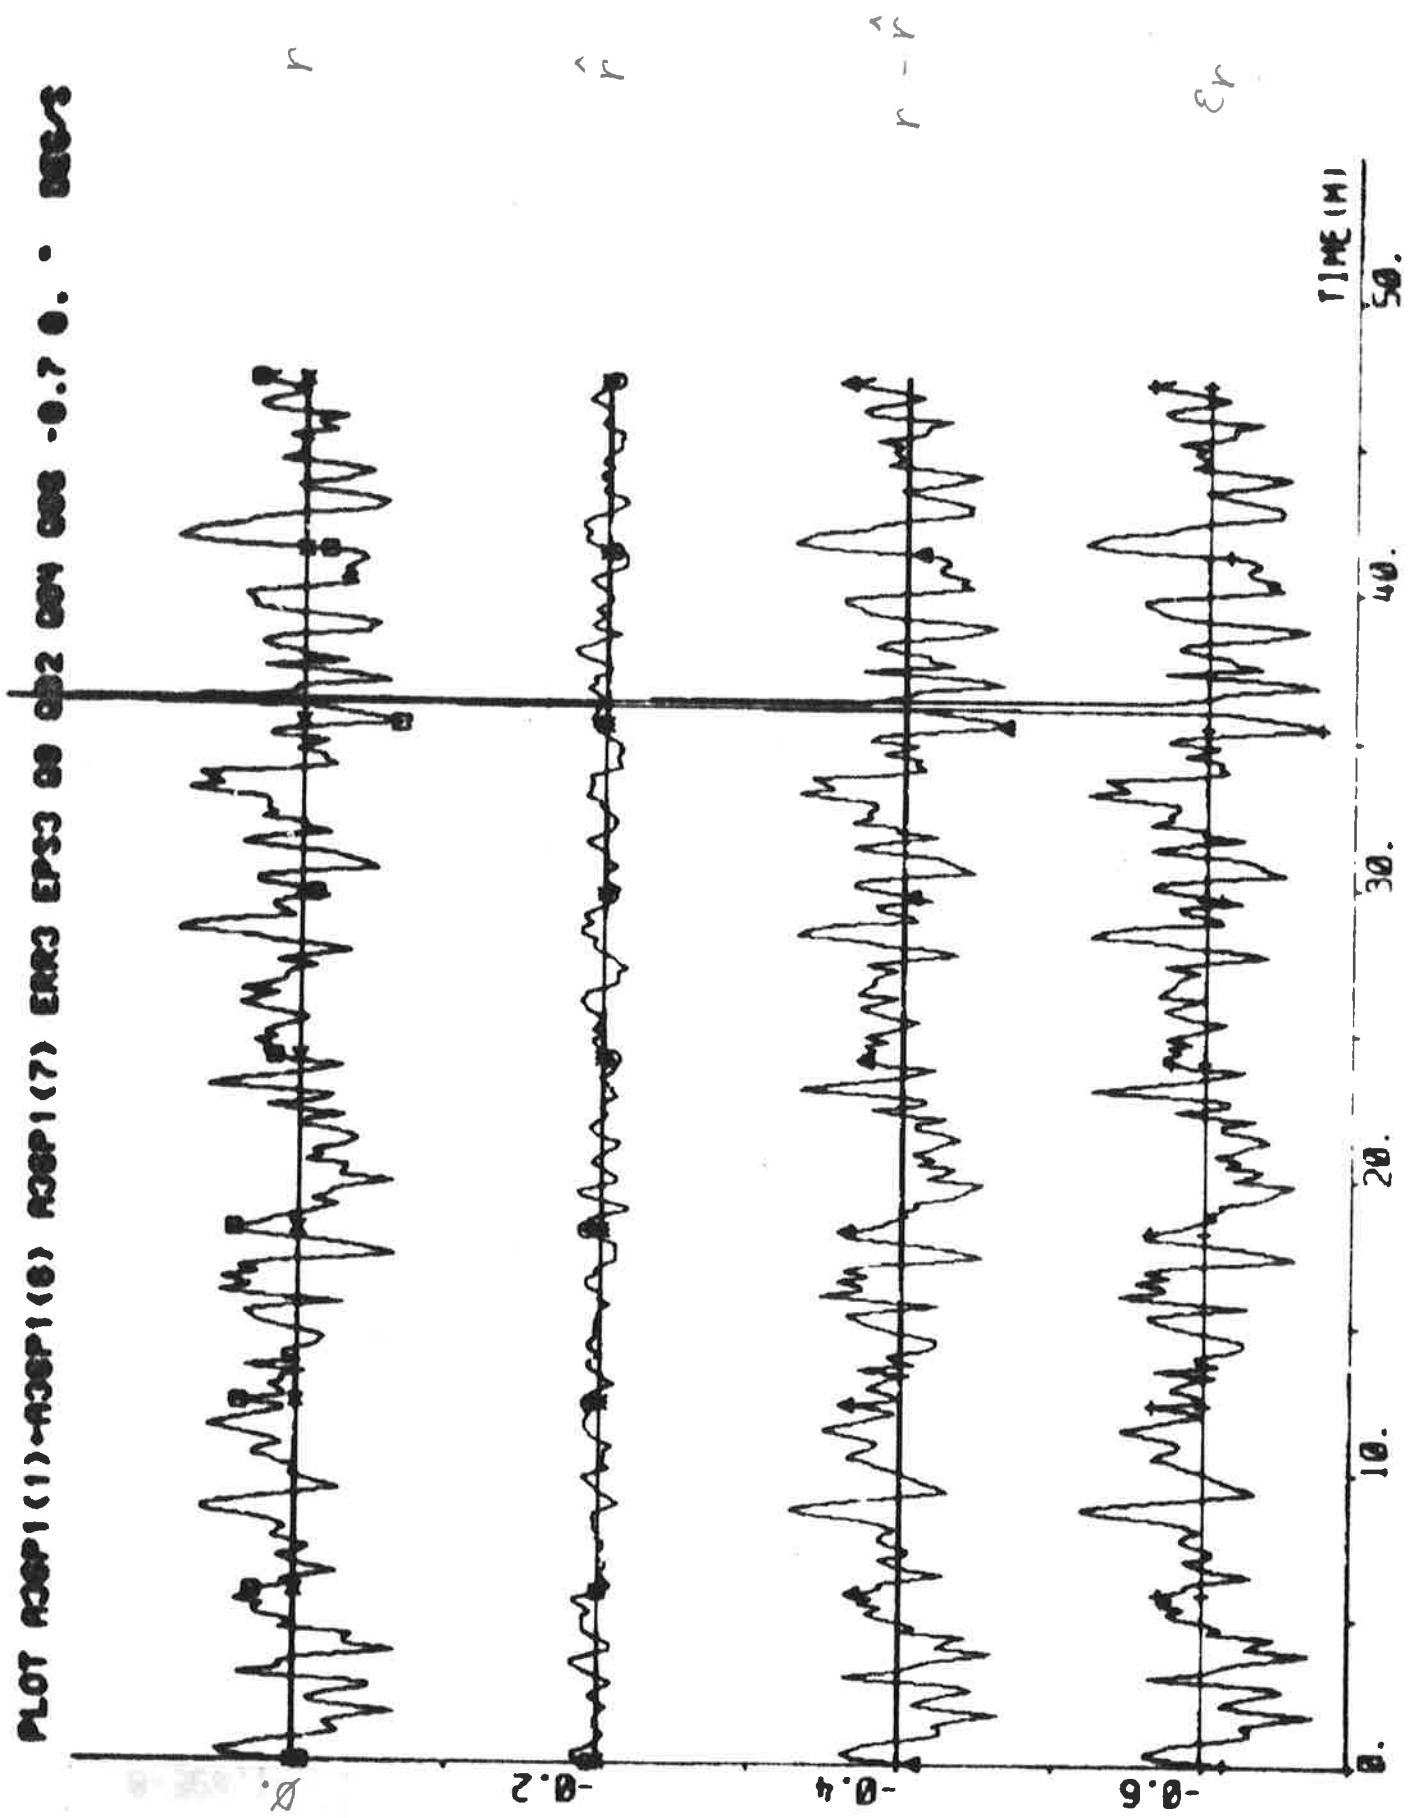


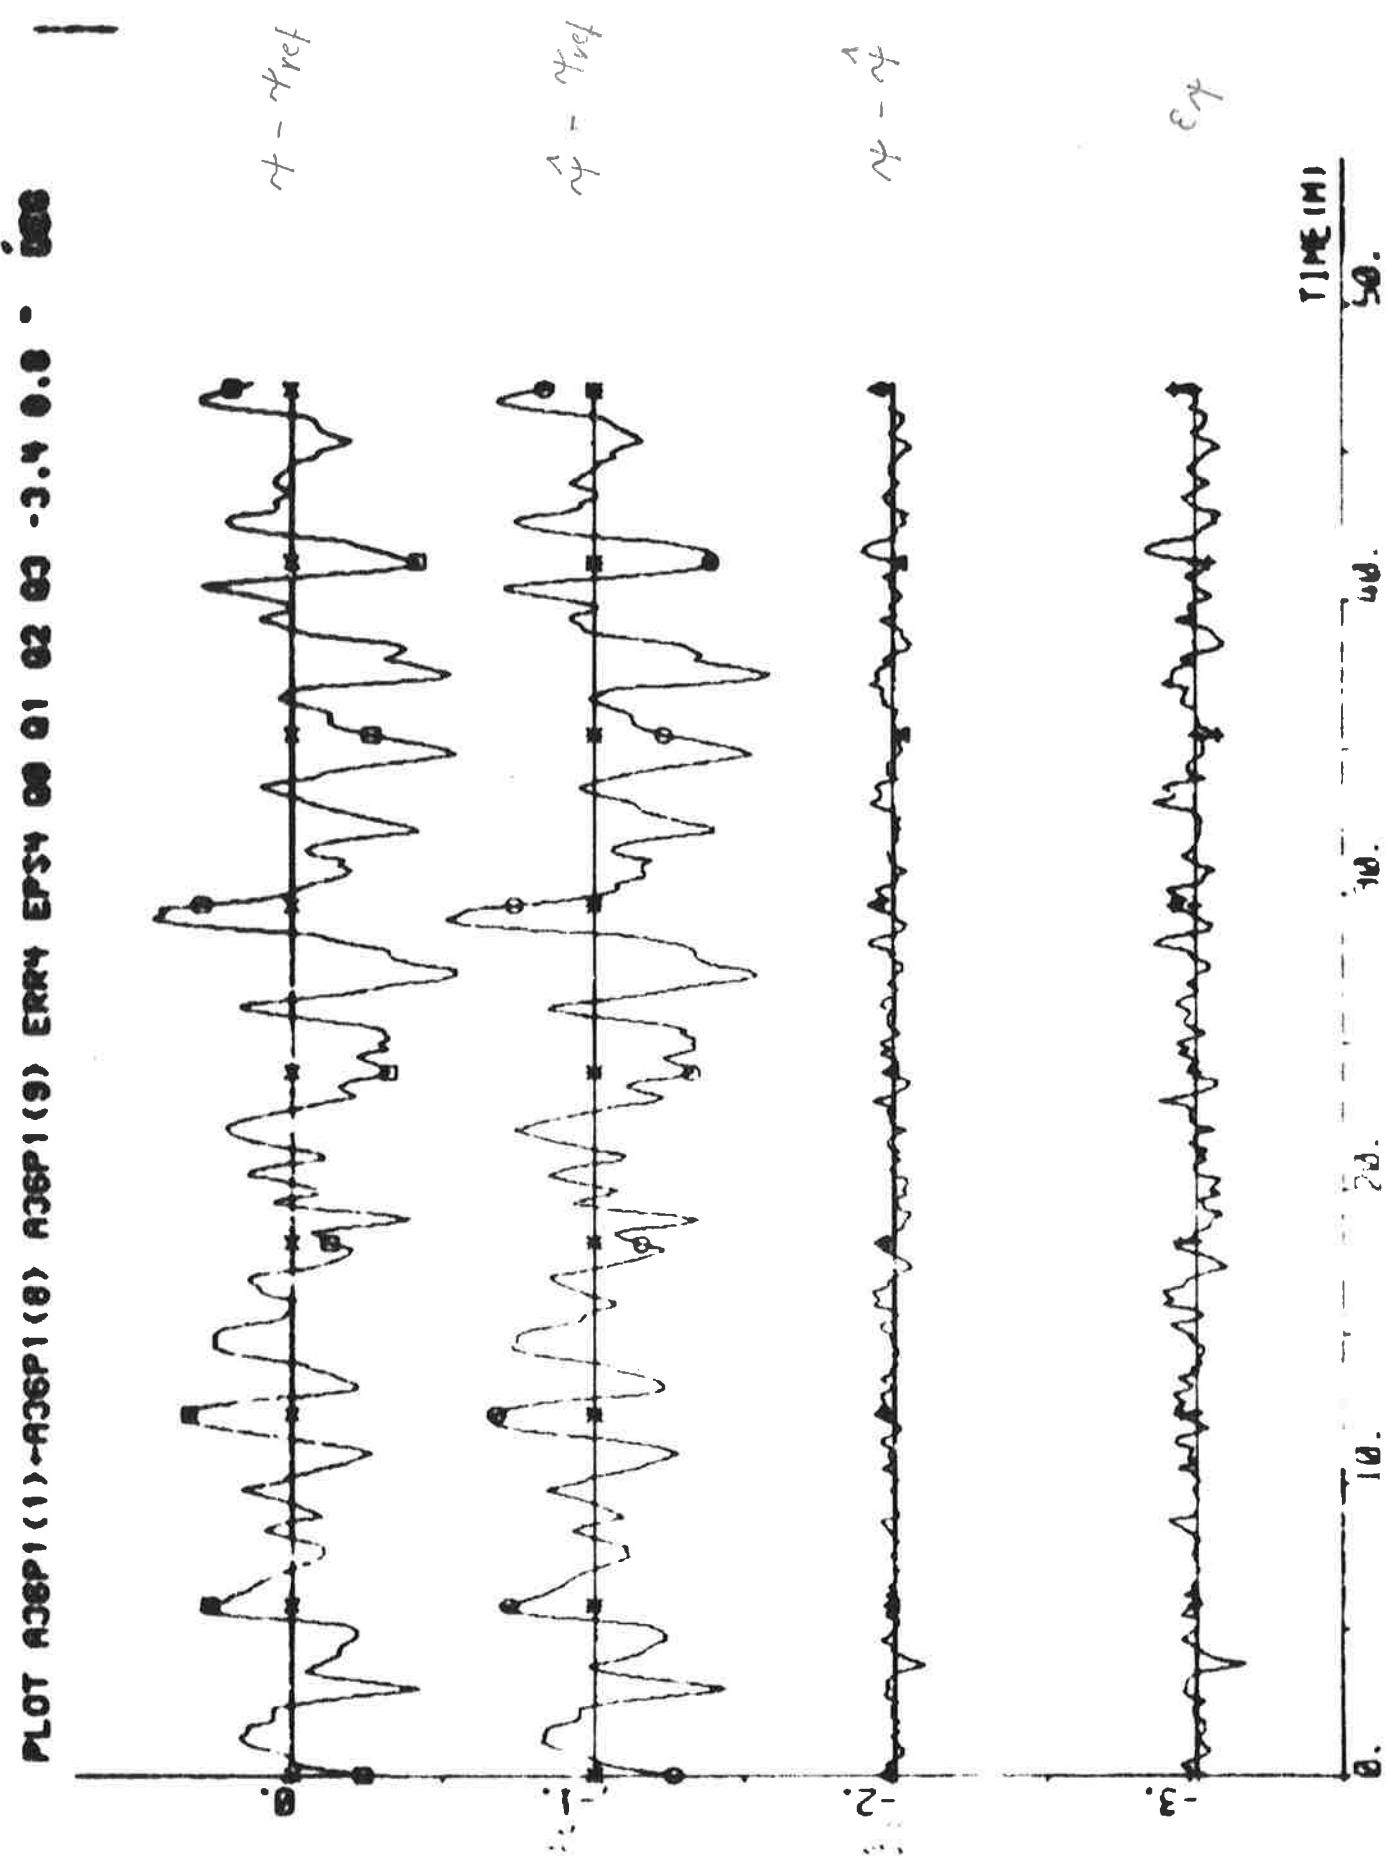


MOT ACPI 1(1) - ACPI(2) RECP 1(3) ER1 ERS 1 00 020 649 000 - 00 - 18 - 000

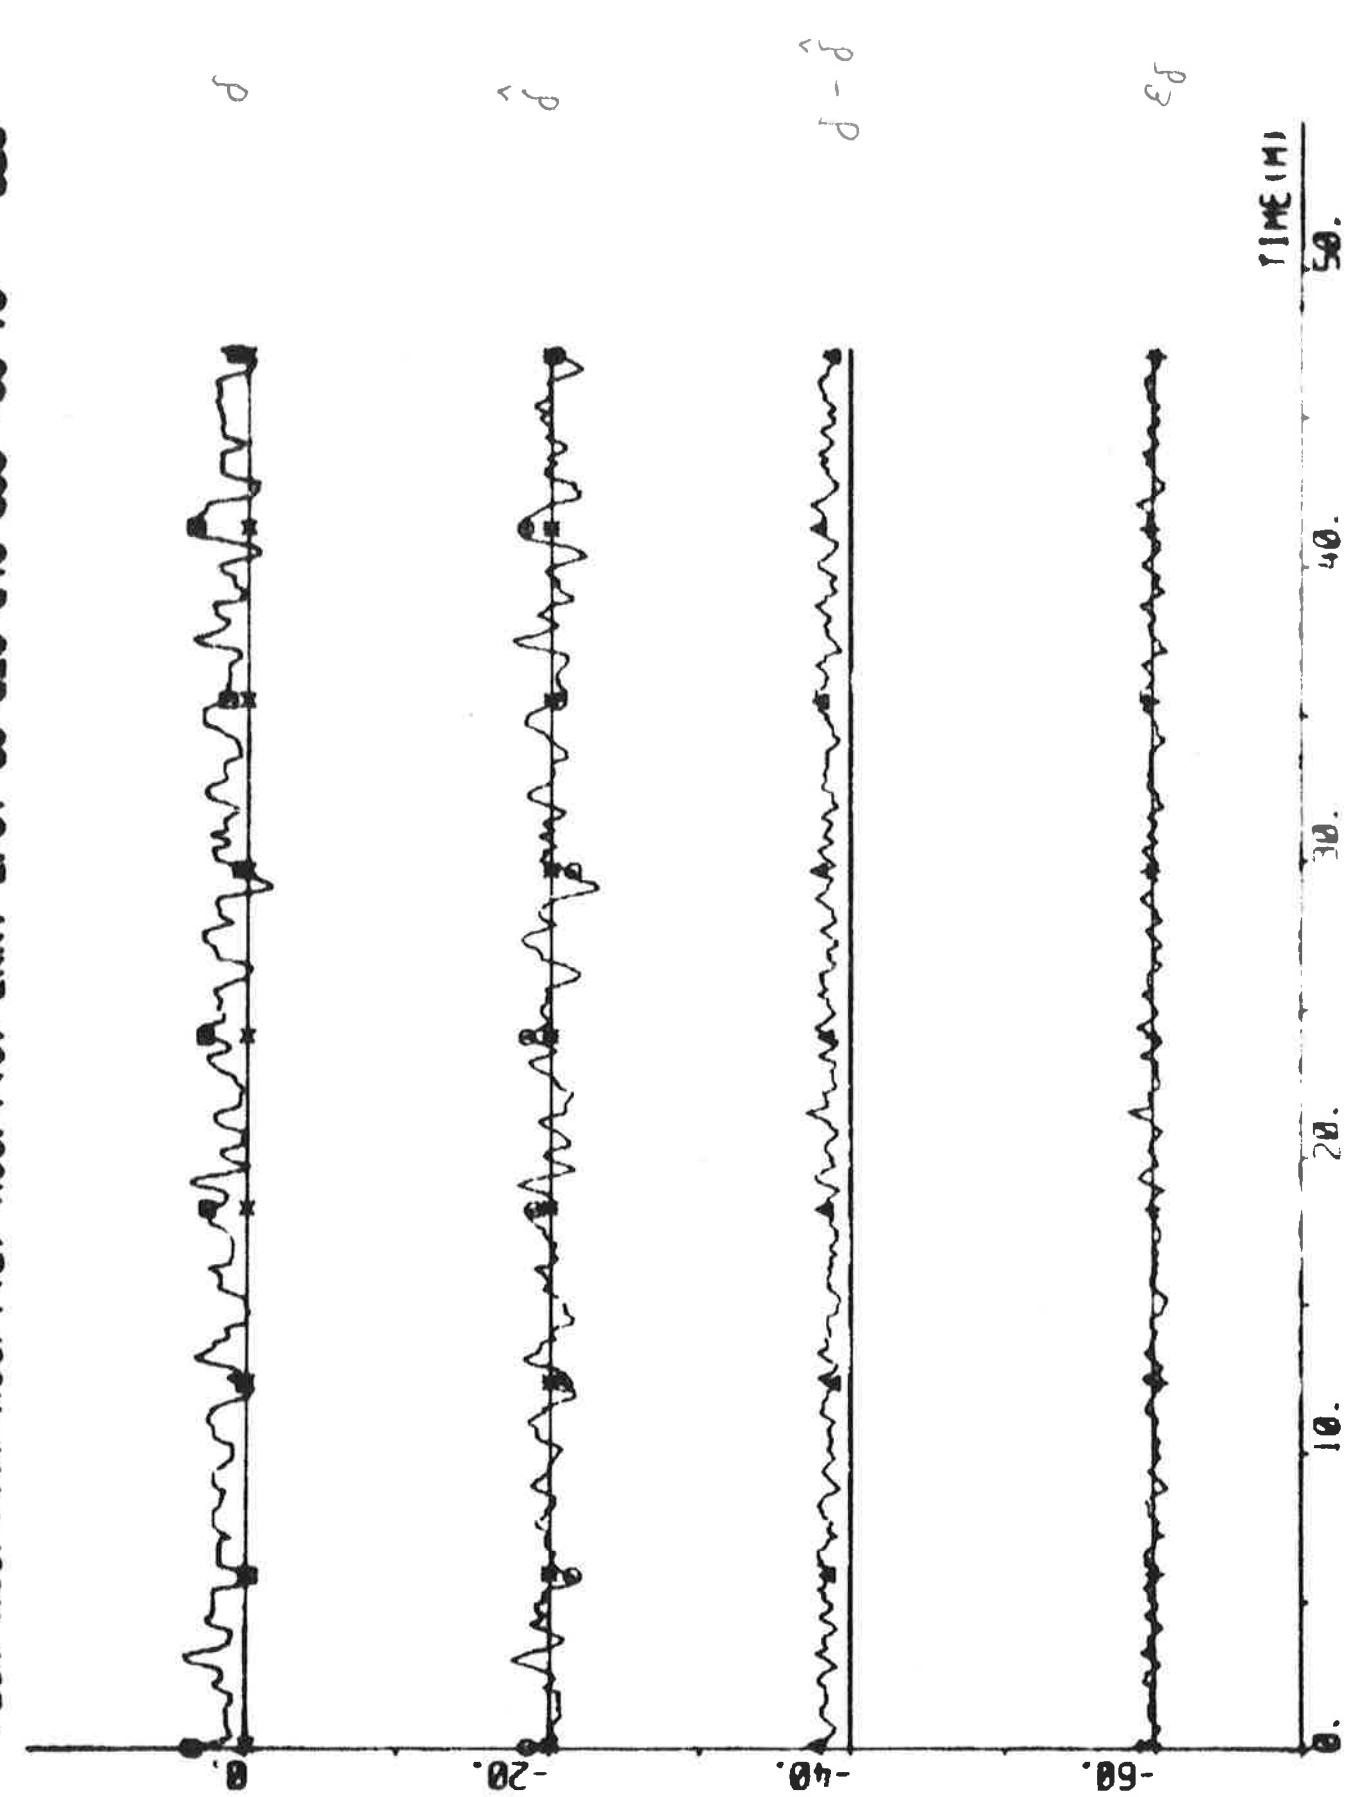

NOTES 132(1) (1997) 1-16

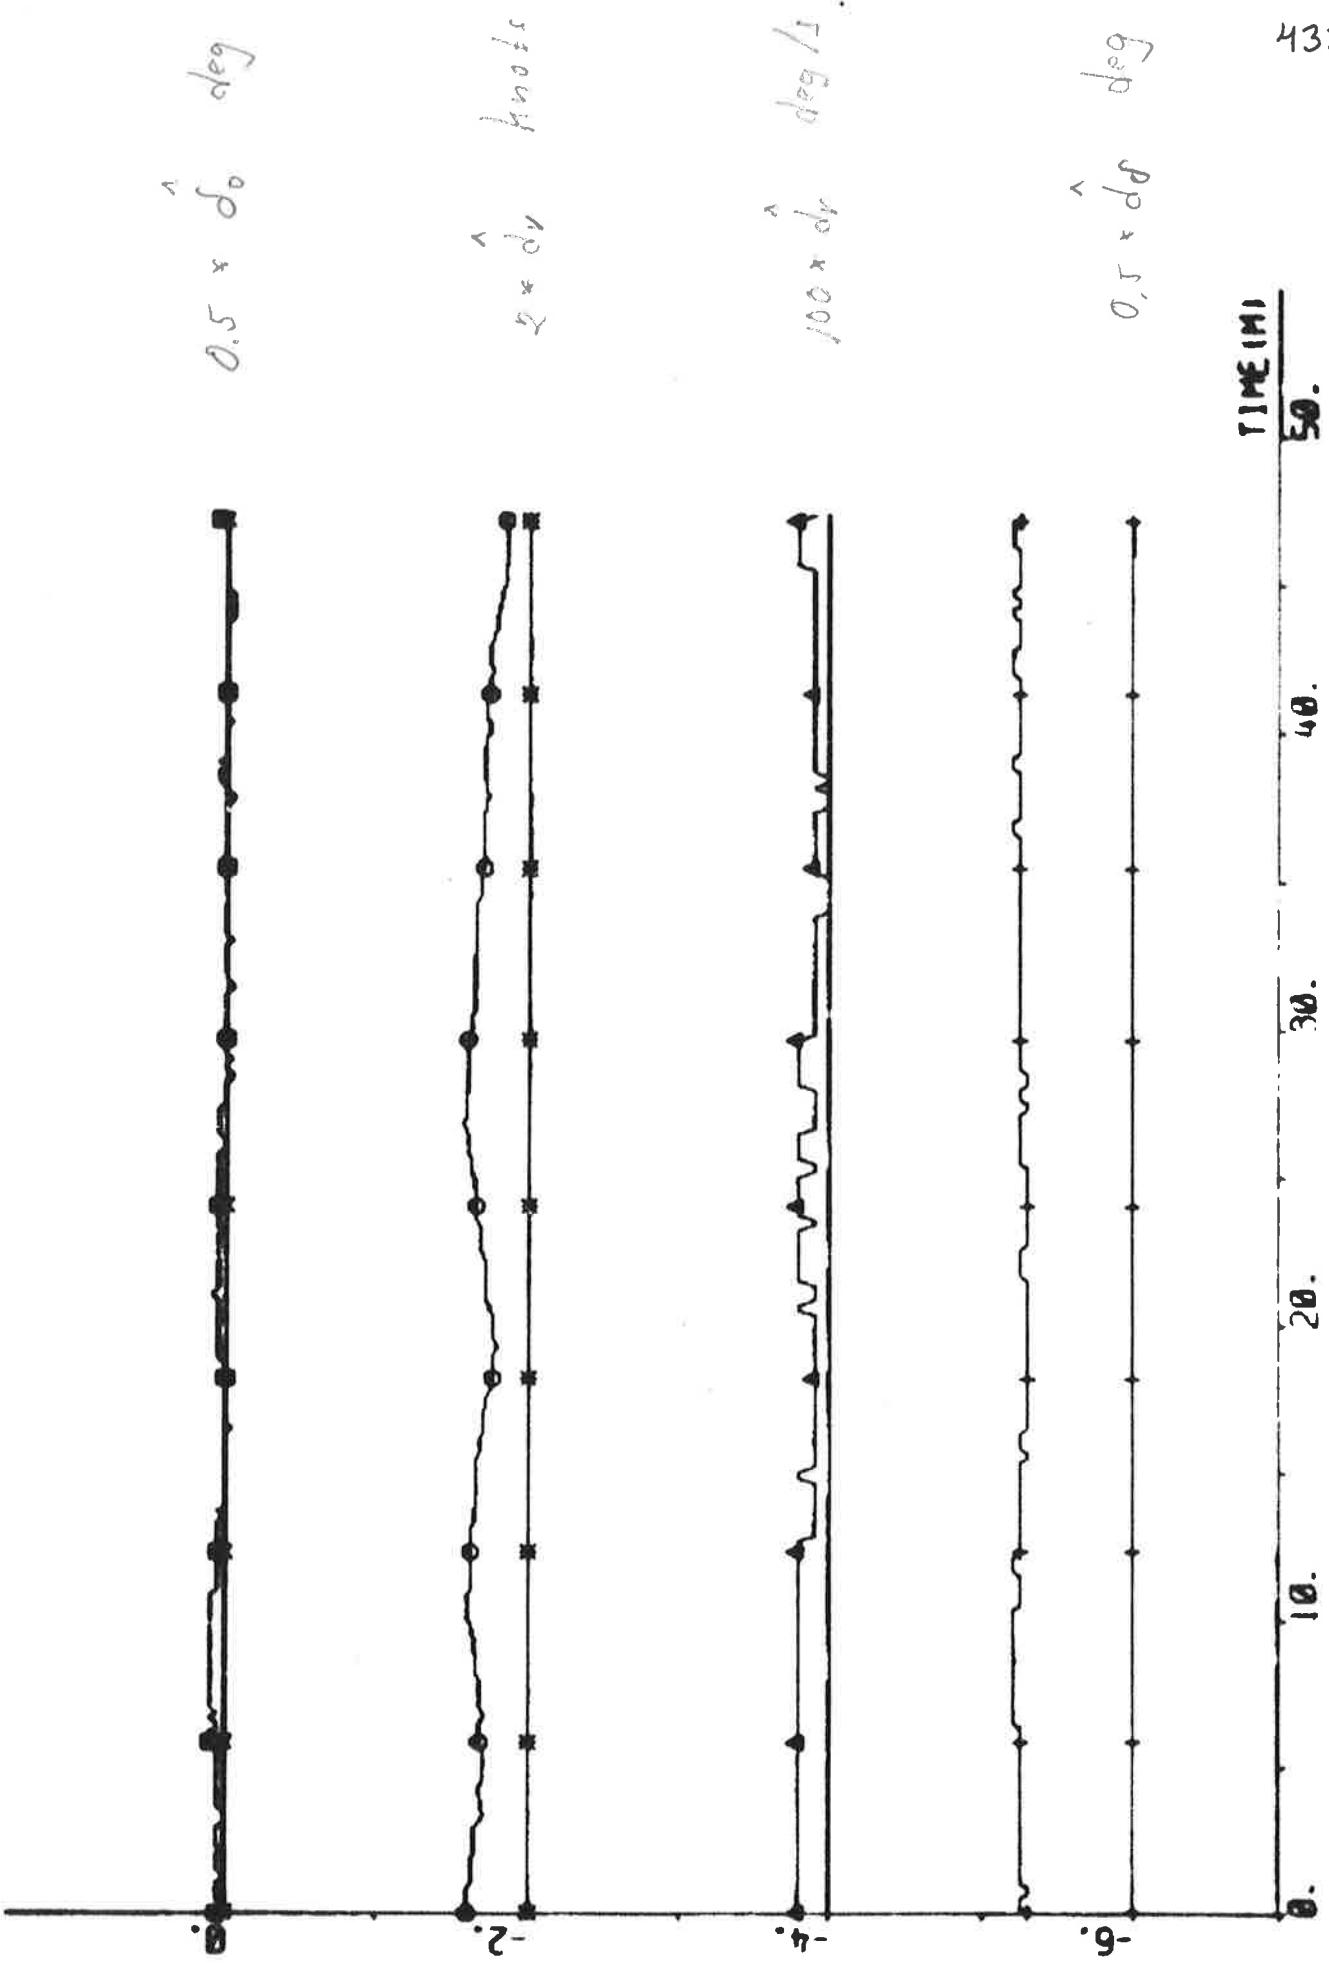

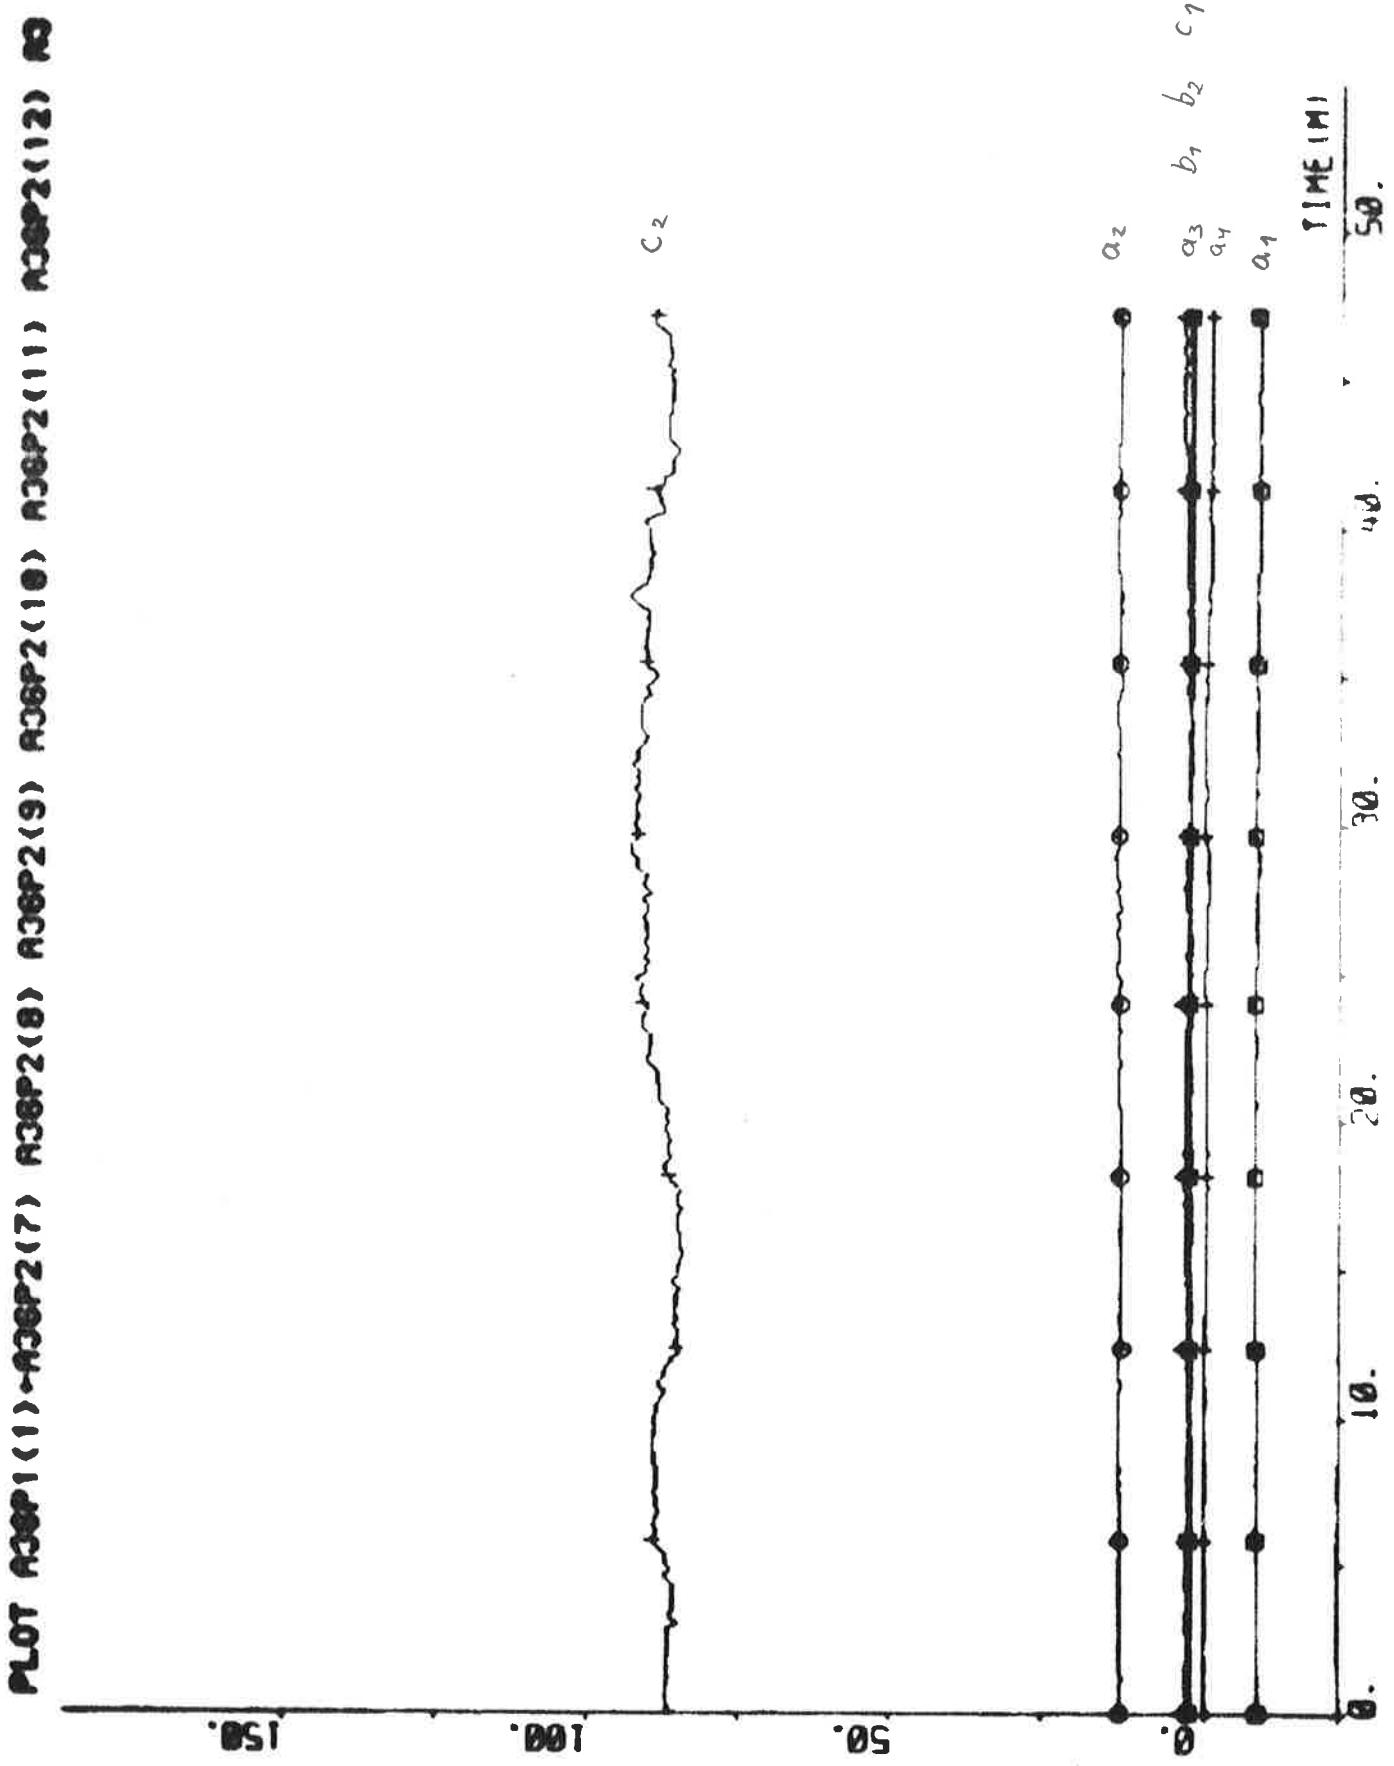

EXPERIMENT B1

| | | | |
|--------------|-------------------|-----------------|-------------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 20.13 | Aft draught | 12.9 m |
| Duration | 26 min | Wind direction | SE (1; see App. A) |
| Position | S 07°28' W 05°32' | Wind velocity | 6 m/s (moderate breeze) |
| ψ_{ref} | 142, 143, 142 deg | Wave height | - |

The data were punched on paper tape every second. A yaw rate estimate is computed every second by the difference approximation

$$\hat{r}_d(t) = \frac{\psi(t) - \psi(t-5)}{5}$$

Final values:

$$\hat{\delta}_0 = -0.1 \text{ deg} \quad \hat{d}_v = 0.12 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.7 \text{ deg}$$

Statistics (mean value and standard deviation)

$$\bar{r} = 0.002 \pm 0.022 \text{ deg/s}$$

$$\bar{\dot{r}} = 0.000 \pm 0.009 \text{ deg/s}$$


$$\bar{\hat{r}}_d = 0.000 \pm 0.014 \text{ deg/s}$$

$$n \approx 69.2 \text{ rpm}$$

$$u \approx 13.7 \text{ knots}$$


$$P_s \approx 14.9 \text{ MW}$$

PLOT B1P1(1)-B1P1(4) B1P1(5) ERN2 08 01 02 - 3.4 0.0 - KNOTS

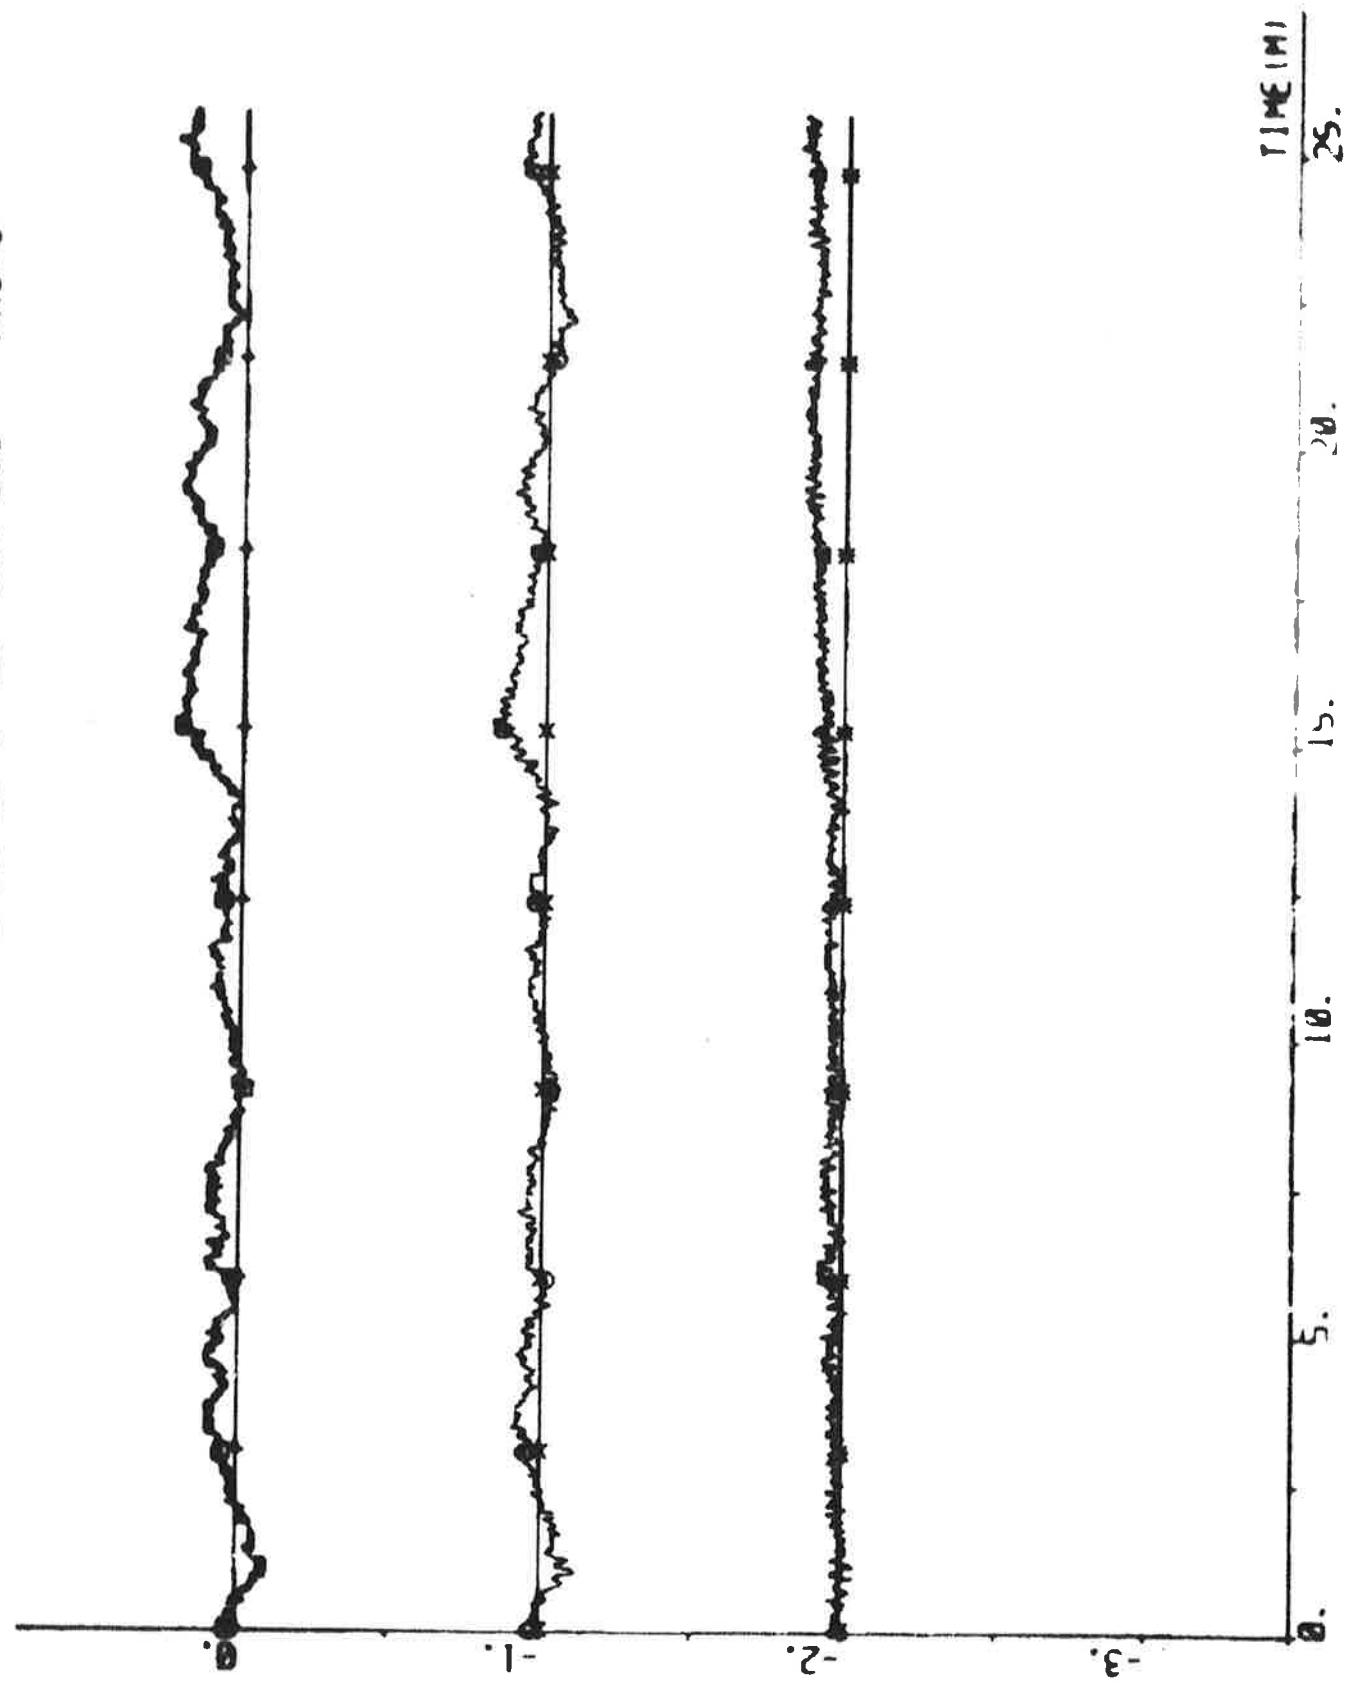


436


PLOT D1P1(11)-B1P1(8) E1P1(7) E2P2 00 002 001 - 0.7 0. - DEG/S

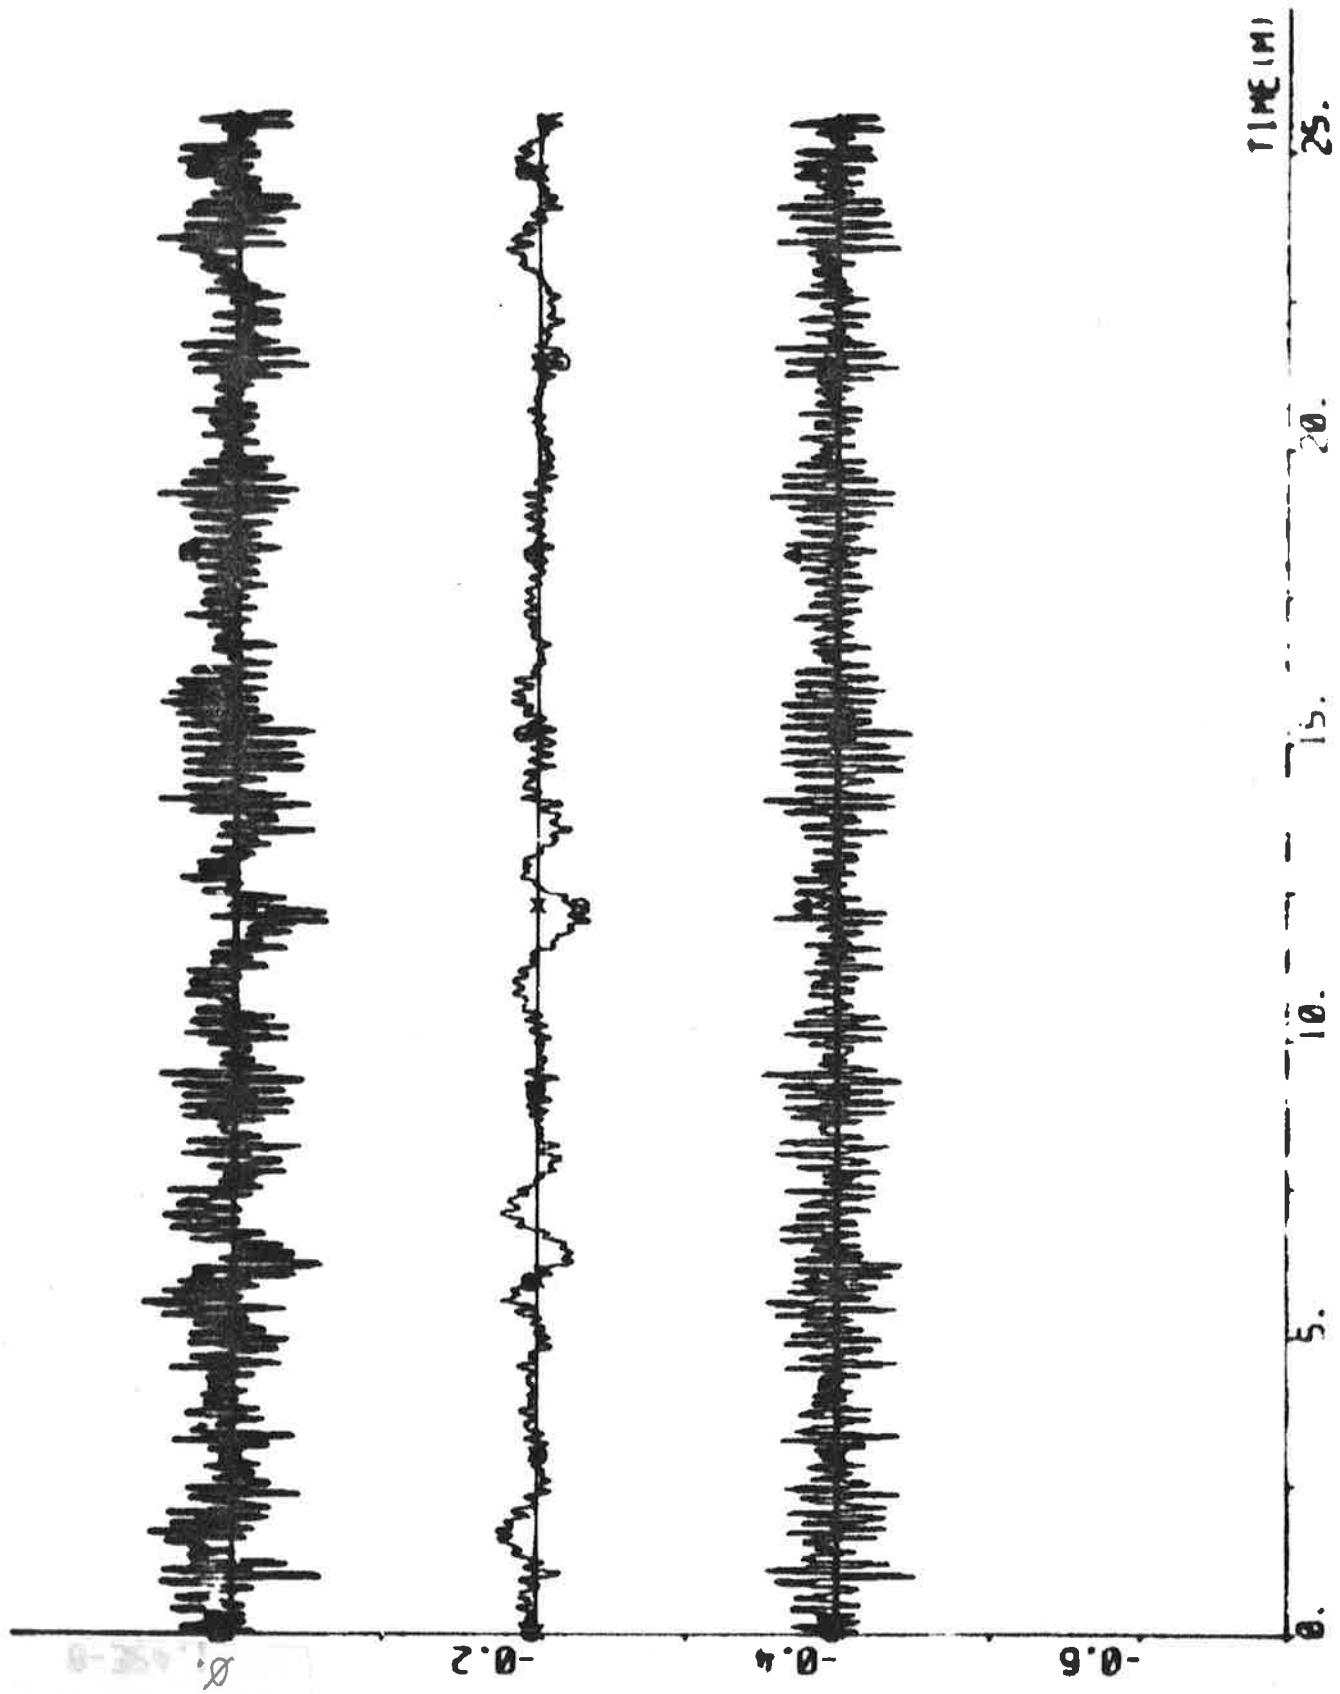


PLOT B1P1(1)-B1P1(9) B1P1(9) ERR4 00 01 02 -3.4 0.0 - 006

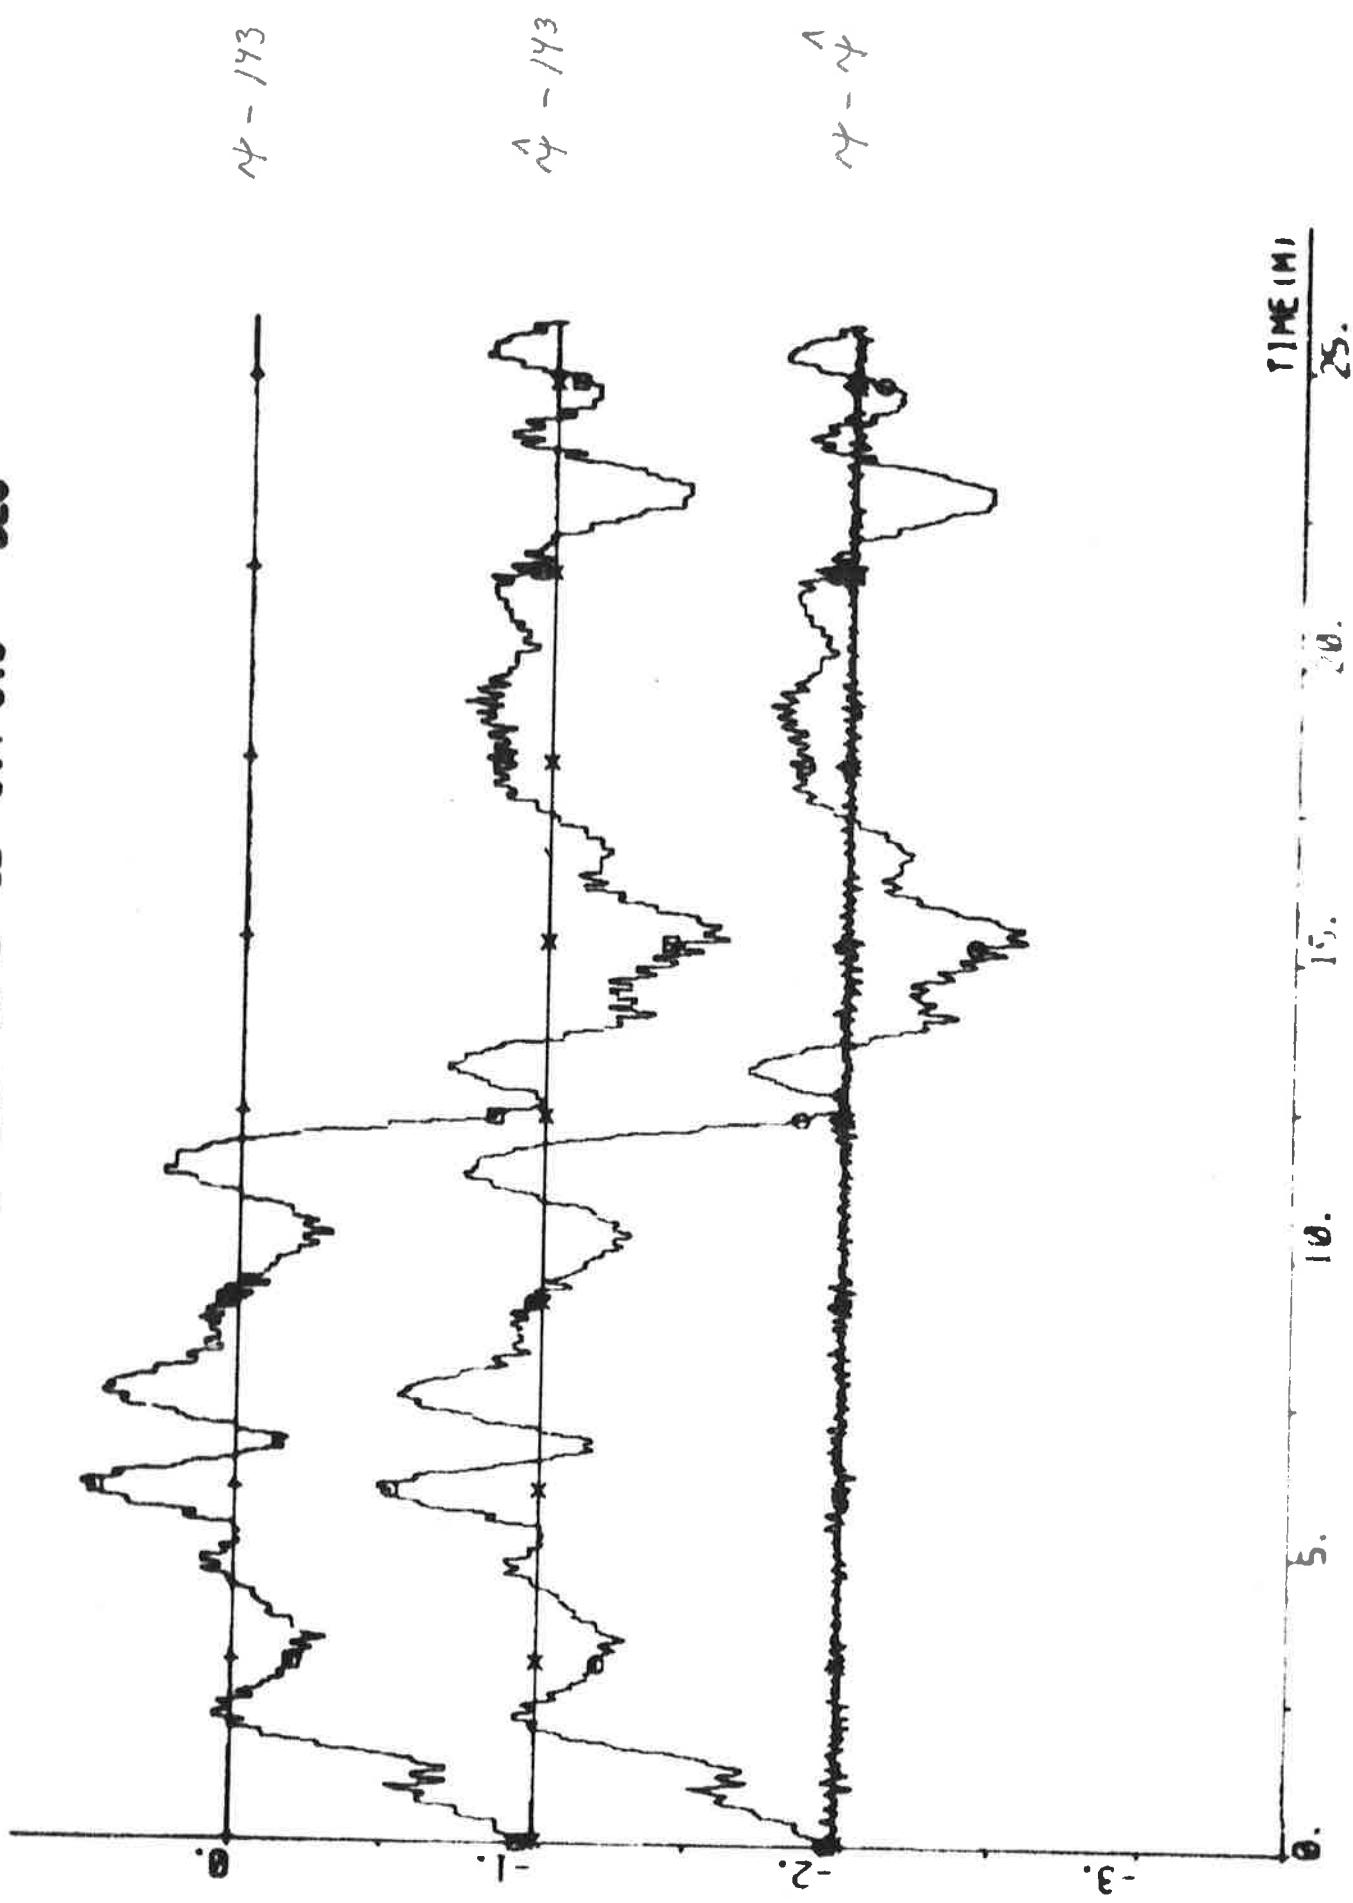

PLOT B1P1(1)-B1P1(2) B1P1(3) B2R1 00 020 040 -85 15 - DEC

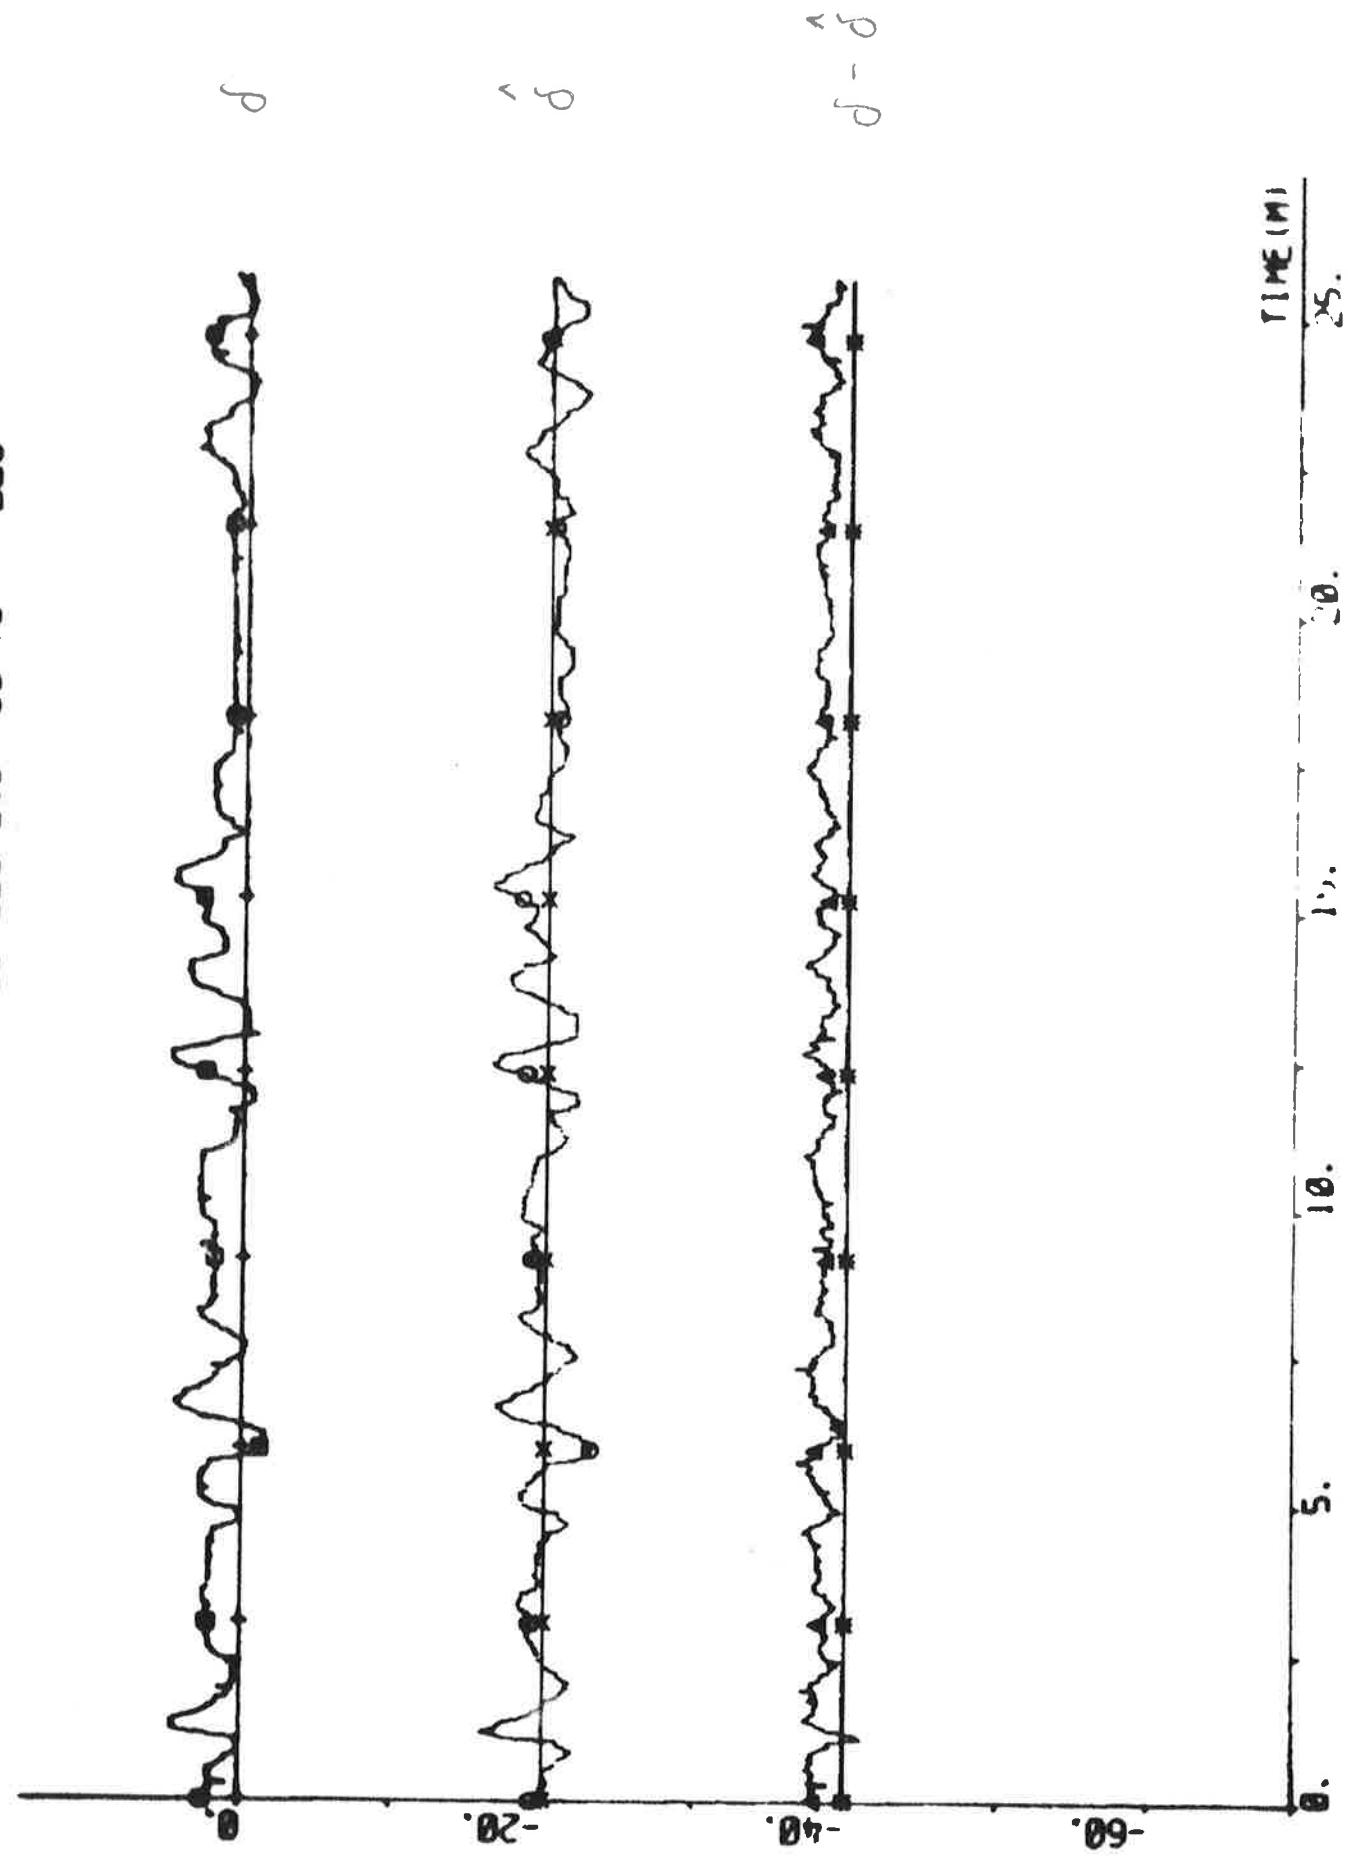

4107 81PI(11)-81PI(6) 81PI(?) 81PI(?) 00 002 001 -0.7 0. - DEG/S

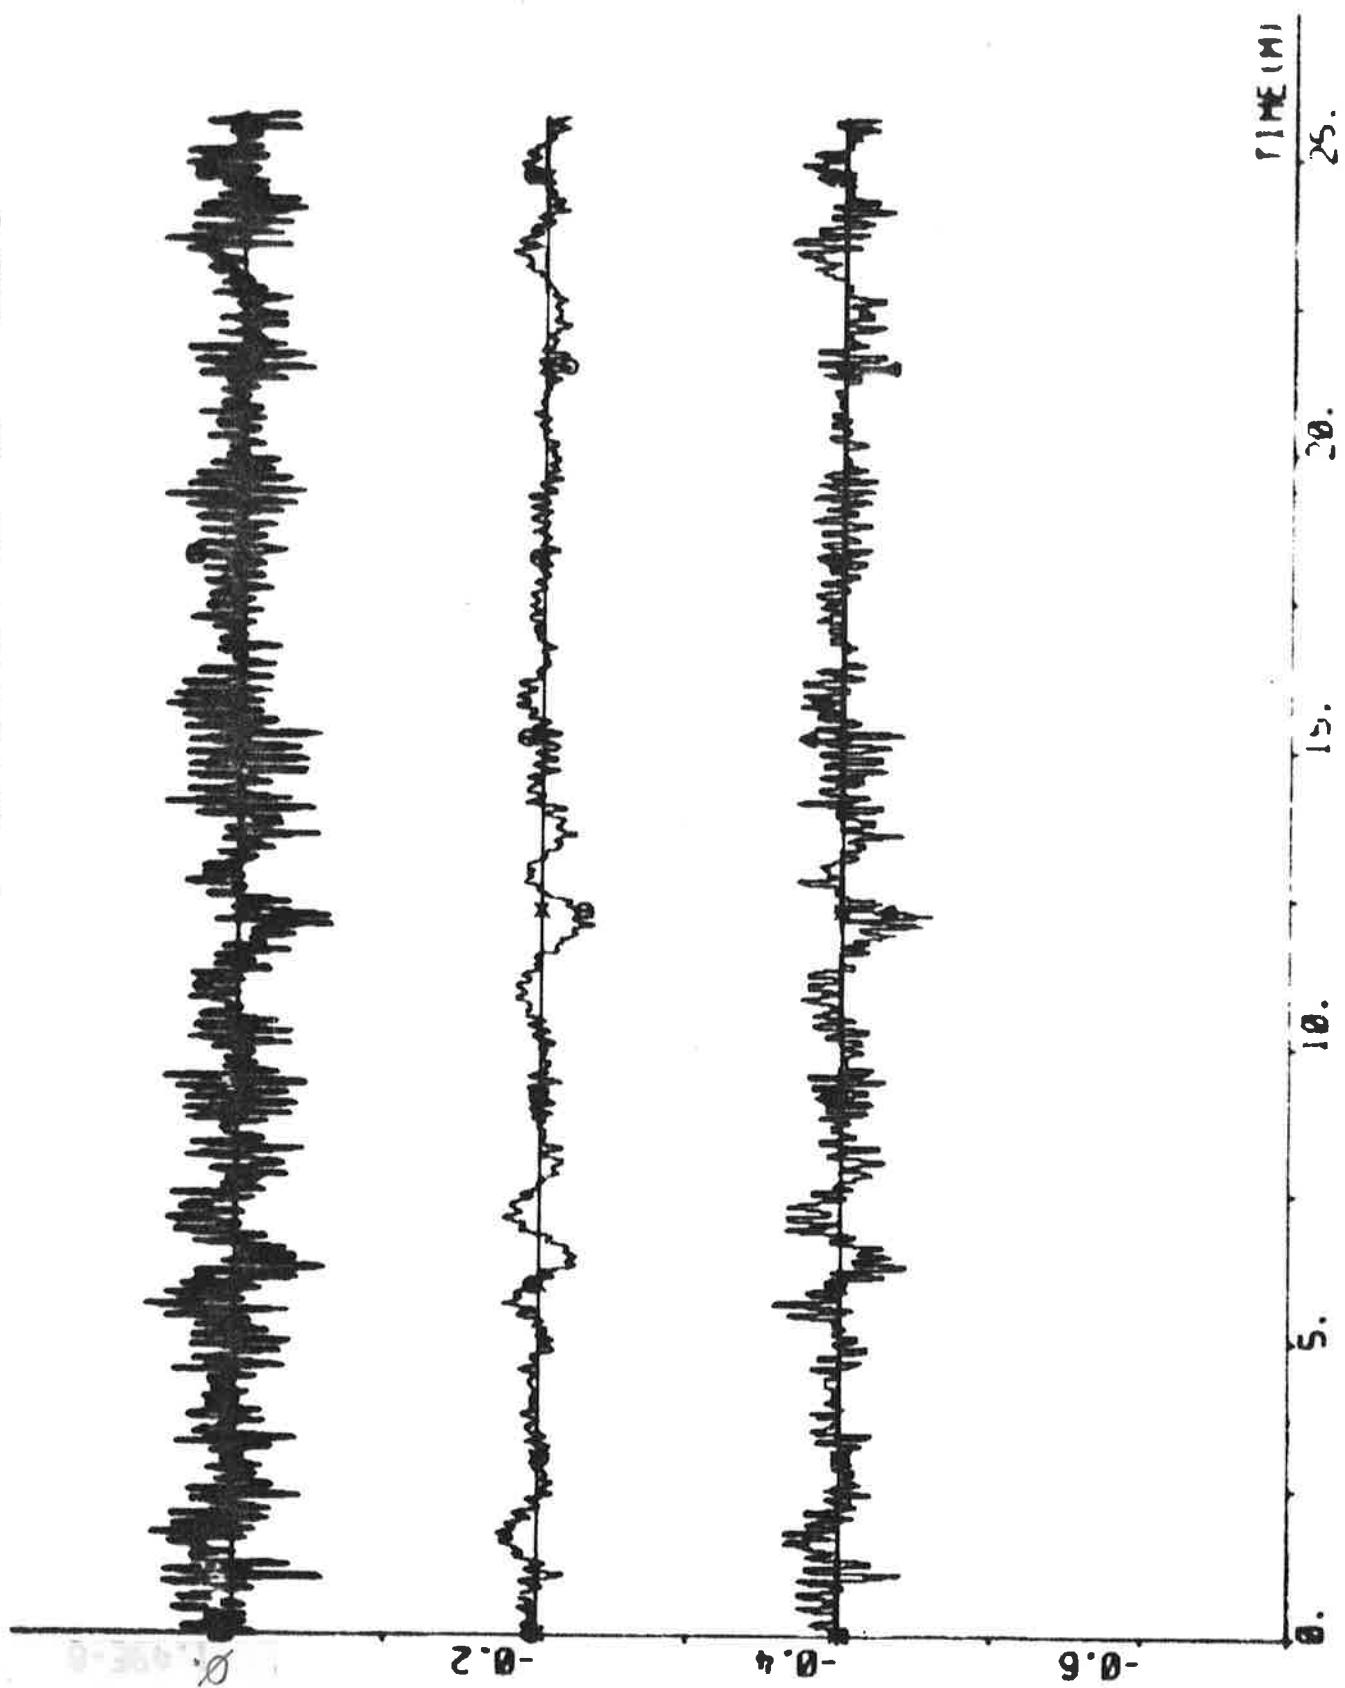

EXPERIMENT B2

| | | | |
|--------------|-------------------|-----------------|-------------------------|
| Date | 1976-04-27 | Forward draught | 10.9 m |
| Time | 08.48 | Aft draught | 12.9 m |
| Duration | 25 min | Wind direction | SE (1; see App. A) |
| Position | S 09°31' W 03°57' | Wind velocity | 8 m/s (moderate breeze) |
| ψ_{ref} | 145 deg | Wave height | - |

The data were punched on paper tape every second. A yaw rate estimate is computed every second by the difference approximation

$$\hat{r}_d(t) = \frac{\psi(t) - \psi(t-5)}{5}$$

Final values:

$$\hat{\delta}_0 = -0.4 \text{ deg} \quad \hat{d}_v = 0.06 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.6 \text{ deg}$$

Statistics (mean value and standard deviation)

$$\bar{r} \quad 0.003 \pm 0.023 \text{ deg/s}$$

$$\bar{\hat{r}} \quad 0.000 \pm 0.007 \text{ deg/s}$$


$$\bar{\hat{r}}_d \quad 0.000 \pm 0.014 \text{ deg/s}$$

$$n \approx 70.1 \text{ rpm}$$

$$u \approx 13.3 \text{ knots}$$

$$P_s \approx 15.2 \text{ MW}$$

PL07 82P1(11)-82P1(4) 82P1(5) ERR2 00 01 02 -3.4 0.0 - 10073

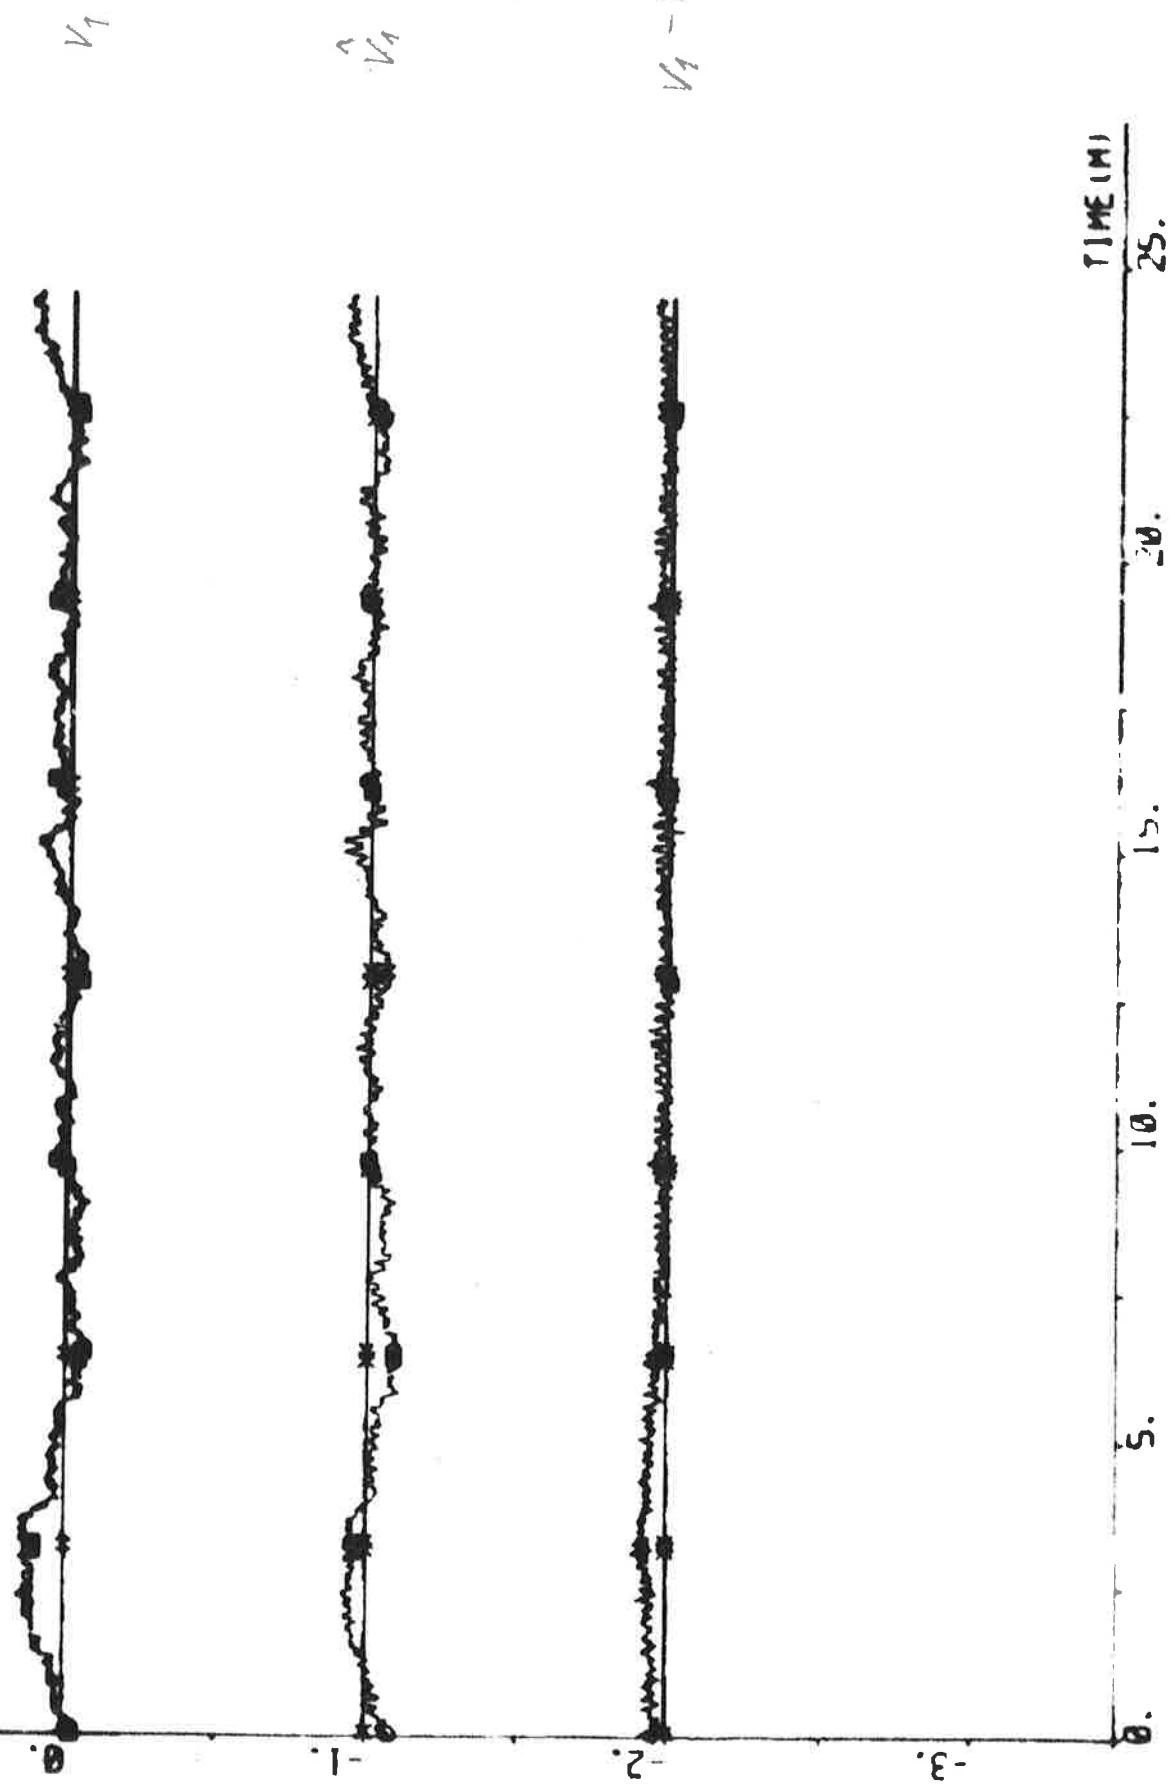

442

PL07 02P1(1)-02P1(6) 02P1(7) ER03 00 002 004 - 0.7 0. - DECS



r

r




r - r

TIME (M)


0. 5. 10. 15. 20. 25.

PL07 B2P1(1)-B2P1(8) ERM 00 01 02 - 3.4 0.0 - DCE

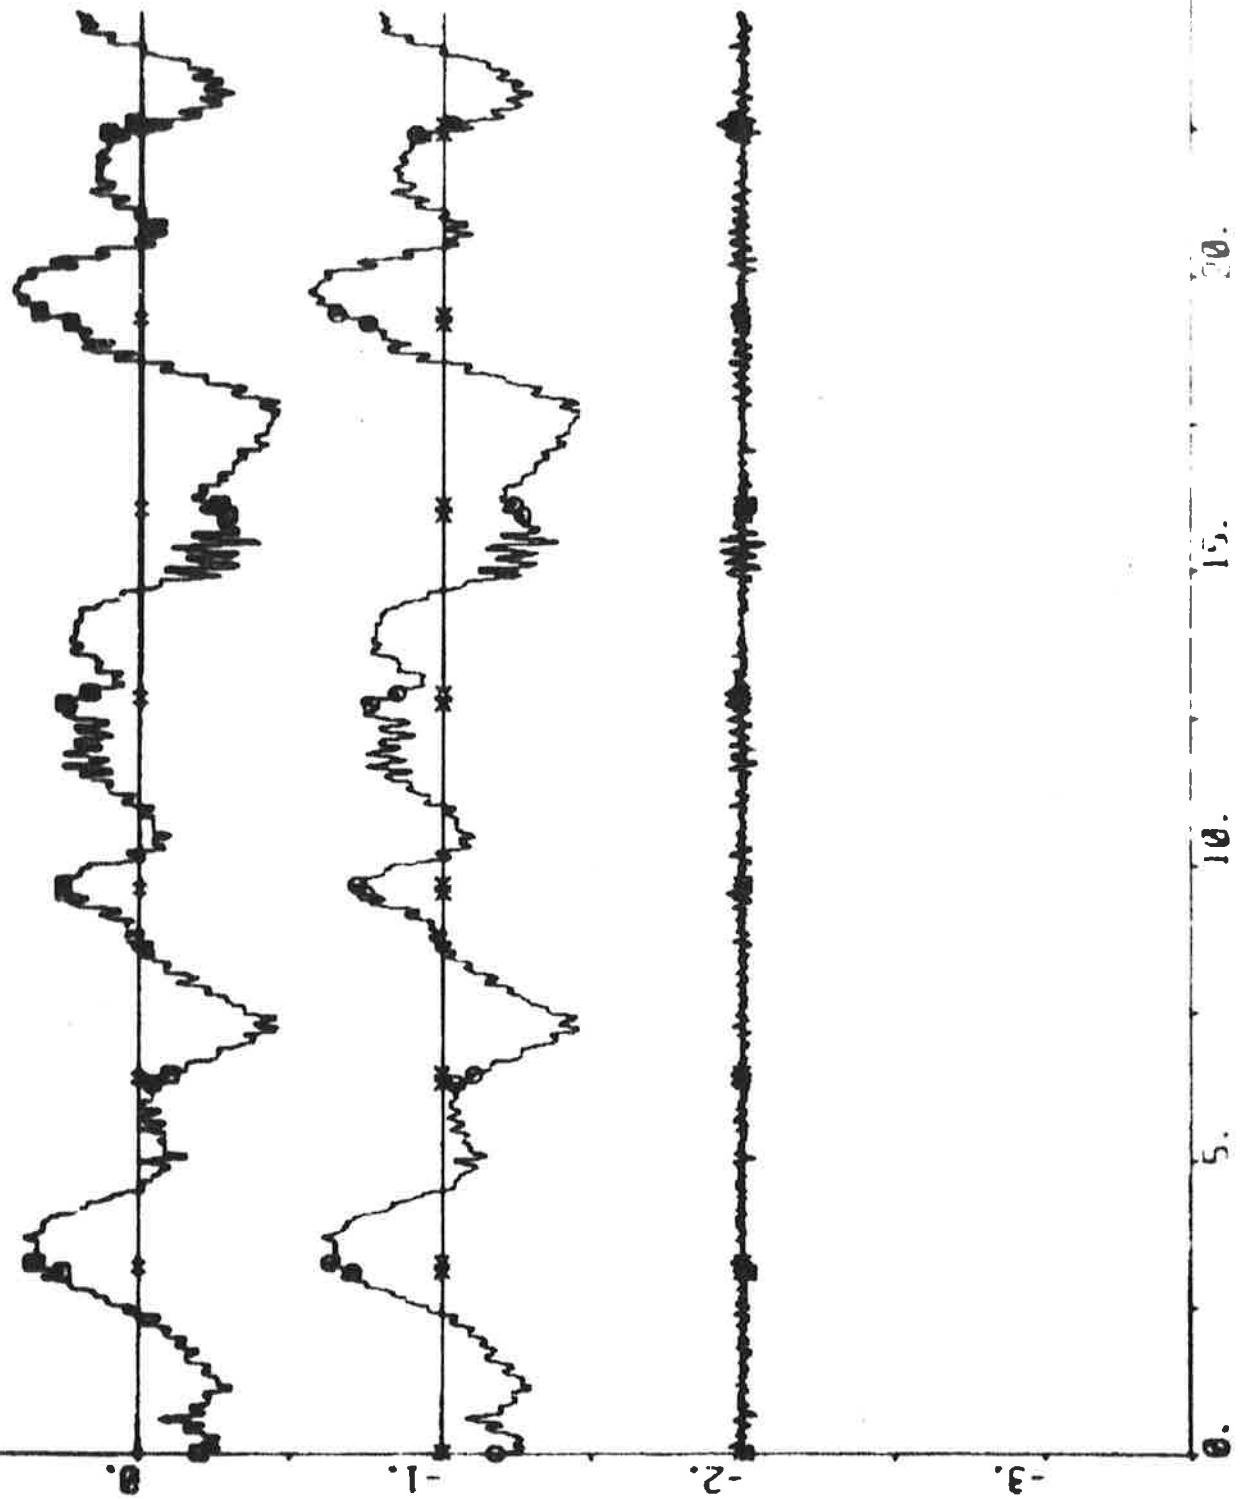

444

PLT B2P1(1)-B2P1(2) B2P1(3) ERRI 00 020 040 - 65 15 - DEC

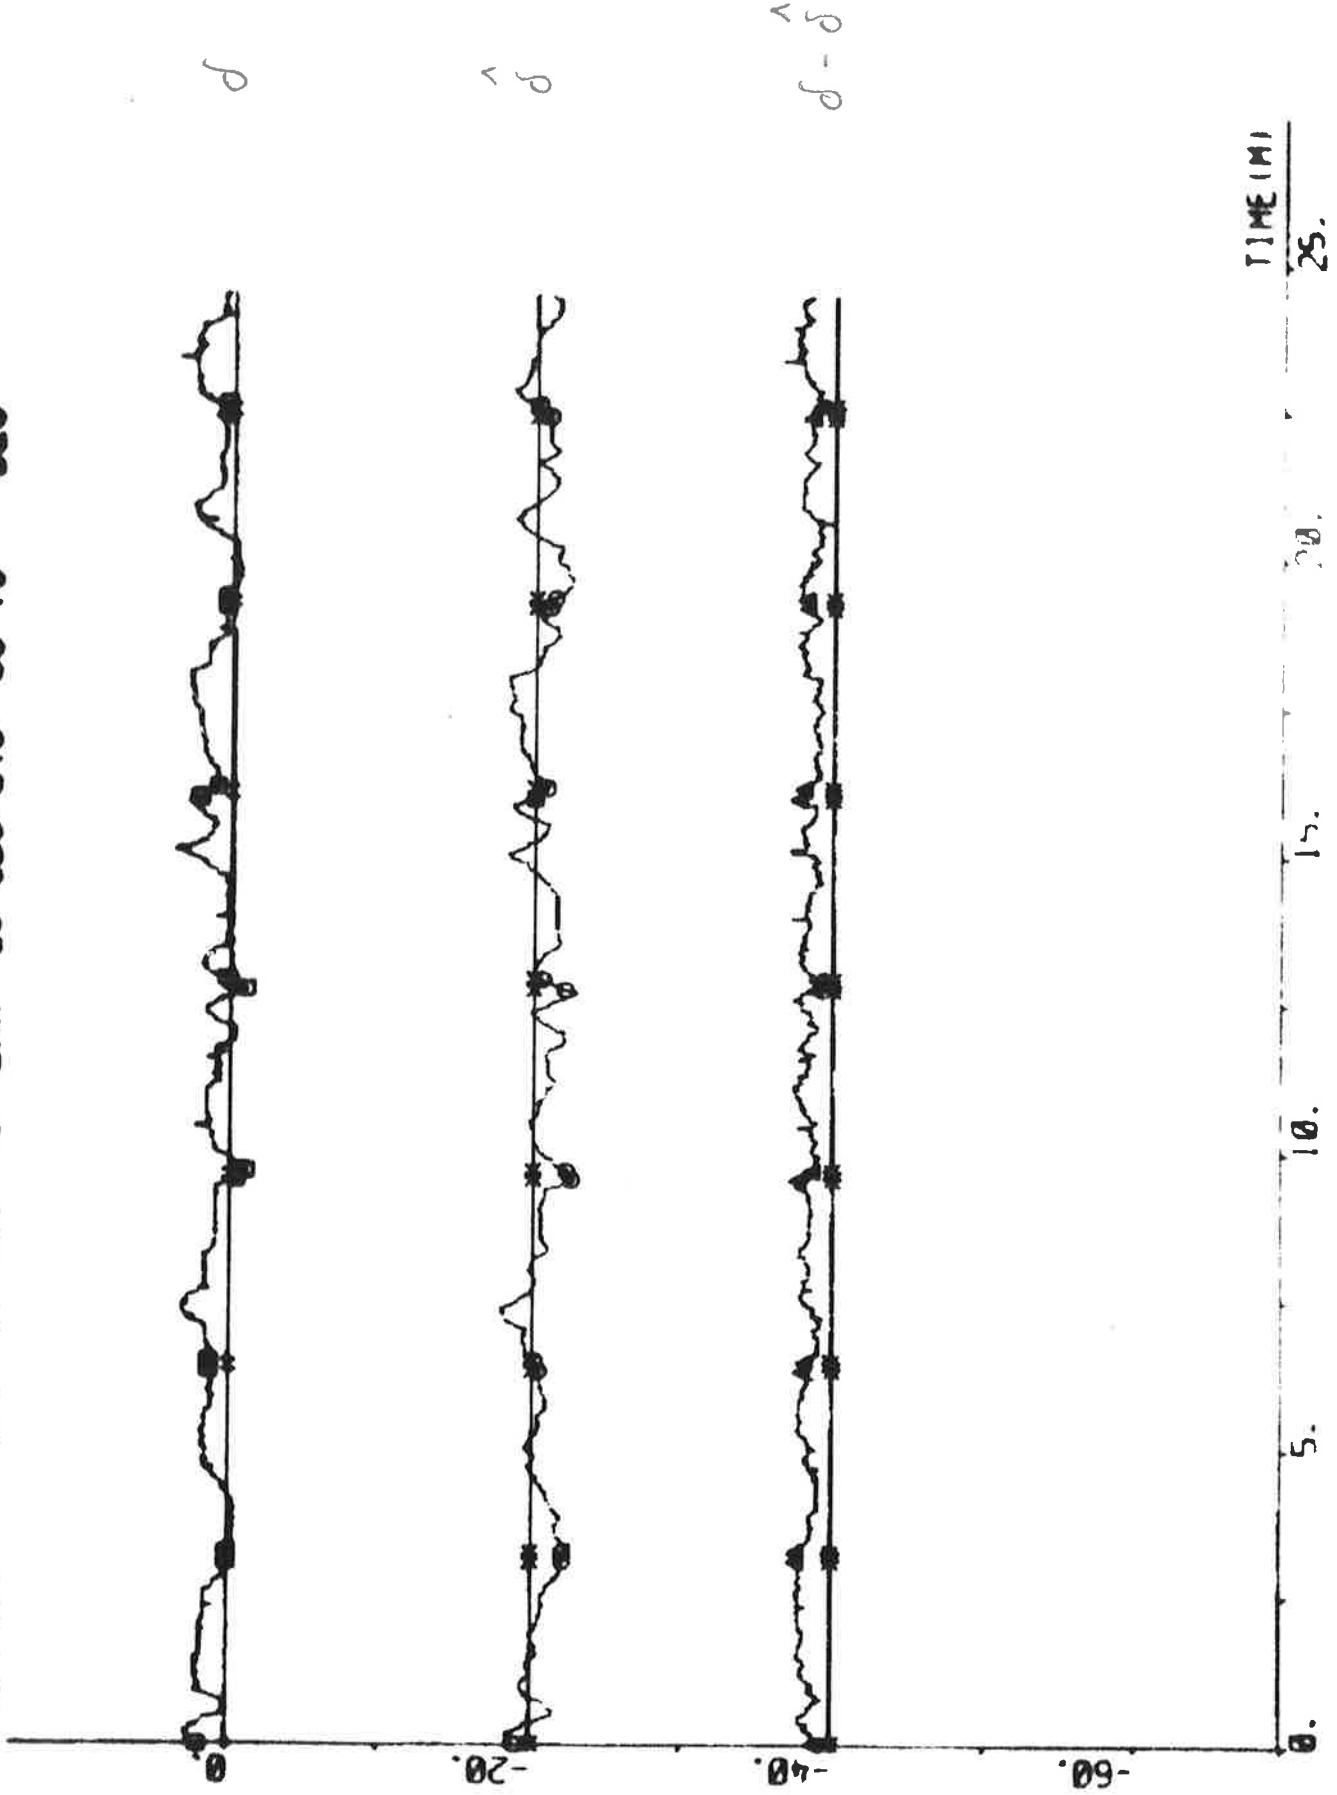

PLOT 82P1(1)-82P1(6) 82P1(7) D031 00 002 001 -0.7 0. - DEC/S



TIME (m)

25.
20.
15.
10.
5.
0.

446

EXPERIMENT B3

| | | | |
|--------------|-------------------------------------|-----------------|------------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 12.59 | Aft draught | 12.9 m |
| Duration | 26 min | Wind direction | SE (1; see App. A) |
| Position | S $18^{\circ}07'$ E $04^{\circ}58'$ | Wind velocity | 15 m/s (moderate gale) |
| ψ_{ref} | 145 deg | Wave height | High sea from SE |

The data were punched on paper tape every second. A yaw rate estimate is computed every second by the difference approximation

$$\hat{r}_d(t) = \frac{\psi(t) - \psi(t-5)}{5}$$

Final values:

$$\hat{\delta}_0 = -0.3 \text{ deg} \quad \hat{d}_v = 0.15 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$

Statistics (mean value and standard deviation)

$$r \quad 0.001 \pm 0.034 \text{ deg/s}$$


$$\dot{r} \quad 0.000 \pm 0.011 \text{ deg/s}$$

$$\ddot{r}_d \quad 0.000 \pm 0.021 \text{ deg/s}$$

$$n \approx 87.4 \text{ rpm}$$

$$u \approx 15.9 \text{ knots}$$

$$P_s \approx 29.5 \text{ MW}$$

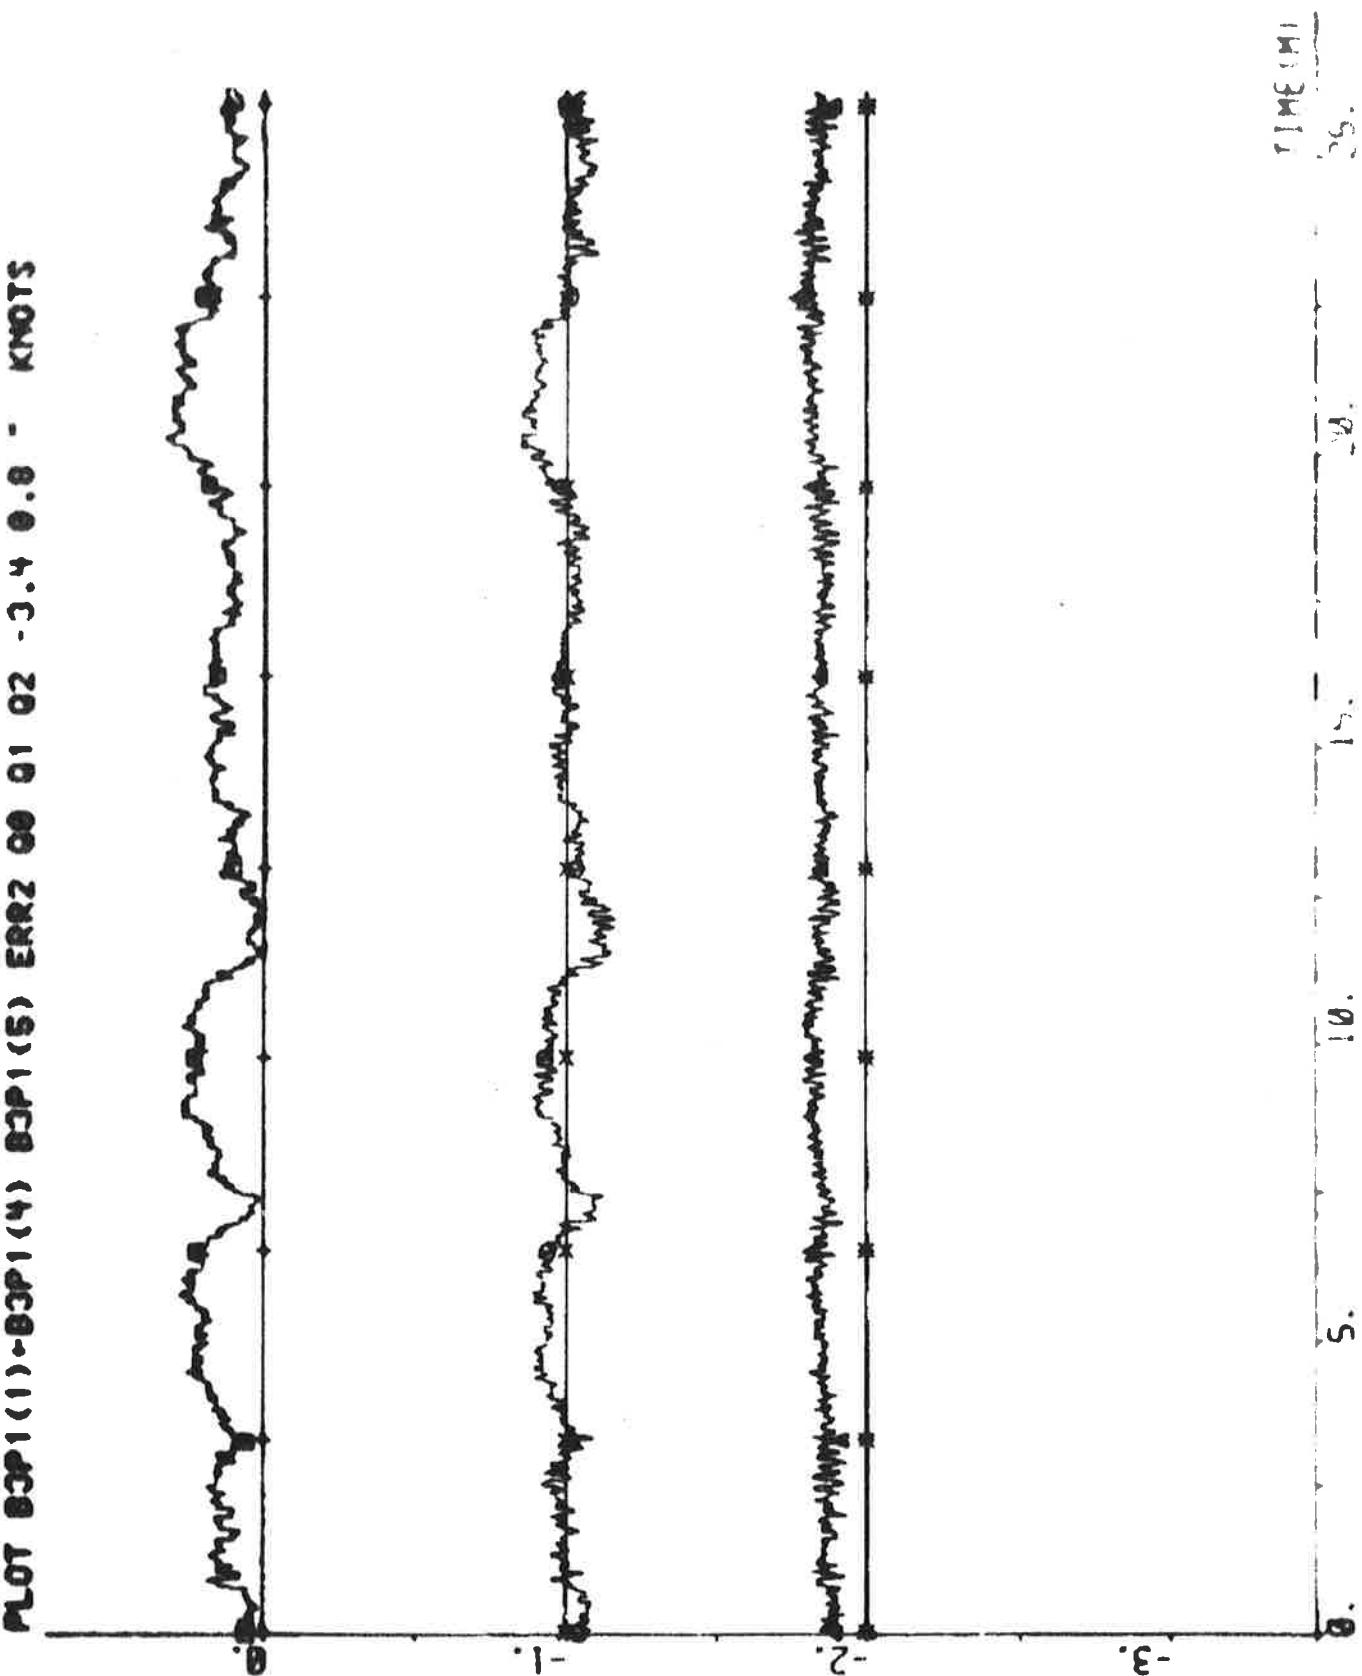


NET STEP 1 (1) - B3P1 (4) B3P1 (5) ER22 00 01 02 - 3.4 0.8 - KNOTS


PLOT B3P1 (1) - B3P1 (6) B3P1 (7) ER3 00 0002 sec - 0.70. - DEC/s



449

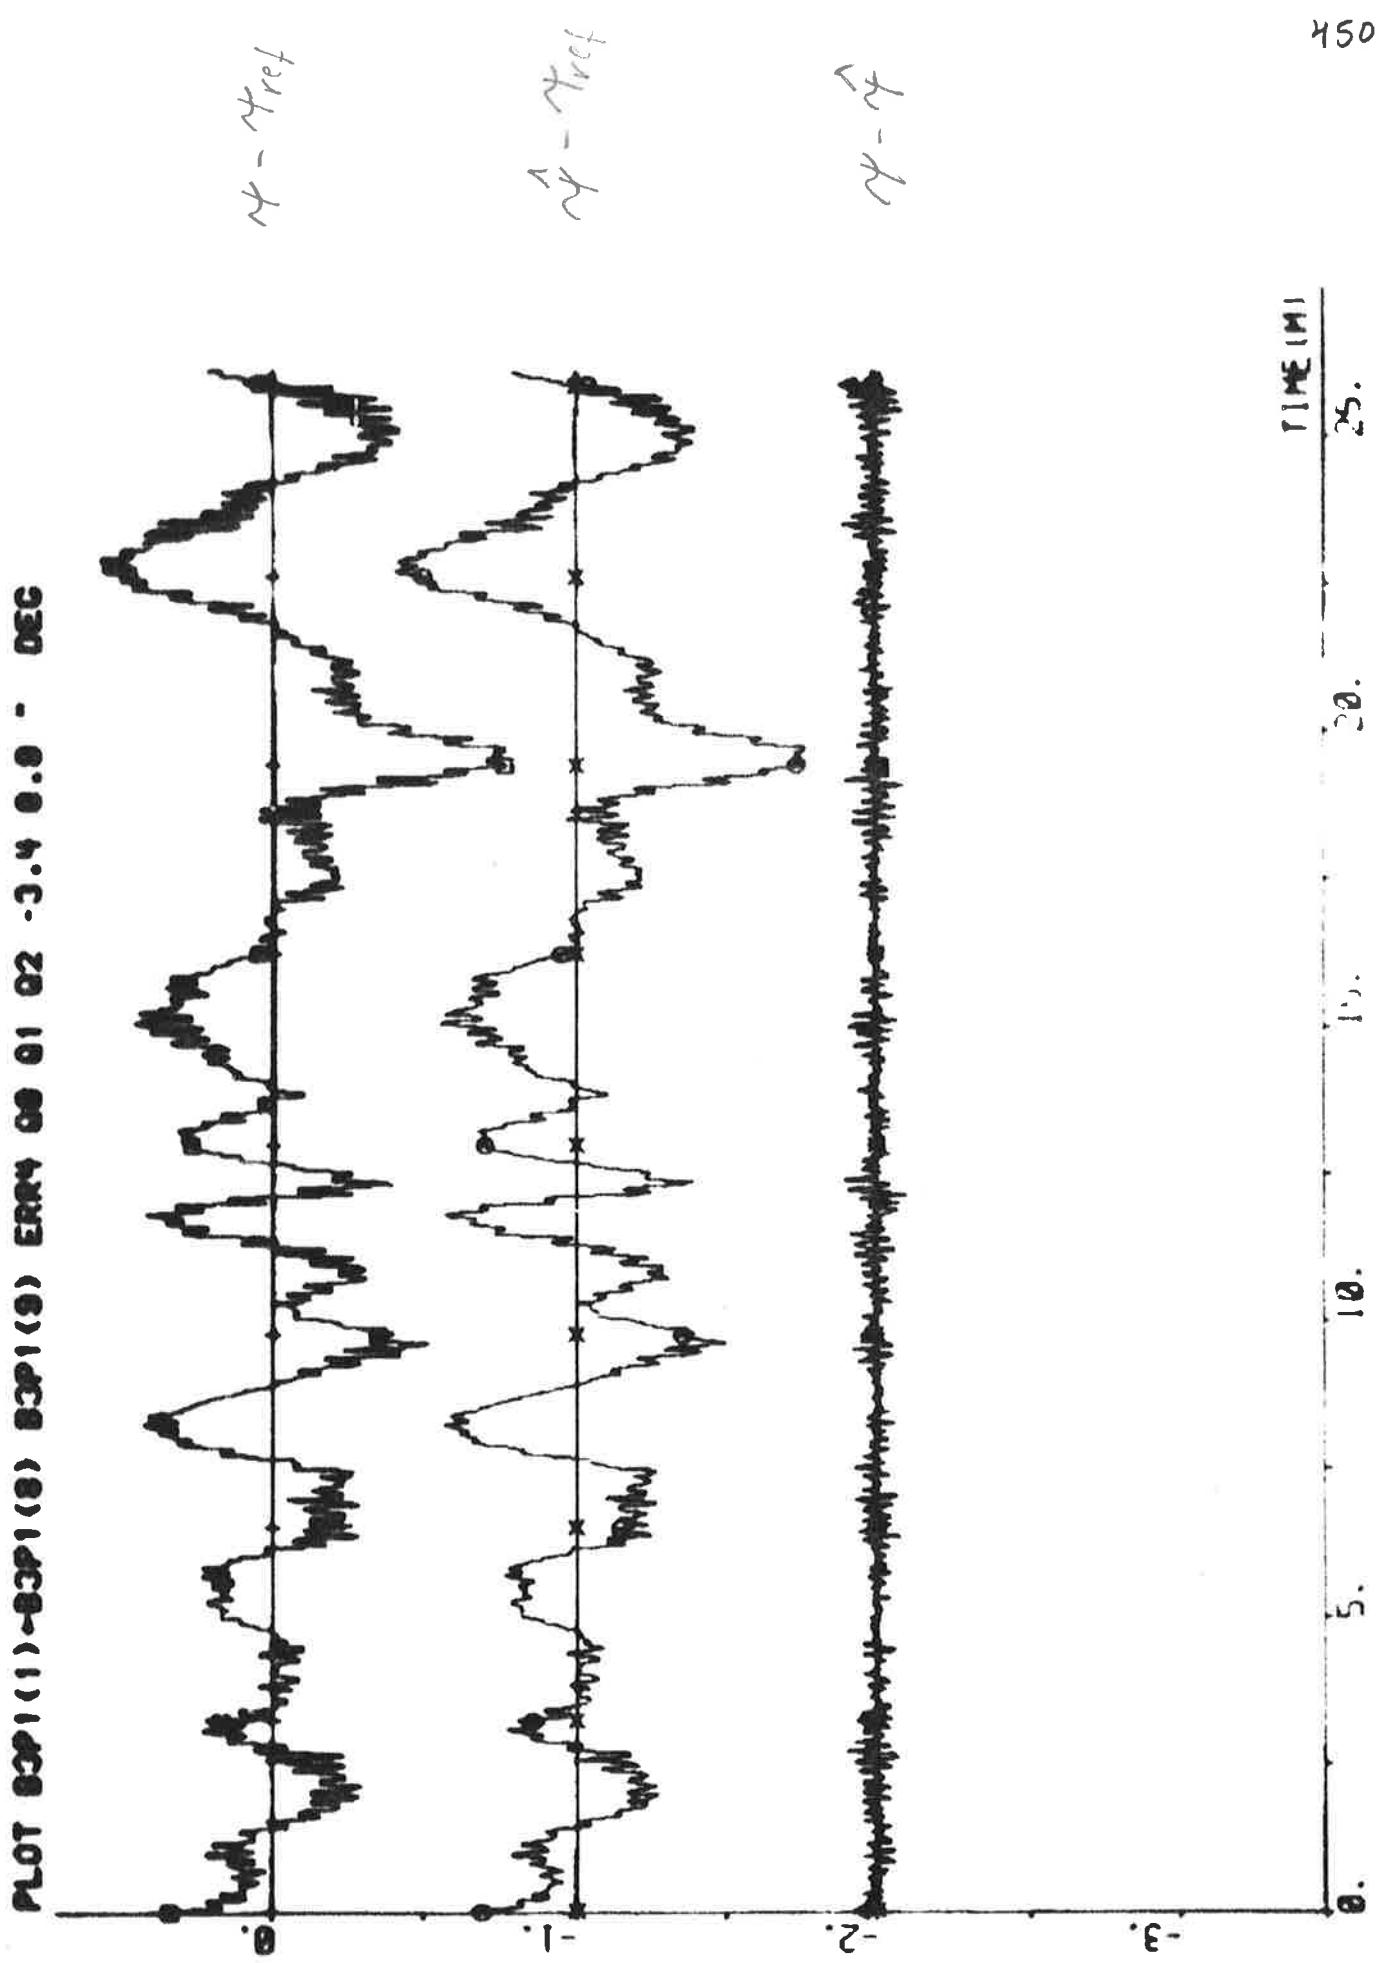

MLOT 3020 (1) - DEG (2) DEG (3) ERRI 00 020 010 - 05 15 - DEC

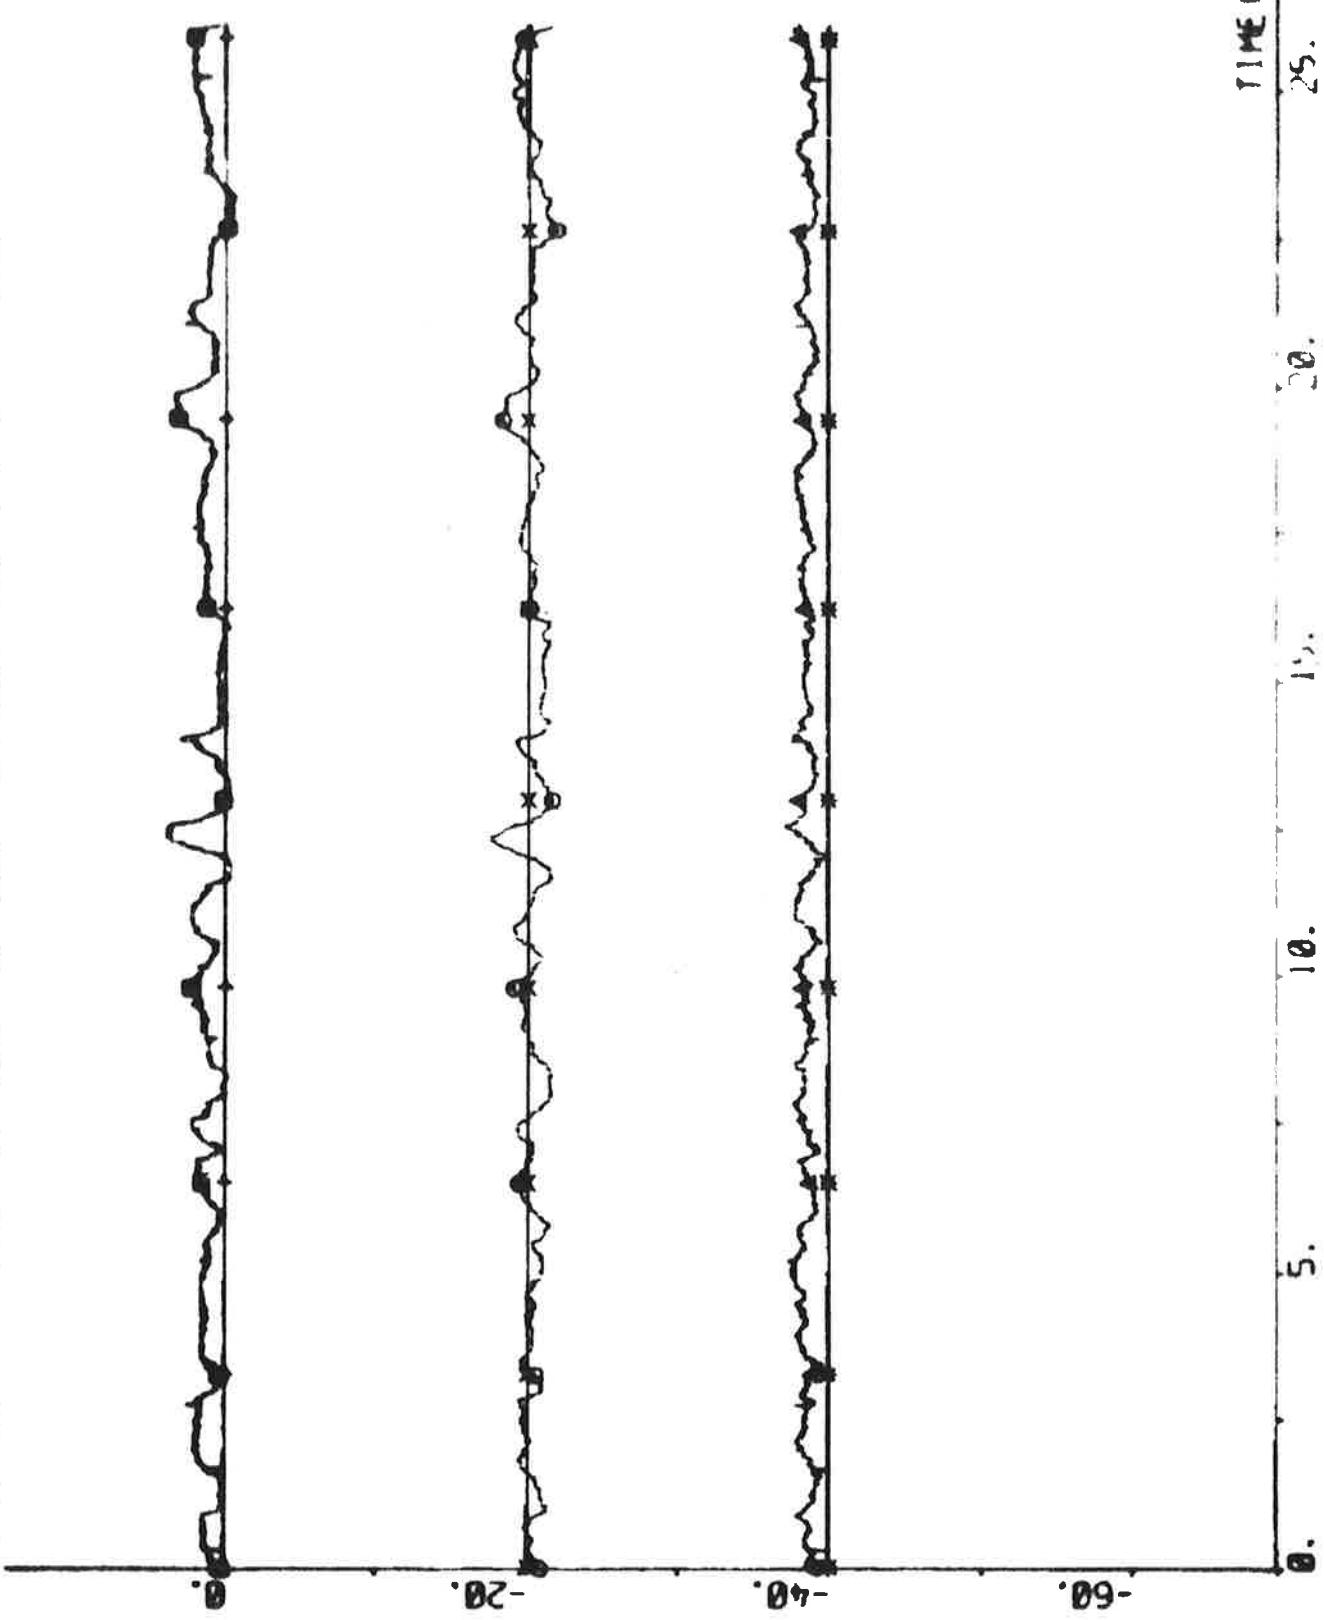

451

MOT 3091 (1) - 03P1 (6) 03P1 (7) DAS1 00 002 00M - 0.70. - 0028



TIME (H)
25.
20.
15.
10.
5.
0.

EXPERIMENT C1

| | | | |
|--------------|----------------------------------|-----------------|----------------------|
| Date | 1976-04-20 | Forward draught | 9.0 m |
| Time | 22.11 | Aft draught | 12.0 m |
| Duration | 41 min | Wind direction | N (5; see App. A) |
| Position | N 20°22' W 18°31' | Wind velocity | 9 m/s (fresh breeze) |
| ψ_{ref} | 180, (184), 195,
175, 180 deg | Wave height | - |
| r_{ref} | 0.05, 0.1 deg/s | | |

The sign of the sway velocity v_1 was incorrect during the experiment.

Self-tuning regulator and yaw regulator using estimates from the Kalman filter.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & v_0 = 7 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.27 \\ 6.10 \\ 2.67 \\ -2.07 \\ 0.48 \\ 0.08 \\ -0.09 \\ 95.45 \end{bmatrix} \quad P = \begin{bmatrix} 8.21 & & & & & & & \\ -8.63 & 16.92 & & & & & & \\ -4.06 & -8.26 & 27.23 & & & & & \\ 4.71 & -0.08 & -14.92 & 10.58 & & & & \\ -0.26 & -0.15 & 0.81 & -0.39 & 0.06 & & & \\ -0.17 & 0.12 & 0.00 & 0.06 & 0.02 & 0.03 & & \\ -1.04 & 1.14 & 0.61 & -0.57 & 0.06 & 0.02 & 0.92 & \\ 29.03 & -5.28 & -71.52 & 49.66 & -2.97 & -0.80 & 15.36 & 1100.32 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.57$$


$$\hat{\delta}_0 = 1.0 \text{ deg} \quad \hat{d}_v = -0.18 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_{\delta} = 1.4 \text{ deg}$$

$$\bar{\delta}_c = 0.7 \text{ deg} \quad (\text{Initial value: } 1.1 \text{ deg})$$

Statistics (mean value and standard deviation)


| | | | |
|----------------|------------------------------|---------------------|-------------------------------|
| n | $69.5 \pm 0.5 \text{ rpm}$ | ϵ_v | $0.00 \pm 0.03 \text{ knots}$ |
| u | $14.2 \pm 0.3 \text{ knots}$ | ϵ_r | $0.00 \pm 0.01 \text{ deg/s}$ |
| P _s | $14.4 \pm 0.1 \text{ MW}$ | ϵ_{ψ} | $0.00 \pm 0.03 \text{ deg}$ |
| | | ϵ_{δ} | $0.0 \pm 0.4 \text{ deg}$ |

PLOT C1PI(1)-C1PI(8) HPP C1PI(10) HPP HODY HPP C1PI(15) 82-3-1

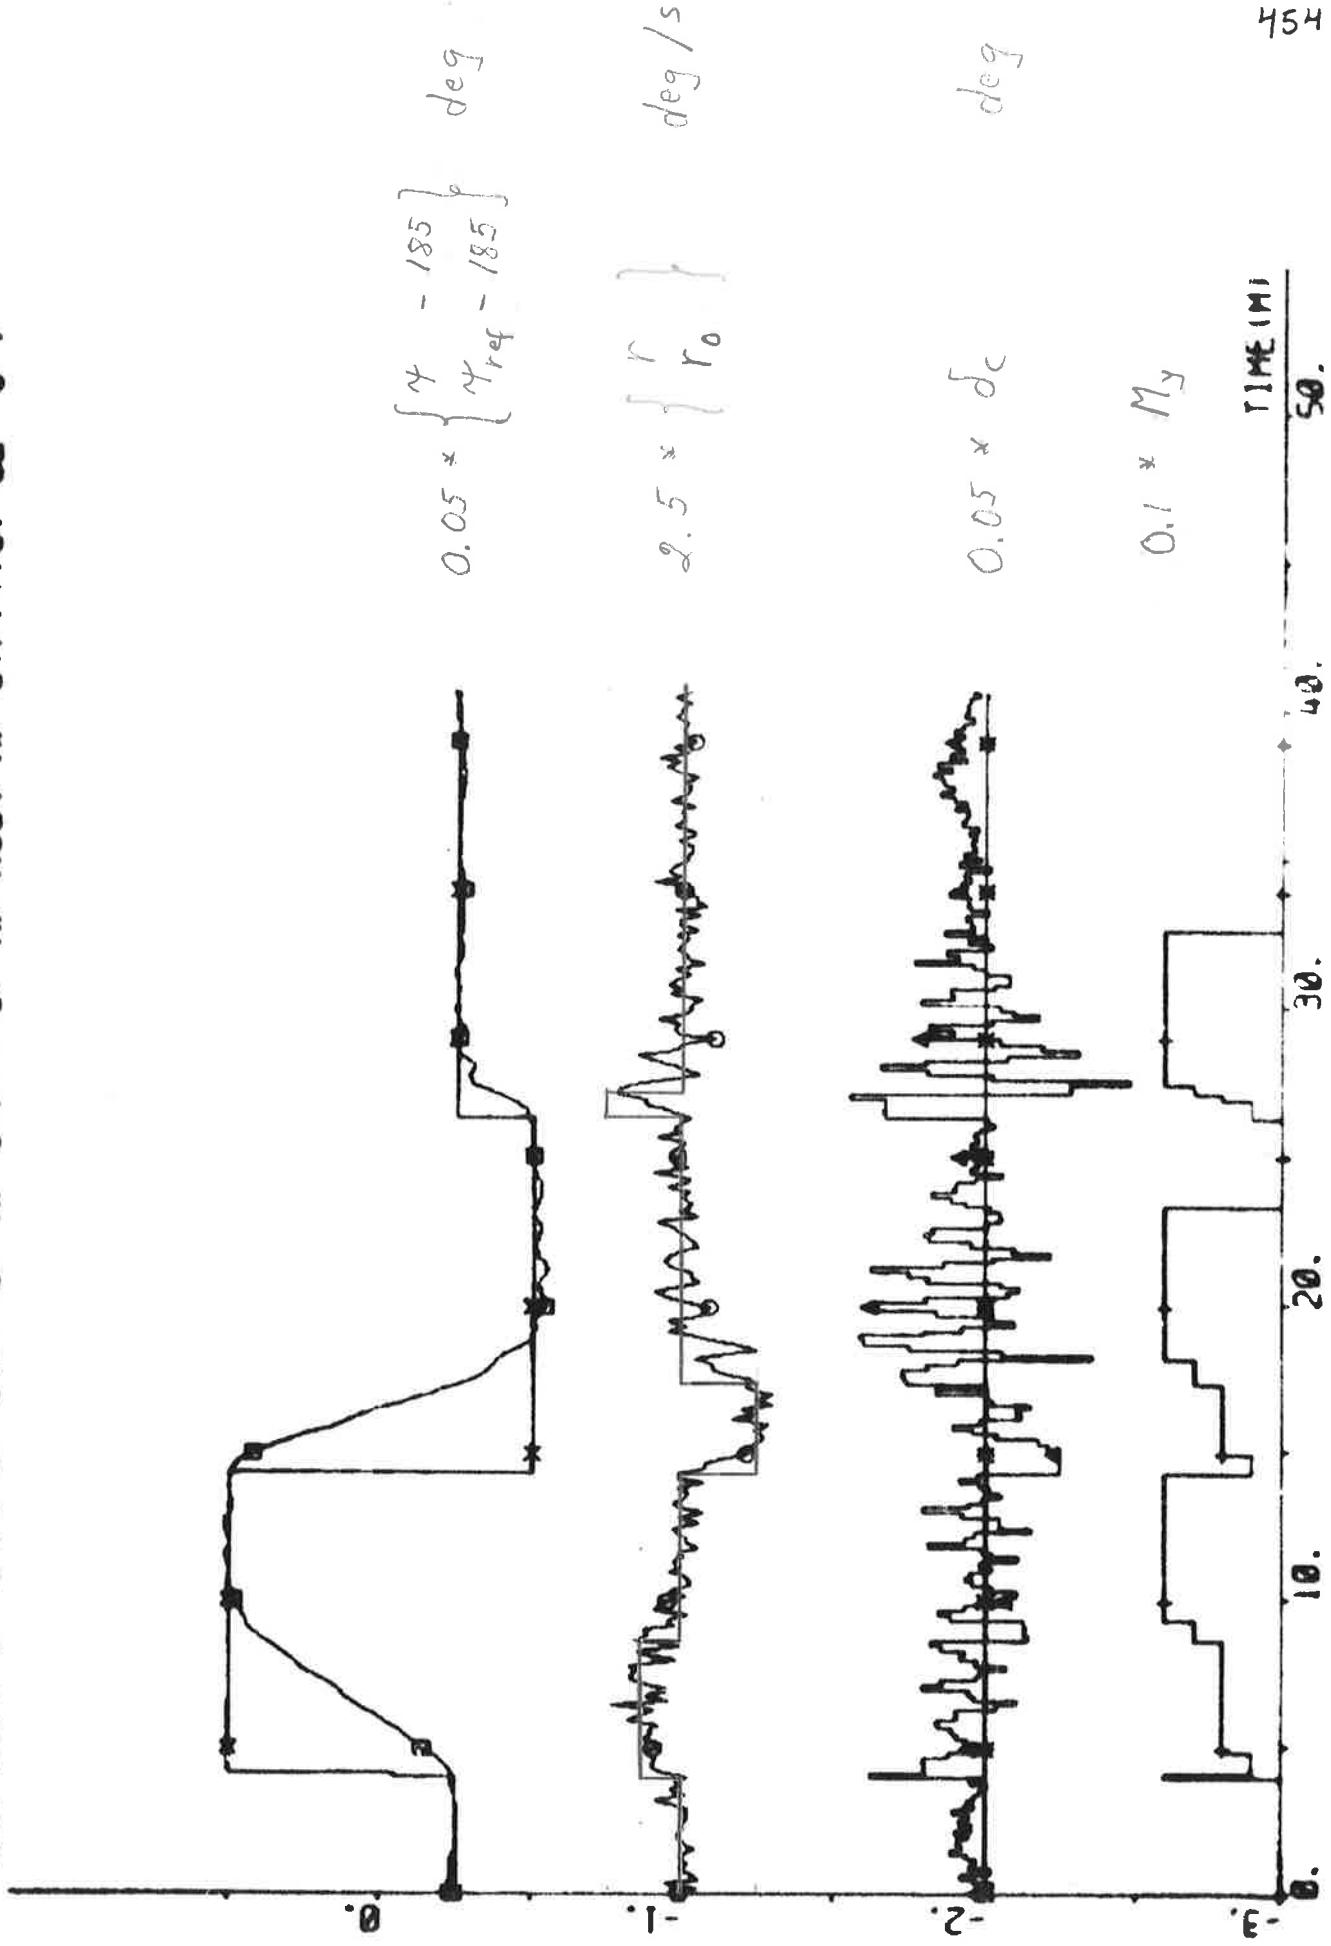

454


PLOT C1P1(1)-C1P1(11) C1P1(12) C1P1(14) C1P1(11) 00 -20 00

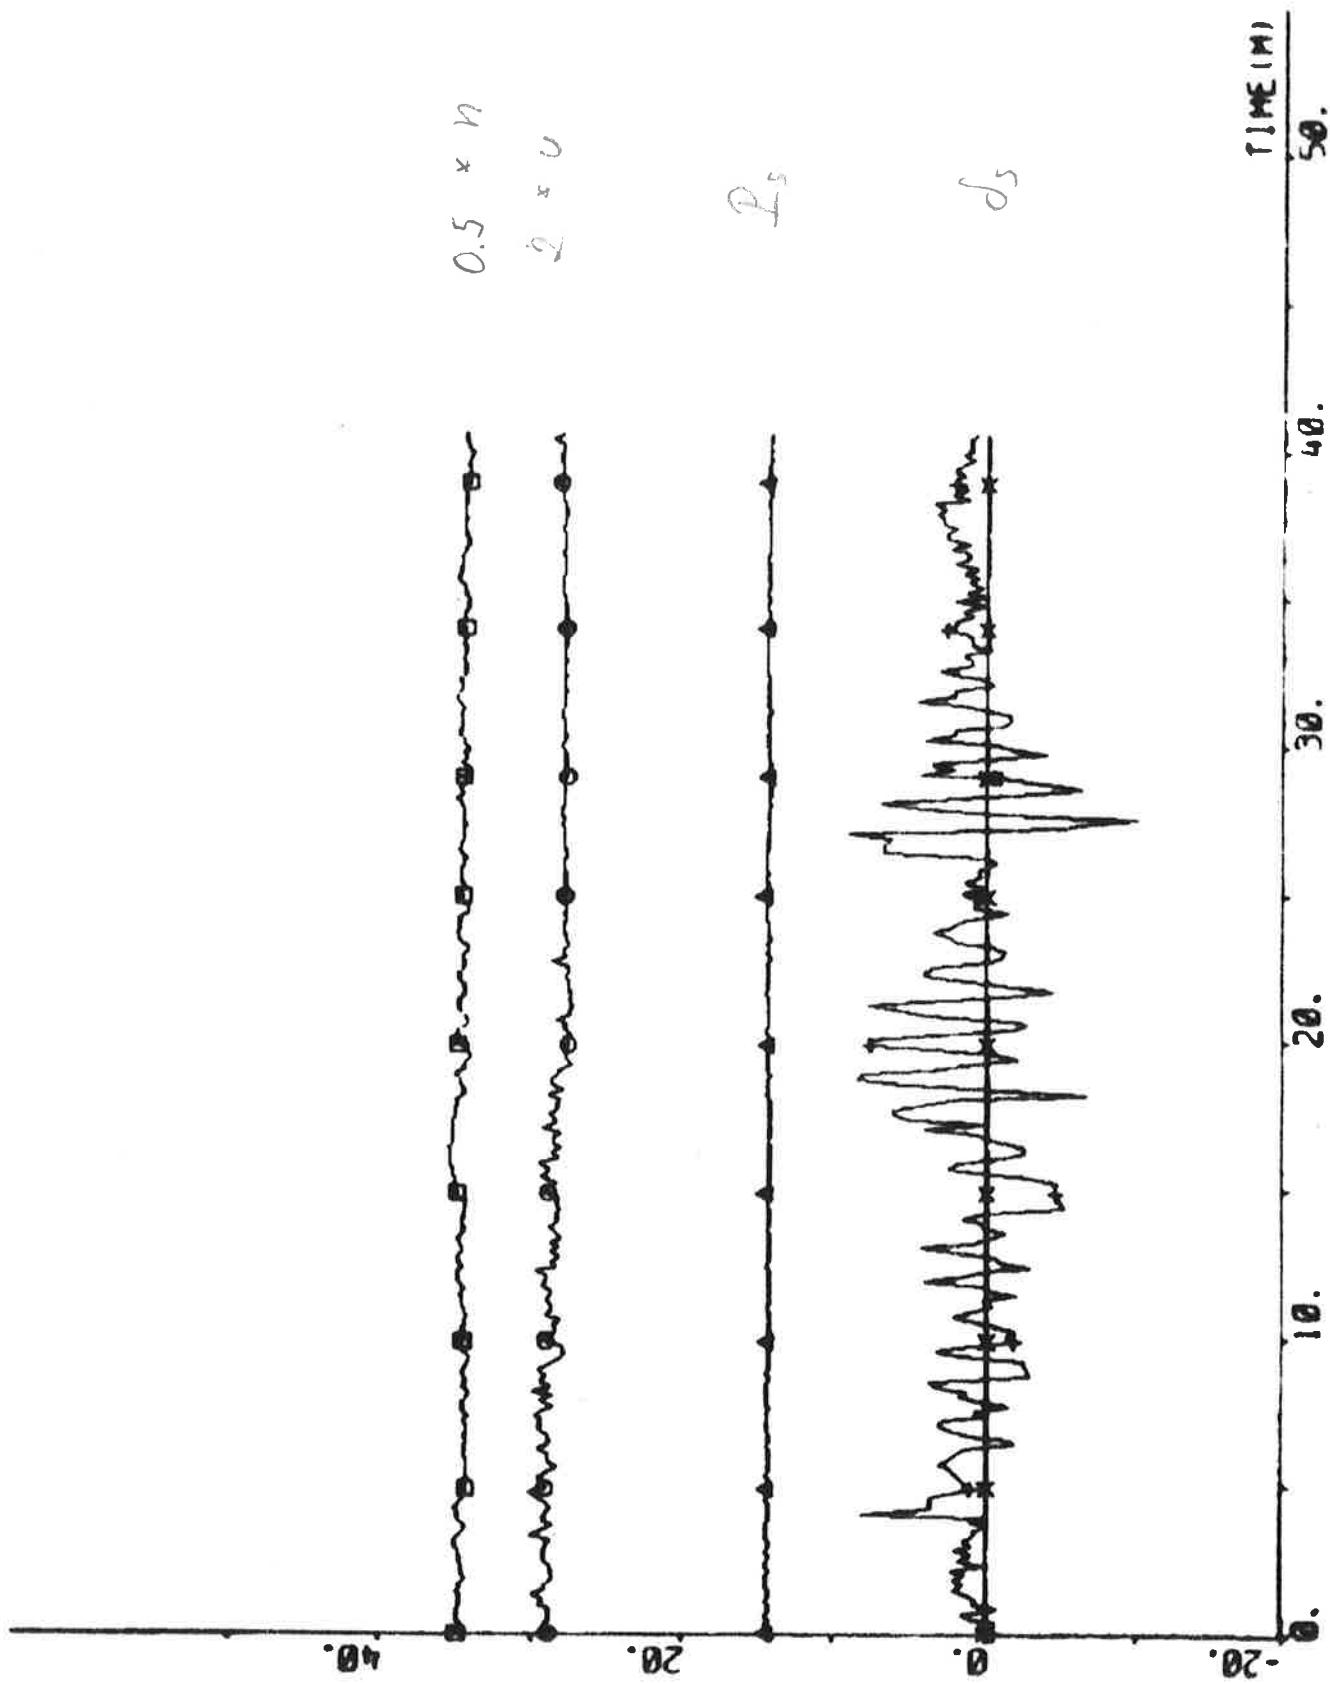


PLOT C1P1(1)-C1P2(1) C1P2(2) ERRE 03 01 02 - 3.4 0.8 - MOTS




NOT C1P1(1)-C1P1(4) C1P1(5) ERR2 EP32 00 01 02 03 -3.4 0.8 - 100%

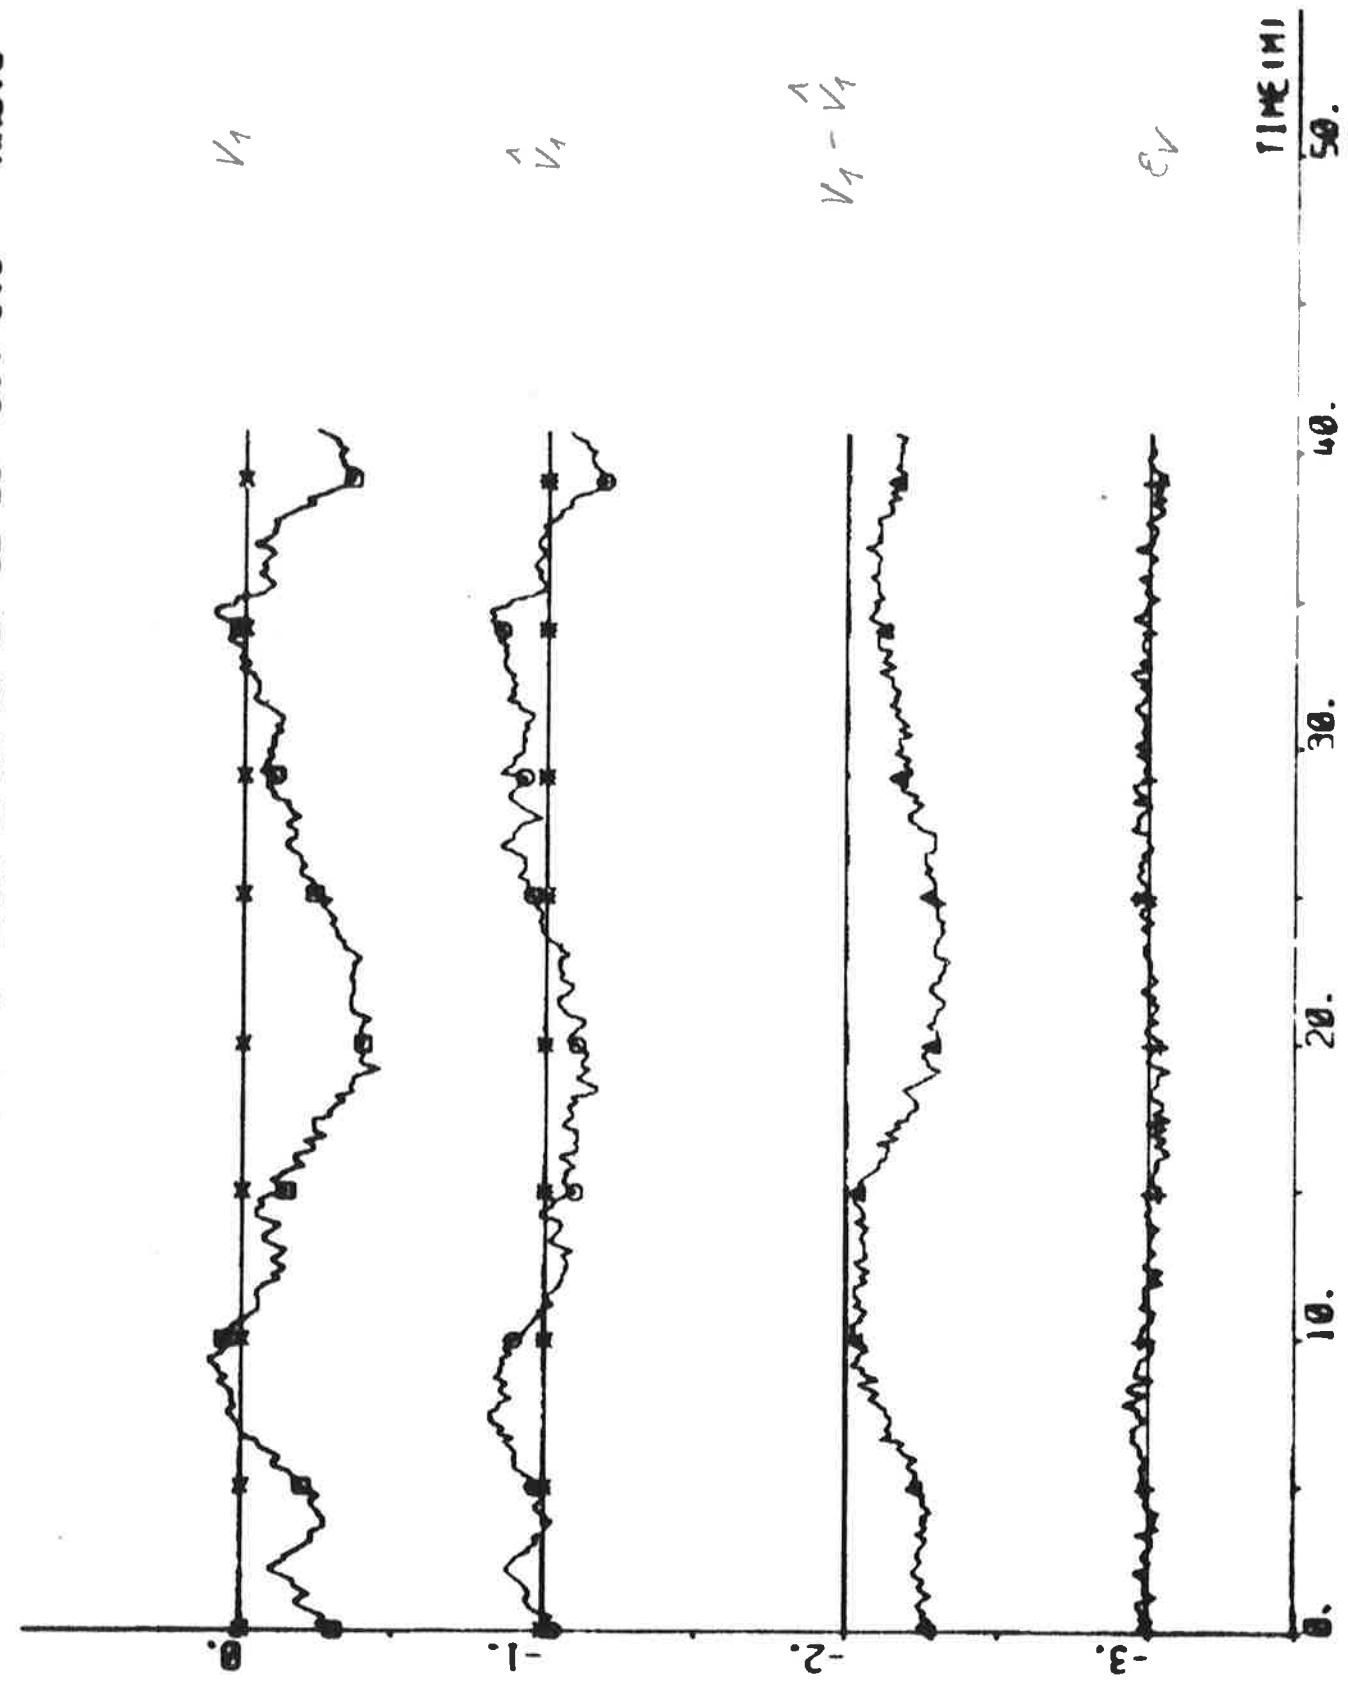


458
MOT C1P1(11)-C1P1(18) C1P1(17) ERCS ERCS 00 0002 000 000 -0.7 0.0 0.0

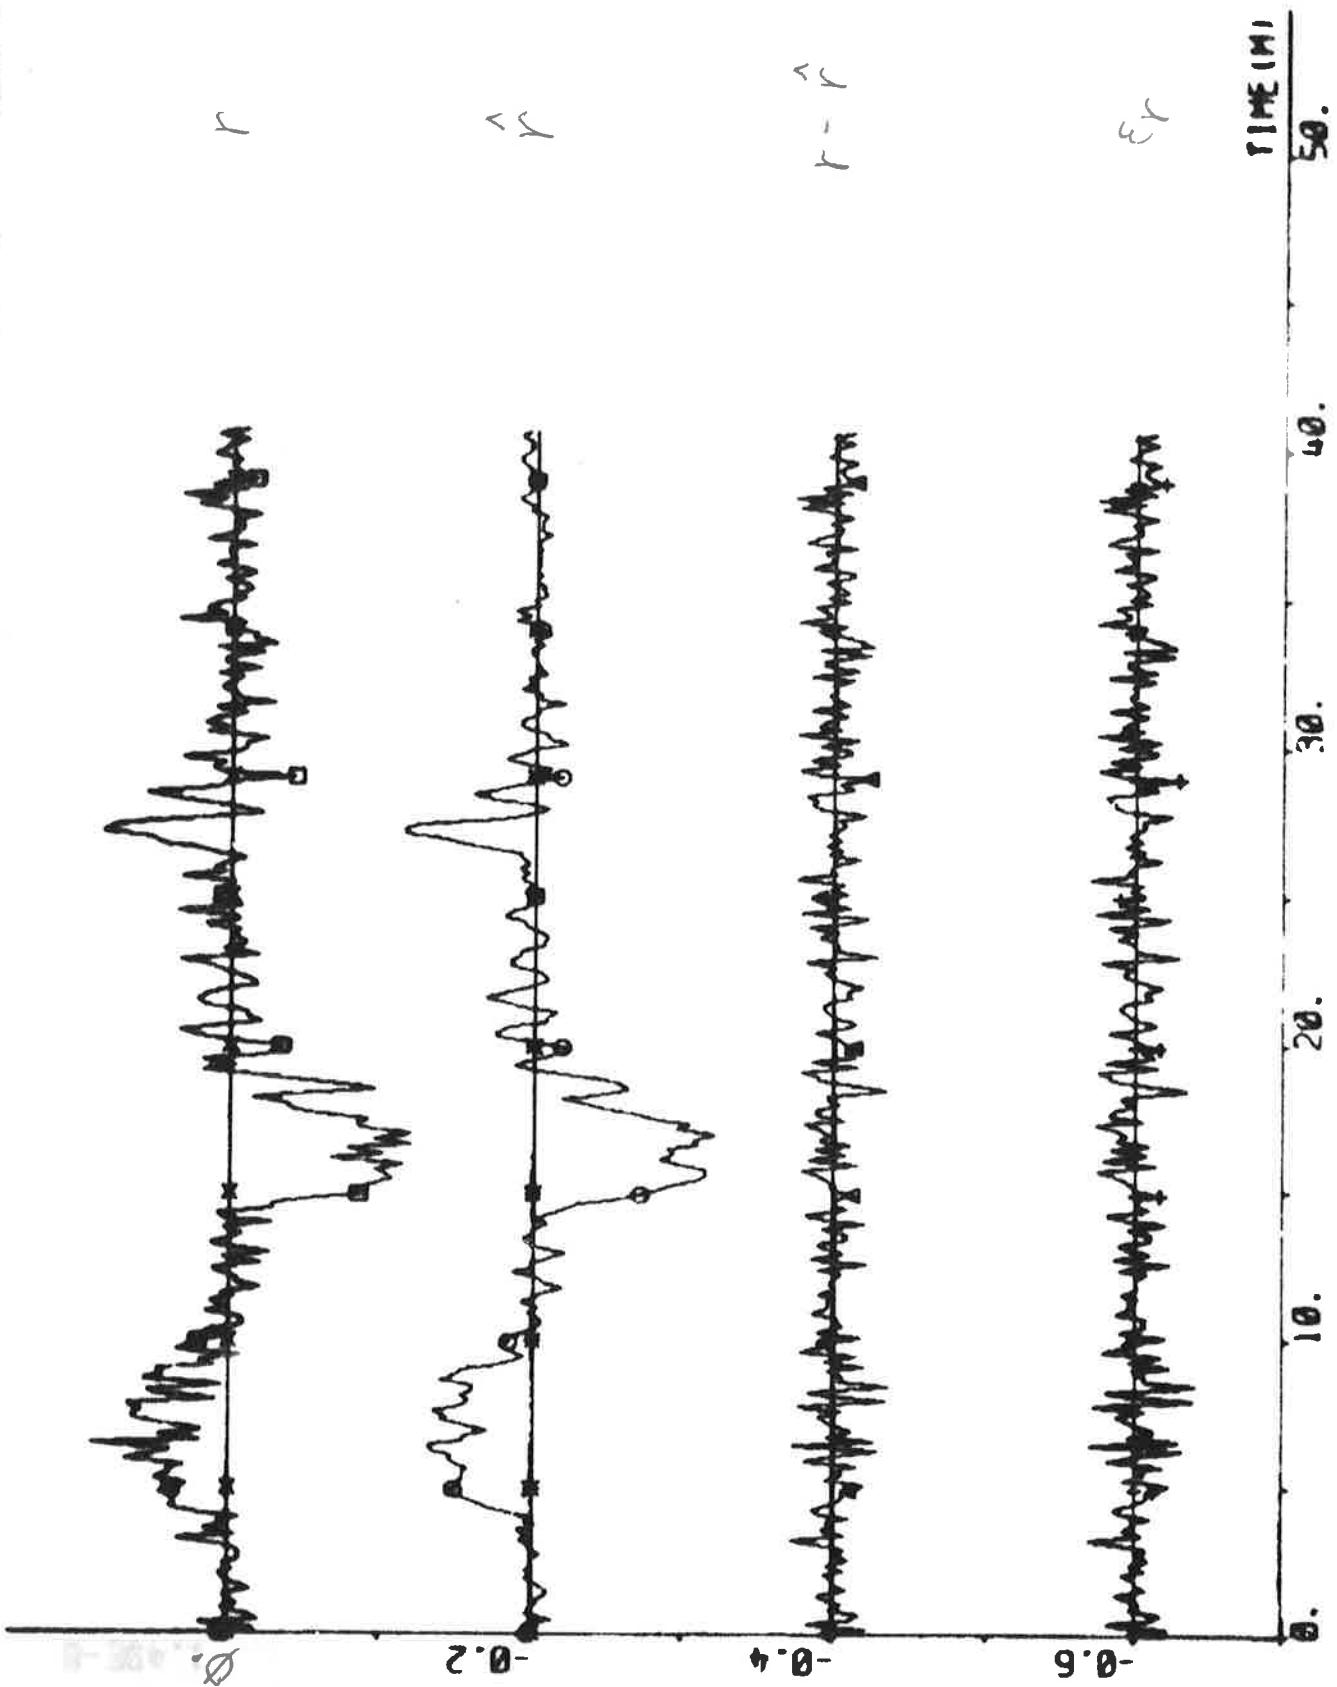


PLOT C1PI(11)-C1PI(9) C1PI(9) ERKA EPMS 00 01 02 03 -3.9 0.0 - 0.0

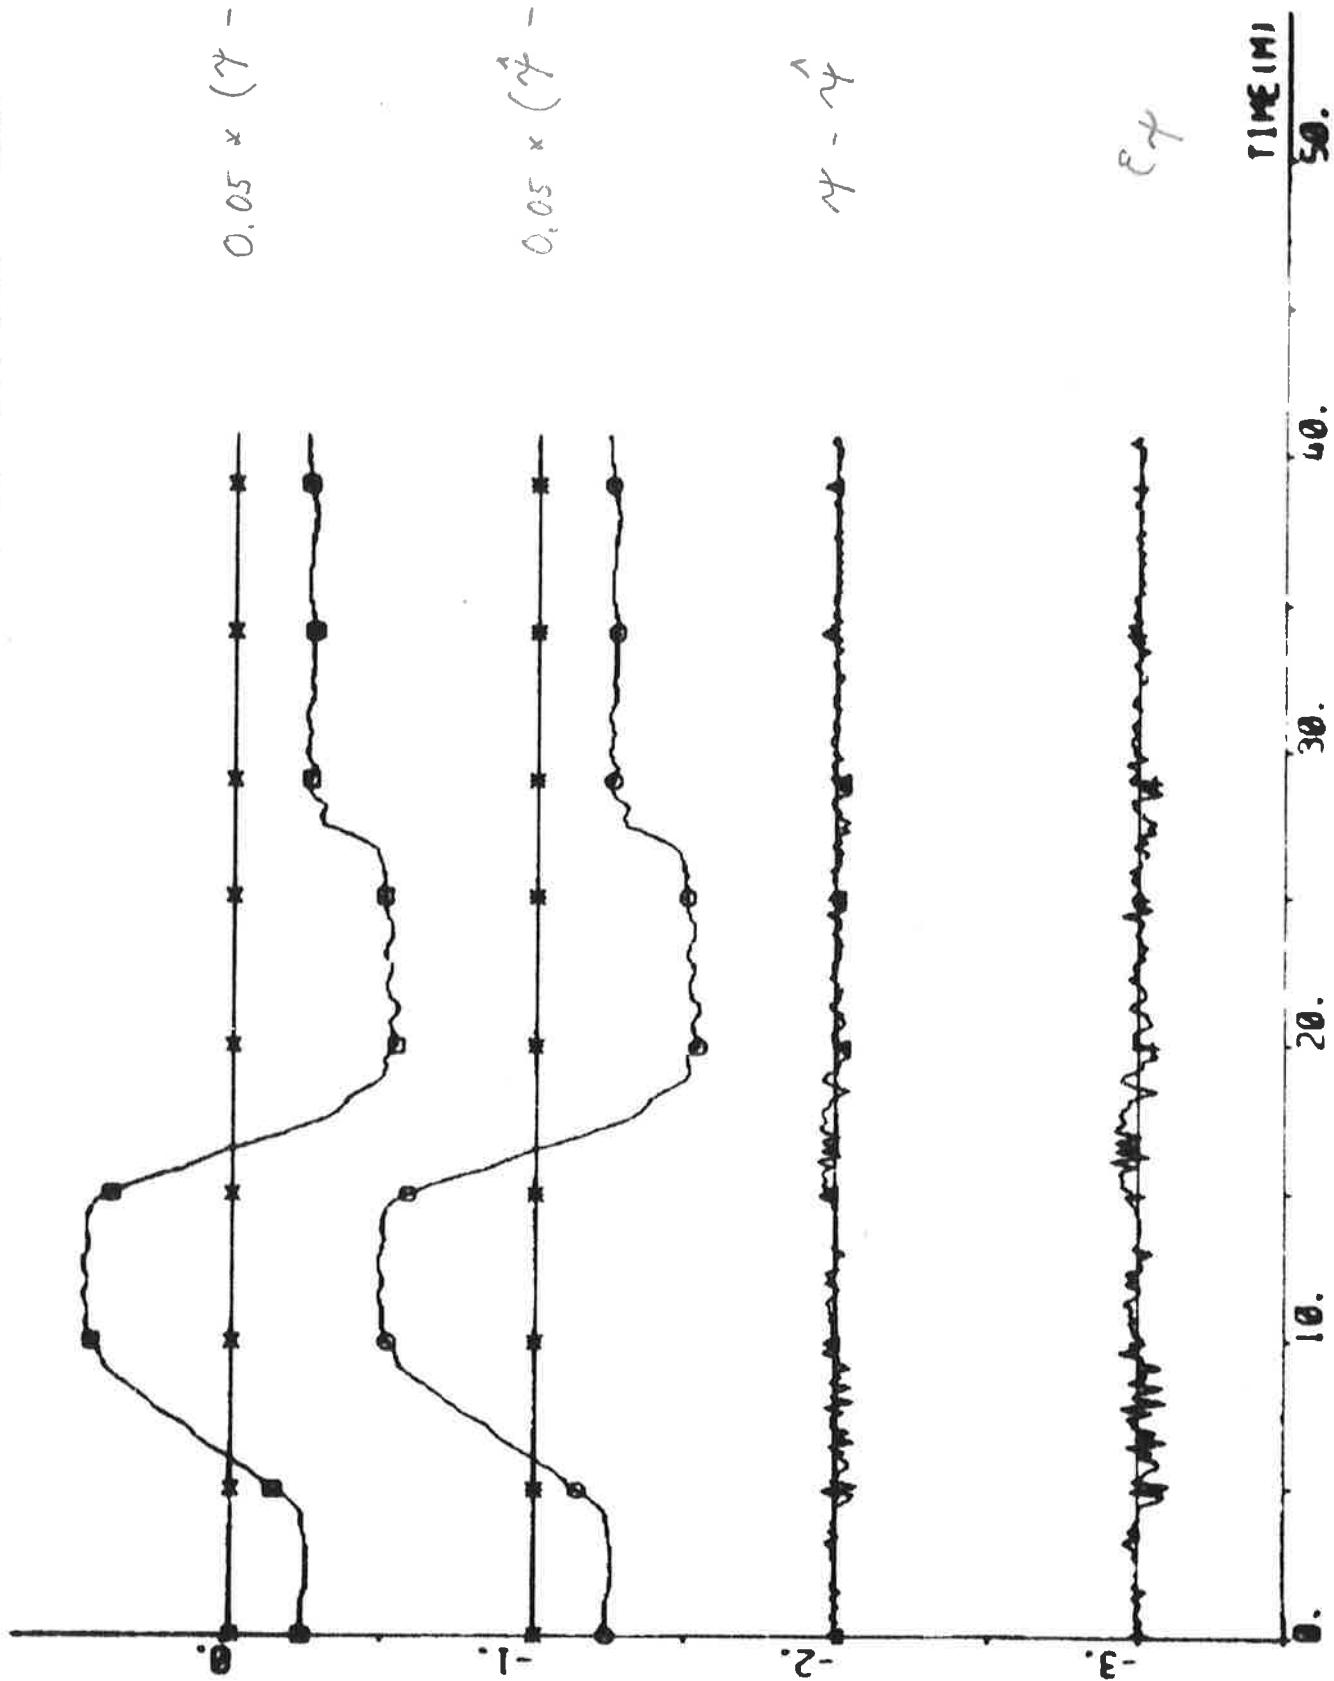


PLOT C1P1(11)-C1P1(22) C1P1(33) ERI1 EPS1 00 020 040 060 080 10 - DEG

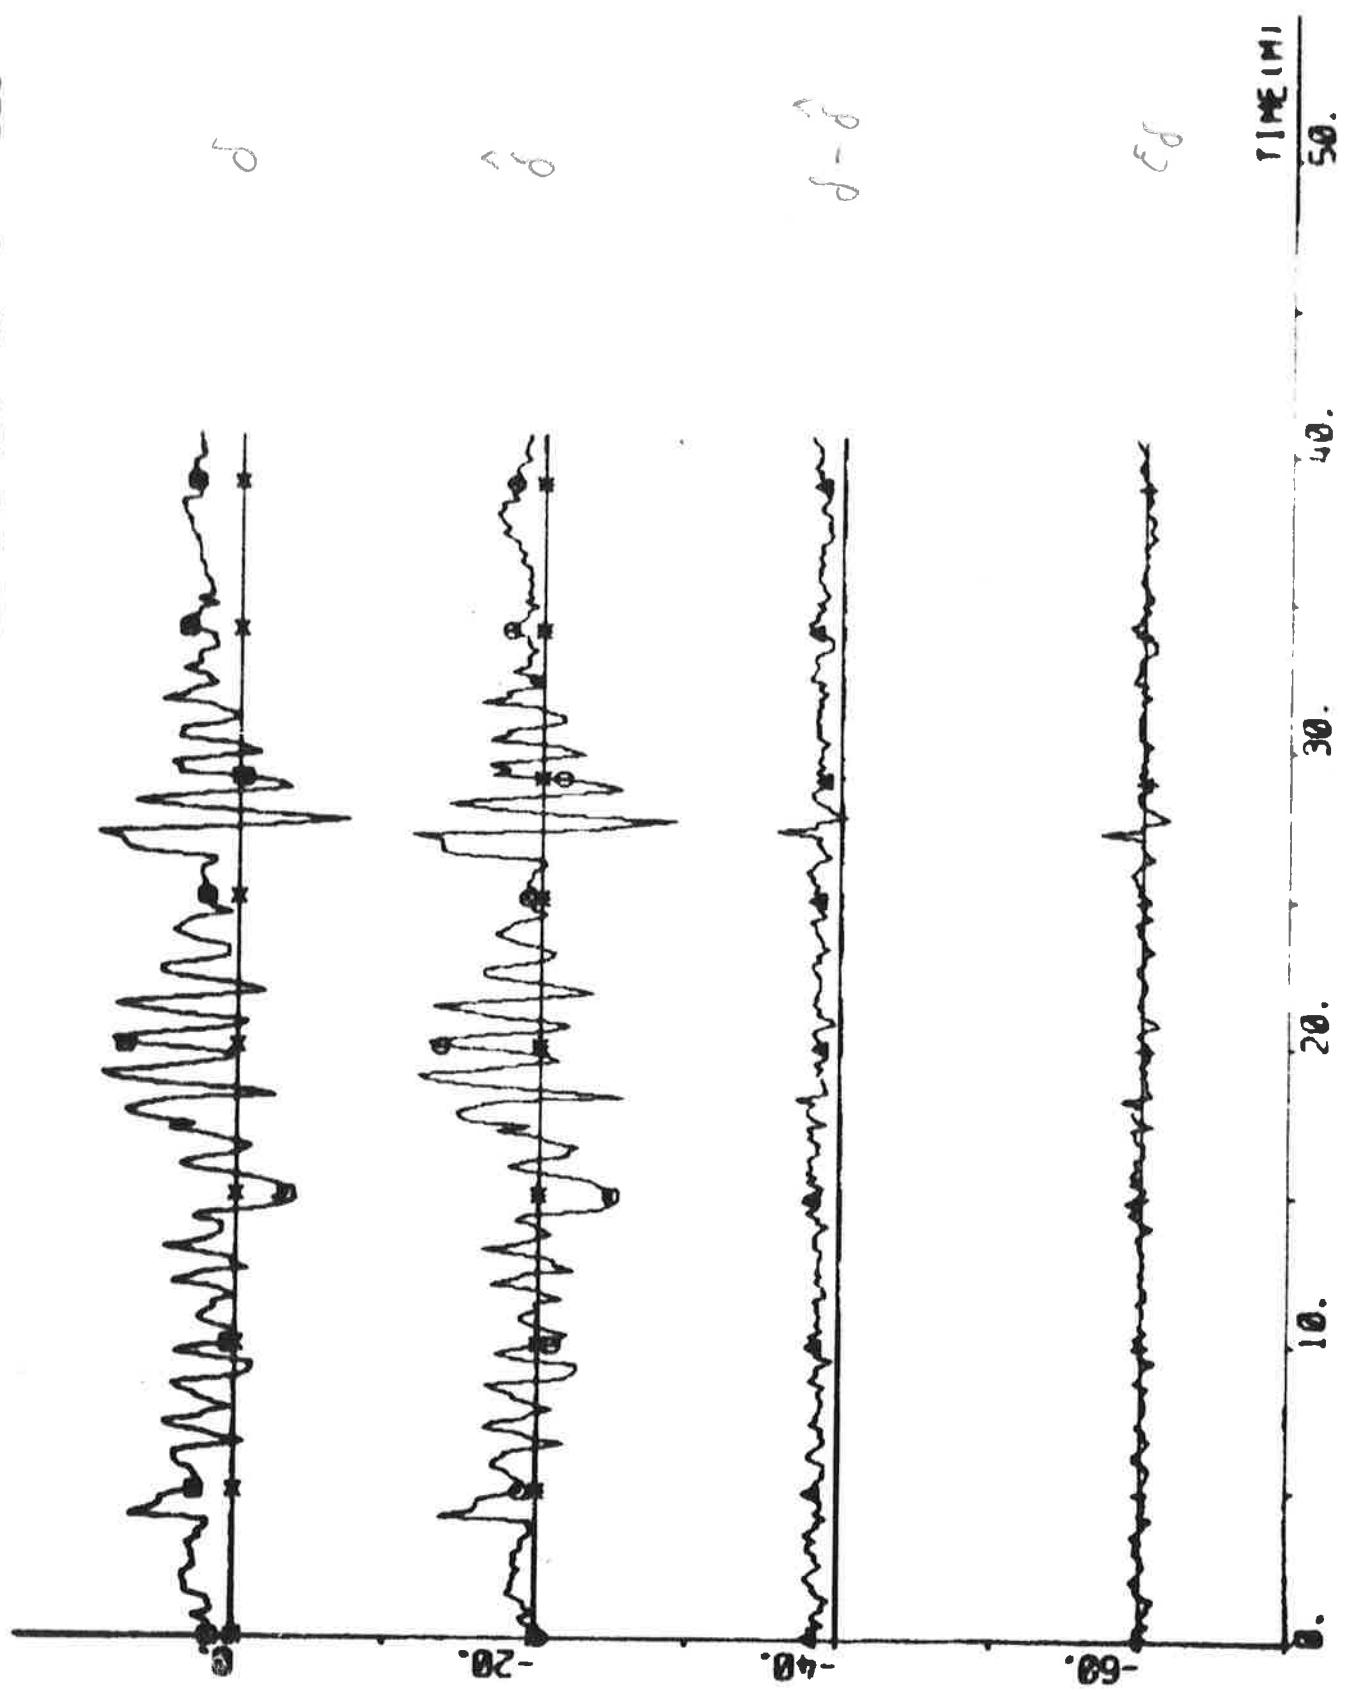

PLT C1P1(1)-C1P2(3) C1P2(4) C1P2(5) C1P2(6) 00 02 04 06 -0.5 1.5

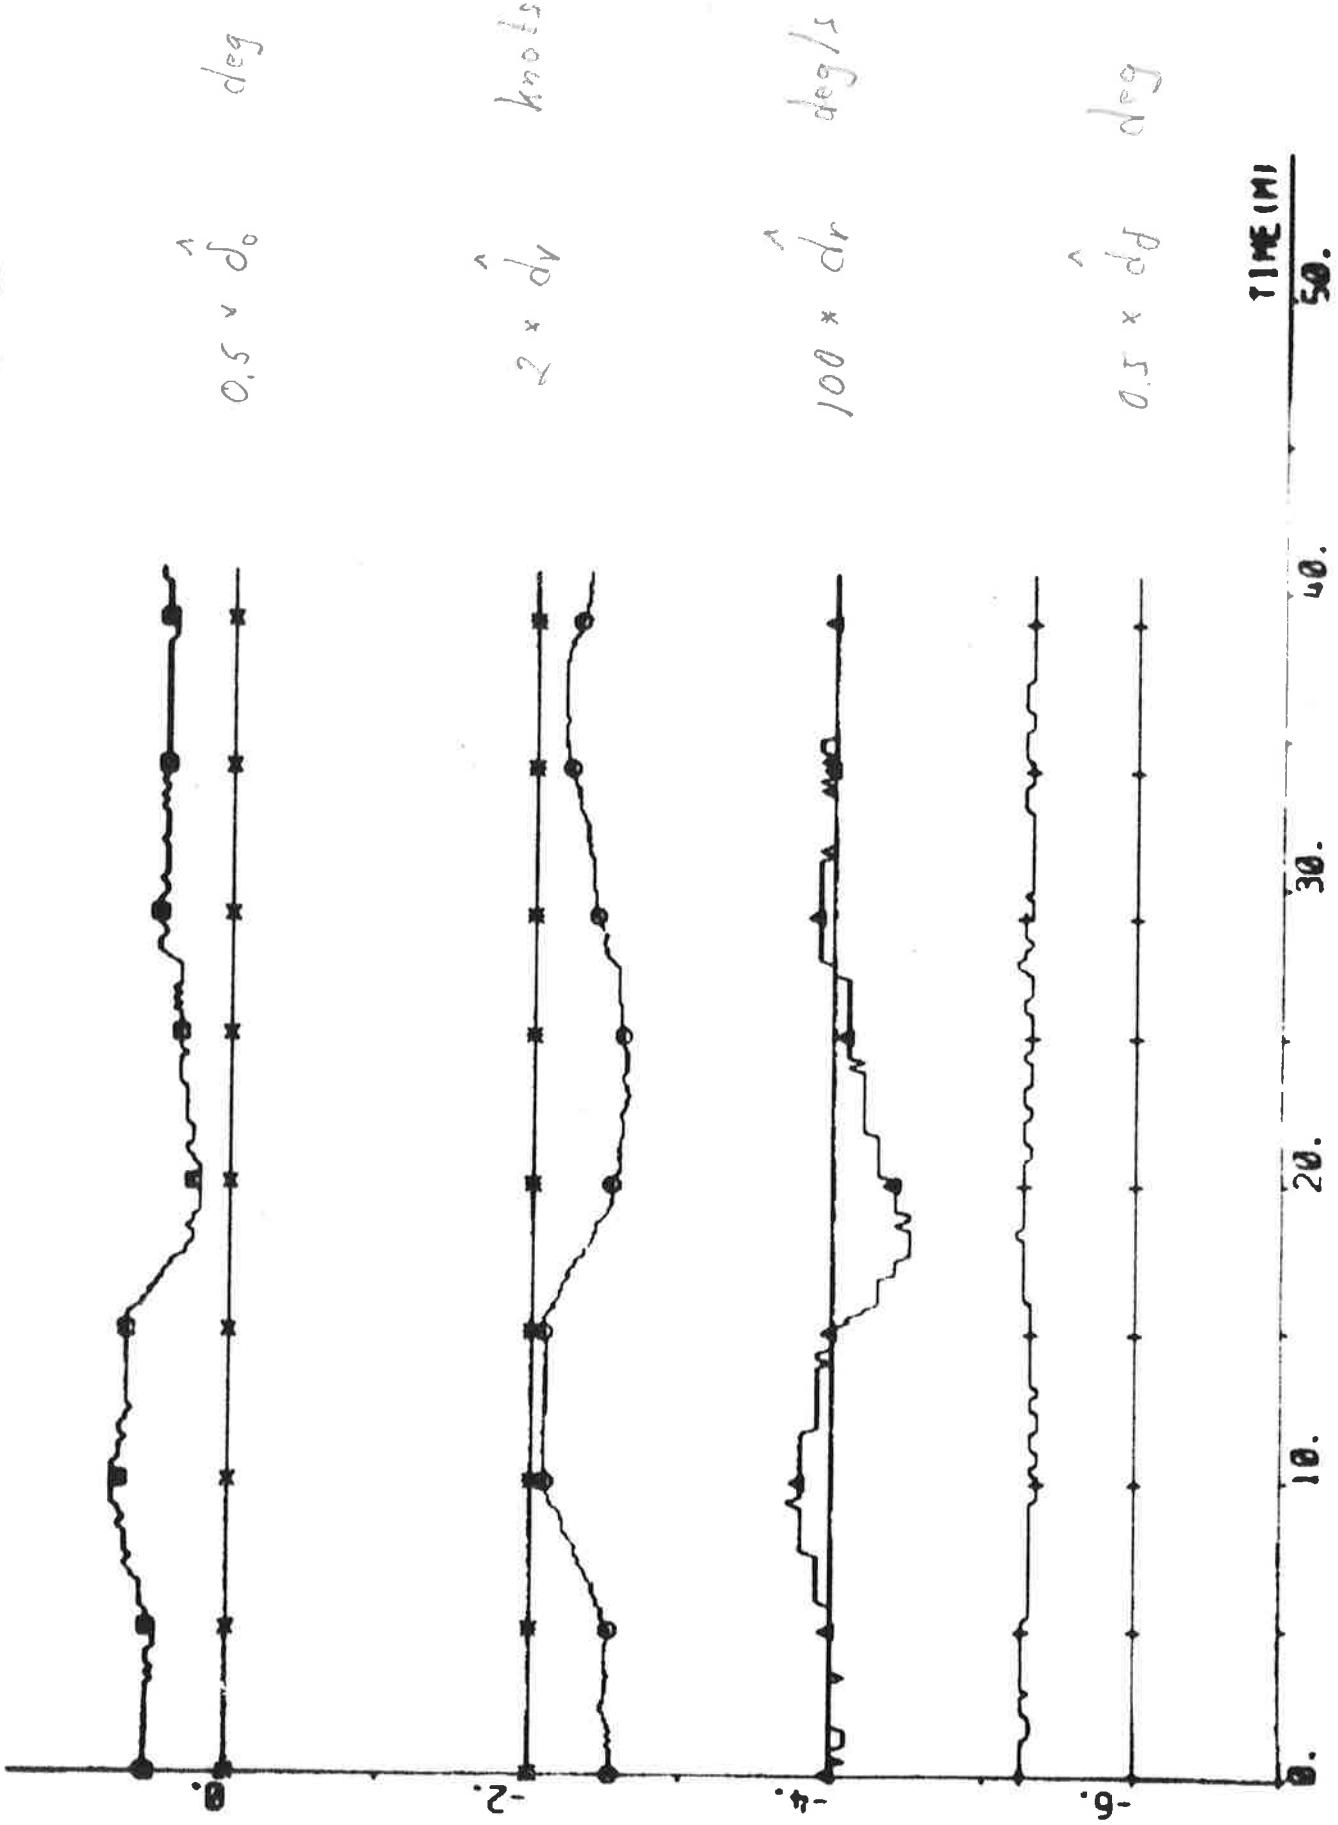

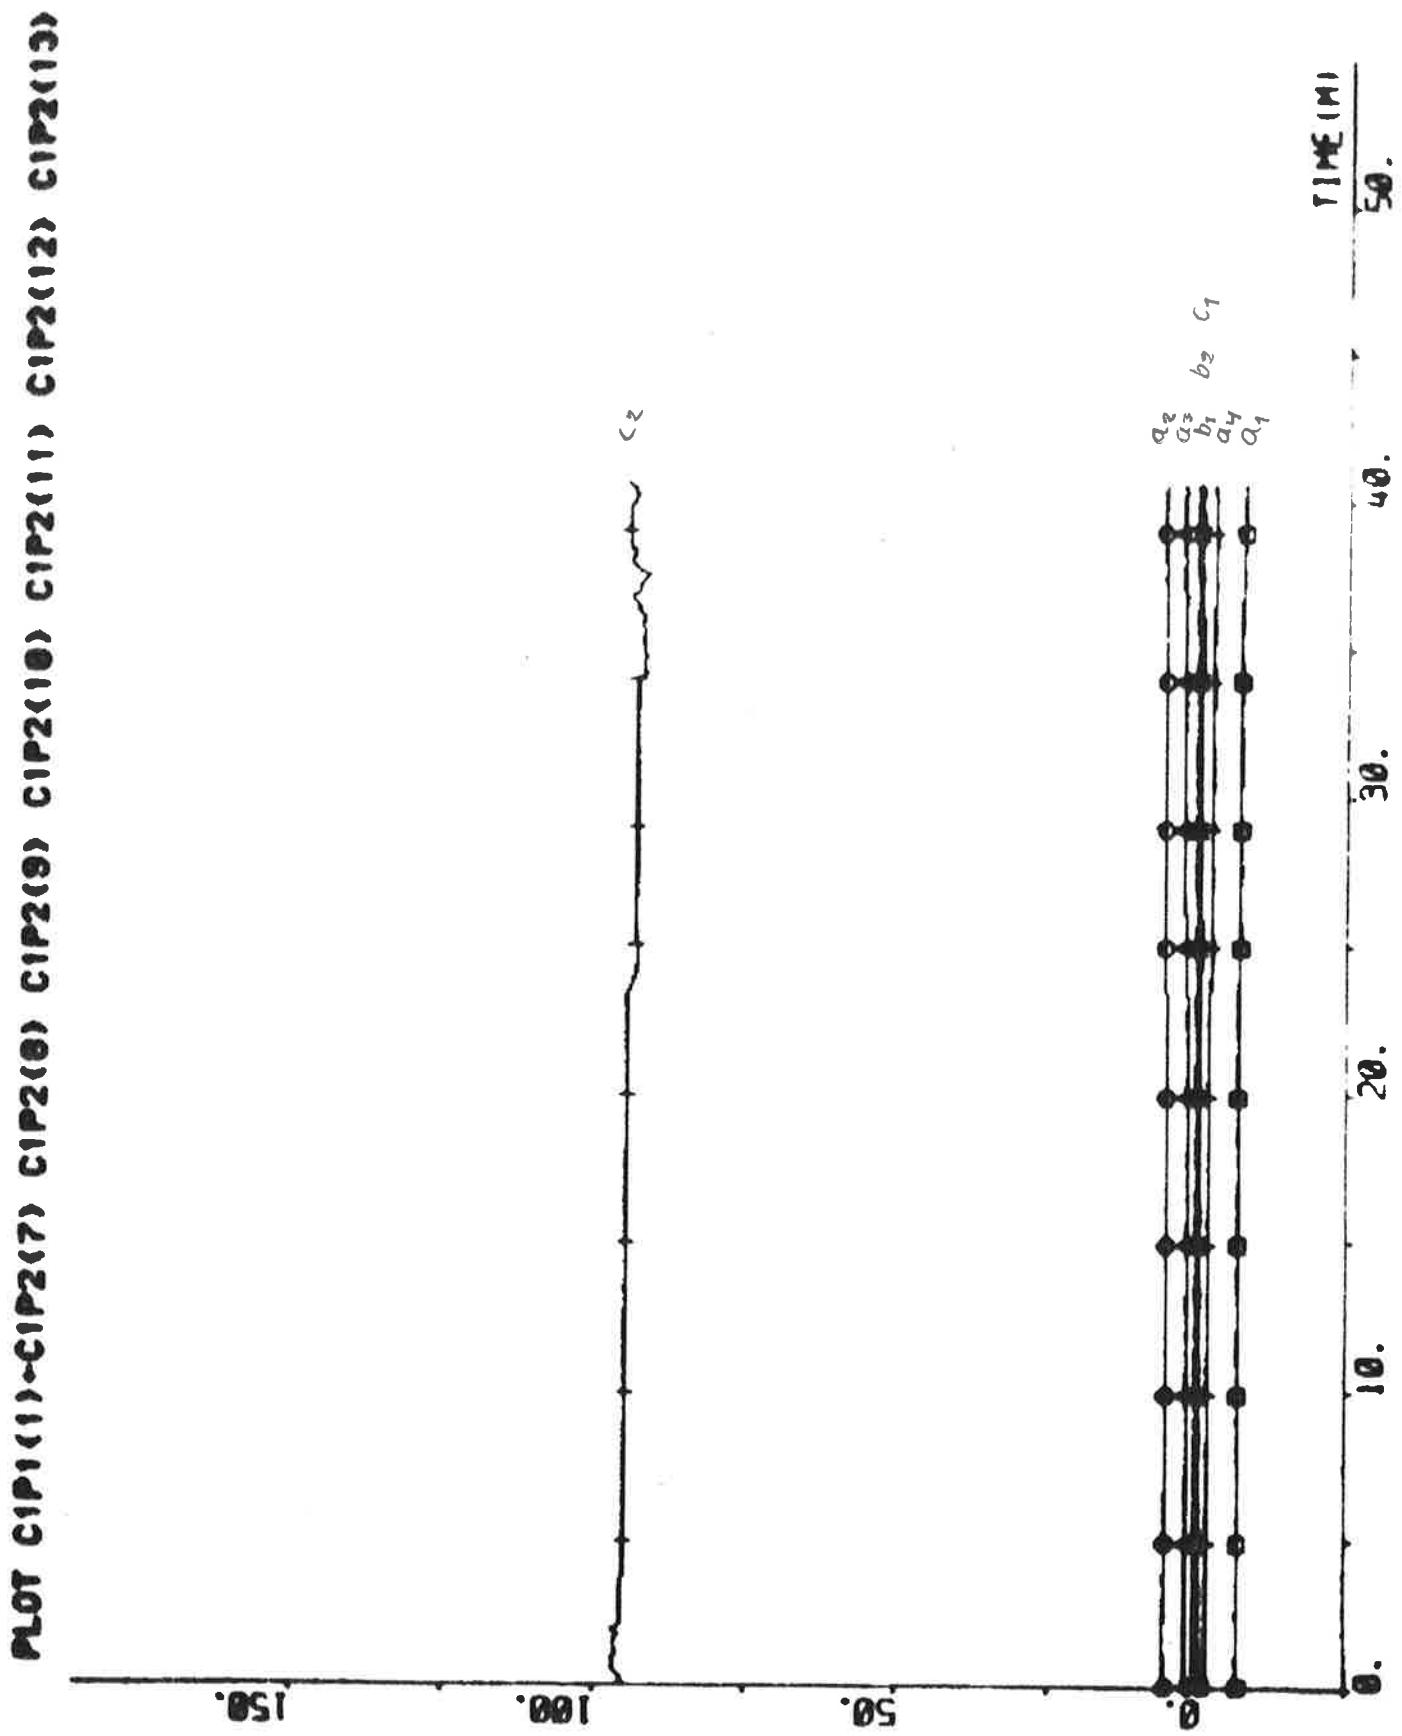

EXPERIMENT C2

| | | | |
|--------------|-------------------------------|-----------------|-------------------------|
| Date | 1976-04-22 | Forward draught | 8.5 m |
| Time | 18.25 | Aft draught | 12.5 m |
| Duration | 33 min | Wind direction | NW (4,5; see App. A) |
| Position | N 10°16' W 18°29' | Wind velocity | 6 m/s (moderate breeze) |
| ψ_{ref} | 180, (176), (147),
143 deg | Wave height | Moderate swell from N |
| r_{ref} | 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from
the Kalman filter.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 8 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -10.20 \\ 11.11 \\ 2.38 \\ -3.34 \\ 0.54 \\ 0.26 \\ -0.71 \\ 65.62 \end{bmatrix} \quad P = \begin{bmatrix} 12.68 \\ -15.73 & 39.39 \\ -3.62 & -32.48 & 73.15 \\ 6.95 & 9.07 & -37.59 & 22.09 \\ -0.35 & -0.60 & 2.11 & -1.14 & 0.08 \\ -0.19 & 0.16 & 0.04 & -0.03 & 0.01 & 0.02 \\ -2.11 & 2.63 & 0.97 & -1.48 & 0.05 & 0.01 & 1.21 \\ 50.22 & -17.07 & -114.61 & 81.47 & -4.60 & -0.60 & 11.50 & 1304.89 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.05$$

$$\hat{\delta}_0 = -1.2 \text{ deg} \quad \hat{d}_v = 0.04 \text{ knots} \quad \hat{d}_r = -0.011 \text{ deg/s} \quad \hat{d}_\delta = 1.7 \text{ deg}$$

$$\bar{\delta}_c = 1.2 \text{ deg} \quad (\text{Initial value: } 0.3 \text{ deg})$$

Statistics (mean value and standard deviation)

| | | | |
|-------|------------------------------|-------------------|-------------------------------|
| n | $69.3 \pm 0.5 \text{ rpm}$ | ϵ_v | $0.00 \pm 0.02 \text{ knots}$ |
| u | $13.7 \pm 0.2 \text{ knots}$ | ϵ_r | $0.00 \pm 0.01 \text{ deg/s}$ |
| P_s | $14.0 \pm 0.1 \text{ MW}$ | ϵ_ψ | $0.01 \pm 0.02 \text{ deg}$ |
| | | ϵ_δ | $0.1 \pm 0.6 \text{ deg}$ |

run C2P1(11)-C2P1(10) C2P1(8) MP C2P1(10) MP BODY MP C2P1(15) 82 - 3 1

464



$$0.025 * \left\{ \begin{array}{l} \gamma = 160 \\ \gamma_{ref} = 160 \end{array} \right\} \text{ deg}$$

$$2.5 * \left\{ \begin{array}{l} r \\ r_0 \end{array} \right\} \text{ deg / s}$$




$$0.05 * \dot{\phi}_c \text{ deg}$$




$$0.1 * \dot{\gamma}_y$$




PL0T C2P1(1)-C2P1(13) C2P1(12) C2P1(14) C2P1(11) C2P1(10) -20 50

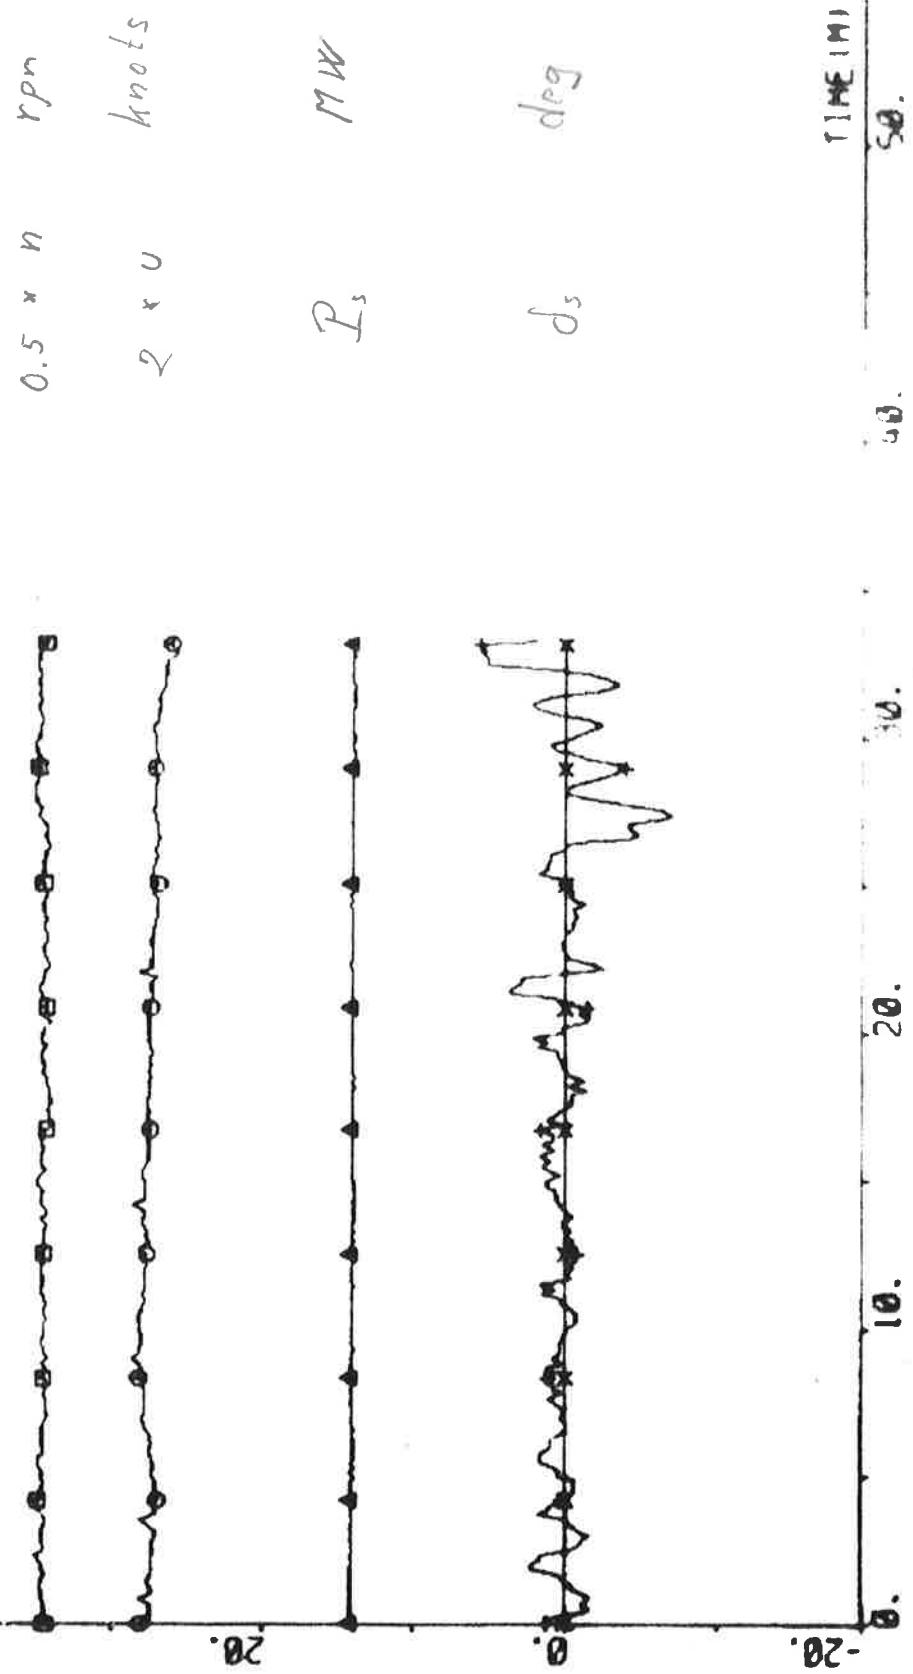



466

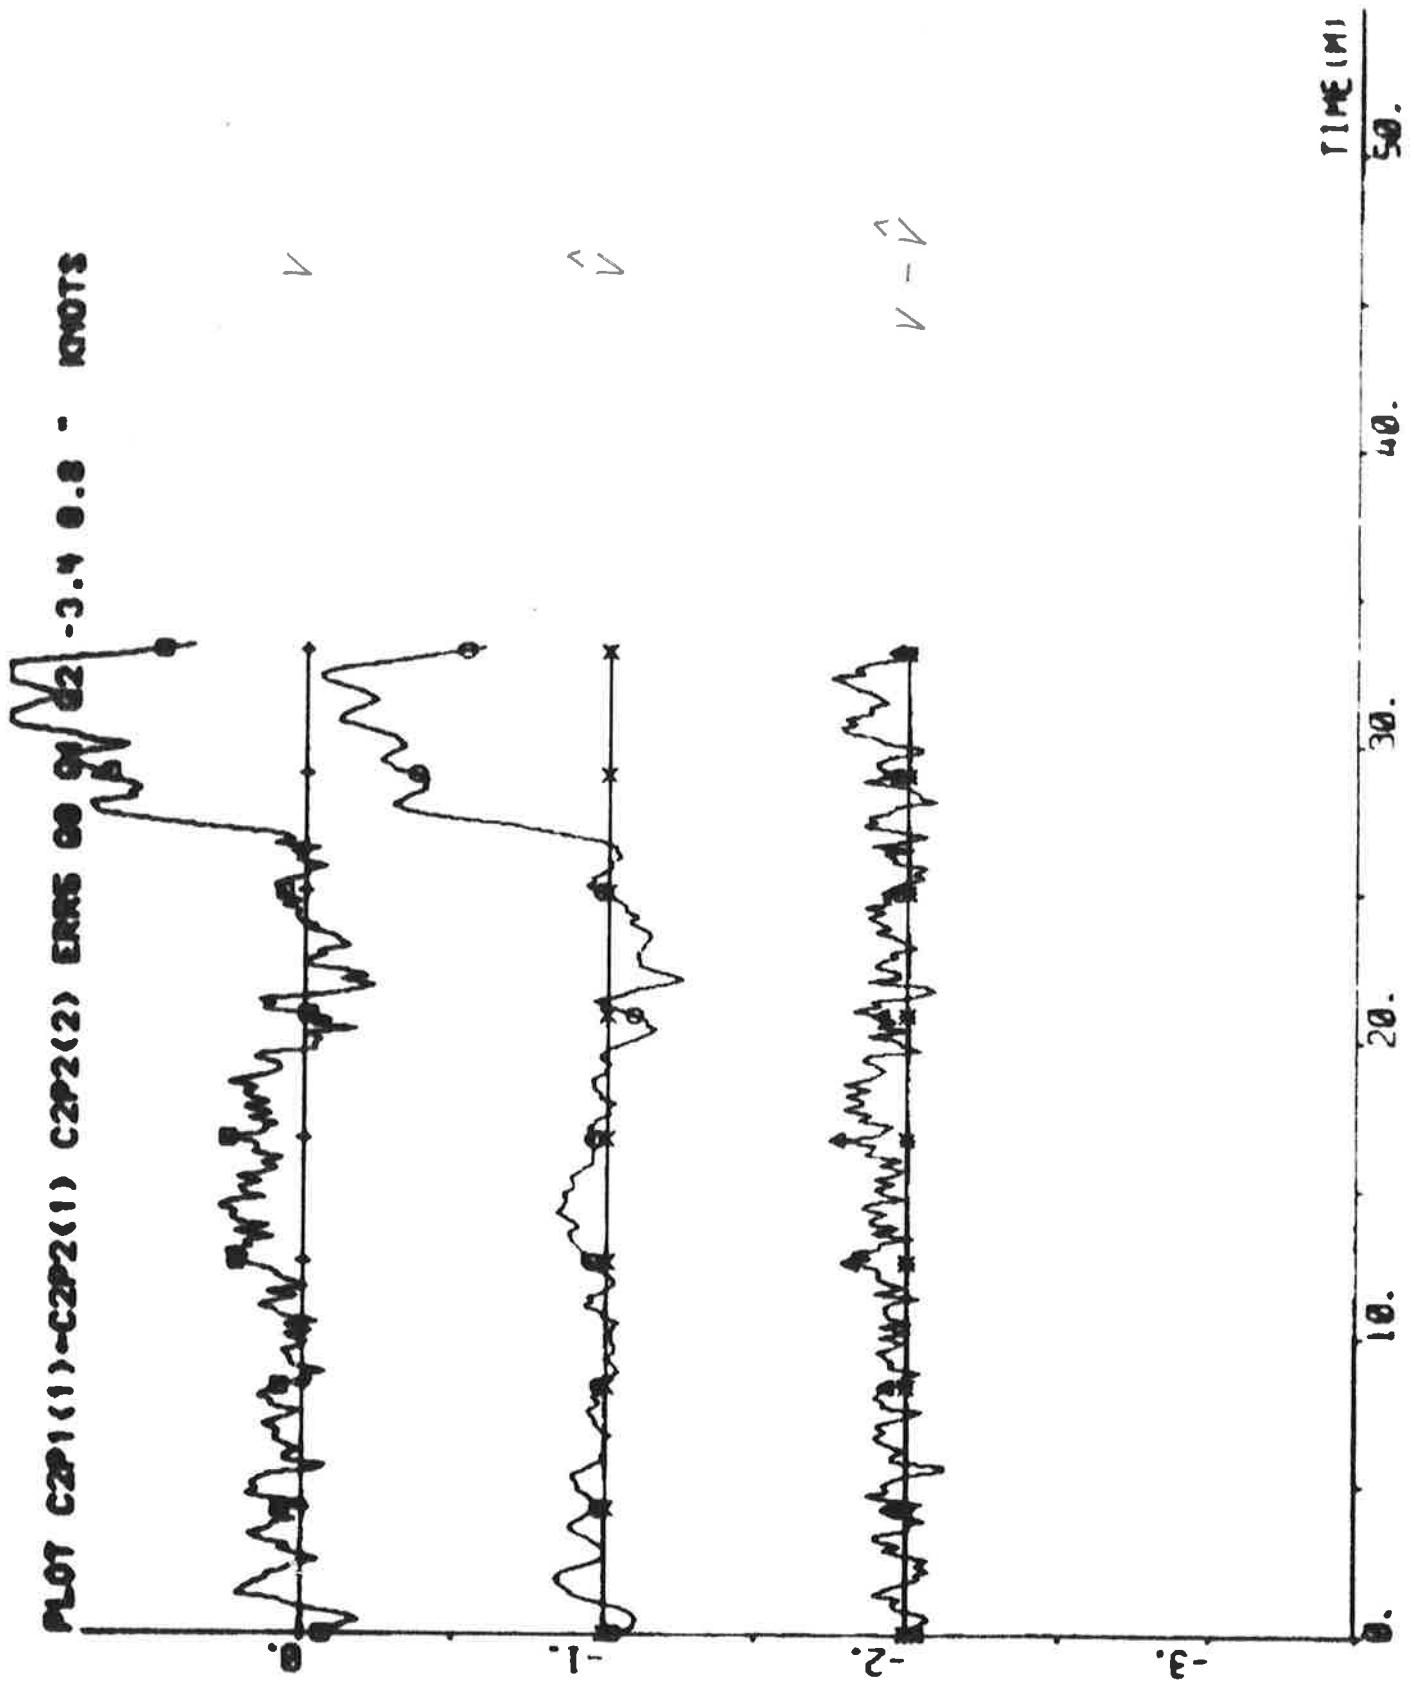


PL0T C2P1(1)-C2P1(4) C2P1(5) ER02 EP02 00 01 02 03 -3.4 0.3 -

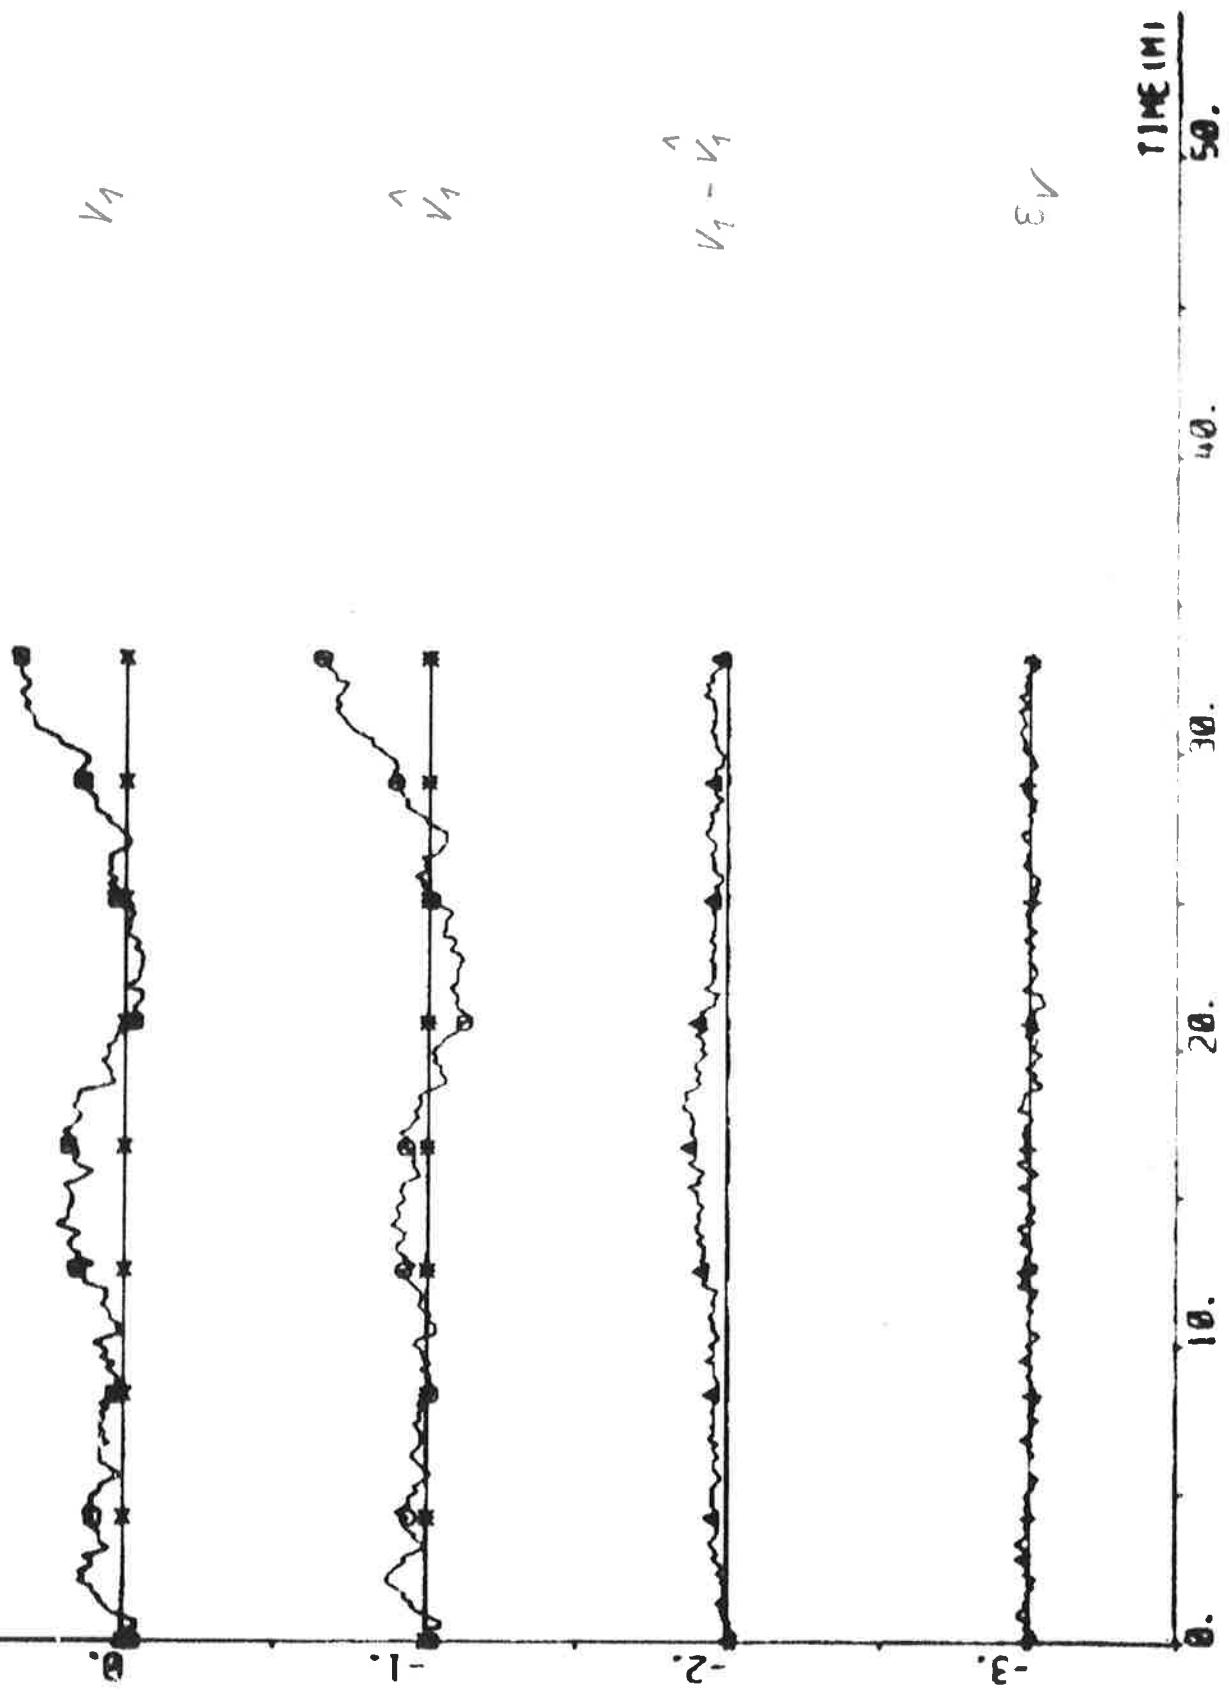


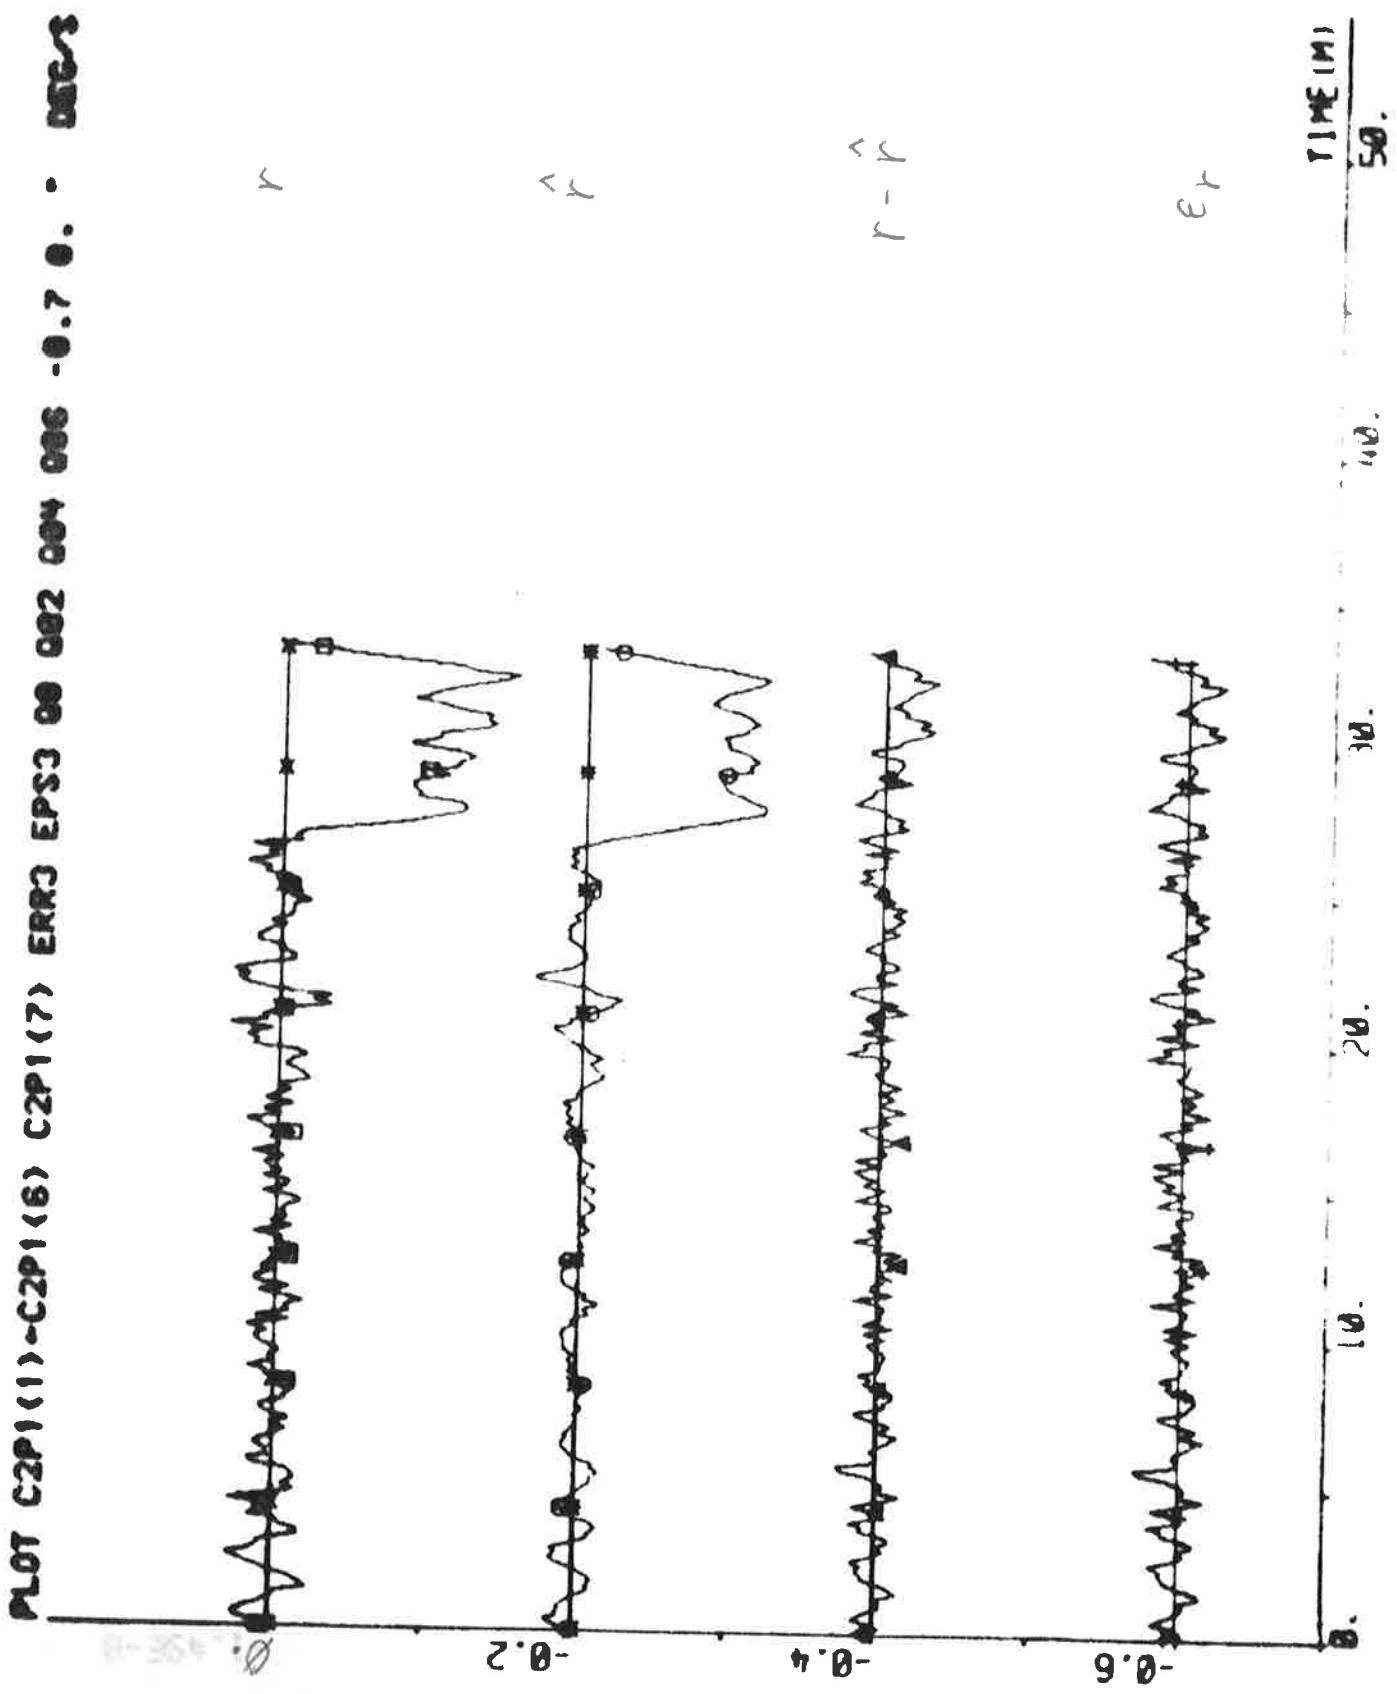


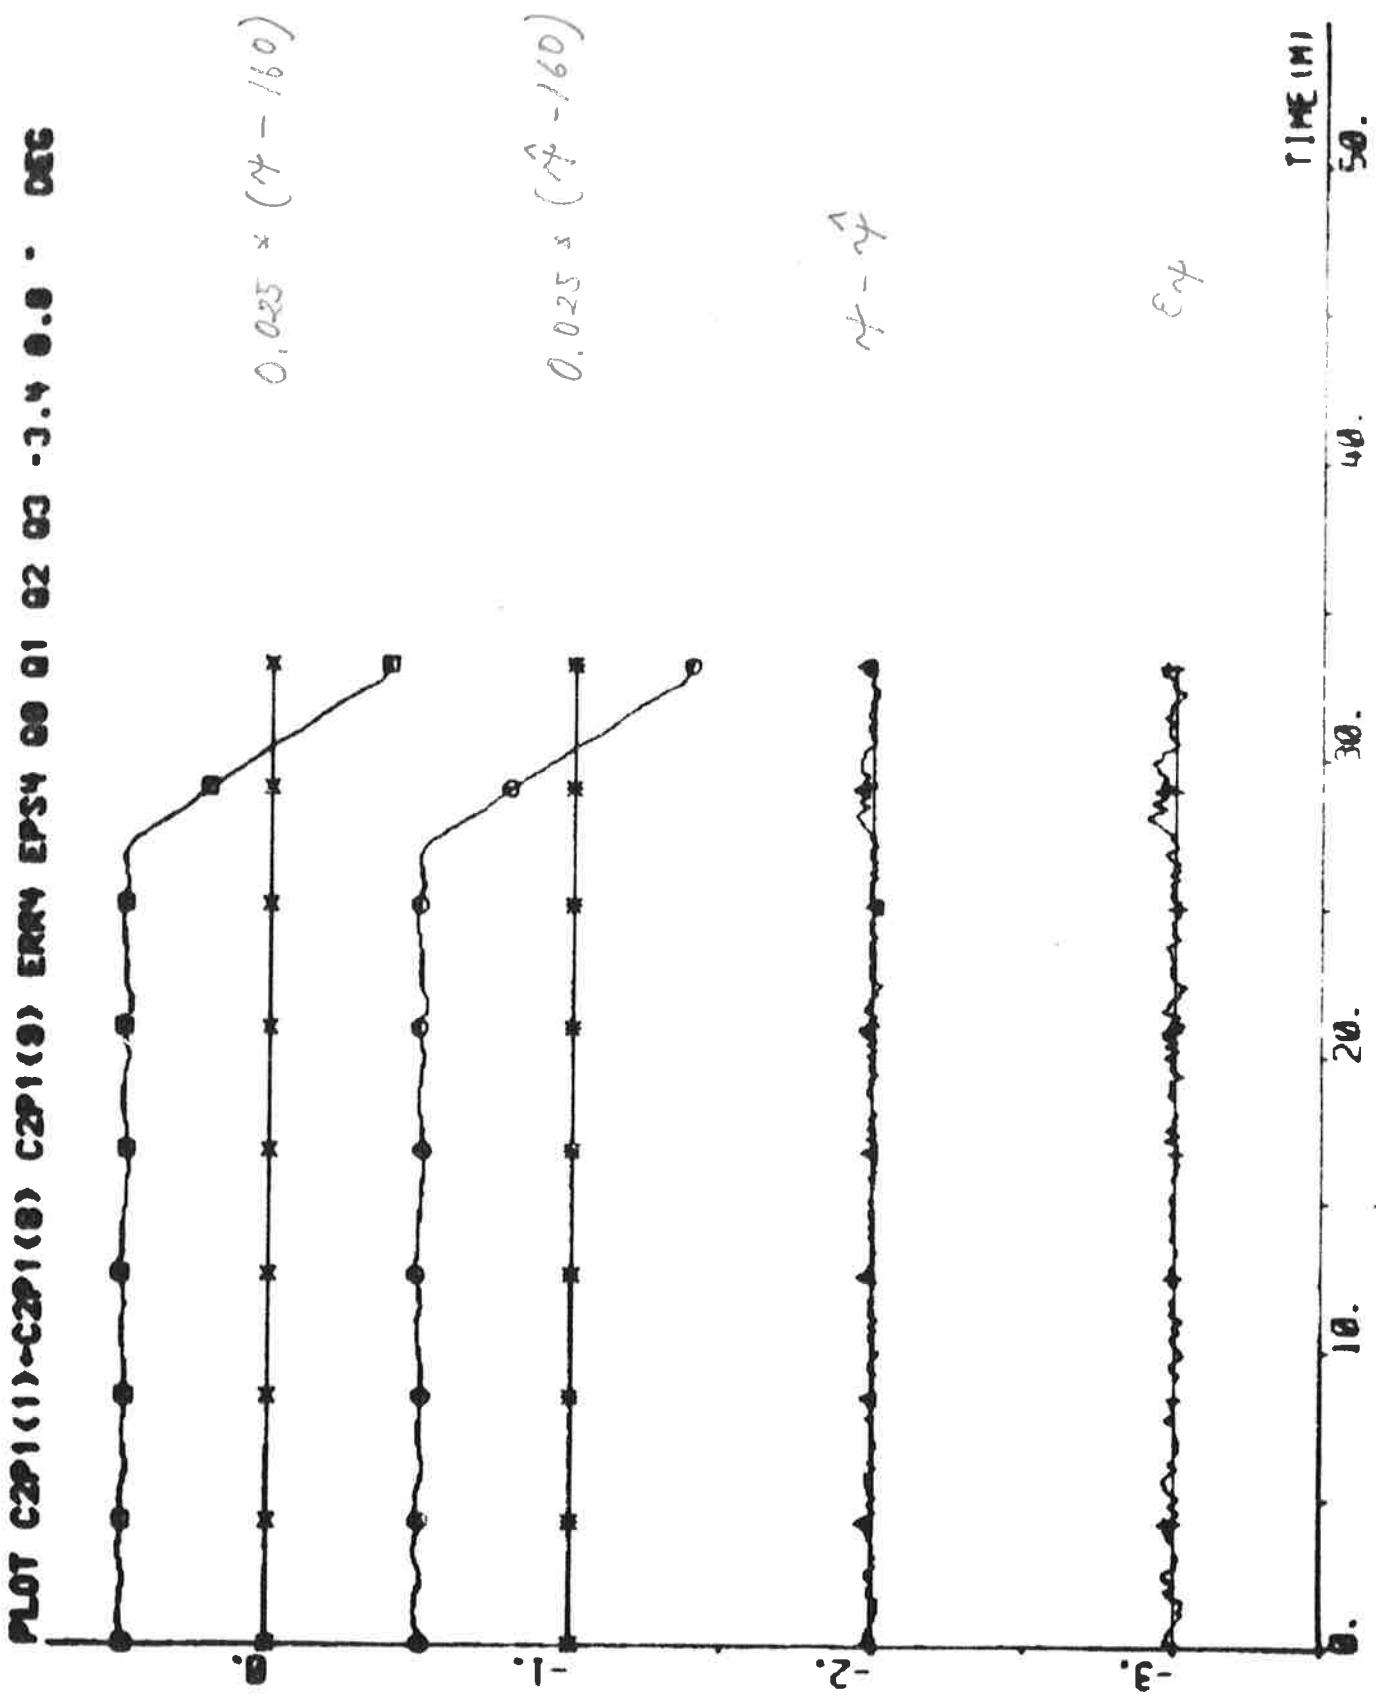

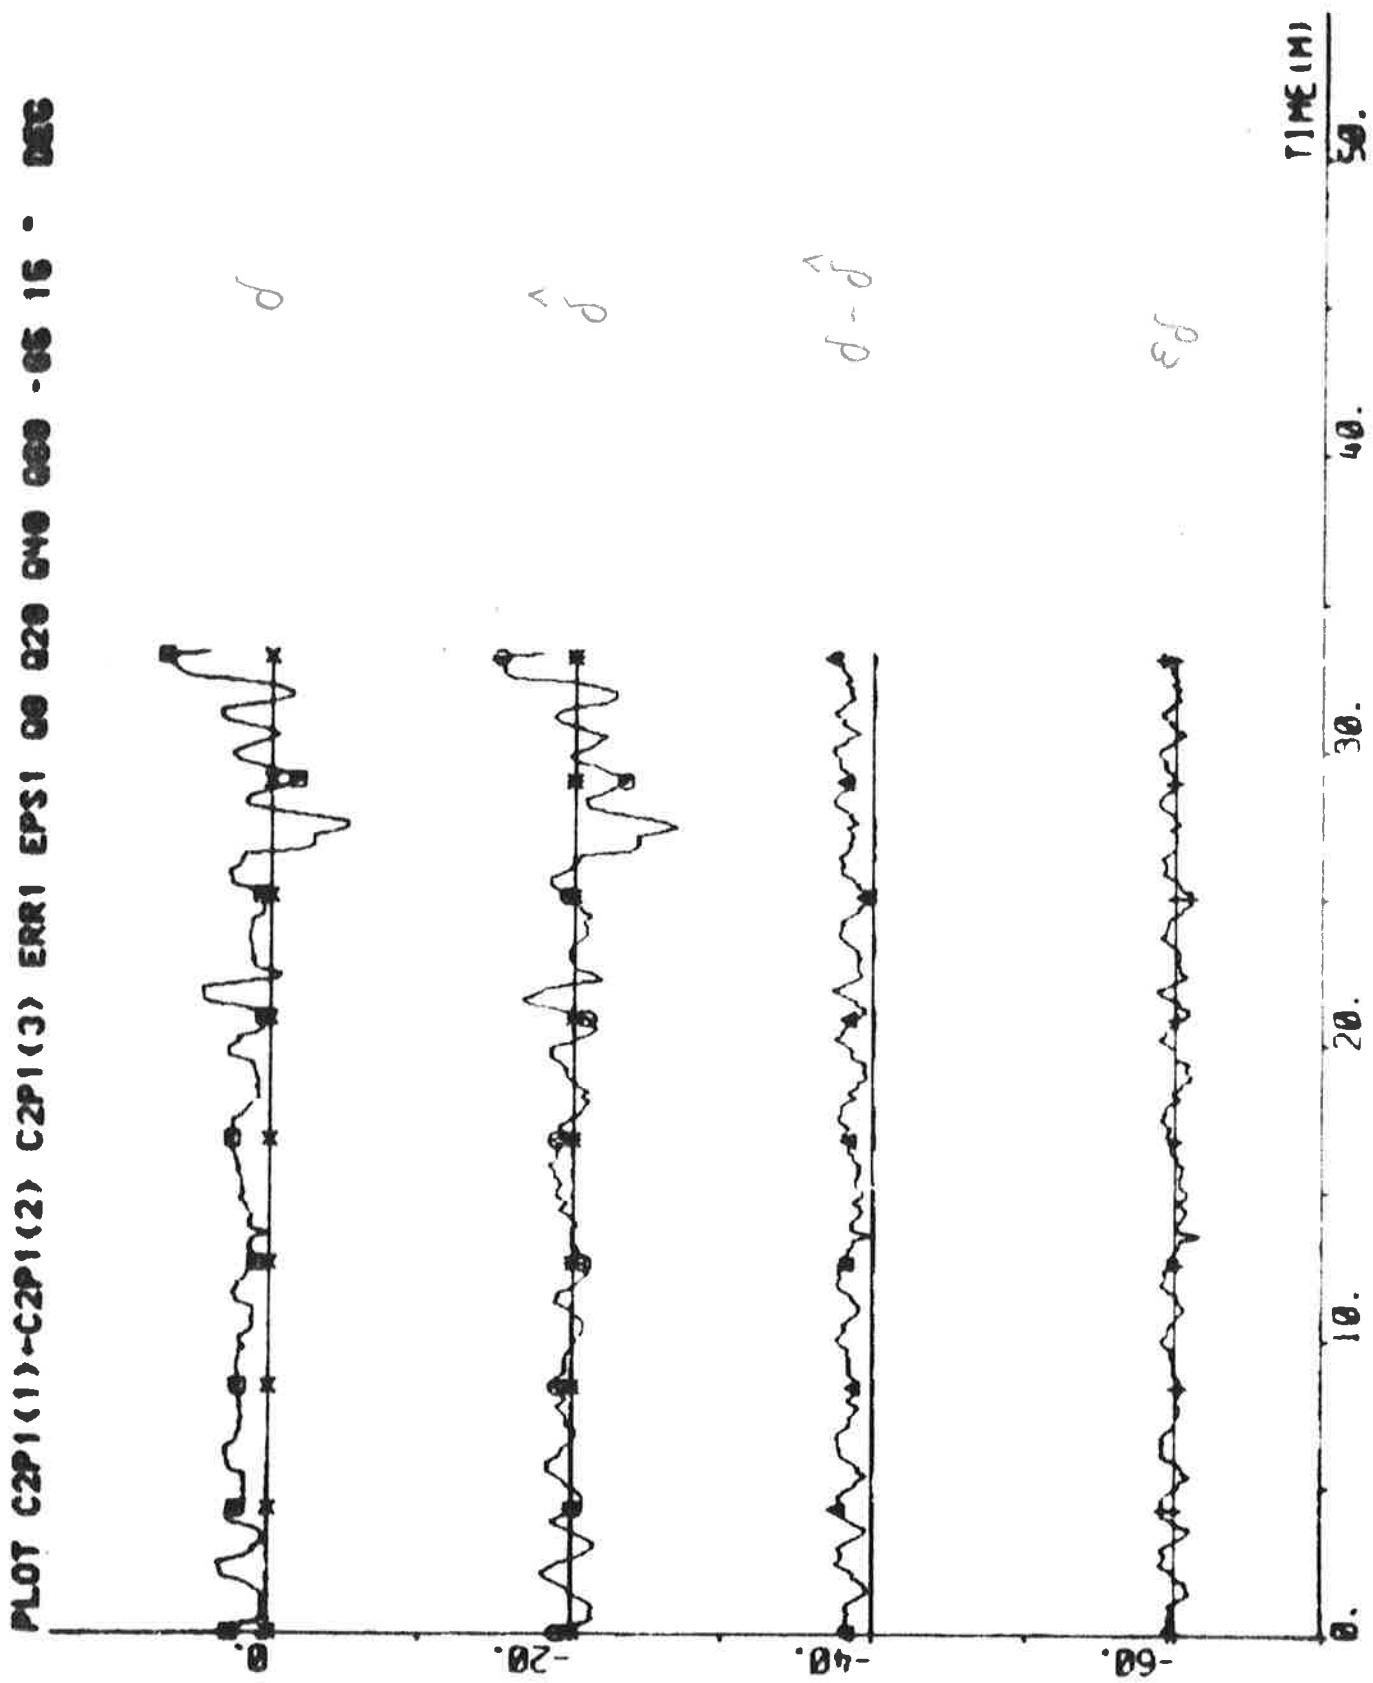

PLT C2P1(1)-C2P2(3) C2P2(4) C2P2(5) C2P2(6) ea ea ea ea ea -6.8 1.6

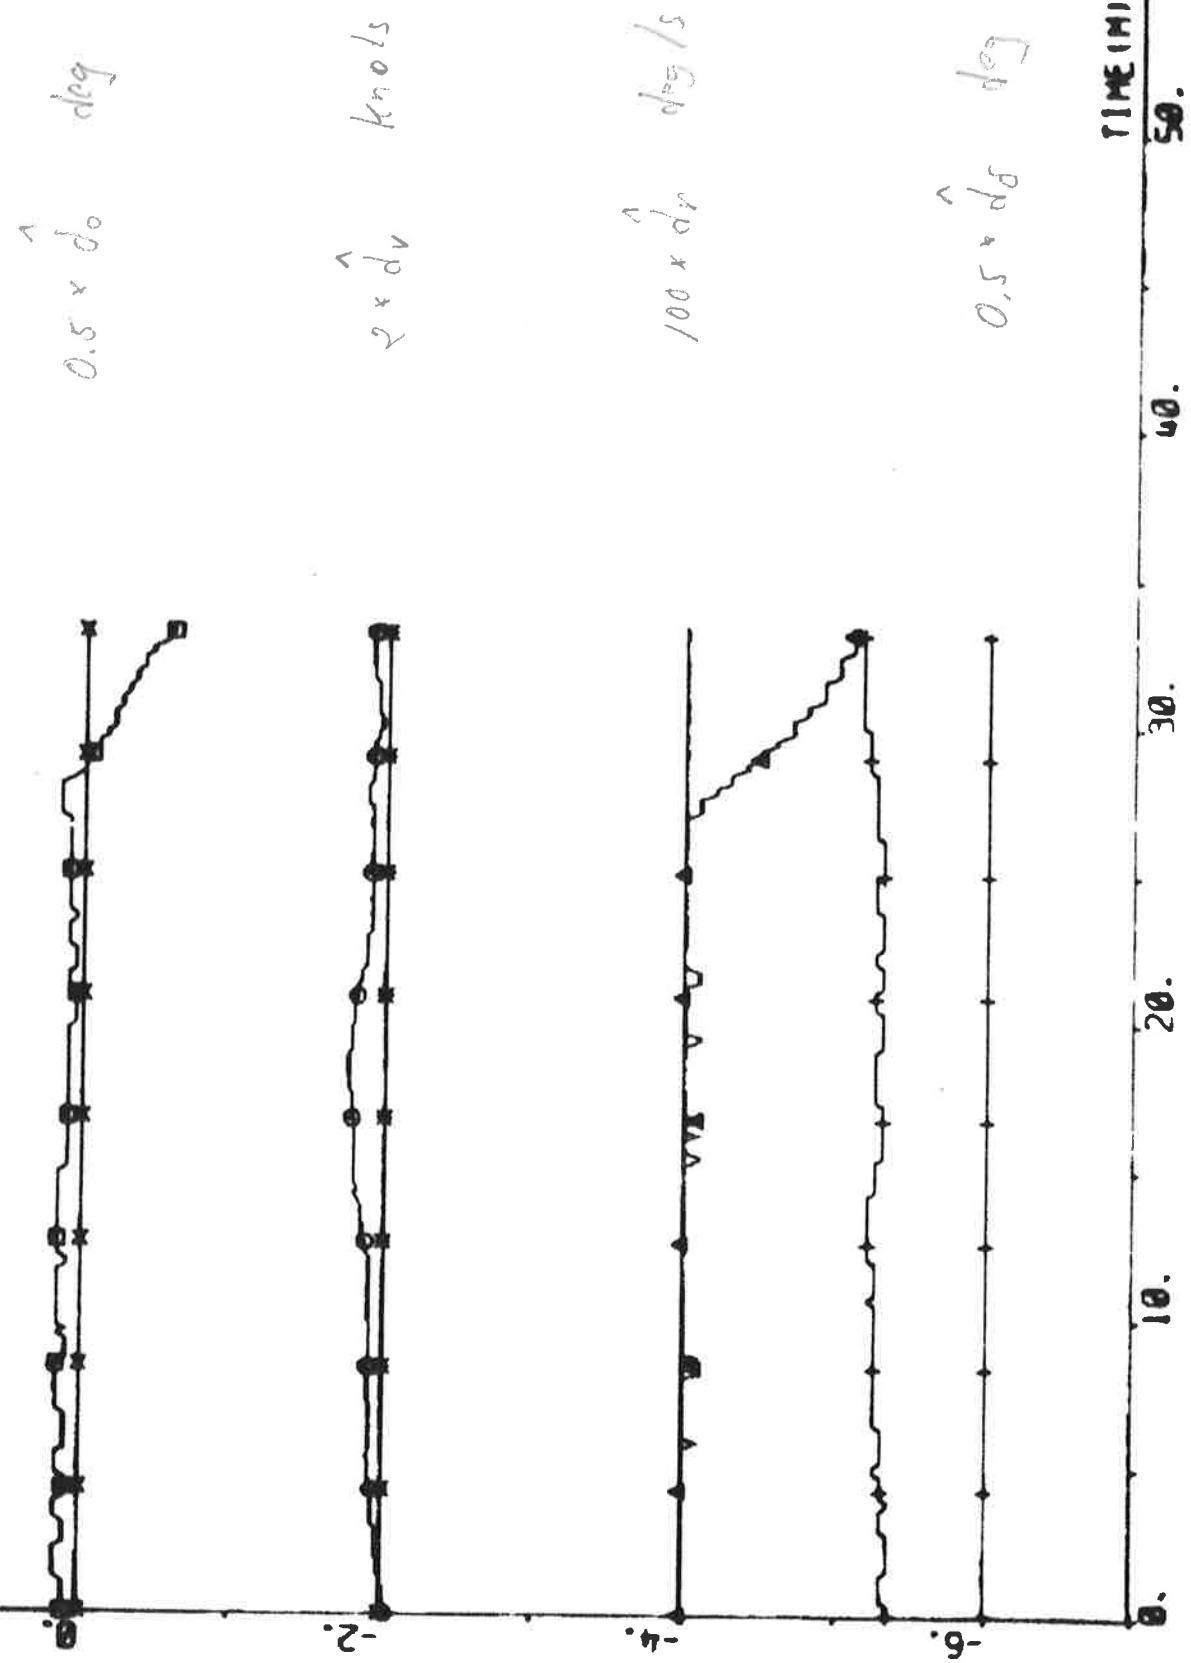

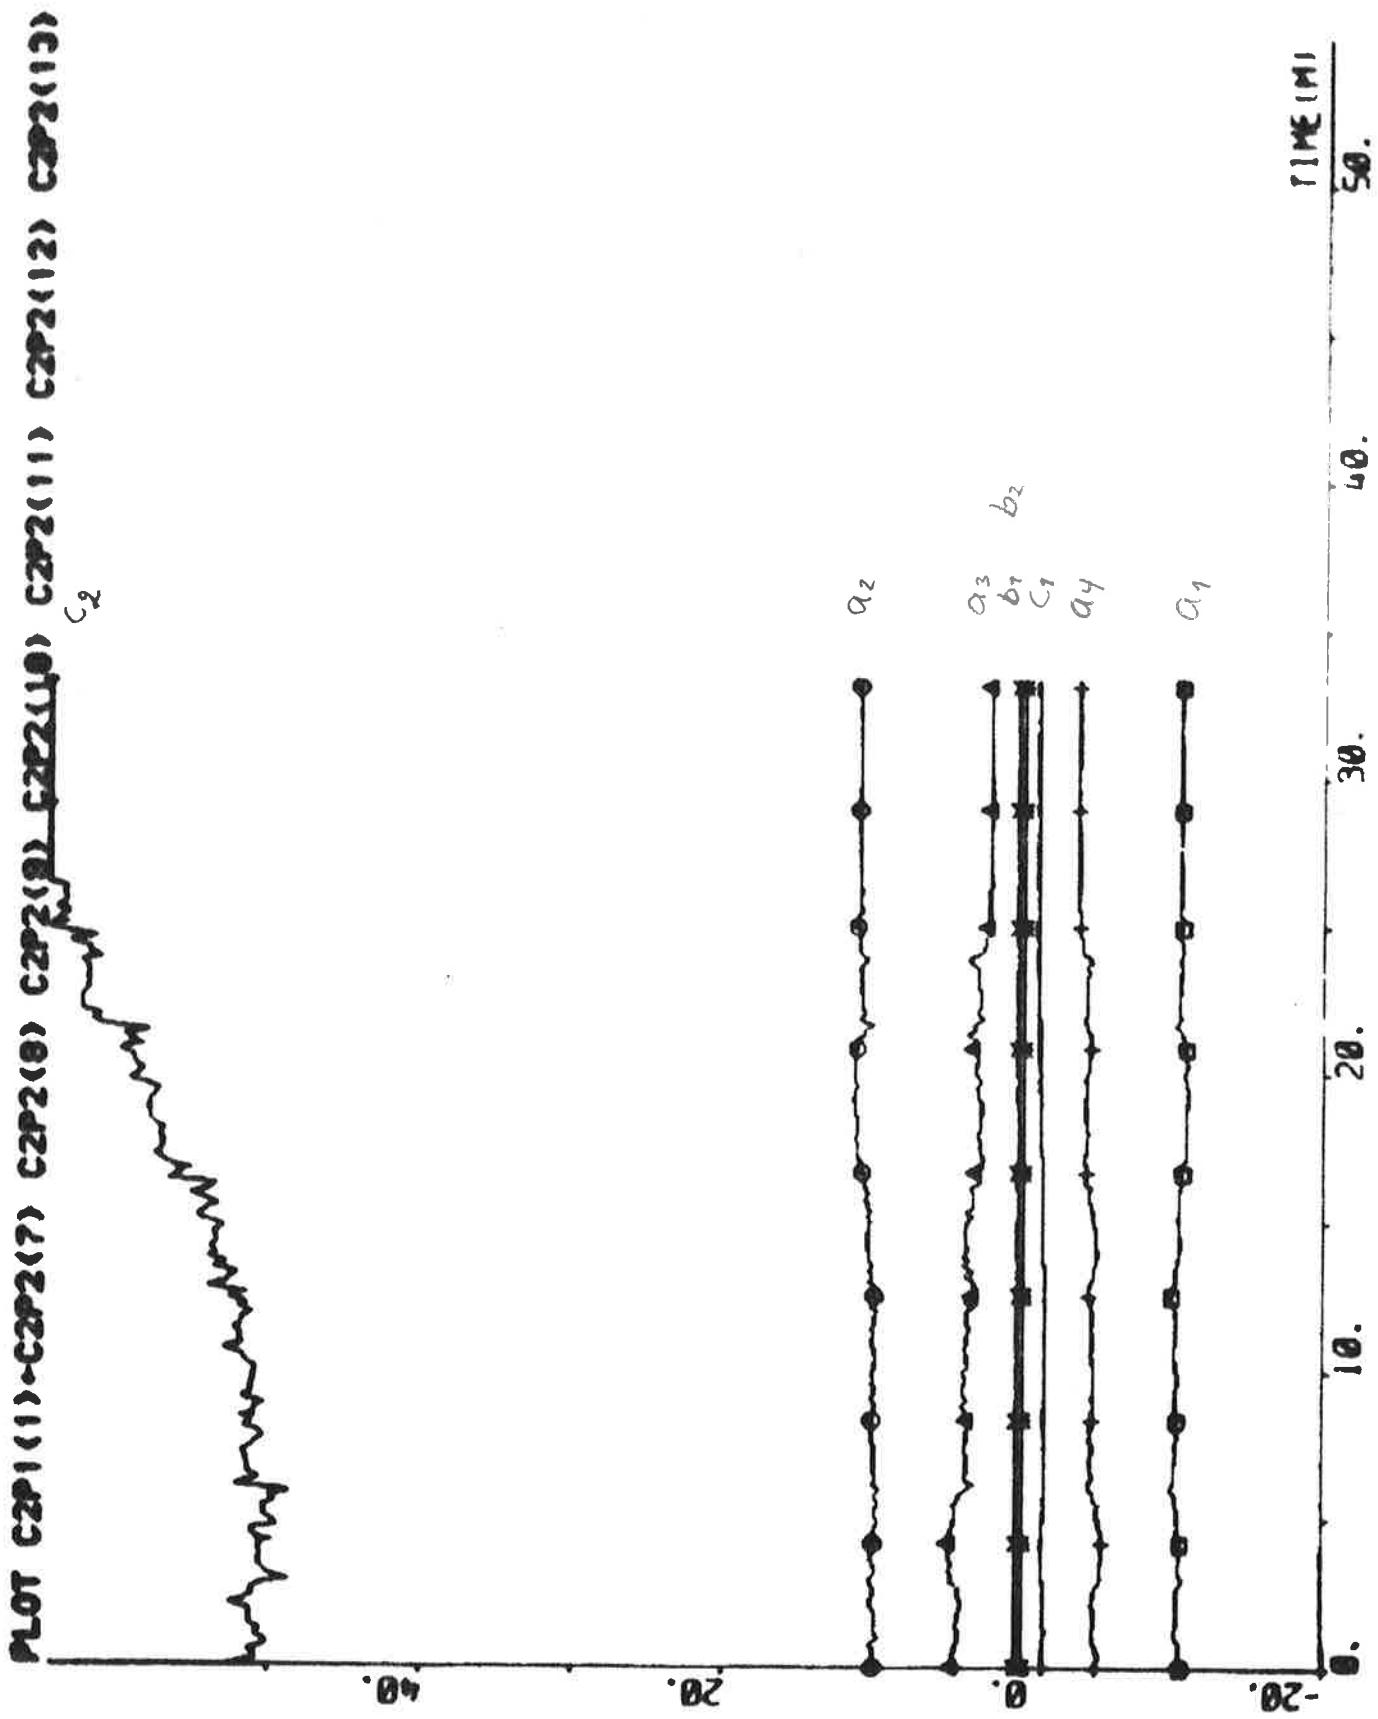

EXPERIMENT C3

| | | | |
|--------------|--|-----------------|-------------------------|
| Date | 1976-04-26 | Forward draught | 10.9 m |
| Time | 21.16 | Aft draught | 12.9 m |
| Duration | 63 min | Wind direction | SE (1; see App. A) |
| Position | S 07°39' W 05°24' | Wind velocity | 7 m/s (moderate breeze) |
| ψ_{ref} | 142, (148), 162,
(159), (131), 122,
(134), 142 deg | Wave height | - |
| r_{ref} | 0.05, 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from
the Kalman filter

The estimates $\hat{\delta}_0^*$, \hat{d}_v^* , \hat{d}_r^* and \hat{d}_δ^* were not updated during the experiment.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\left[\begin{array}{c} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{array} \right] = \left[\begin{array}{c} -10.55 \\ 12.90 \\ -0.97 \\ -1.57 \\ 0.38 \\ 0.17 \\ -0.54 \\ 89.70 \end{array} \right] \quad P = \left[\begin{array}{ccccccccc} 8.37 & & & & & & & & \\ -15.05 & 45.05 & & & & & & & \\ 6.78 & -44.53 & 67.66 & & & & & & \\ 0.16 & 14.52 & -30.18 & 16.19 & & & & & \\ 0.23 & -1.19 & 1.57 & -0.60 & 0.05 & & & & \\ -0.04 & 0.24 & -0.47 & 0.30 & -0.01 & 0.02 & & & \\ -1.78 & 2.64 & 0.15 & -1.09 & -0.03 & -0.01 & 1.26 & & \\ 1.83 & -4.92 & 5.09 & -1.17 & 0.59 & 0.04 & 22.65 & 961.96 & \end{array} \right]$$

$$a_1 + a_2 + a_3 + a_4 = -0.19$$

$$\hat{\delta}_0 = 0.0 \text{ deg} \quad \hat{d}_r = 0.21 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.7 \text{ deg}$$


$$\bar{\delta}_c = 0.8 \text{ deg} \quad (\text{Initial value: } 0.0 \text{ deg})$$

Statistics (mean value and standard deviation)


| | | | |
|----------------|------------------------------|-----------------|--------------------------------|
| n | $69.8 \pm 0.7 \text{ rpm}$ | ϵ_v | $-0.01 \pm 0.02 \text{ knots}$ |
| u | $13.4 \pm 0.2 \text{ knots}$ | ϵ_r | $0.00 \pm 0.02 \text{ deg/s}$ |
| P _s | $14.9 \pm 0.1 \text{ MW}$ | ϵ_ψ | $0.01 \pm 0.06 \text{ deg}$ |


TEST C3P1(1) C3P1(2) C3P1(3) C3P1(4) C3P1(5) C3P1(6) C3P1(7) C3P1(8) C3P1(9) C3P1(10) NOV 1982 - 3 - 1

474

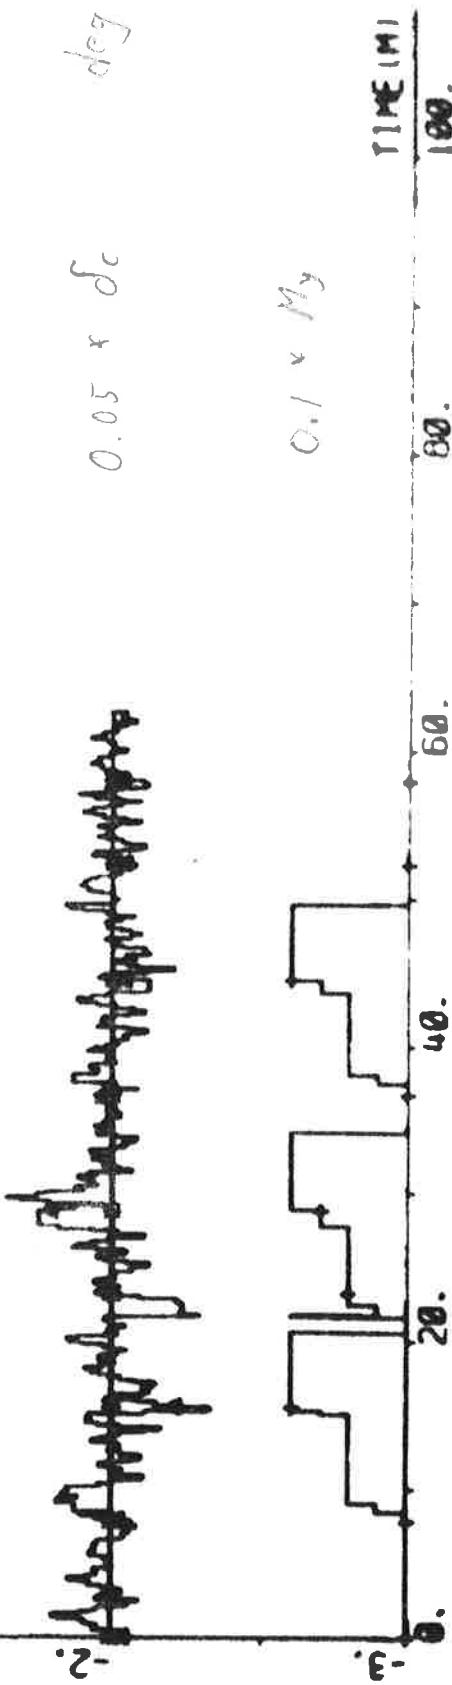


PLOT C3P1(11)-C3P1(12) C3P1(14) C3P1(11) 38 -20 32

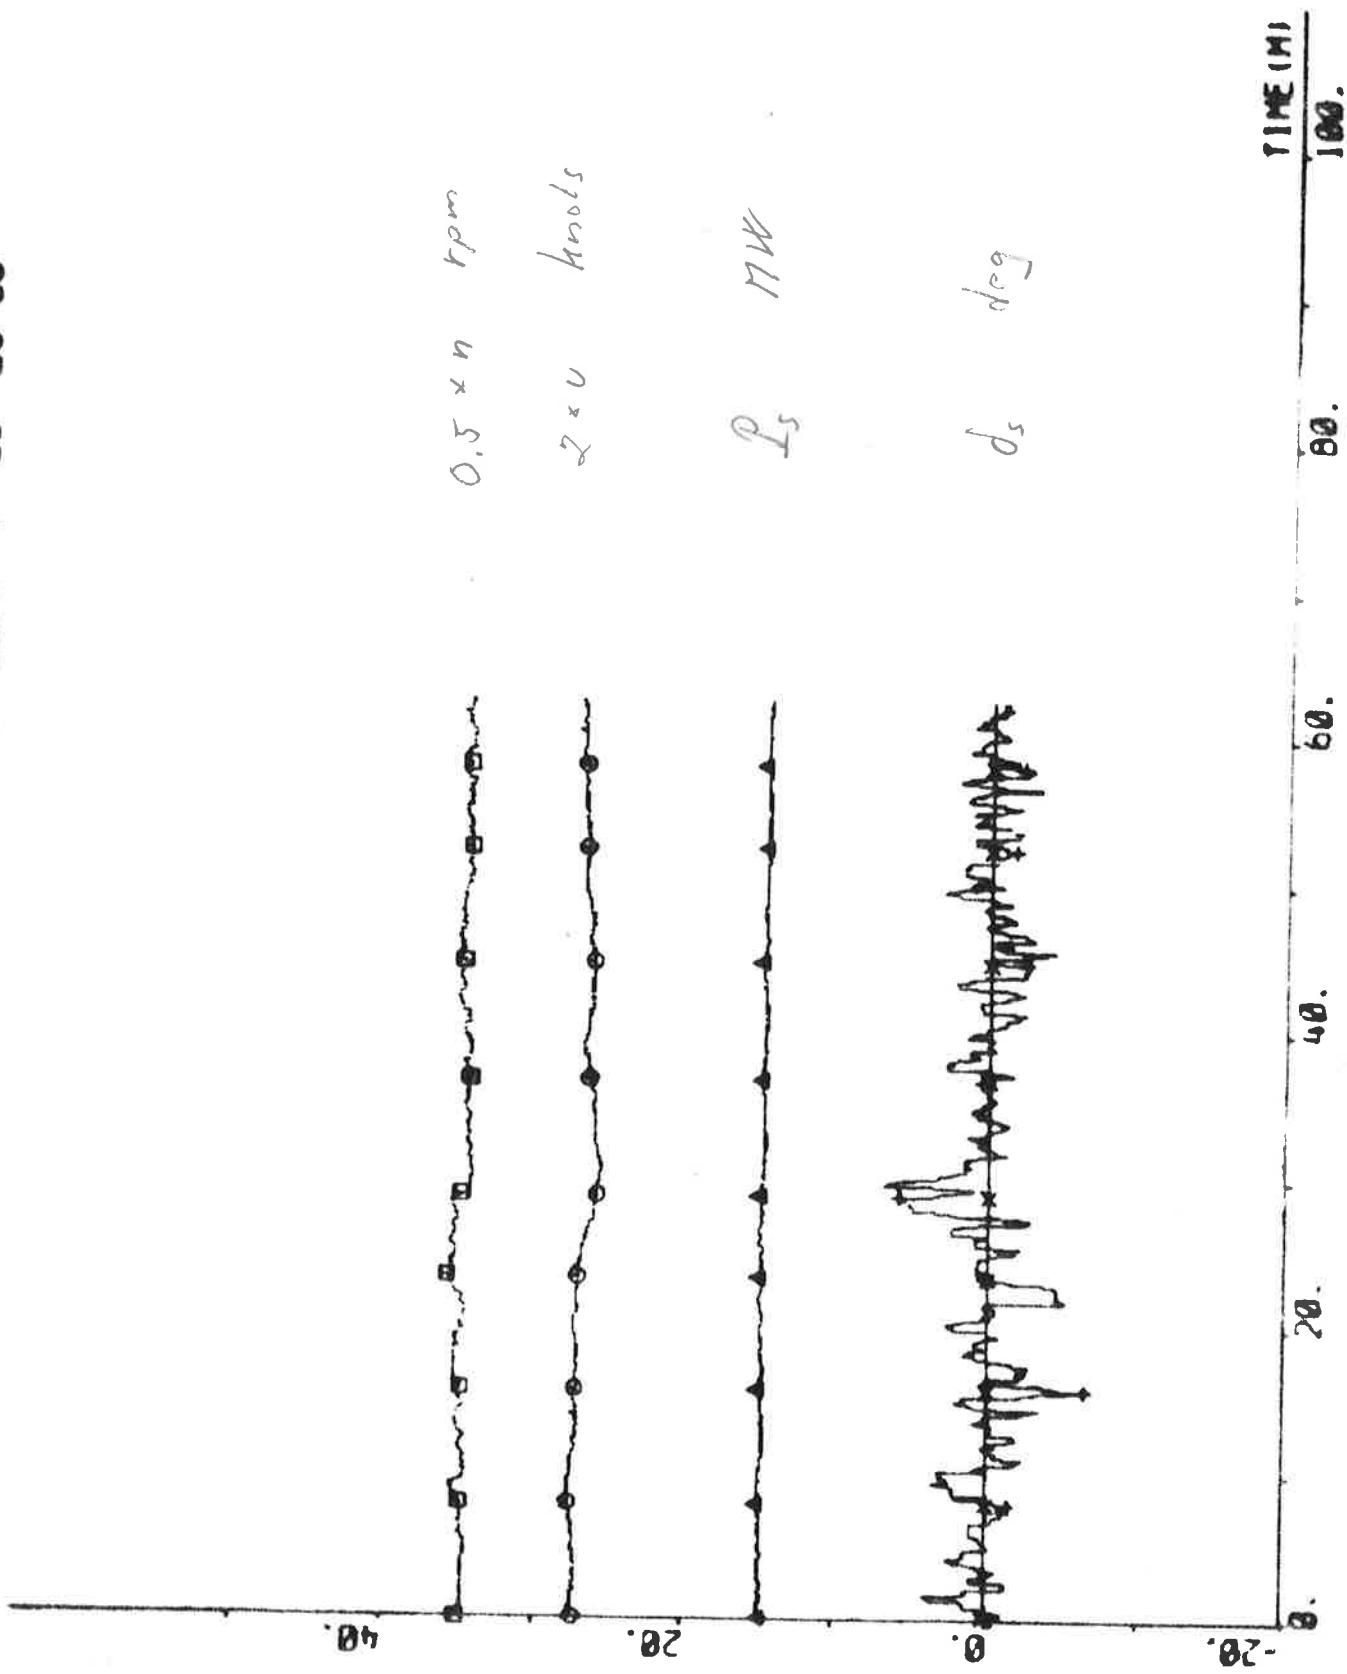

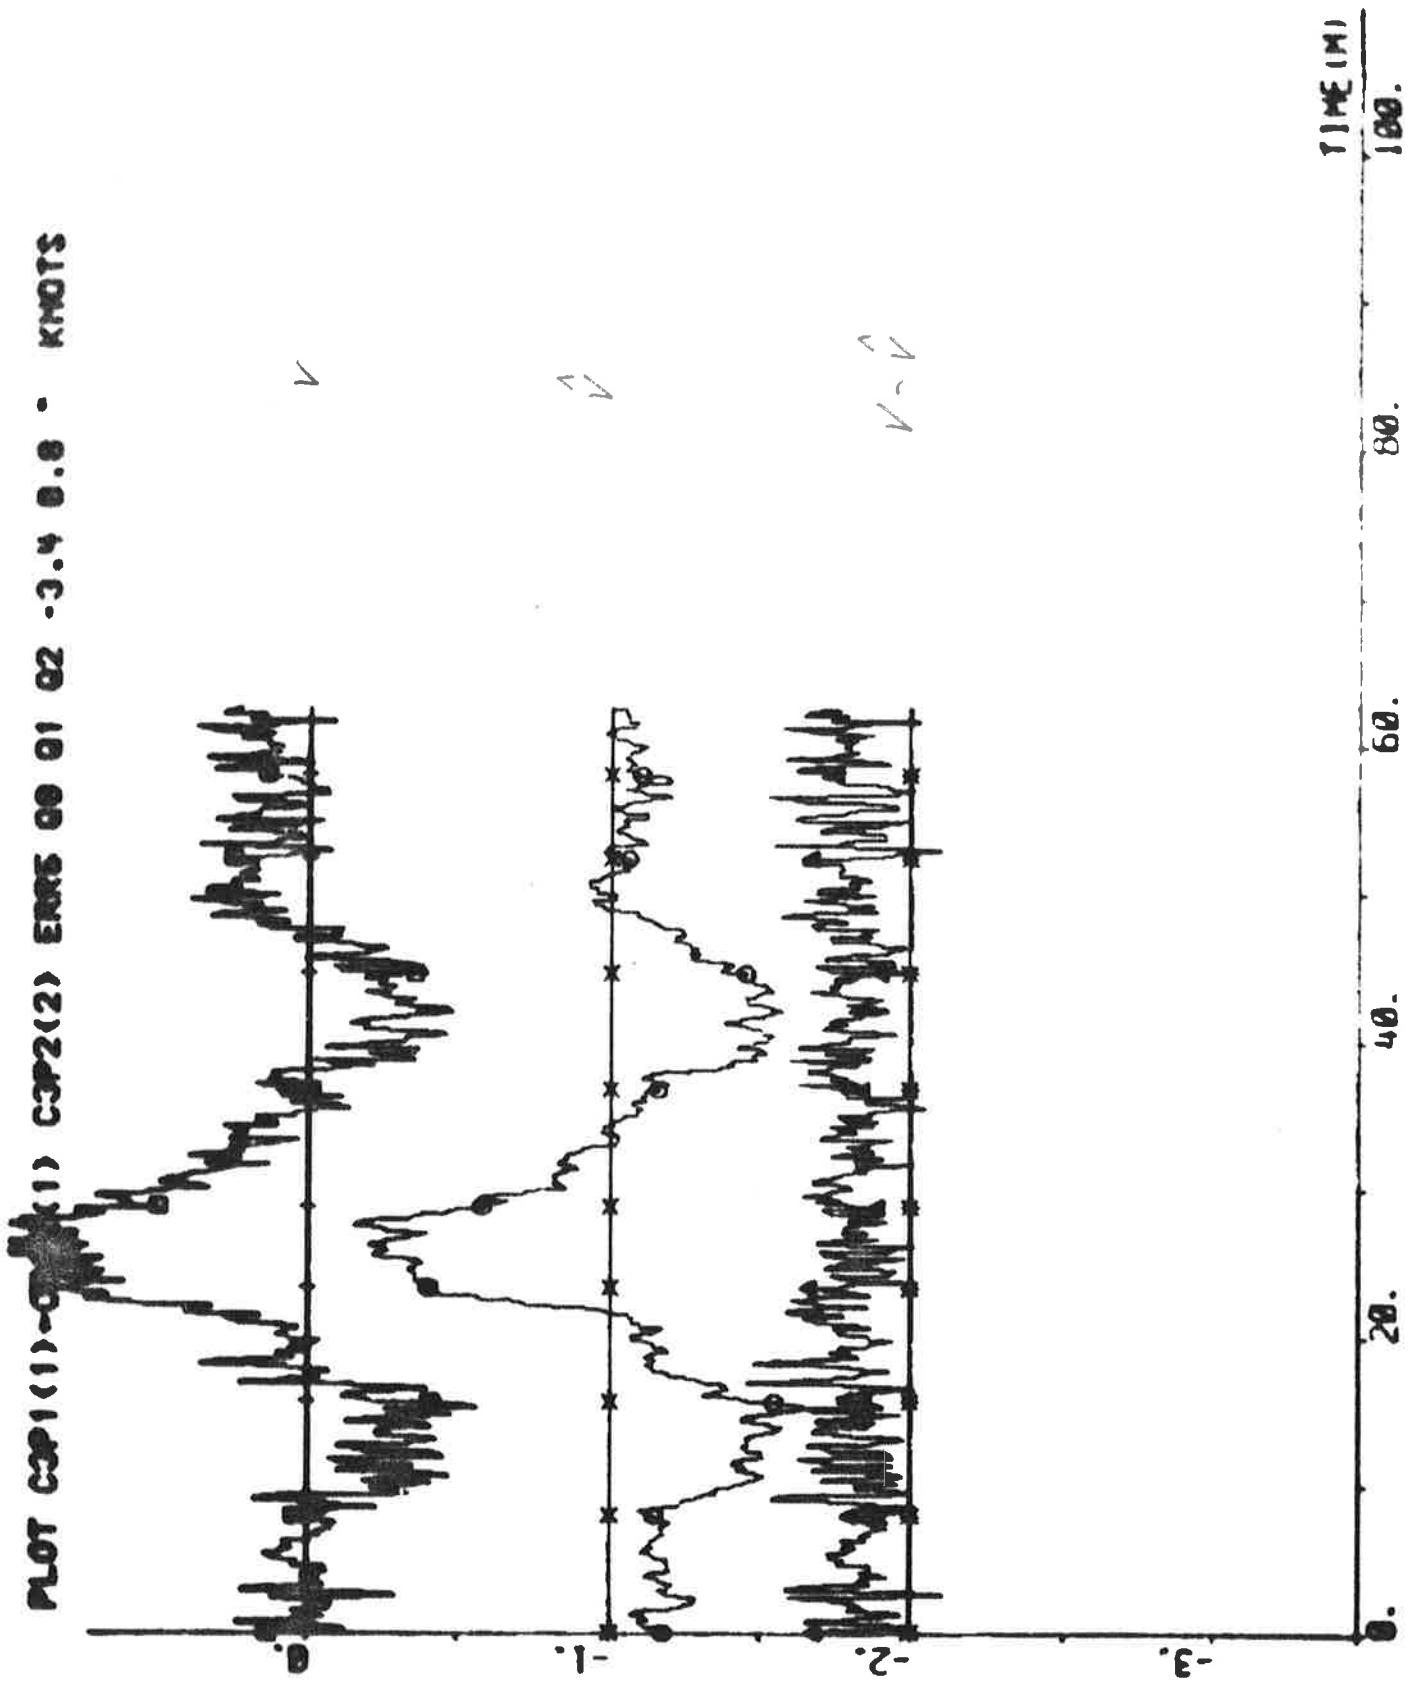


NOT C3P1(11)-C3P1(4) (C3P1(5)) ERAS ERSS 00 01 02 03 - 3.4 0.0 - rates




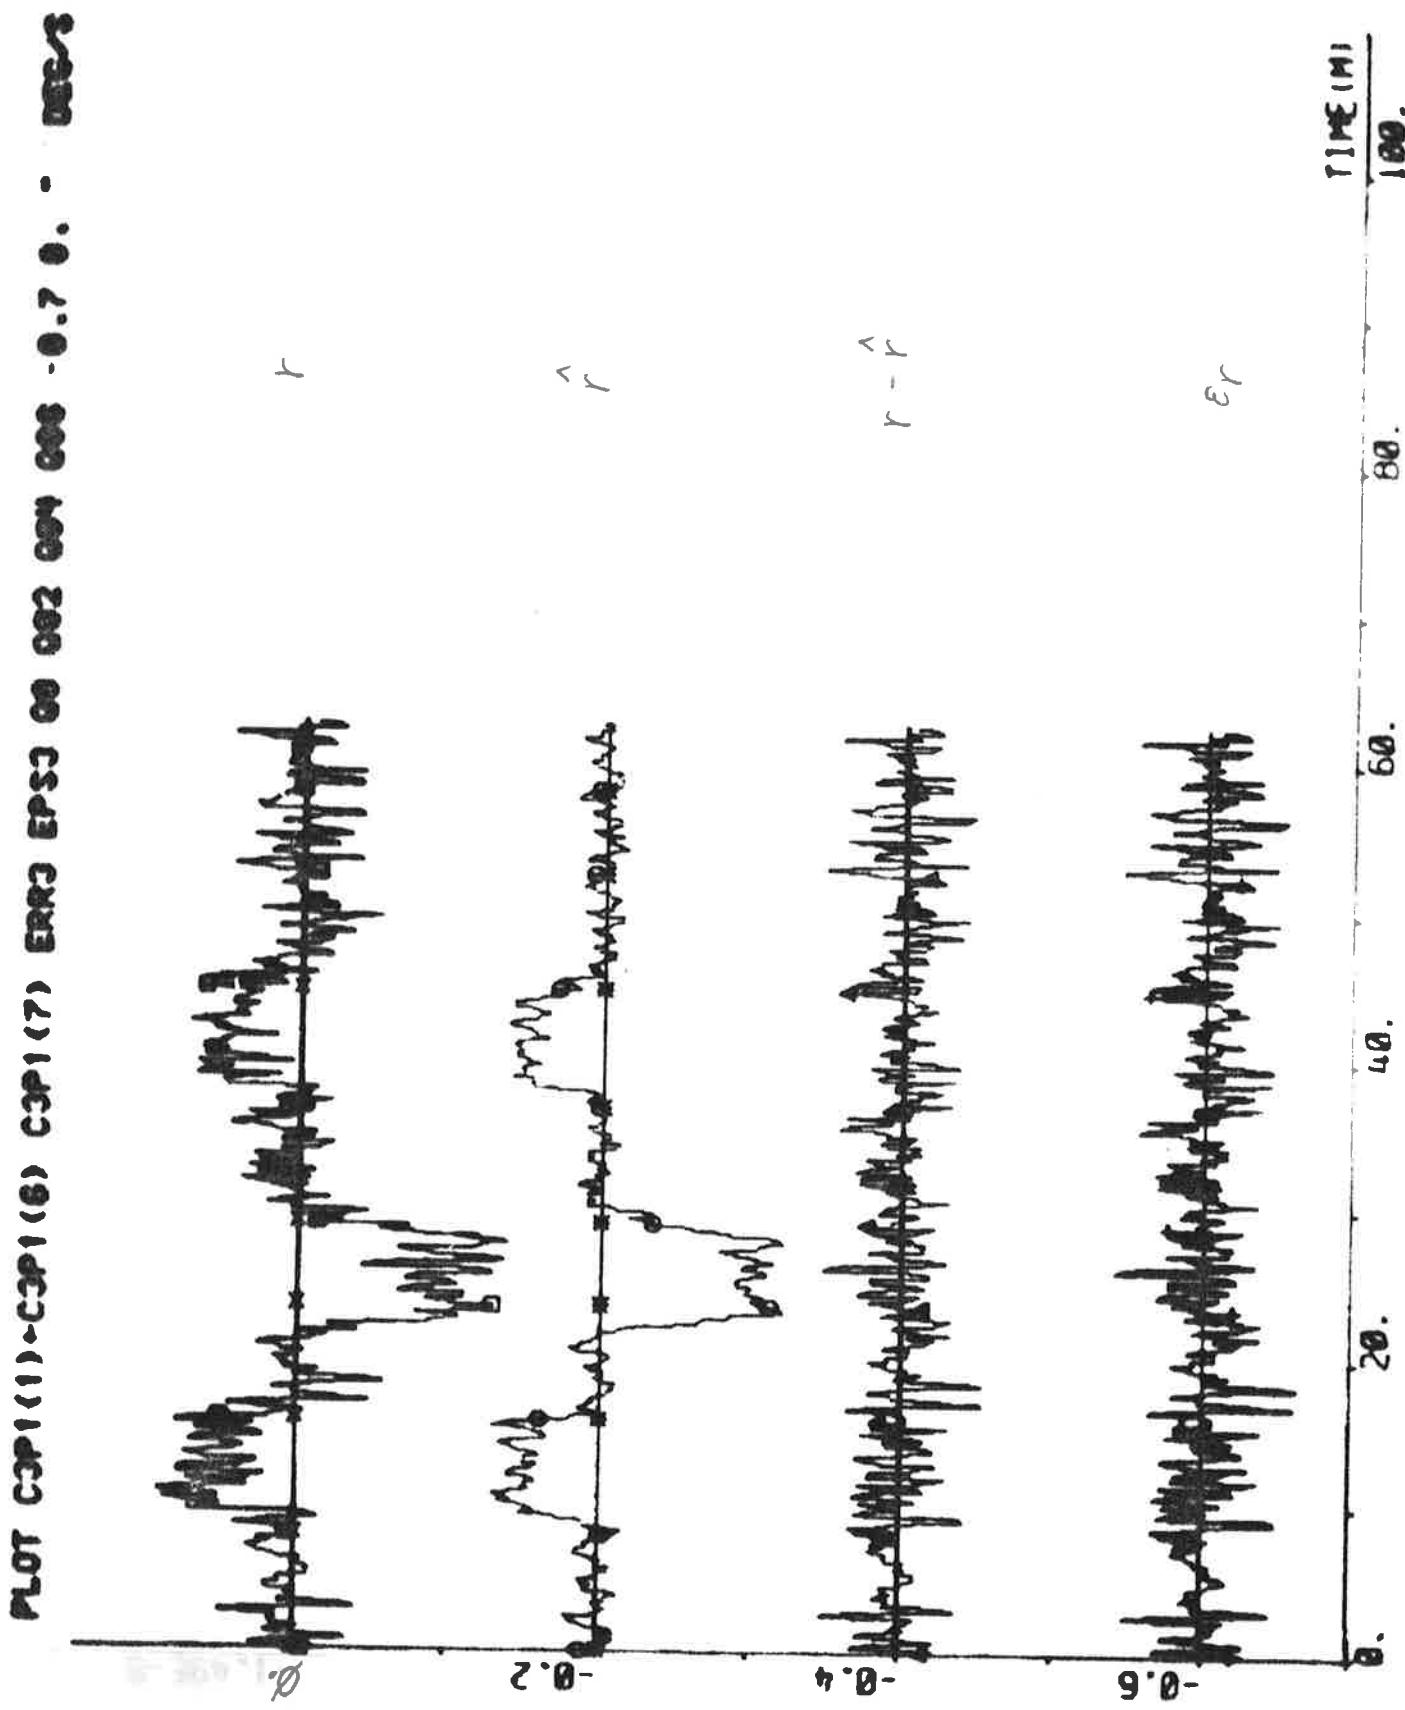


Plot C3P1(1)-C3P1(8) ERRA ERS4 00 01 02 03 - C.4 0.0 - 0.0

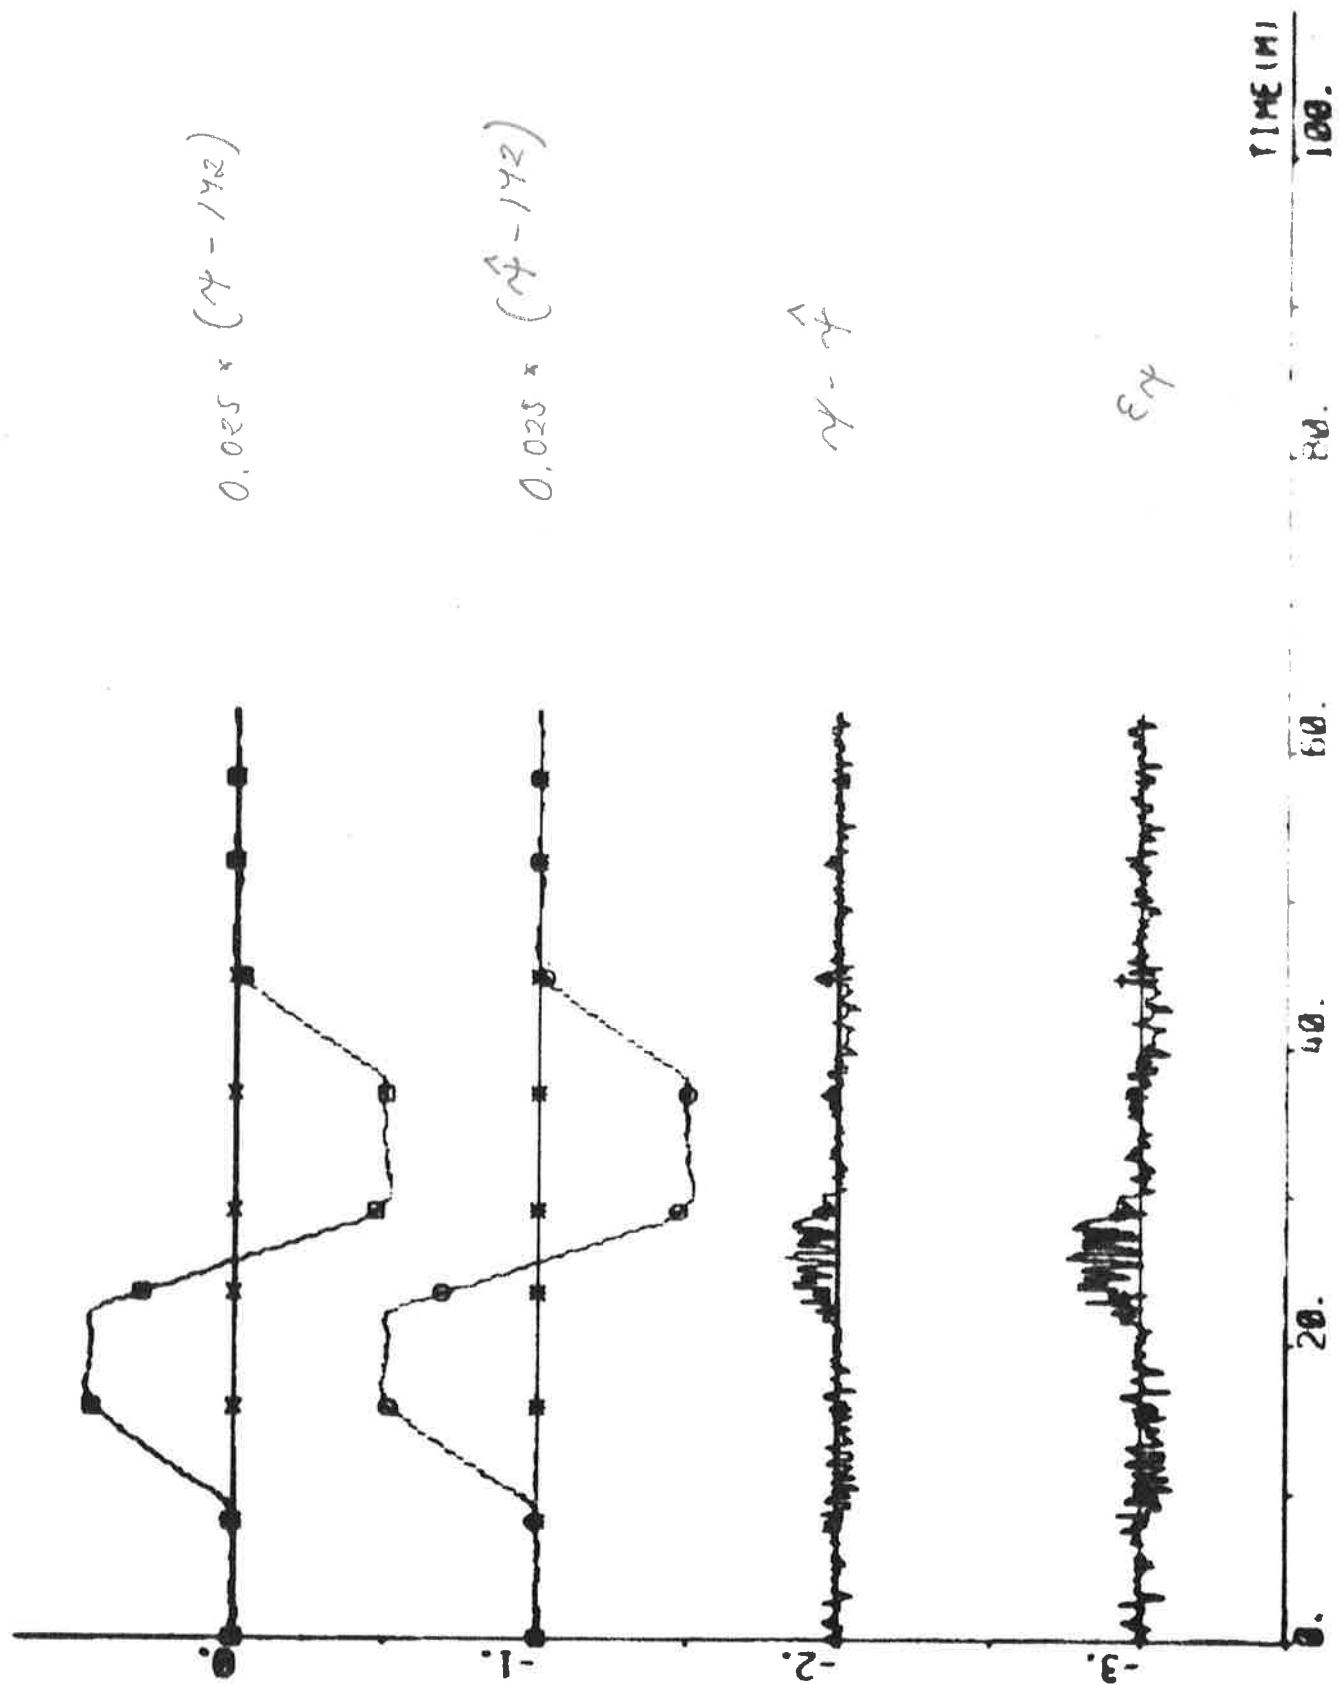


480

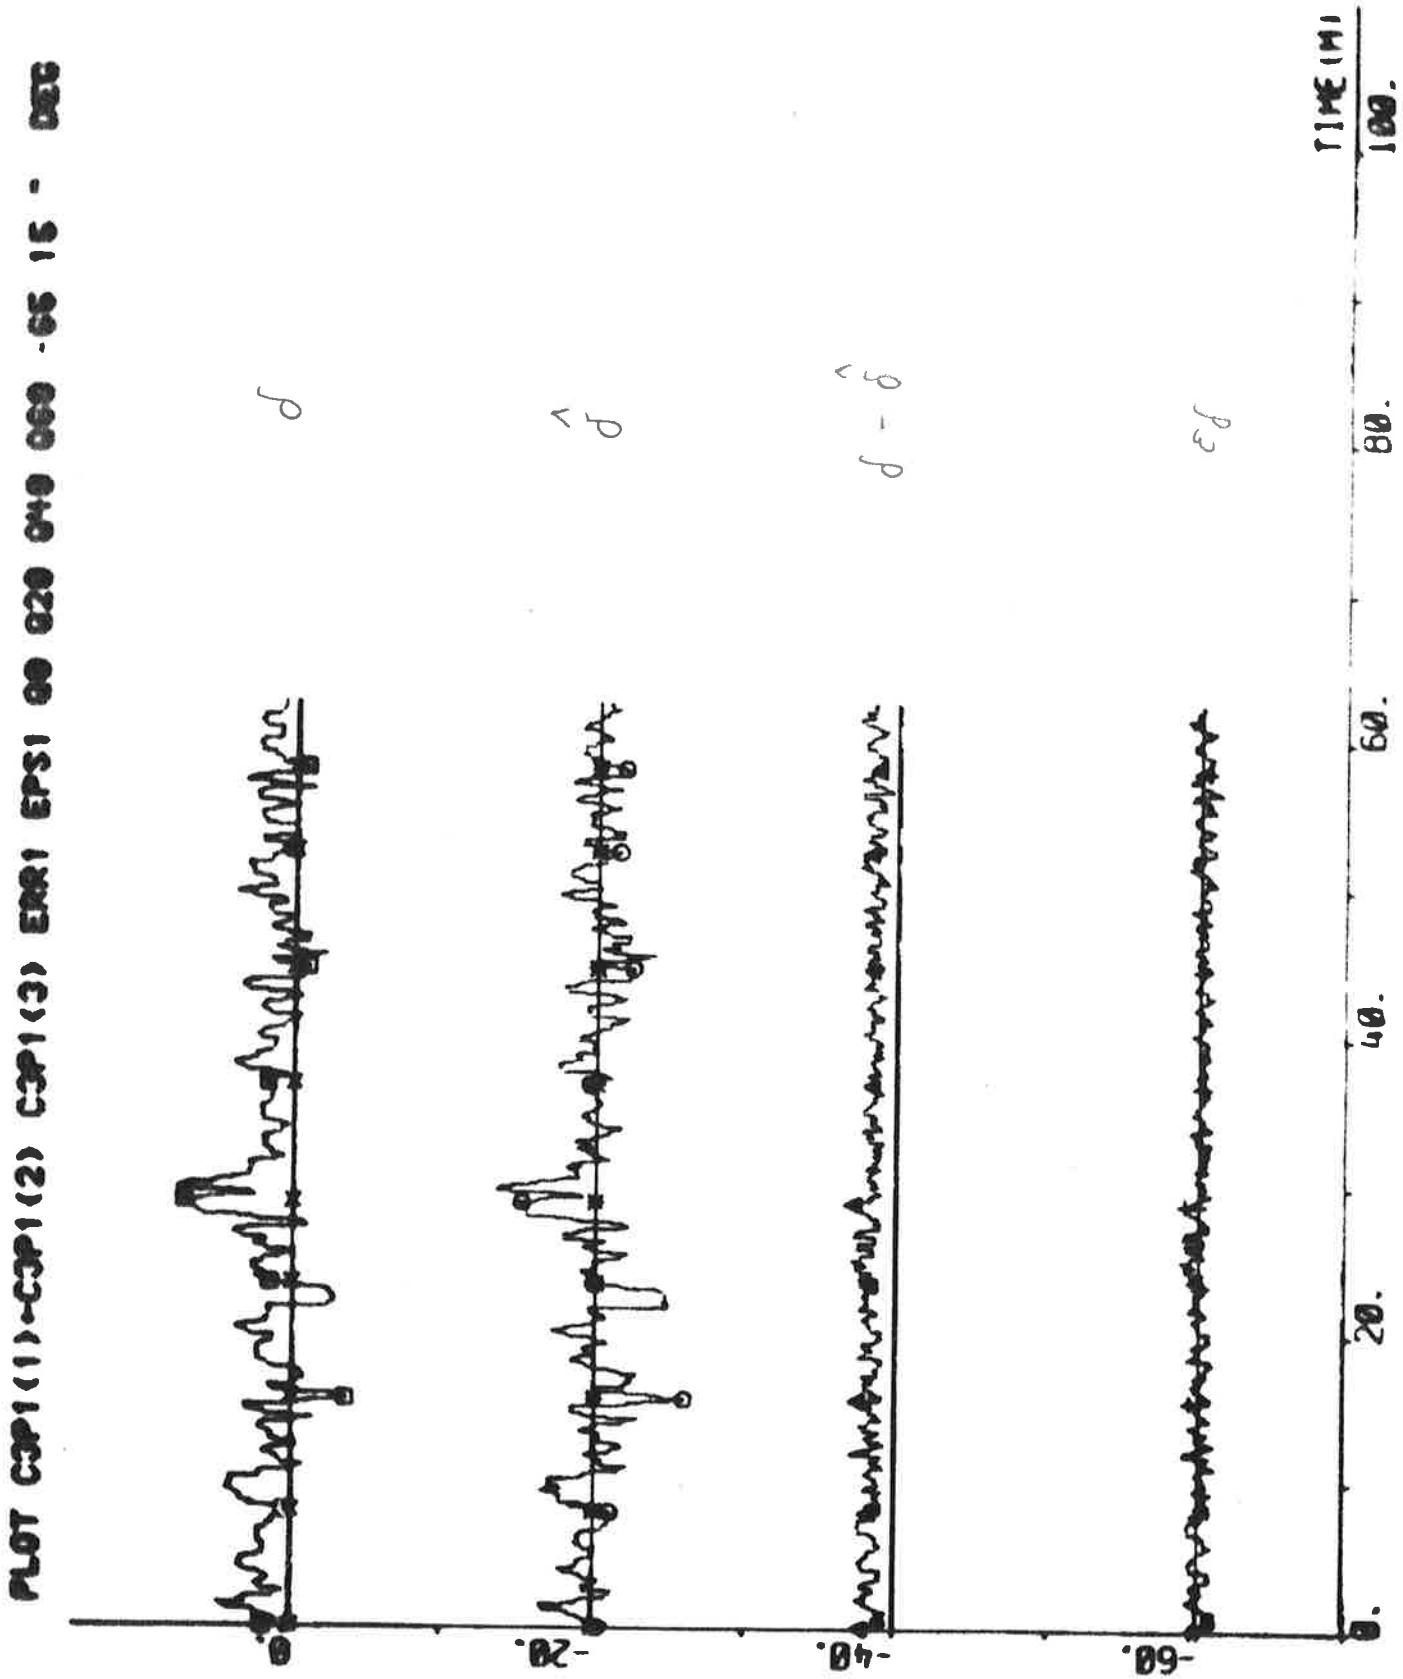

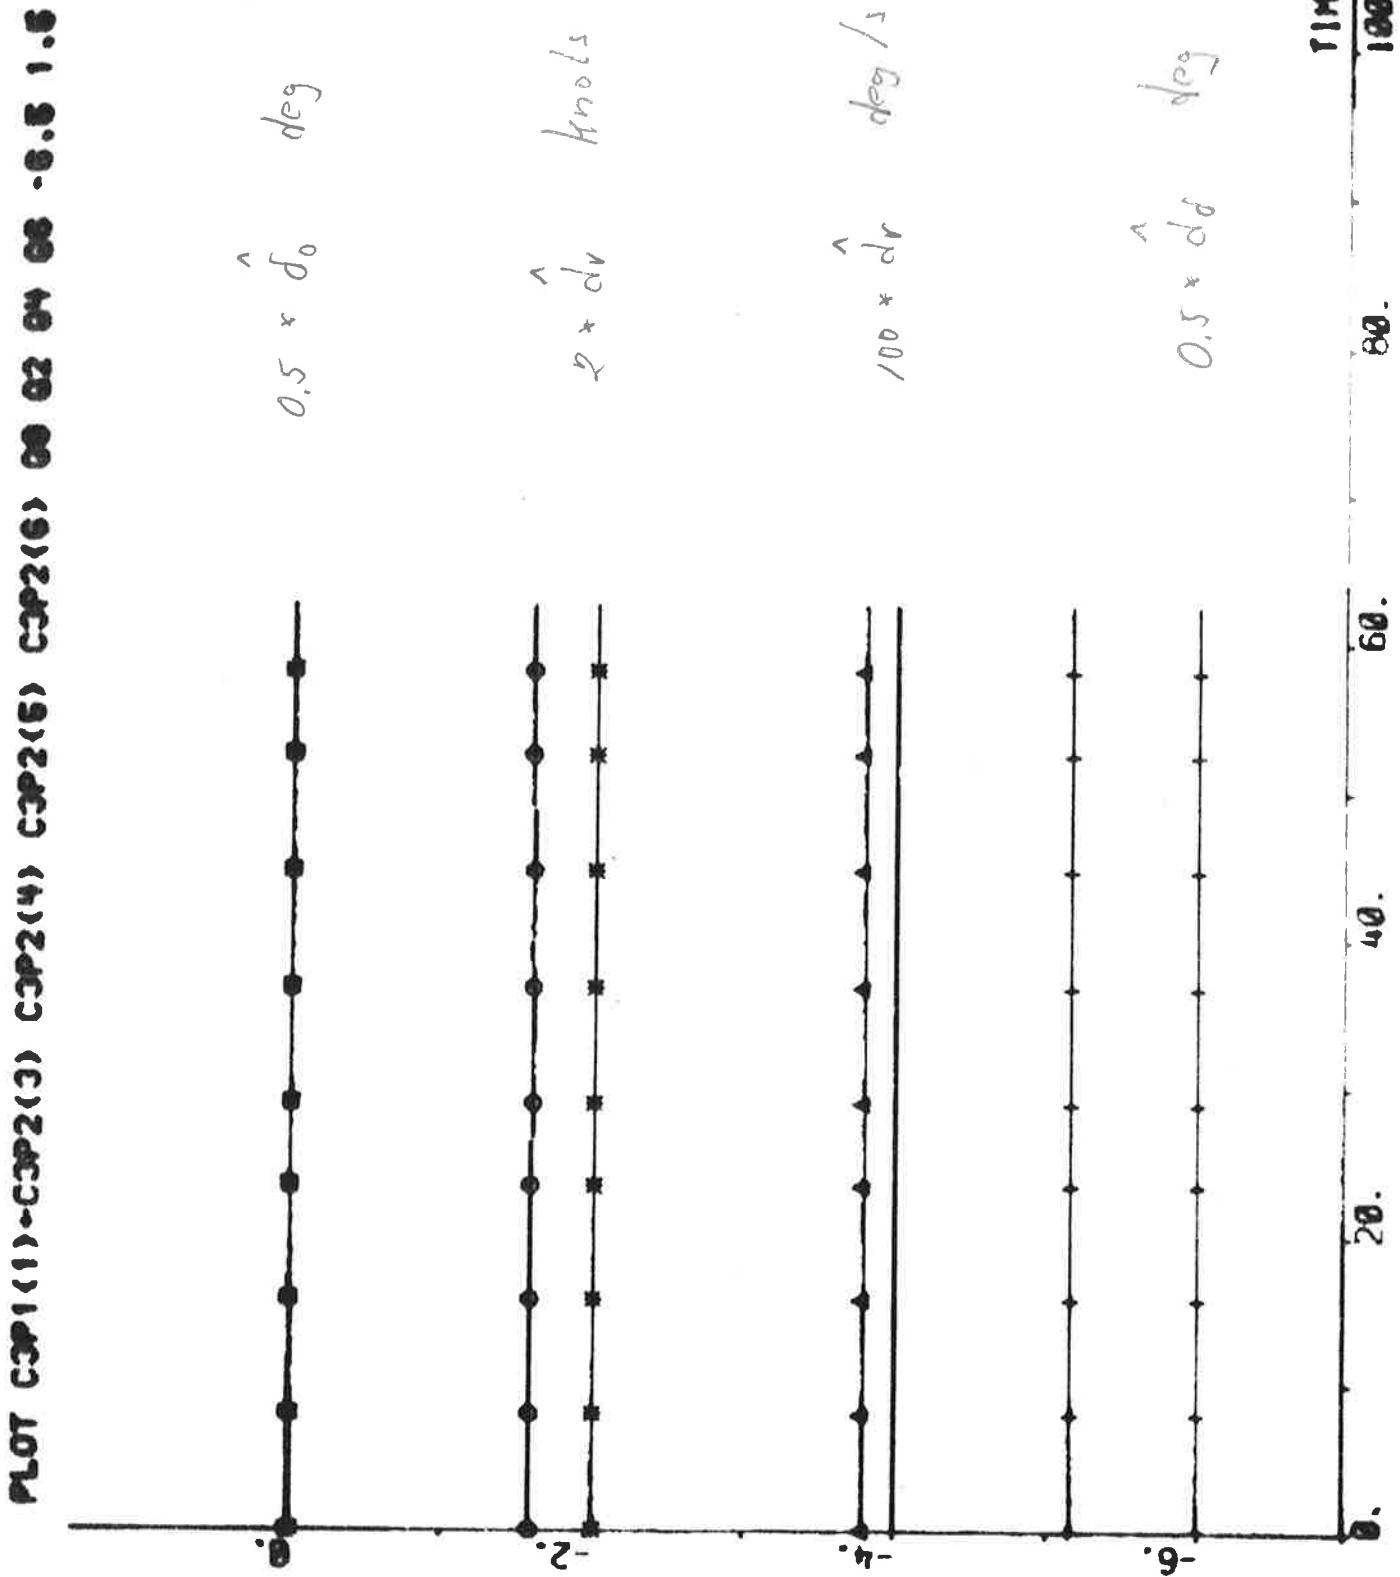

1601 C3P1(11)-C3P2(7) C3P2(9) C3P2(10) C3P2(11) C3P2(12) C3P2(13)

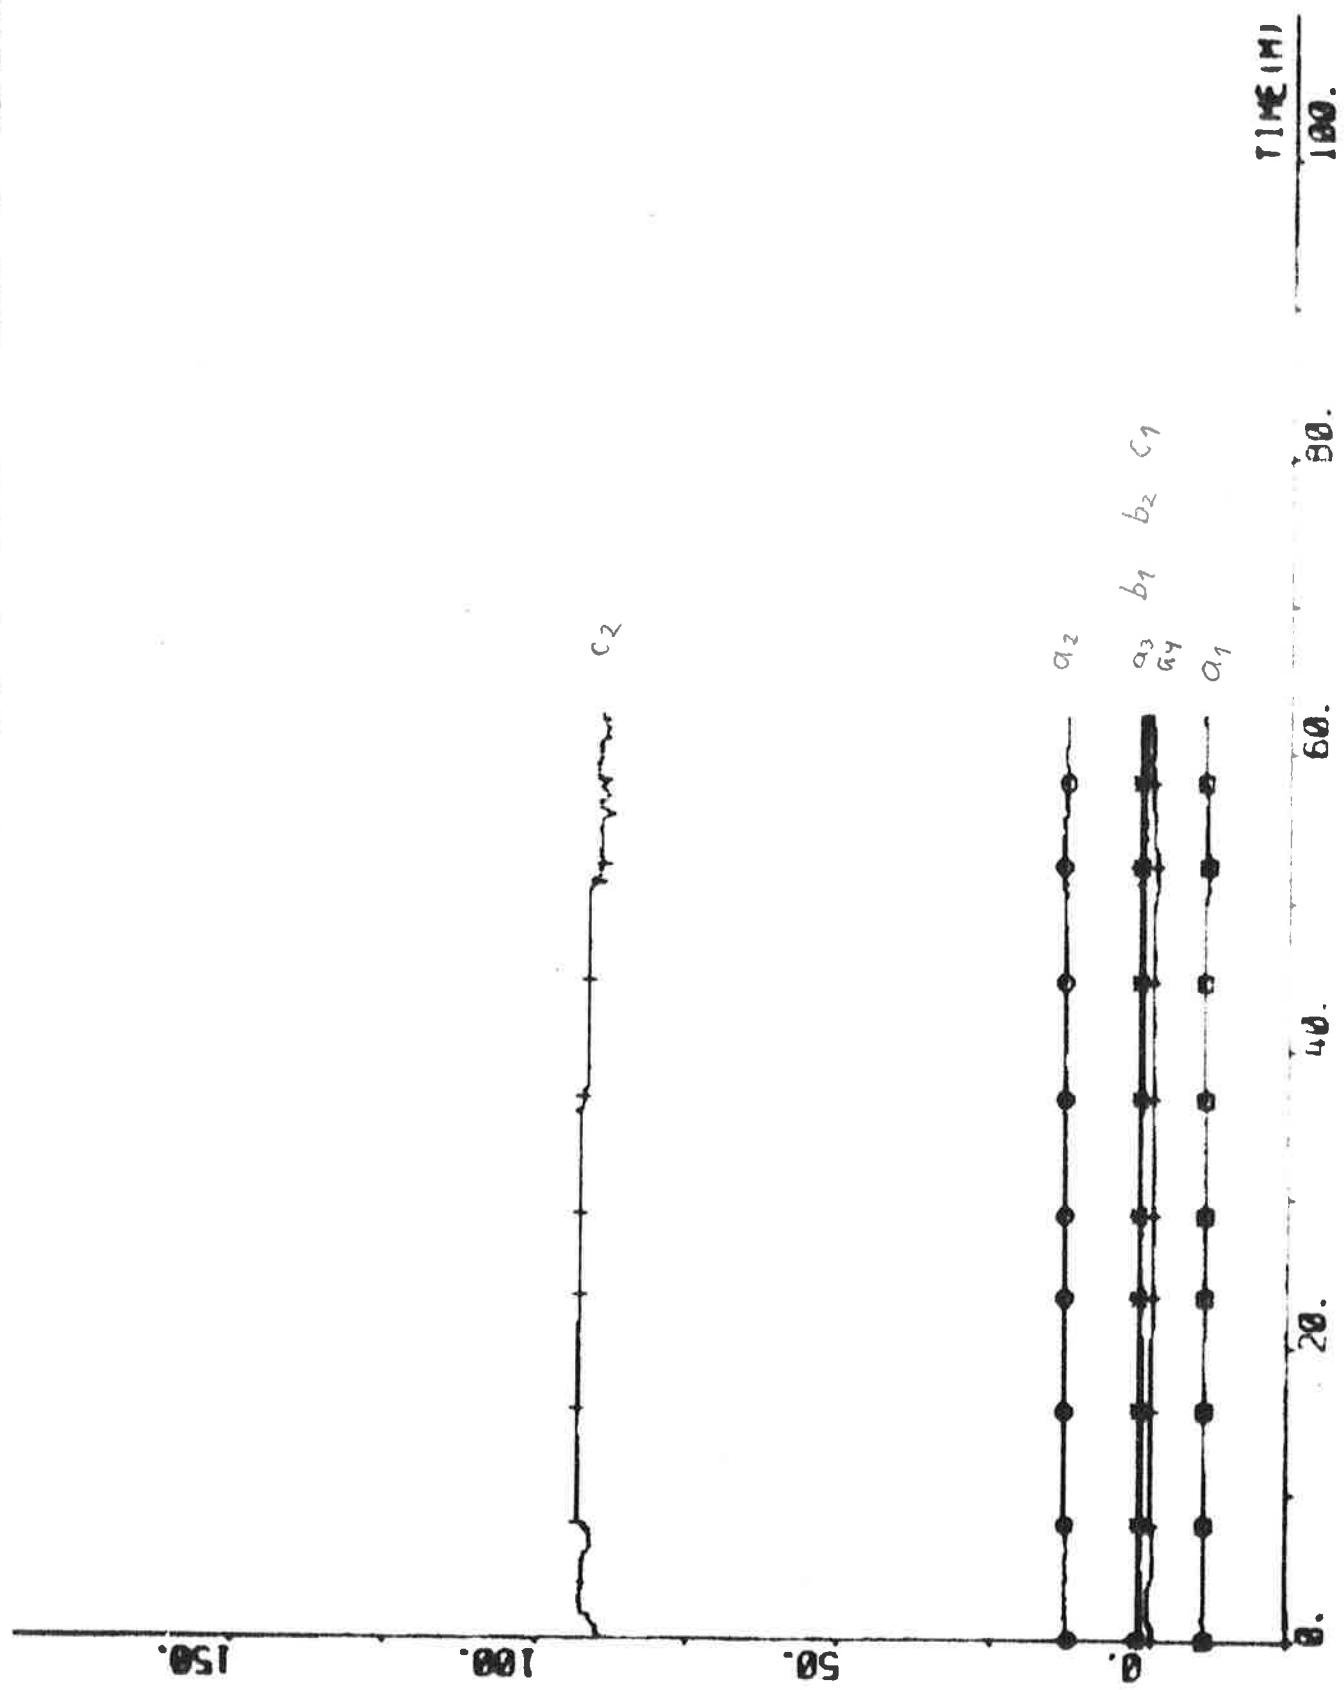

EXPERIMENT C4

| | | | |
|--------------|---|-----------------|------------------------|
| Date | 1976-04-27 | Forward draught | 10.9 m |
| Time | 10.53 | Aft draught | 12.9 m |
| Duration | 49 min | Wind direction | SE (1; see App. A) |
| Position | S 09°53' W 03°40' | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 145, (147), 165,
(159), (129), 125,
(126), (131), 145 deg | Wave height | - |
| r_{ref} | 0.1, 0.2 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from the Kalman filter.

The estimates $\hat{\delta}_0^*$, \hat{d}_v^* , \hat{d}_r^* and \hat{d}_δ^* were not updated during the experiment.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -15.46 \\ 18.76 \\ -1.80 \\ -2.39 \\ 0.40 \\ 0.19 \\ 0.29 \\ 108.85 \end{bmatrix} \quad P = \begin{bmatrix} 8.33 \\ -15.68 & 51.68 \\ 9.50 & -57.08 & 84.40 \\ -1.80 & 20.73 & -37.65 & 19.44 \\ 0.18 & -1.20 & 1.69 & -0.69 & 0.04 \\ -0.06 & 0.17 & -0.36 & 0.26 & 0.00 & 0.01 \\ -1.67 & 2.09 & 0.81 & -1.35 & 0.00 & -0.02 & 1.46 \\ 6.98 & -15.94 & 16.67 & -9.62 & 0.67 & -0.57 & 22.66 & 971.56 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.89$$


$$\hat{\delta}_0 = -0.4 \text{ deg} \quad \hat{d}_v = 0.10 \text{ knots} \quad \hat{d}_r = 0.003 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$


$$\hat{\delta}_c = -0.5 \text{ deg} \quad (\text{Initial value: } -0.1 \text{ deg})$$


Statistics (mean value and standard deviation)

| | | | |
|-------|------------------------------|-------------------|-------------------------------|
| n | $69.1 \pm 0.8 \text{ rpm}$ | ϵ_v | $0.00 \pm 0.03 \text{ knots}$ |
| u | $12.5 \pm 0.4 \text{ knots}$ | ϵ_r | $0.00 \pm 0.02 \text{ deg/s}$ |
| P_s | $14.5 \pm 0.4 \text{ MW}$ | ϵ_ψ | $0.00 \pm 0.06 \text{ deg}$ |
| | | ϵ_δ | $0.0 \pm 0.6 \text{ deg}$ |


PLOT CHP1(11)-CHP1(10) CHP1(6) HEP CHP1(10) HEP HODY HE CHP1(15) 92-31

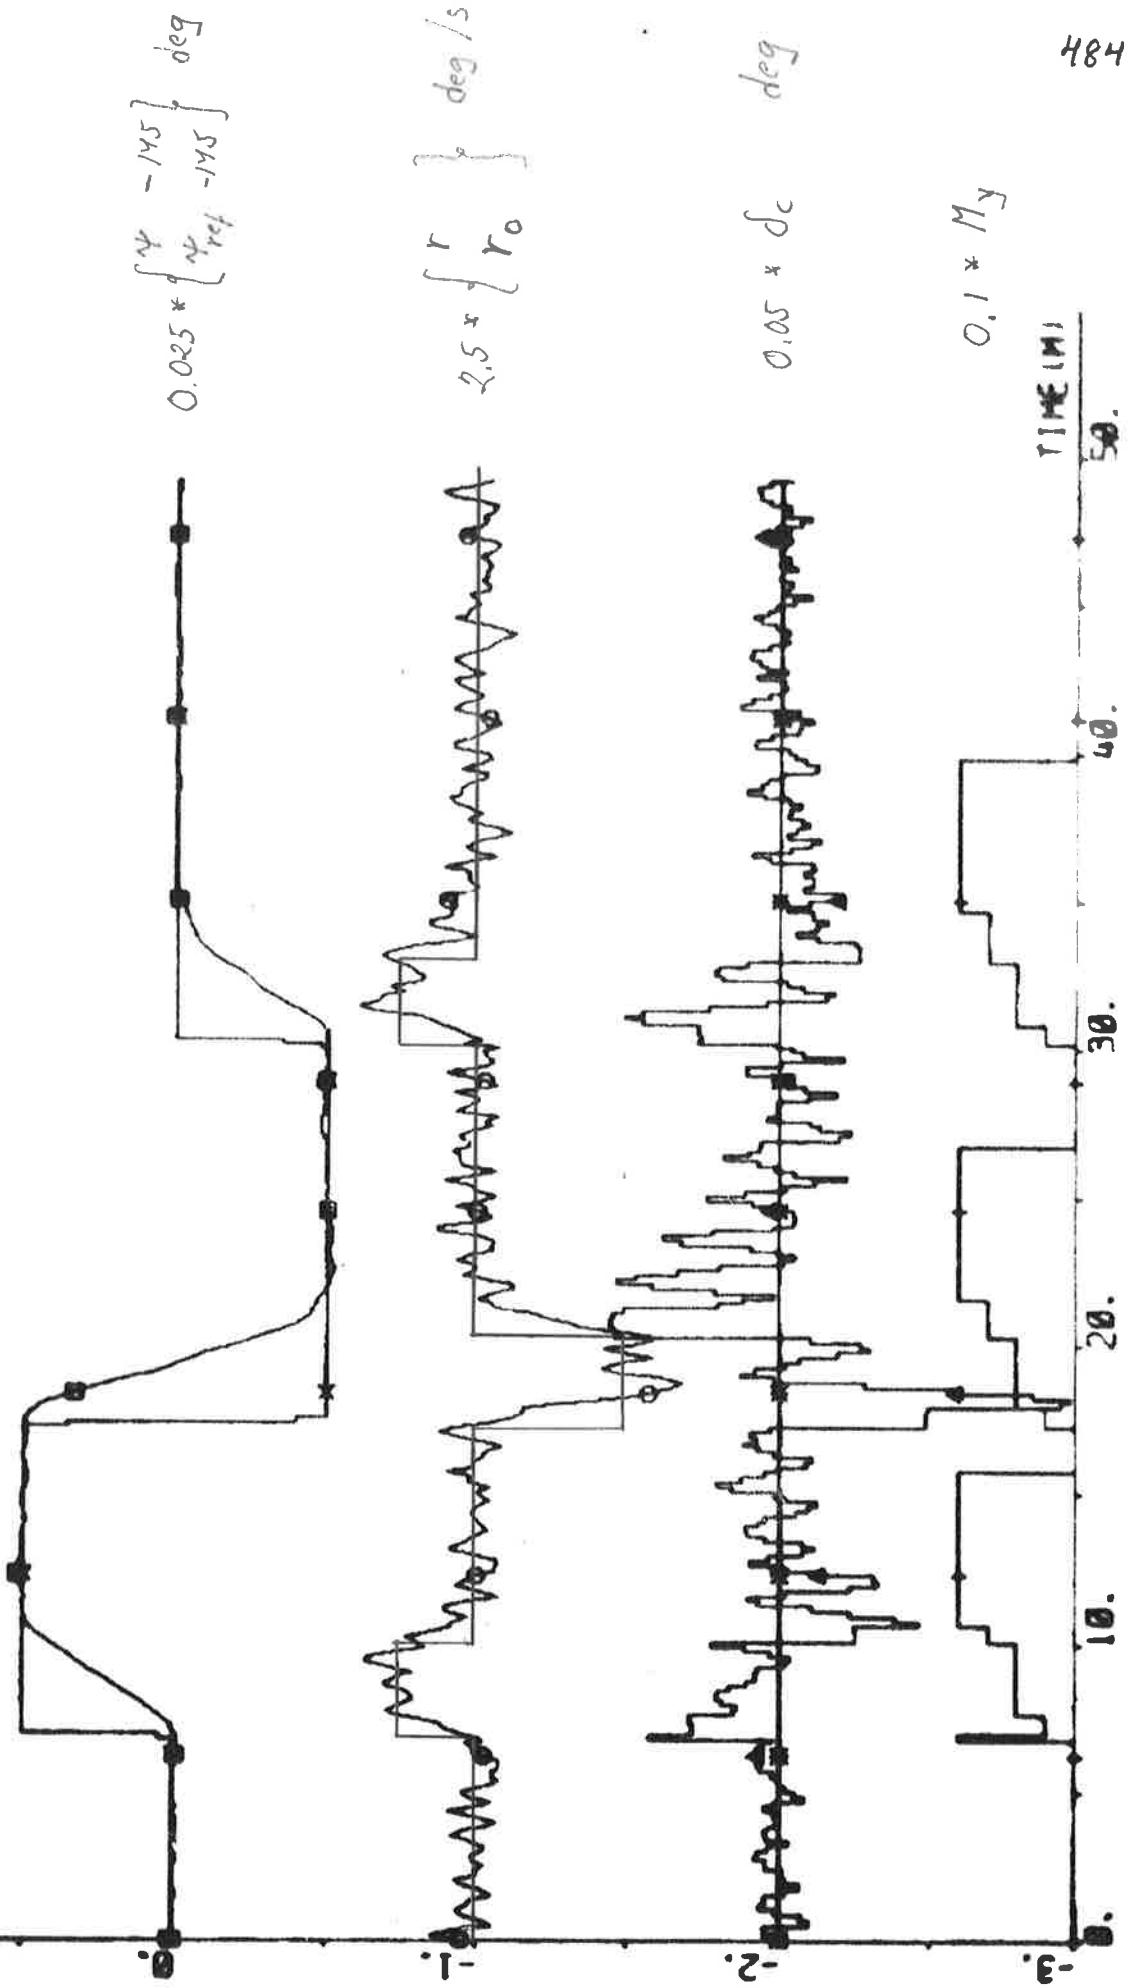

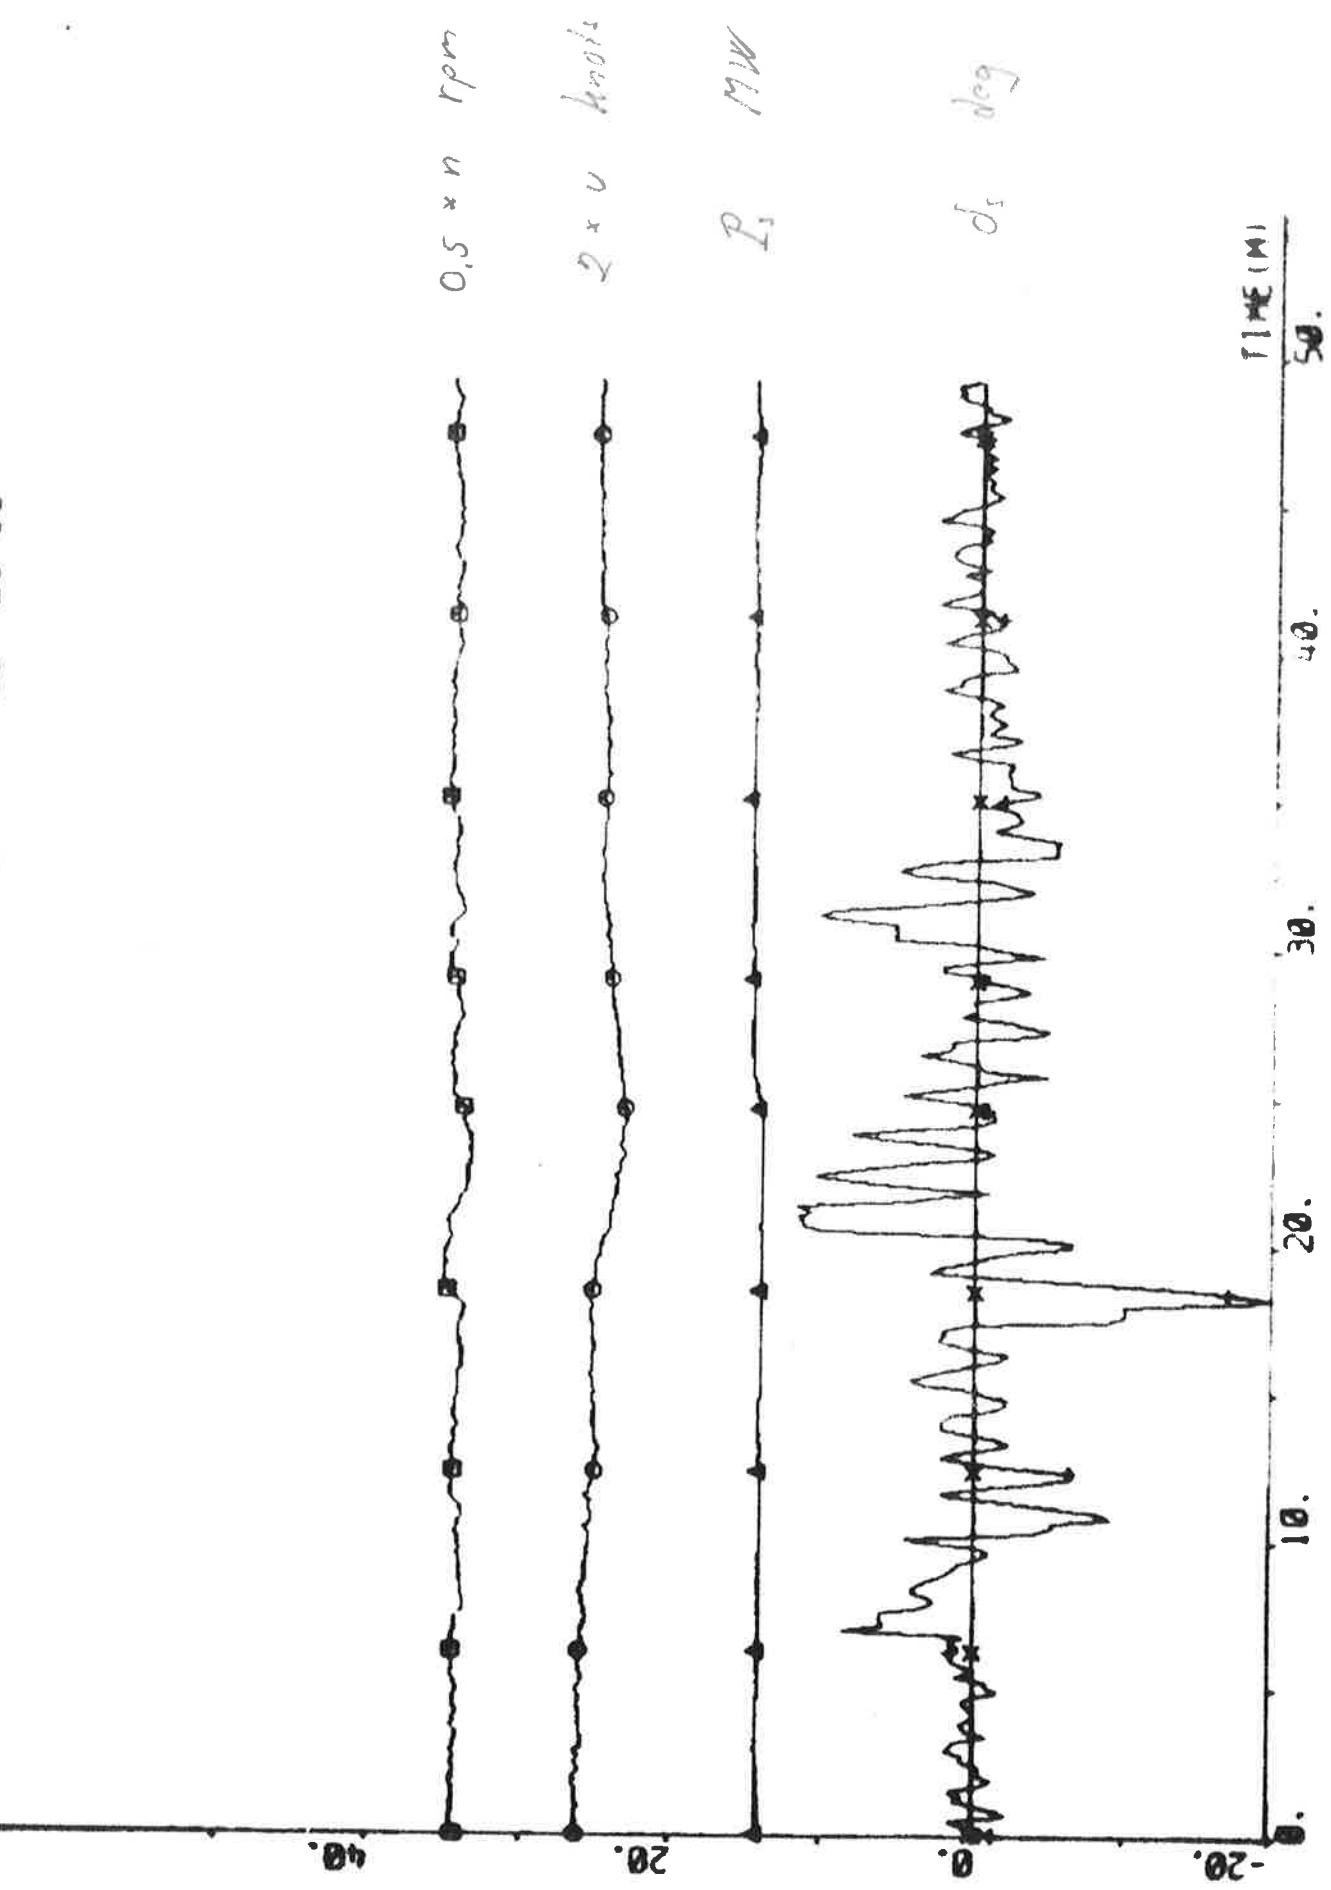


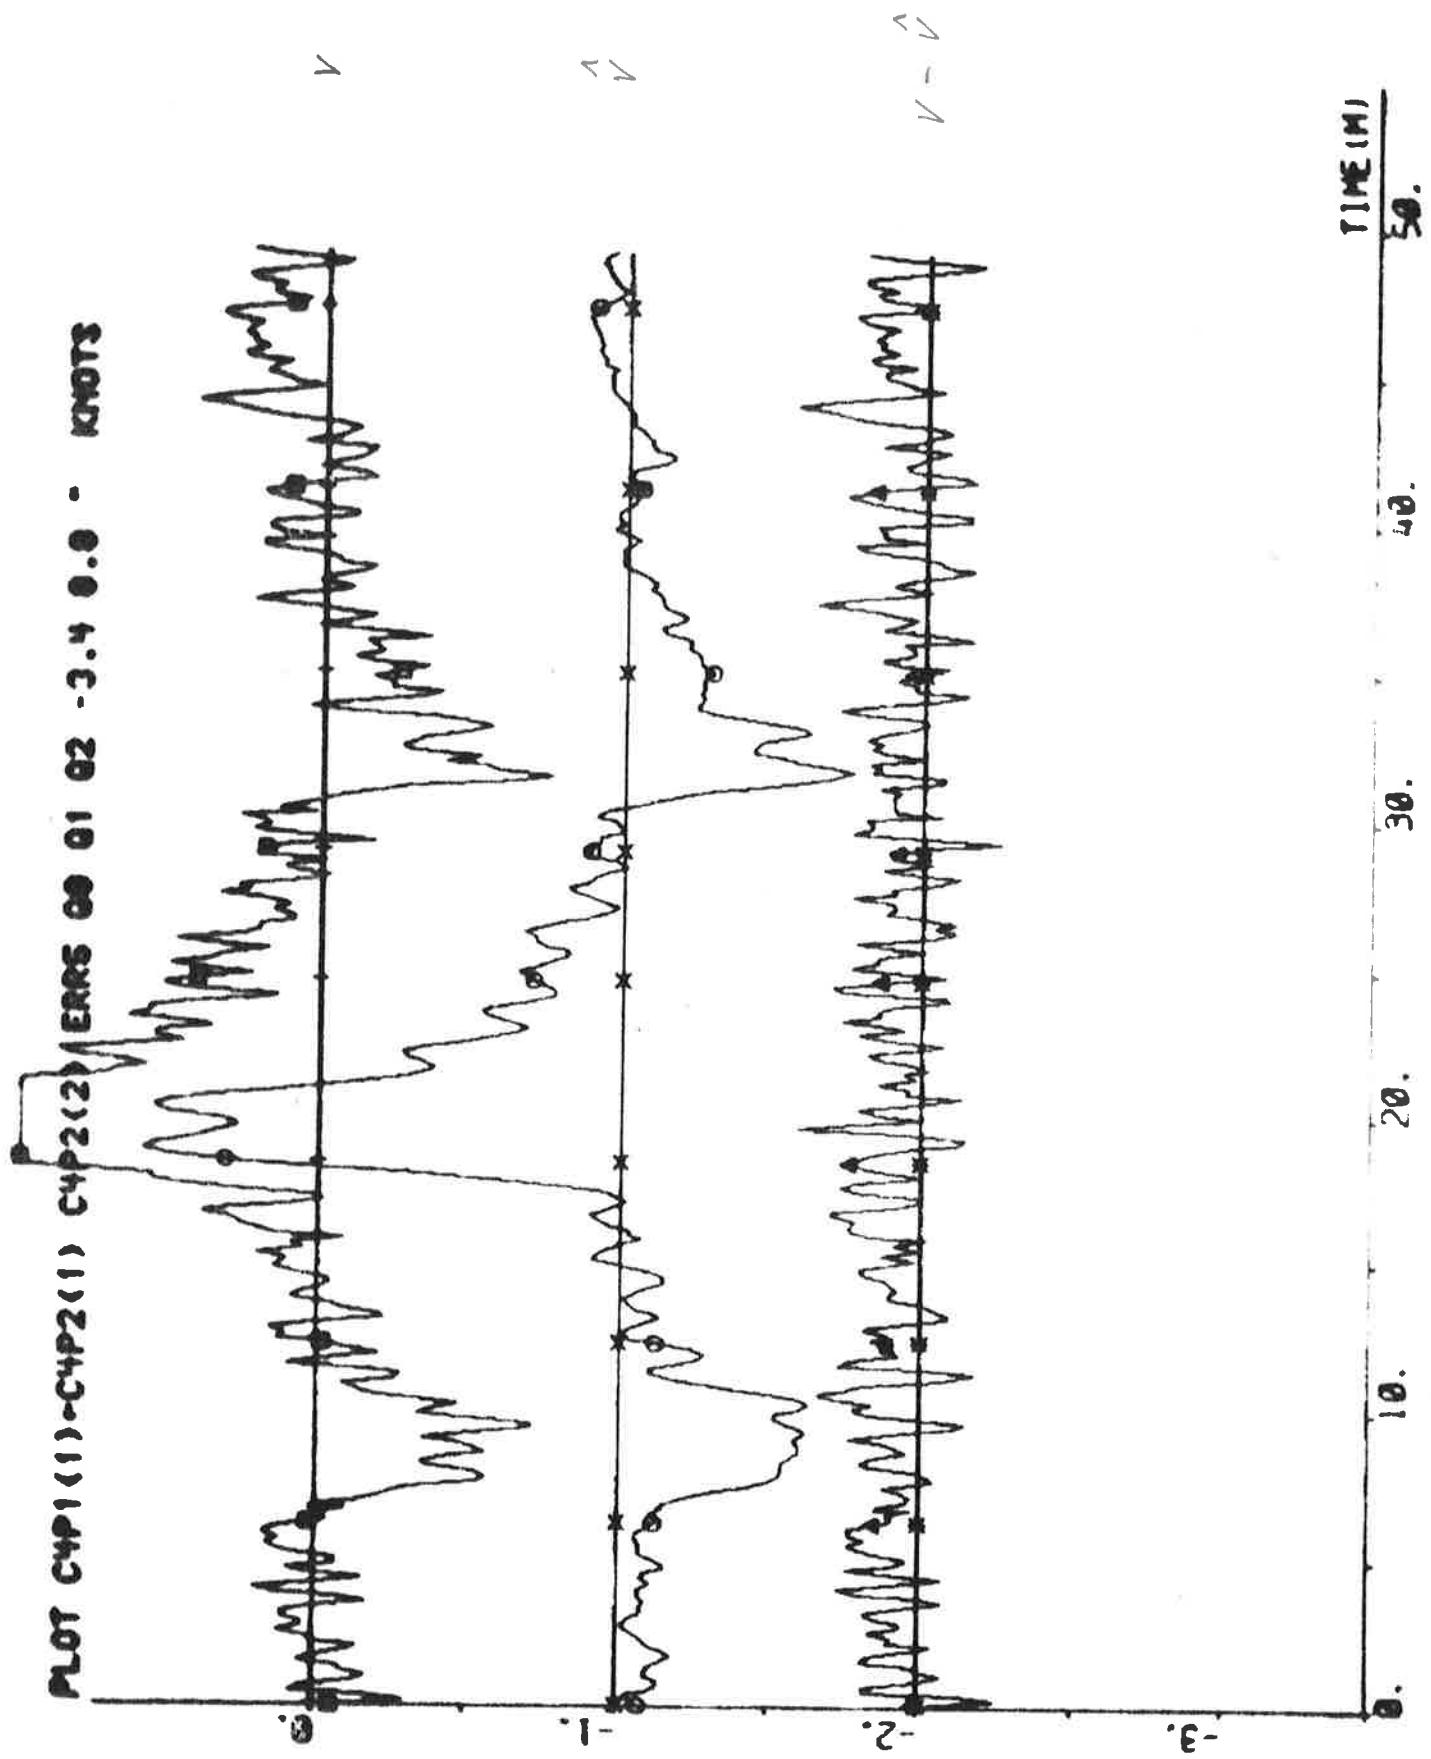


PLT CHP1(1)-CHP1(4) CHP1(5) EMA2 EMA32 00 01 02 03 -3.4 0.0 - Meters

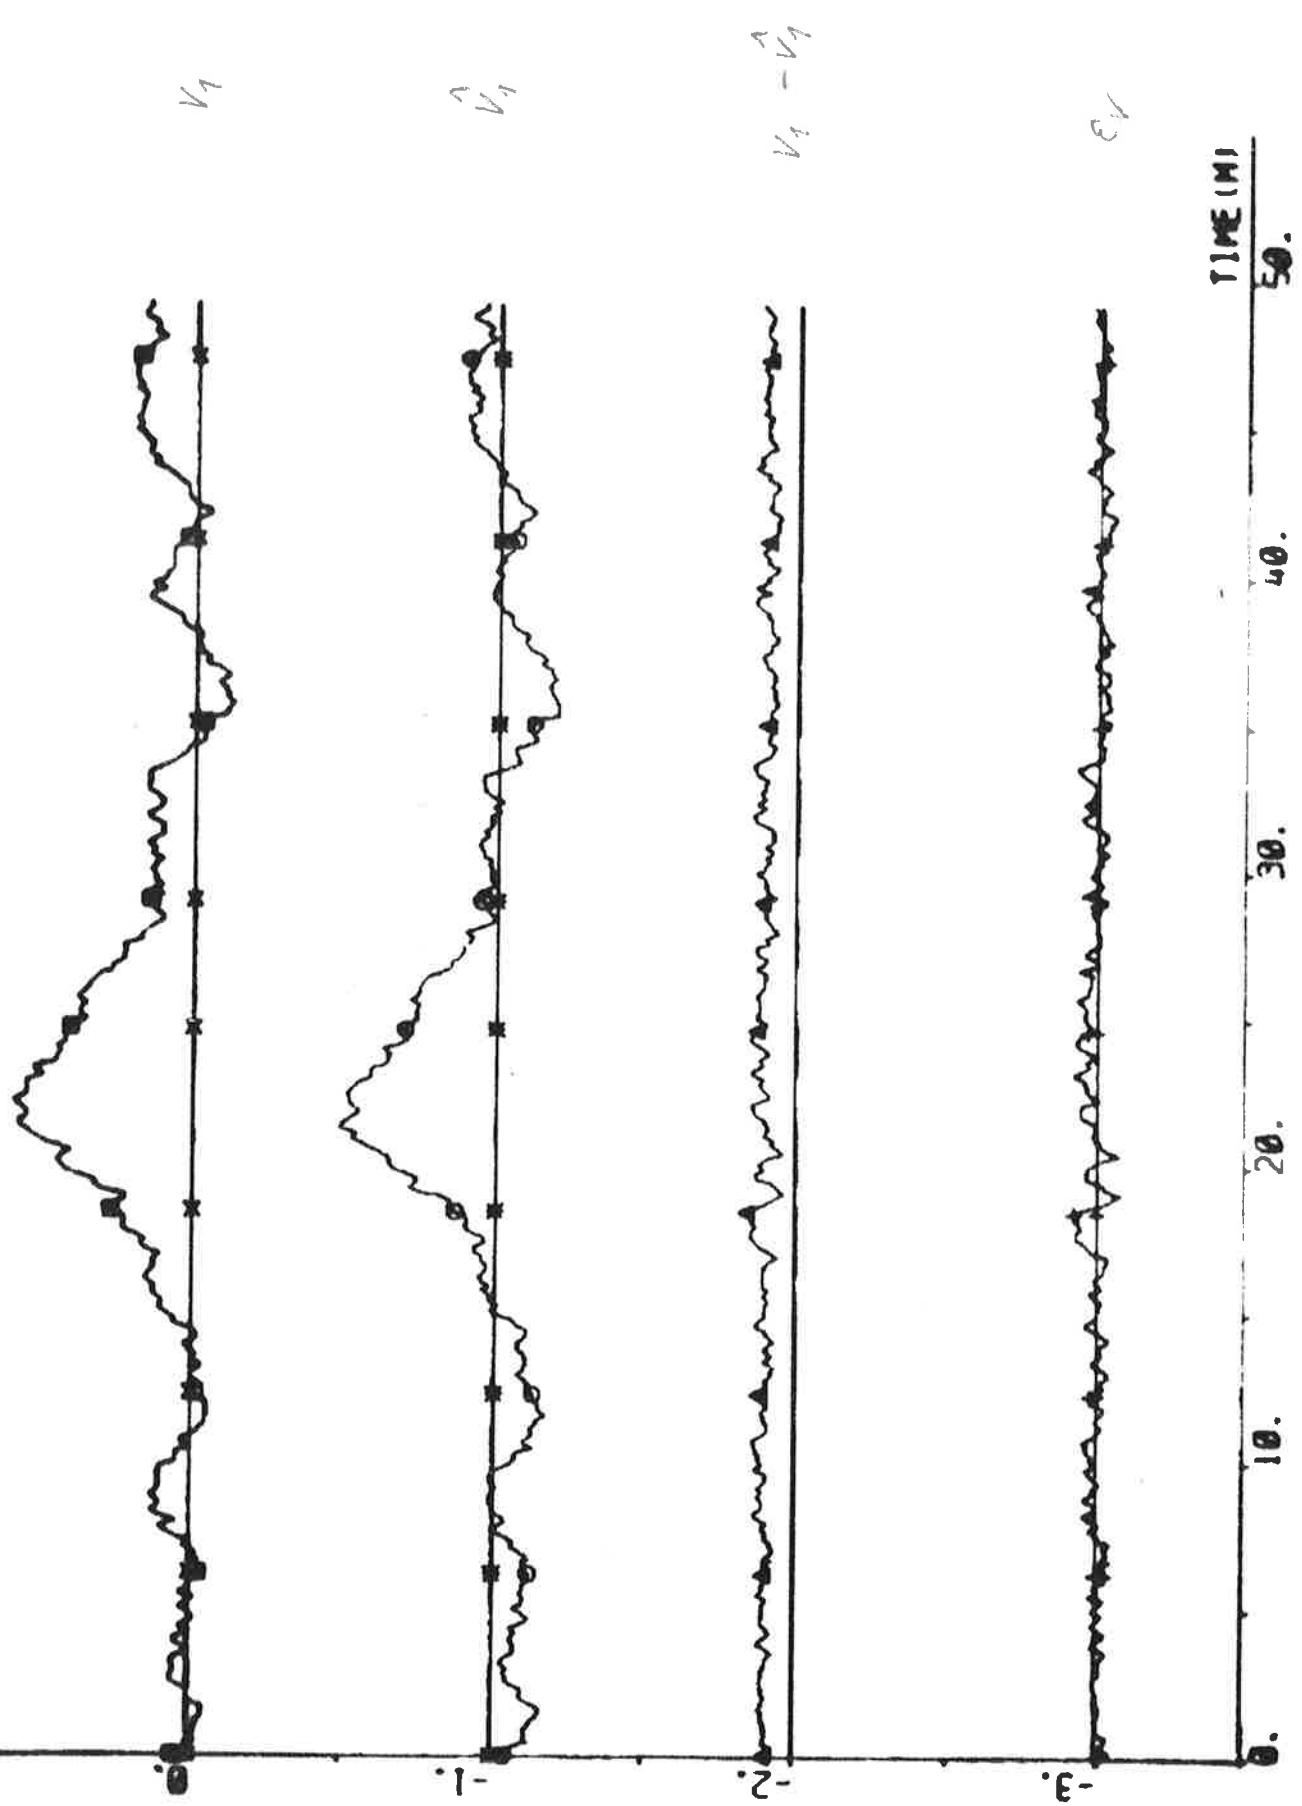


Plot CH1(11)-CH1(8) CH1(7) ENS E32 00 sec 00 sec -0.70. -0.65

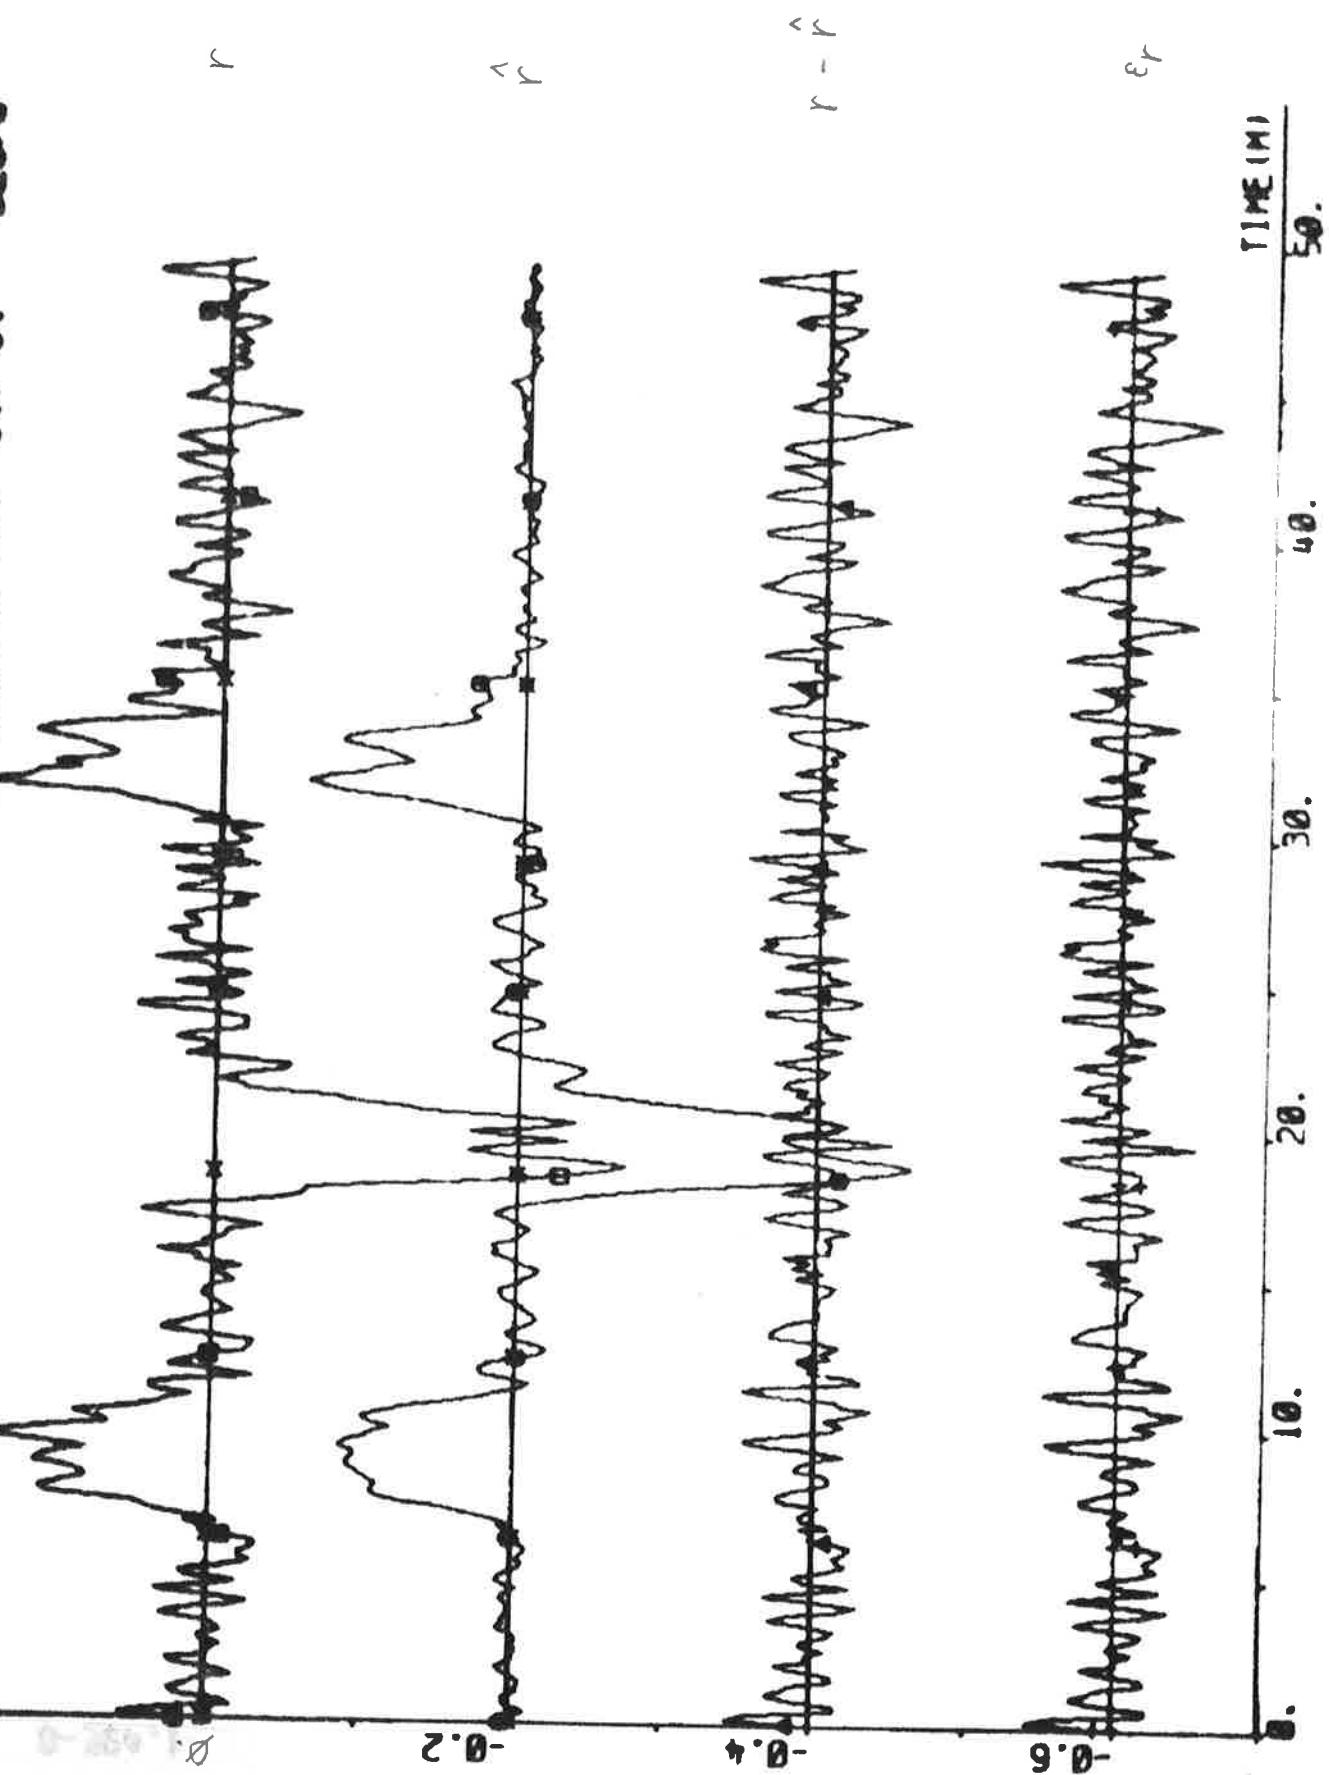

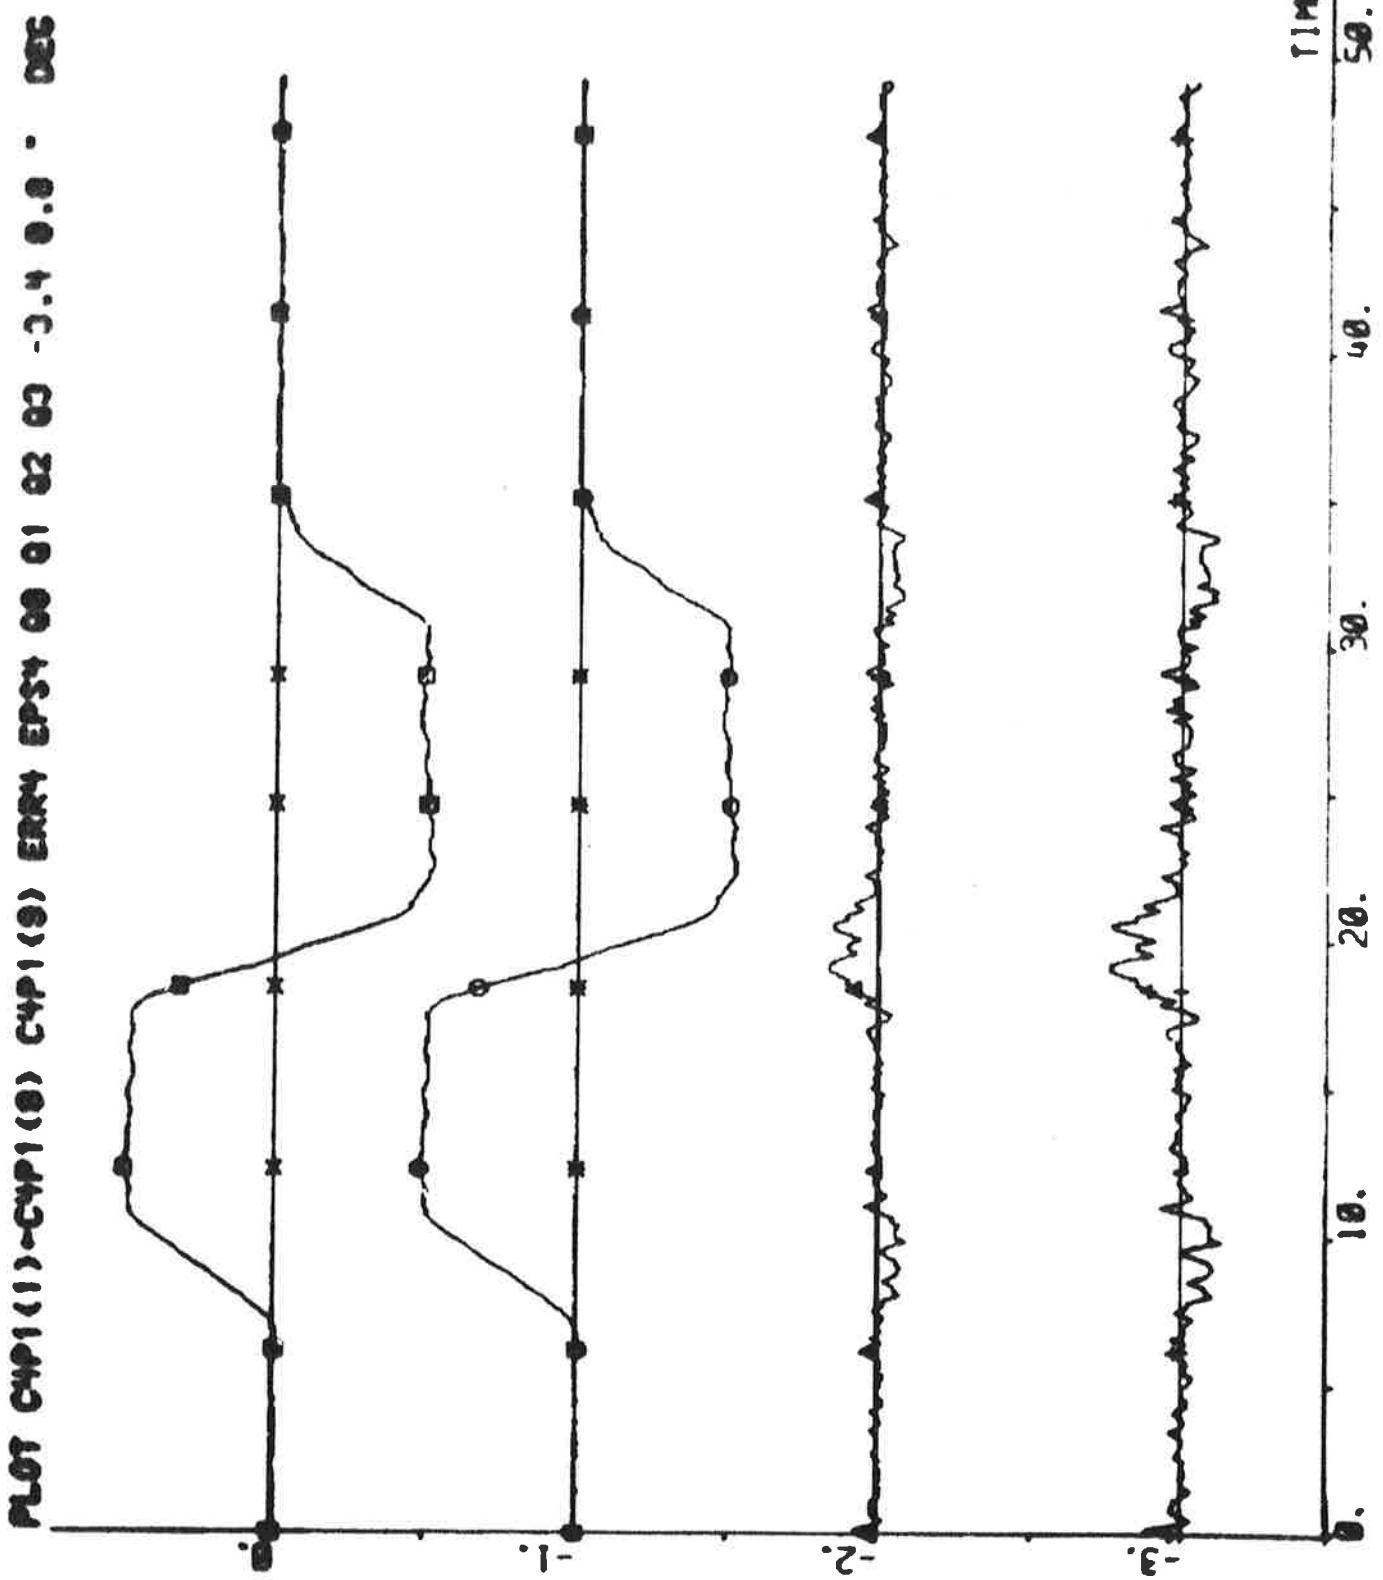

1971-04-11 - C141(2) - ESS1 - 020 040 060 080 100 - 120

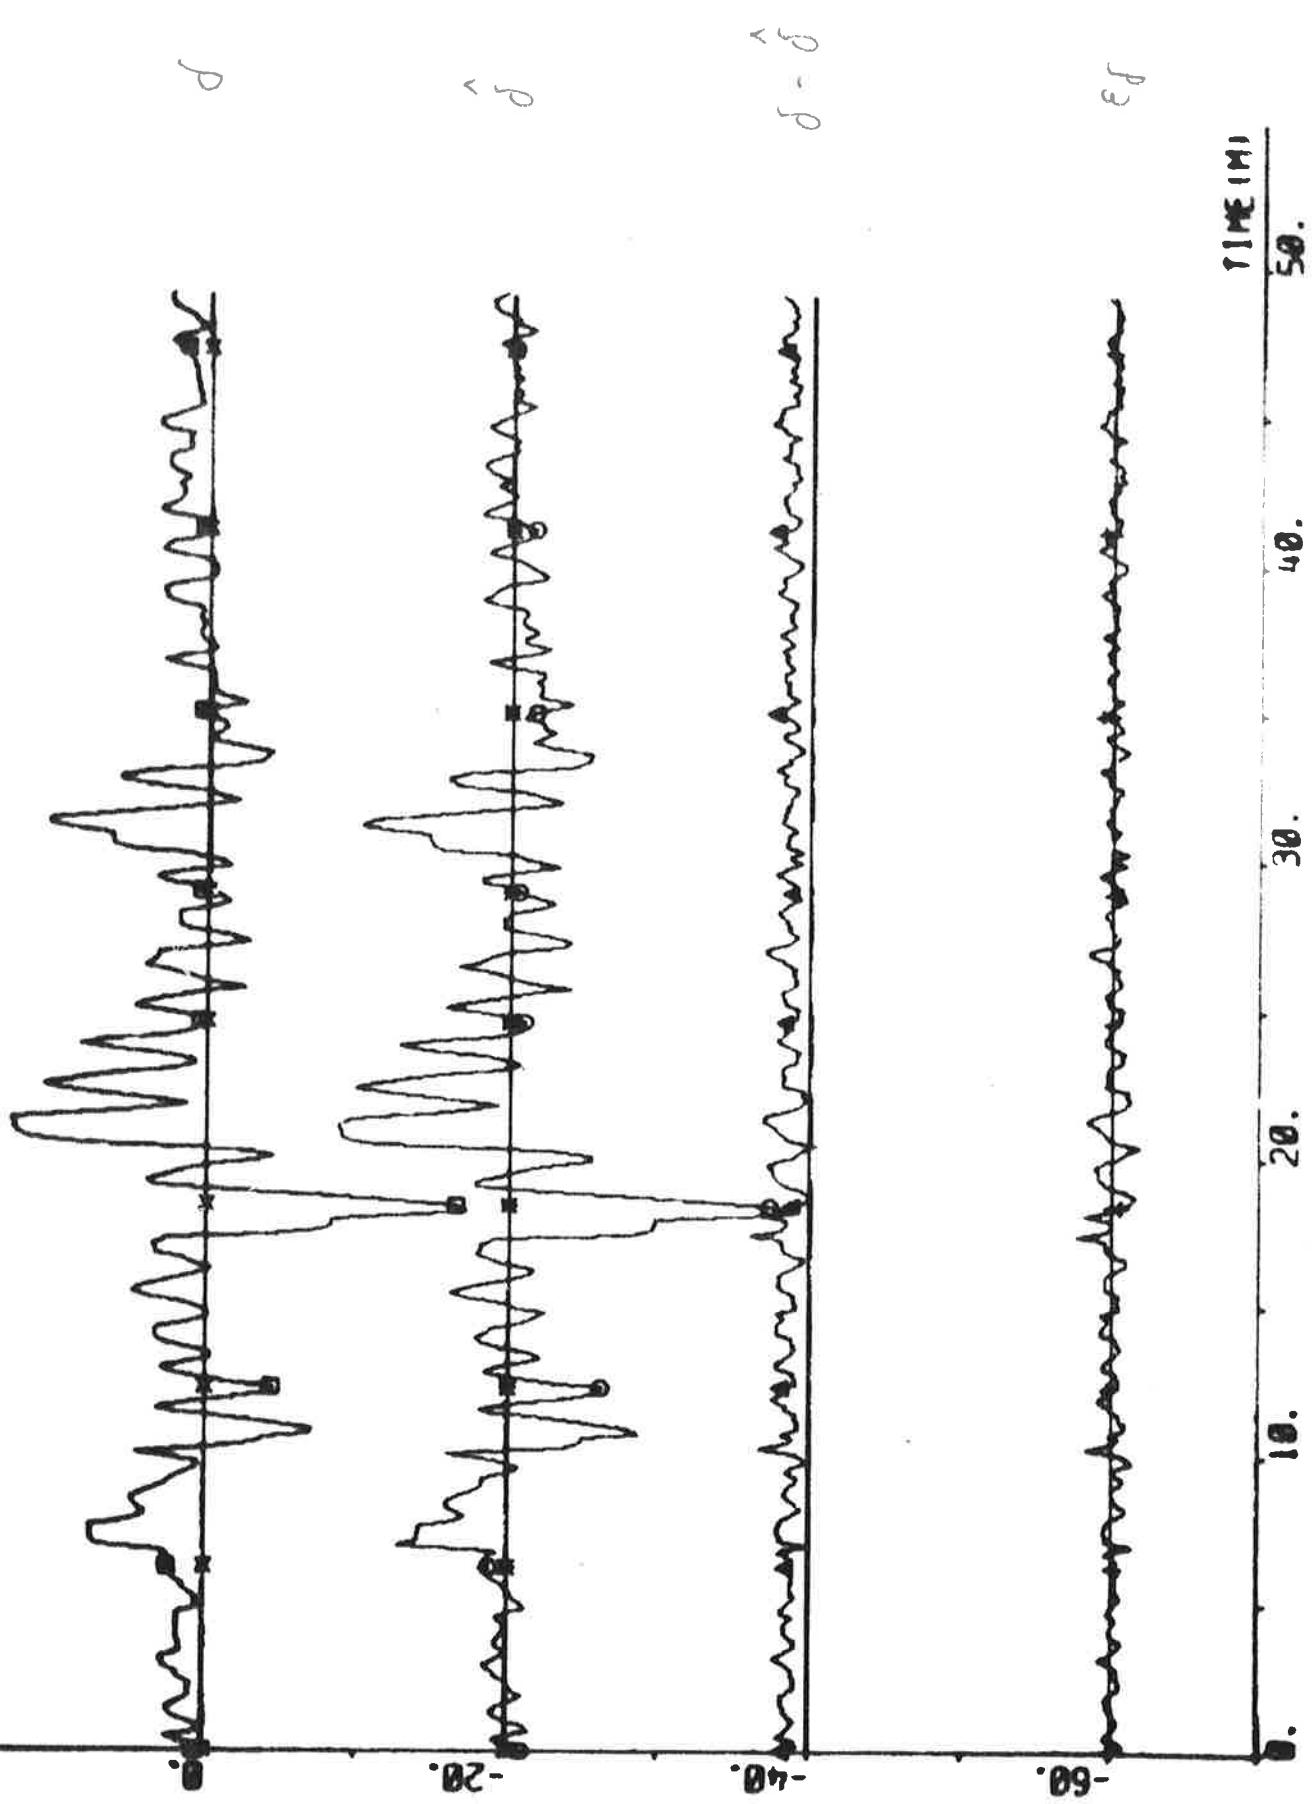

num C4P1(1)-C4P2(3) C4P2(4) C4P2(5) C4P2(6) 00 02 04 06 - 0.3 1.8

$$0.5 \times d_0 \text{ deg}$$



$$2 \times d_V \text{ knots}$$




$$100 \times d_r \text{ deg}$$



$$0.5 \times d_d \text{ deg}$$



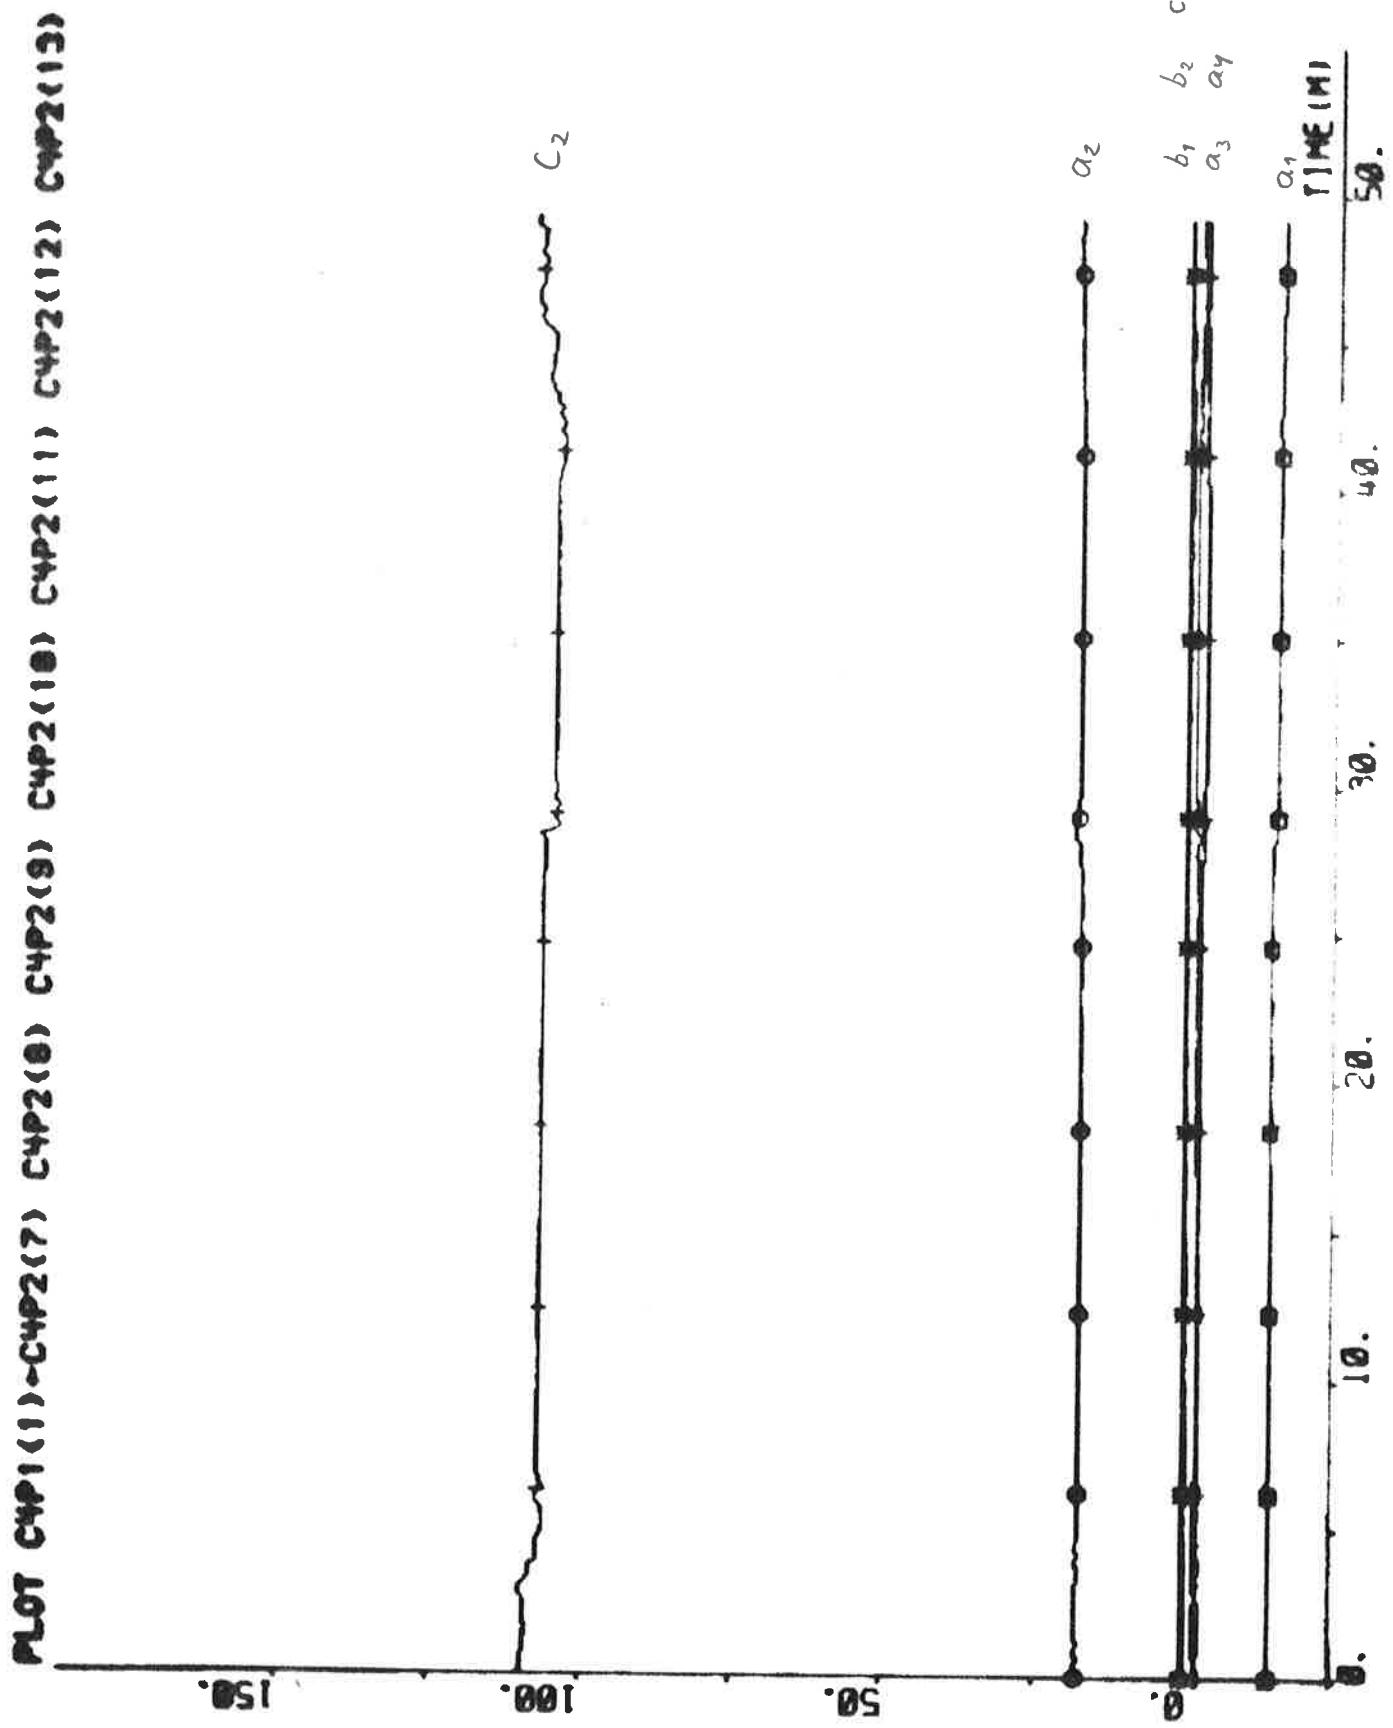

EXPERIMENT C5

| | | | |
|--------------|---|-----------------|-------------------------|
| Date | 1976-04-27 | Forward draught | 10.9 m |
| Time | 14.10 | Aft draught | 12.9 m |
| Duration | 27 min | Wind direction | SE (1; see App. A) |
| Position | S 10°27' W 03°14' | Wind velocity | 8 m/s (moderate breeze) |
| ψ_{ref} | 144, (150), 149,
(147), 139, 144 deg | Wave height | - |
| r_{ref} | 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from the Kalman filter.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -10.07 \\ 8.90 \\ 5.69 \\ -4.90 \\ 0.41 \\ 0.05 \\ -1.54 \\ 48.49 \end{bmatrix} \quad P = \begin{bmatrix} 8.31 \\ -13.48 & 35.98 \\ 3.24 & -29.55 & 47.87 \\ 2.41 & 6.81 & -21.85 & 13.31 \\ 0.13 & -0.89 & 1.18 & -0.41 & 0.05 \\ 0.00 & 0.14 & -0.44 & 0.33 & -0.01 & 0.03 \\ -1.08 & 1.49 & 0.26 & -0.68 & -0.01 & -0.01 & 1.09 \\ 23.69 & -42.91 & 0.47 & 18.03 & 1.56 & -0.45 & 17.22 & 1078.29 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.38$$


$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.13 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

$$\bar{\delta}_c = 0.4 \text{ deg} \quad (\text{Initial value: } 0.3 \text{ deg})$$


Statistics (mean value and standard deviation)

| | | | |
|----------------|------------------------------|-------------------|-------------------------------|
| n | $69.7 \pm 0.7 \text{ rpm}$ | ϵ_v | $0.00 \pm 0.03 \text{ knots}$ |
| u | $13.2 \pm 0.1 \text{ knots}$ | ϵ_r | $0.00 \pm 0.02 \text{ deg/s}$ |
| P _s | $14.7 \pm 0.2 \text{ MW}$ | ϵ_ψ | $0.00 \pm 0.03 \text{ deg}$ |
| | | ϵ_δ | $0.0 \pm 0.6 \text{ deg}$ |


PLOT CSP1(1)-CSP1(8) CSP1(9) CSP1(10) AND MODY MP CSP1(11B) 02-31

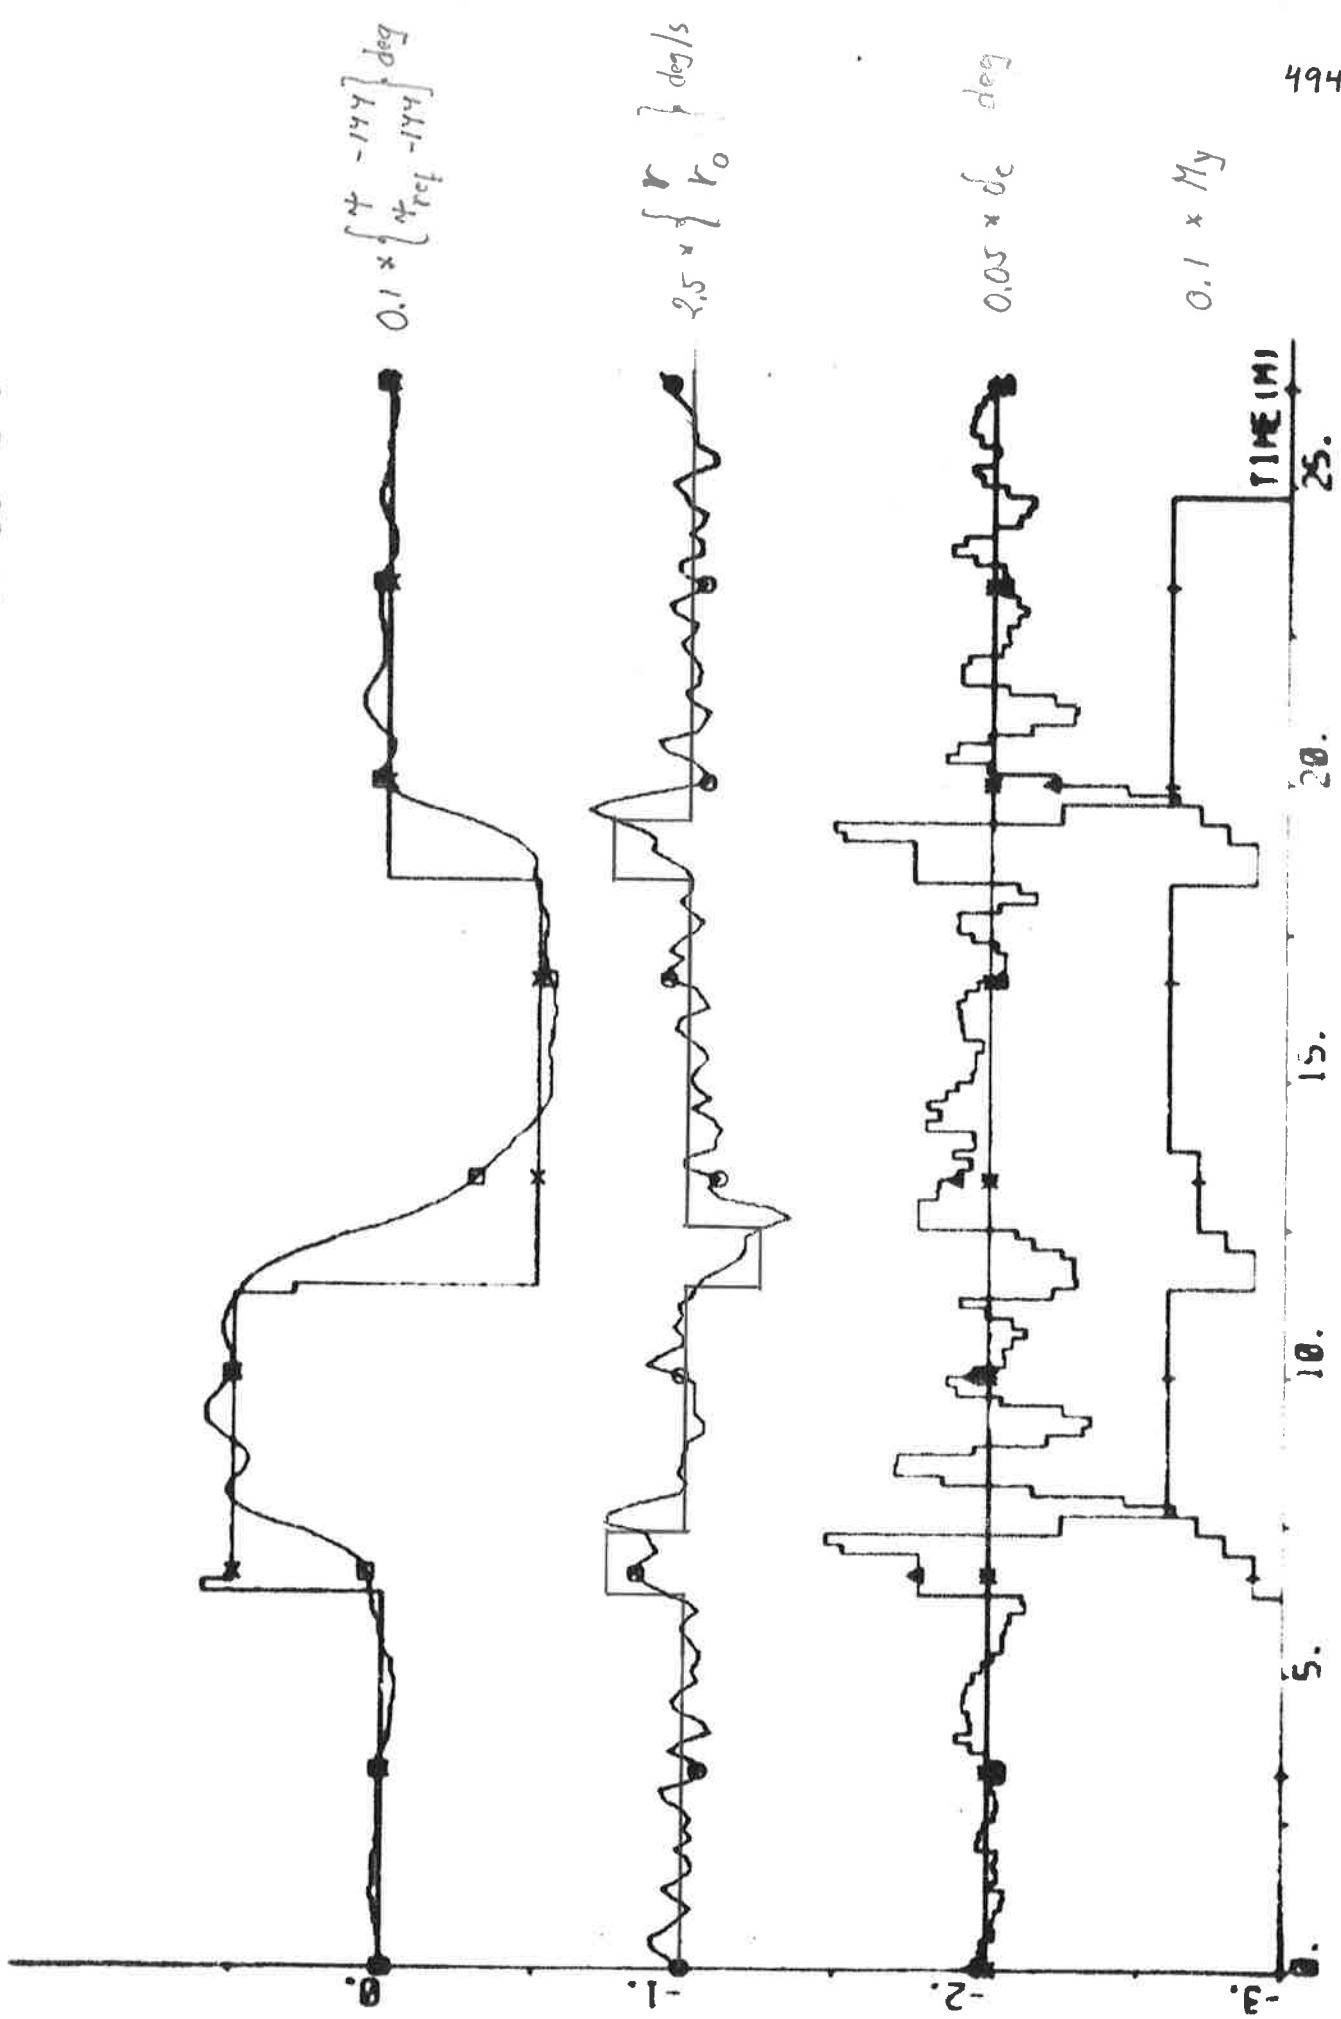

PLOT CSP1(1) CSP1(2) CSP1(3) CSP1(4) CSP1(11) 60 - 20 60

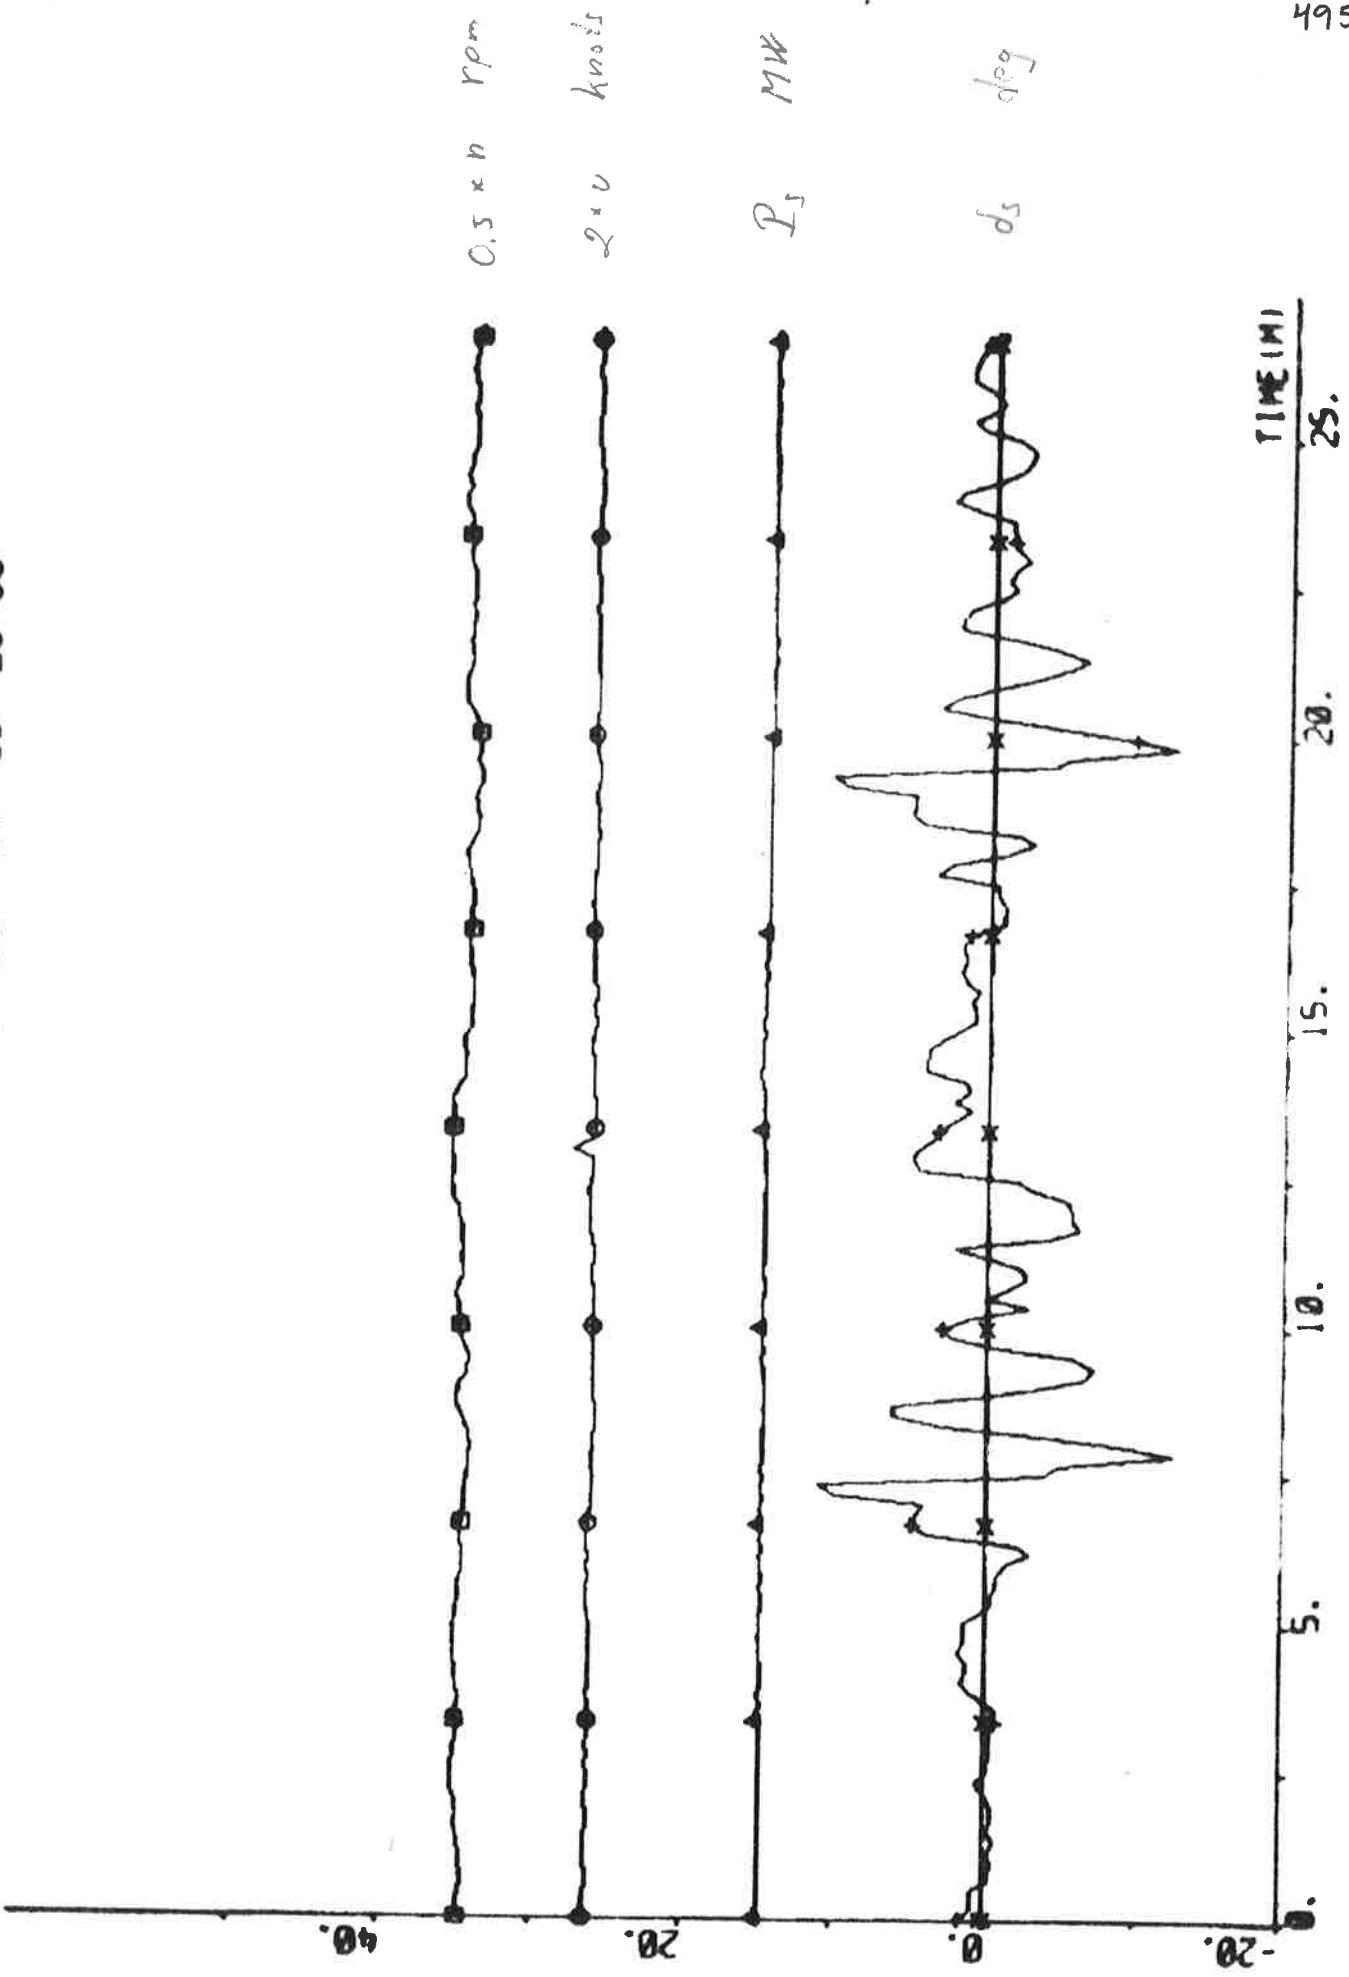


PLOT CSP1(1) - CSP2(1) CSP2(2) ENR2 60 81 82 -3.4 0.0 - KNOTS

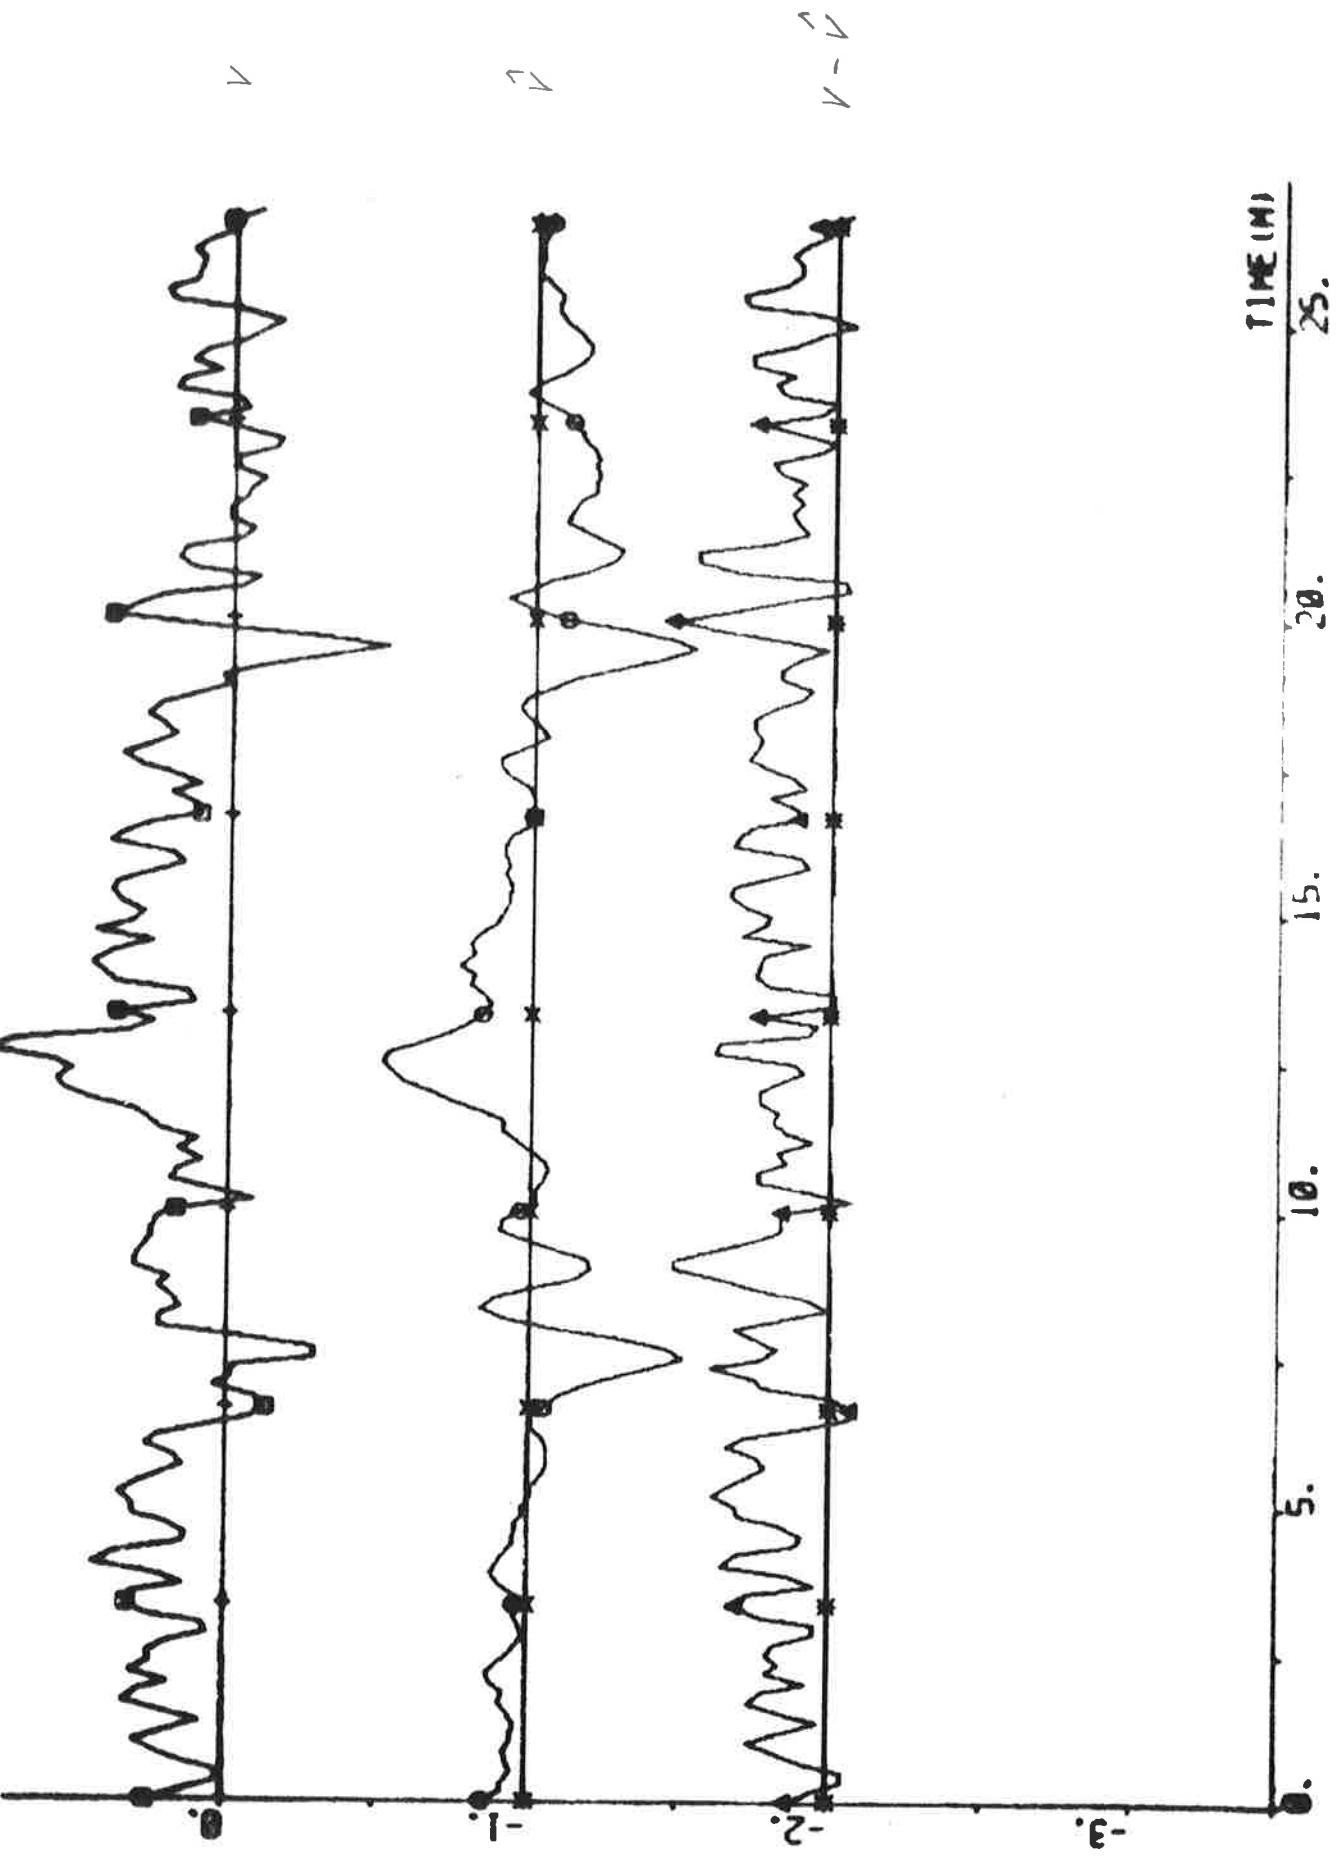

496

Plot CEP1(1) - CEP1(4) CEP1(5) ER82 EP32 90 91 92 93 - 3.4.0.3 - 100%

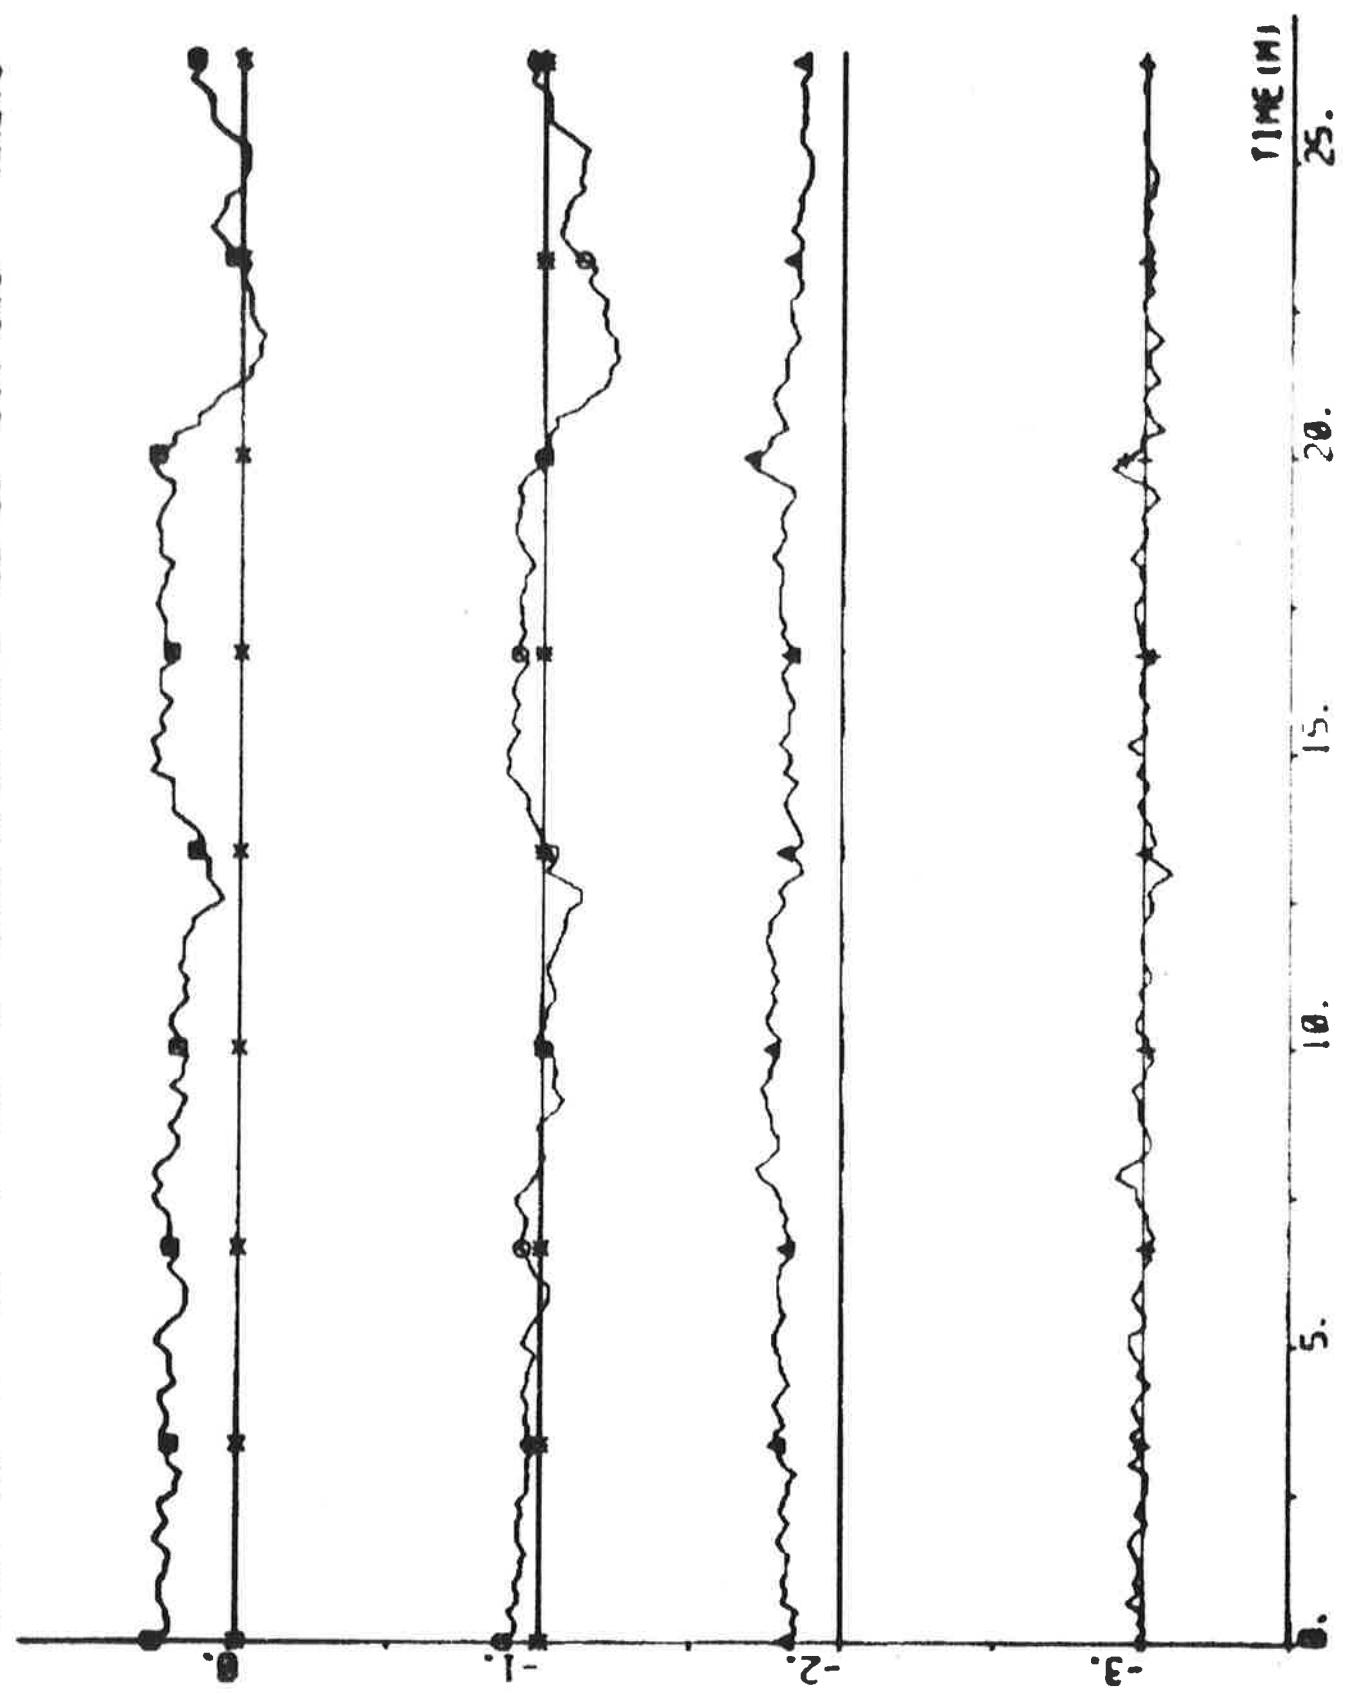

PLOT CSP1(11)-CSP1(10) CSP1(7) ENR2 ENR3 00 0002 004 008 - 0.7 0.0 - 0.05



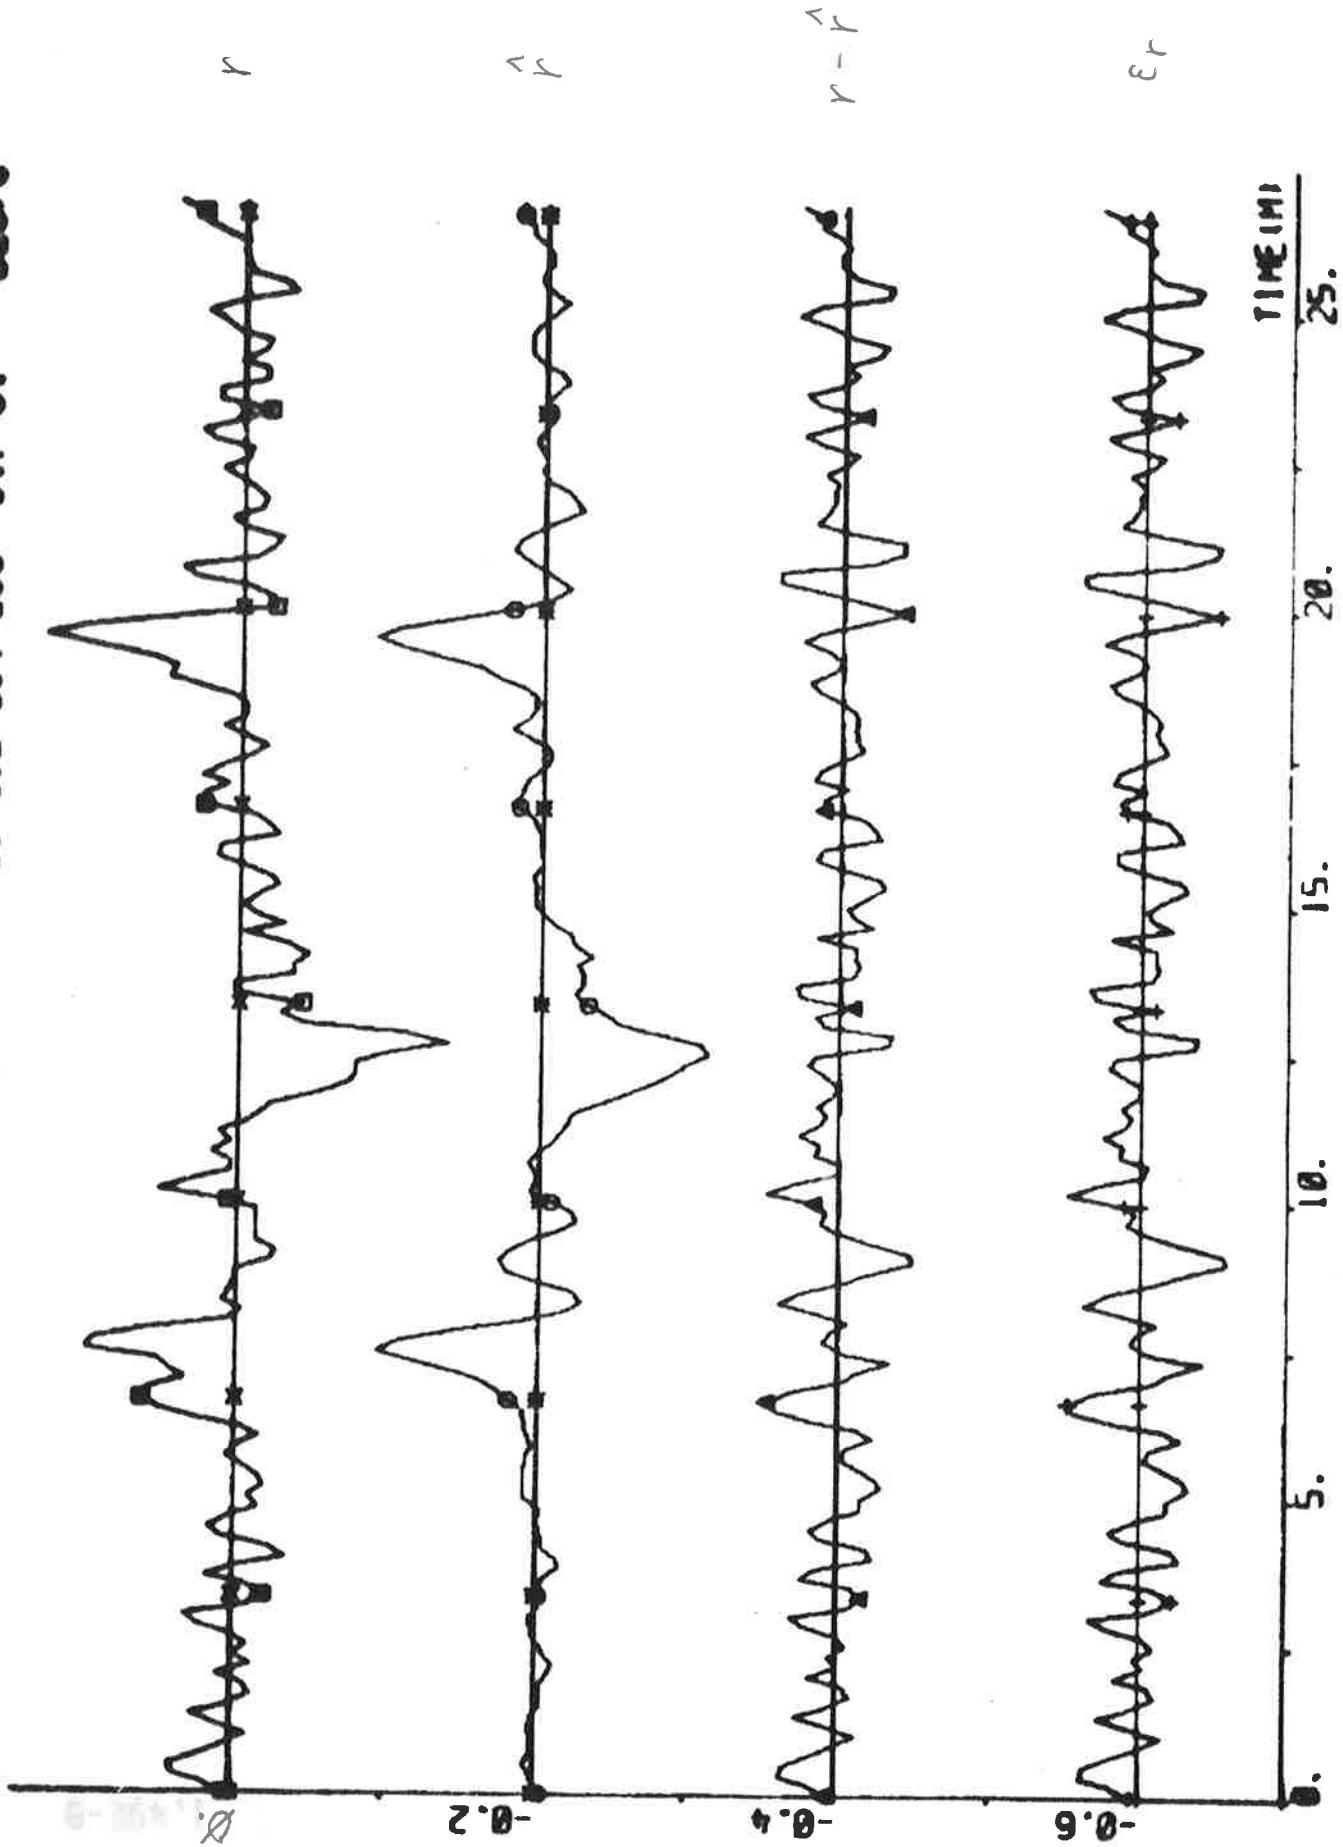



PLATE CARBONATE - CEMENT (10) CEMENT (8) CEMENT (6) CEMENT (4)

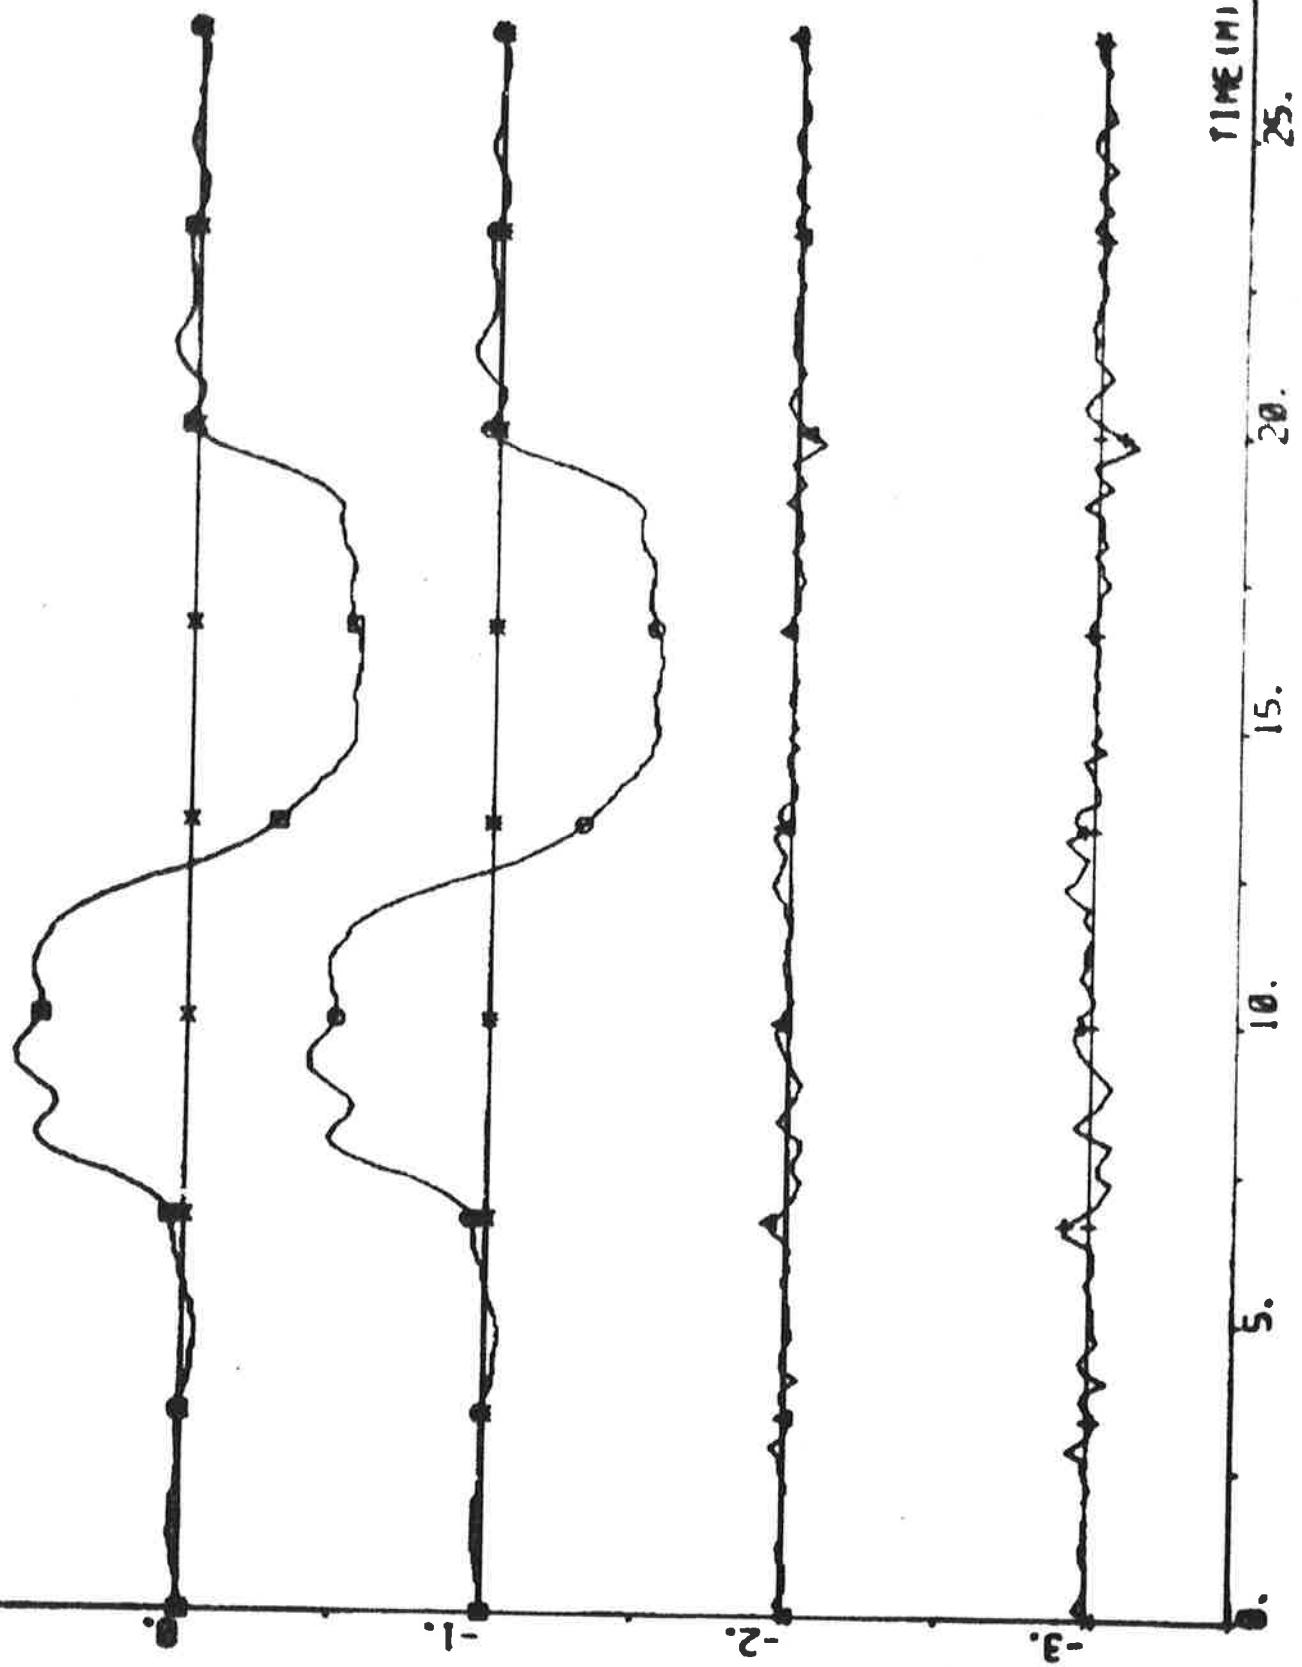


run C8P1(1)-C8P1(2) C8P1(3) ERA1 ERA1

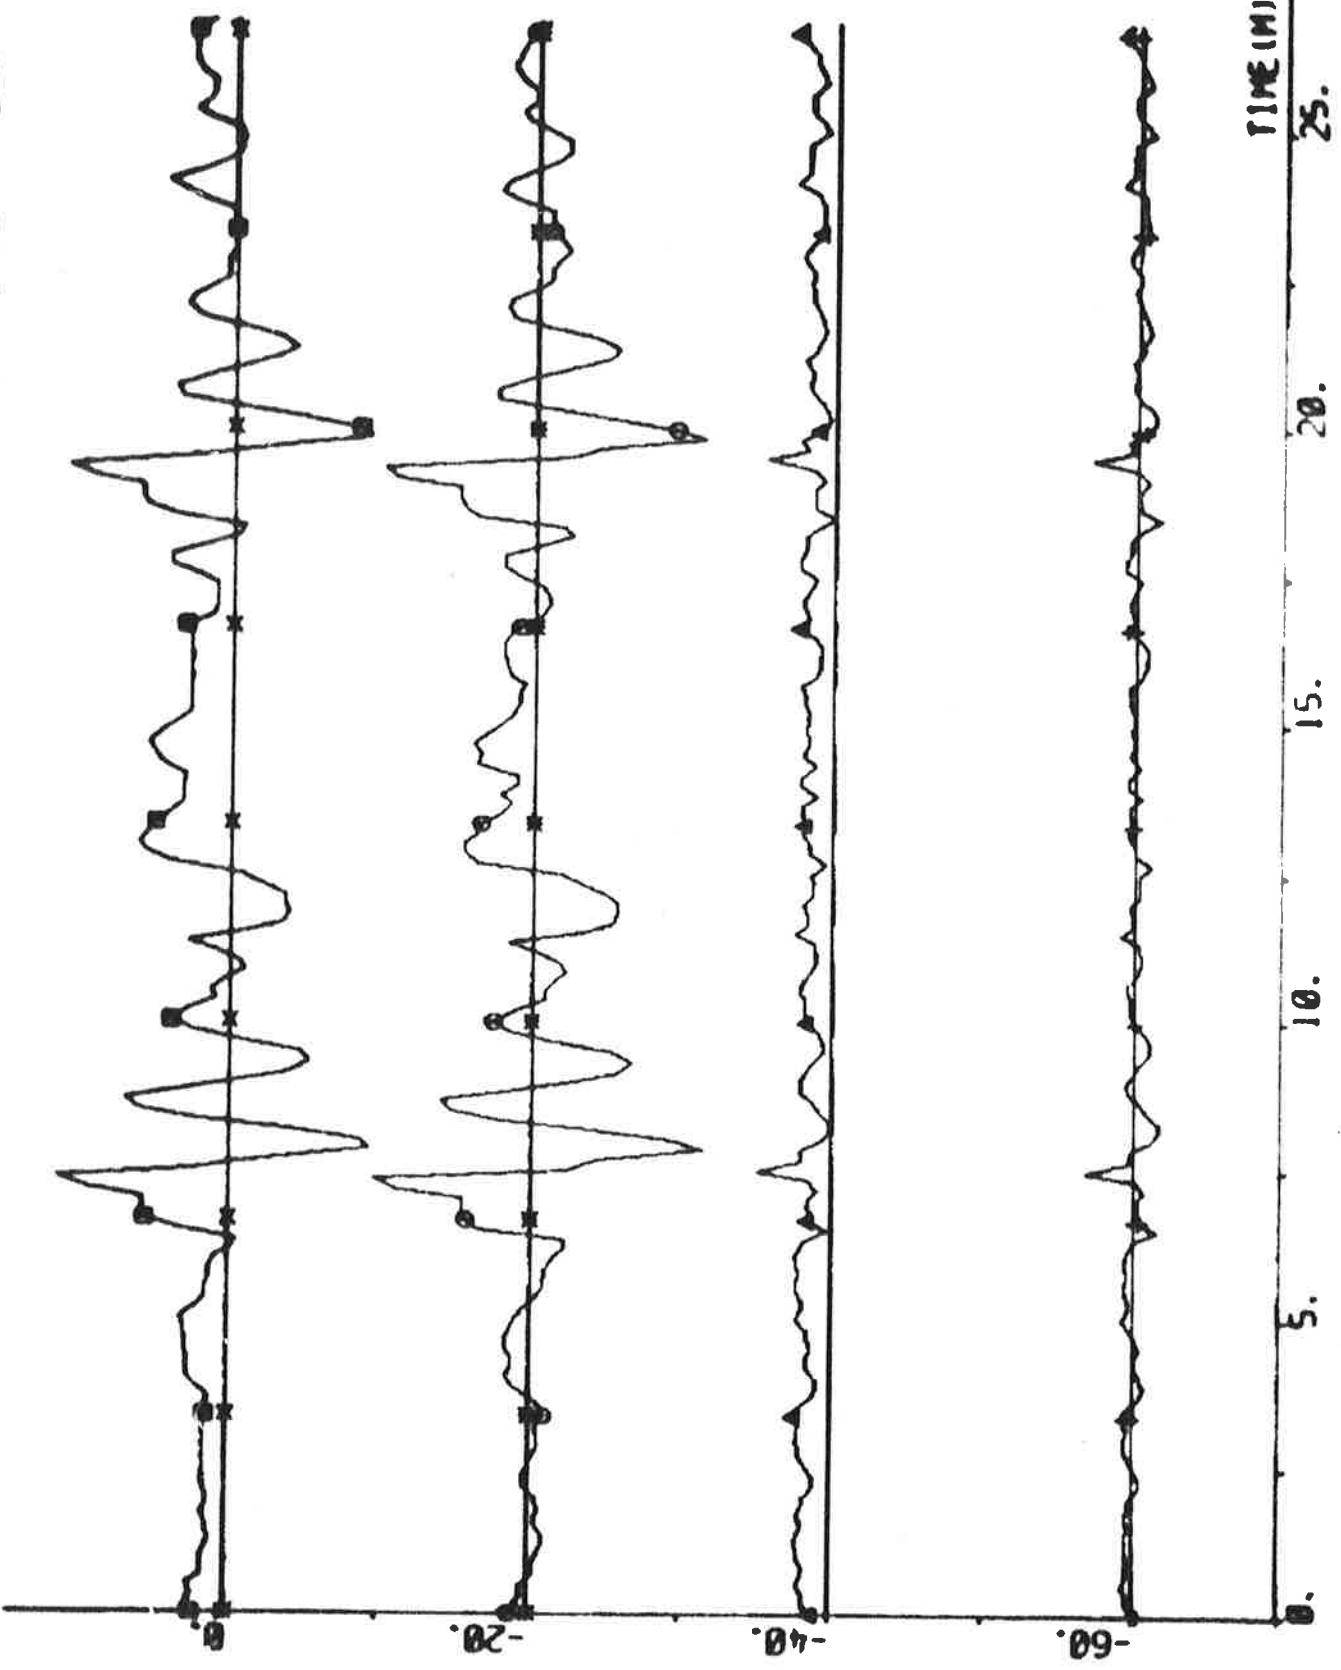

run CSP1(1)-CSP2(3) CSP2(4) CSP2(5) CSP2(6) 93 92 94 93 -8.5 1.5

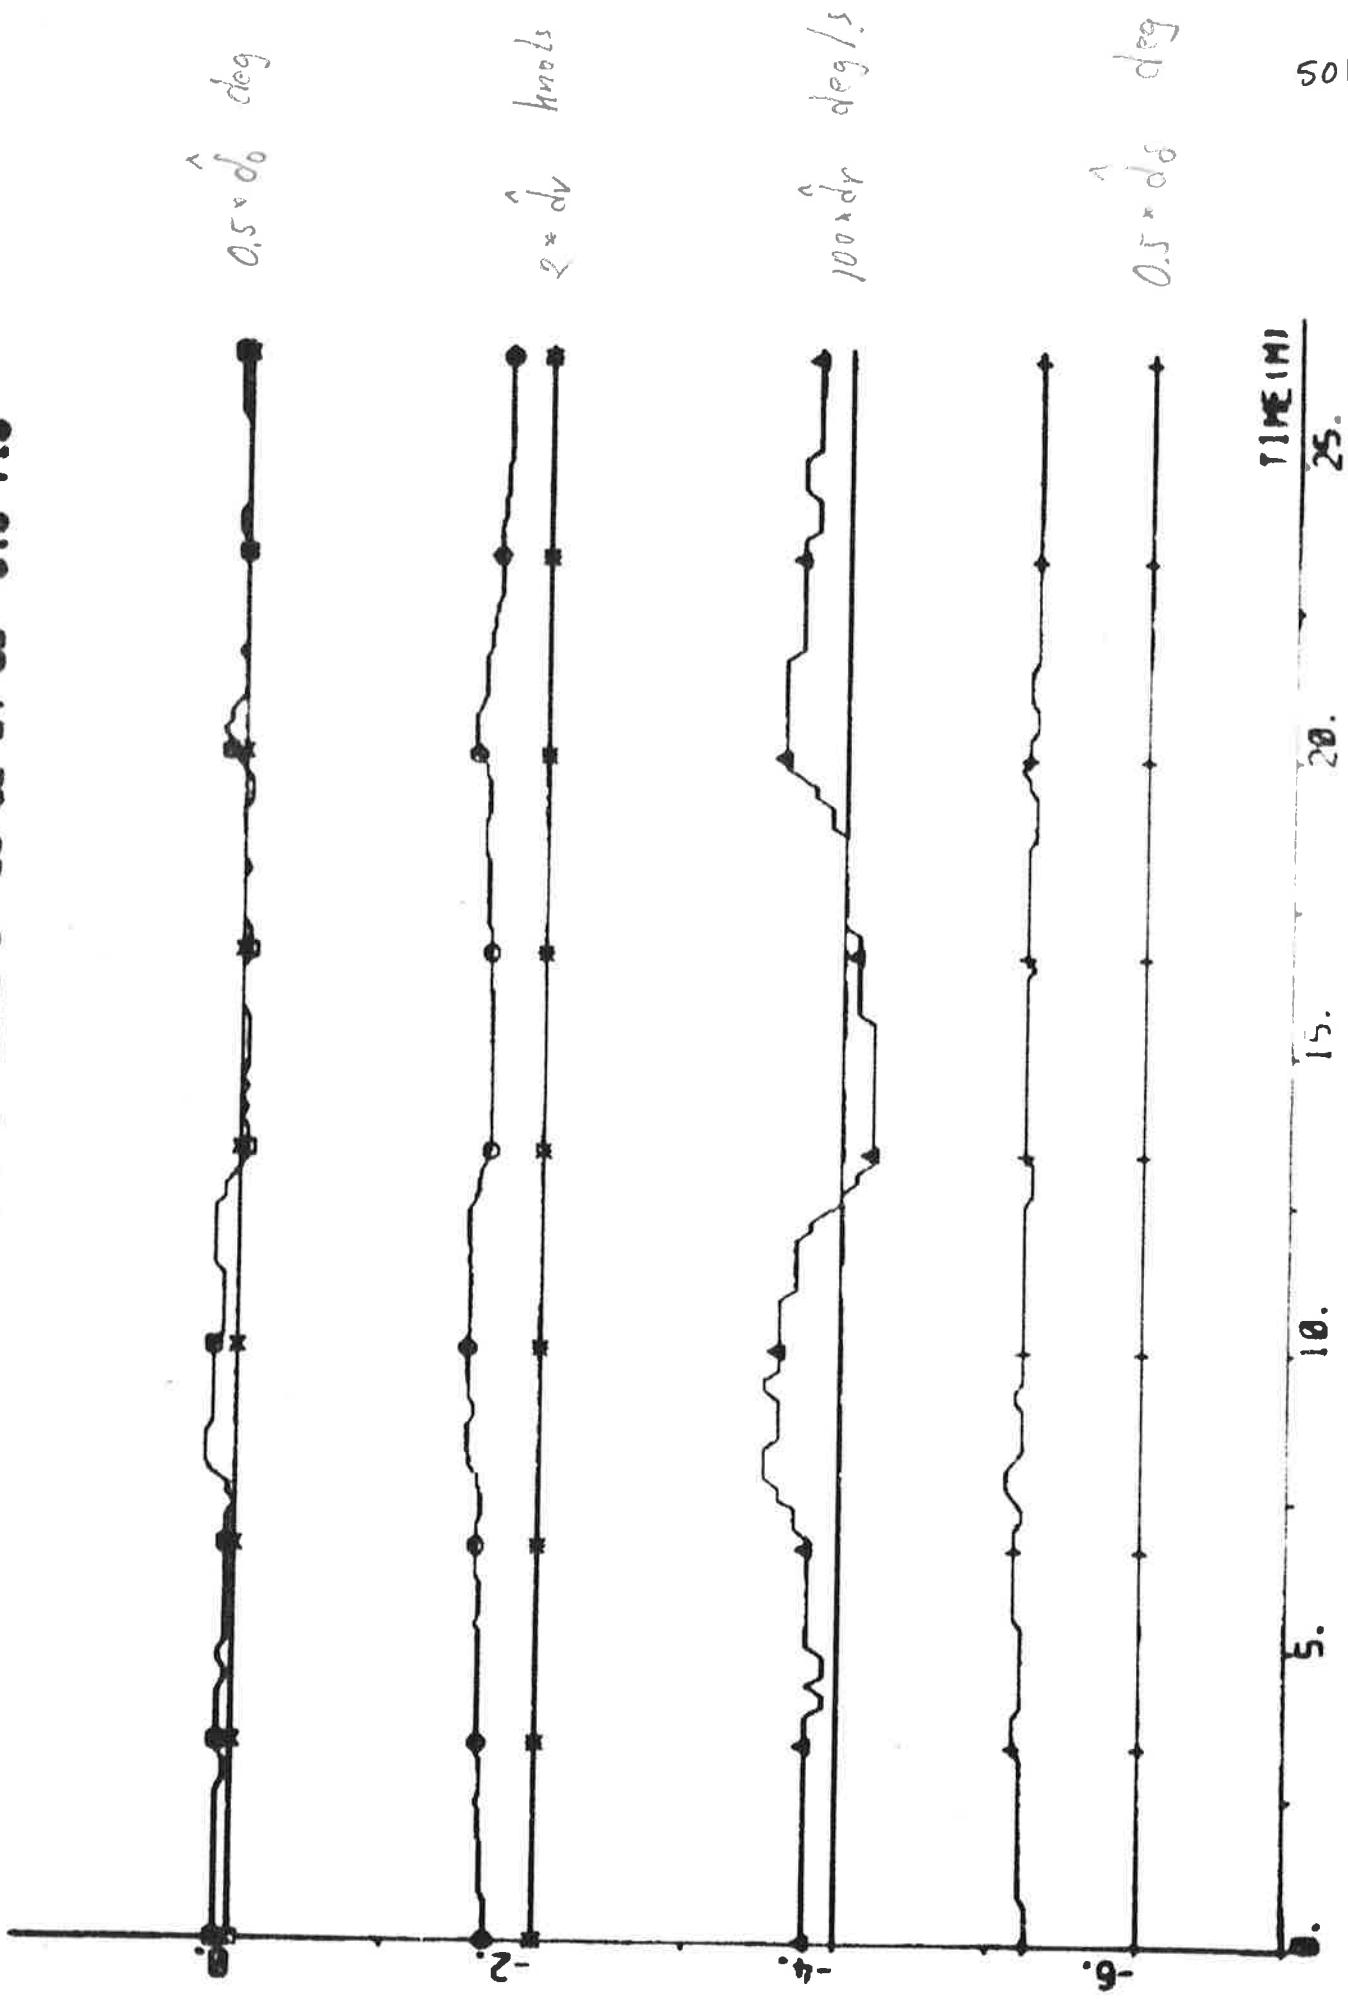

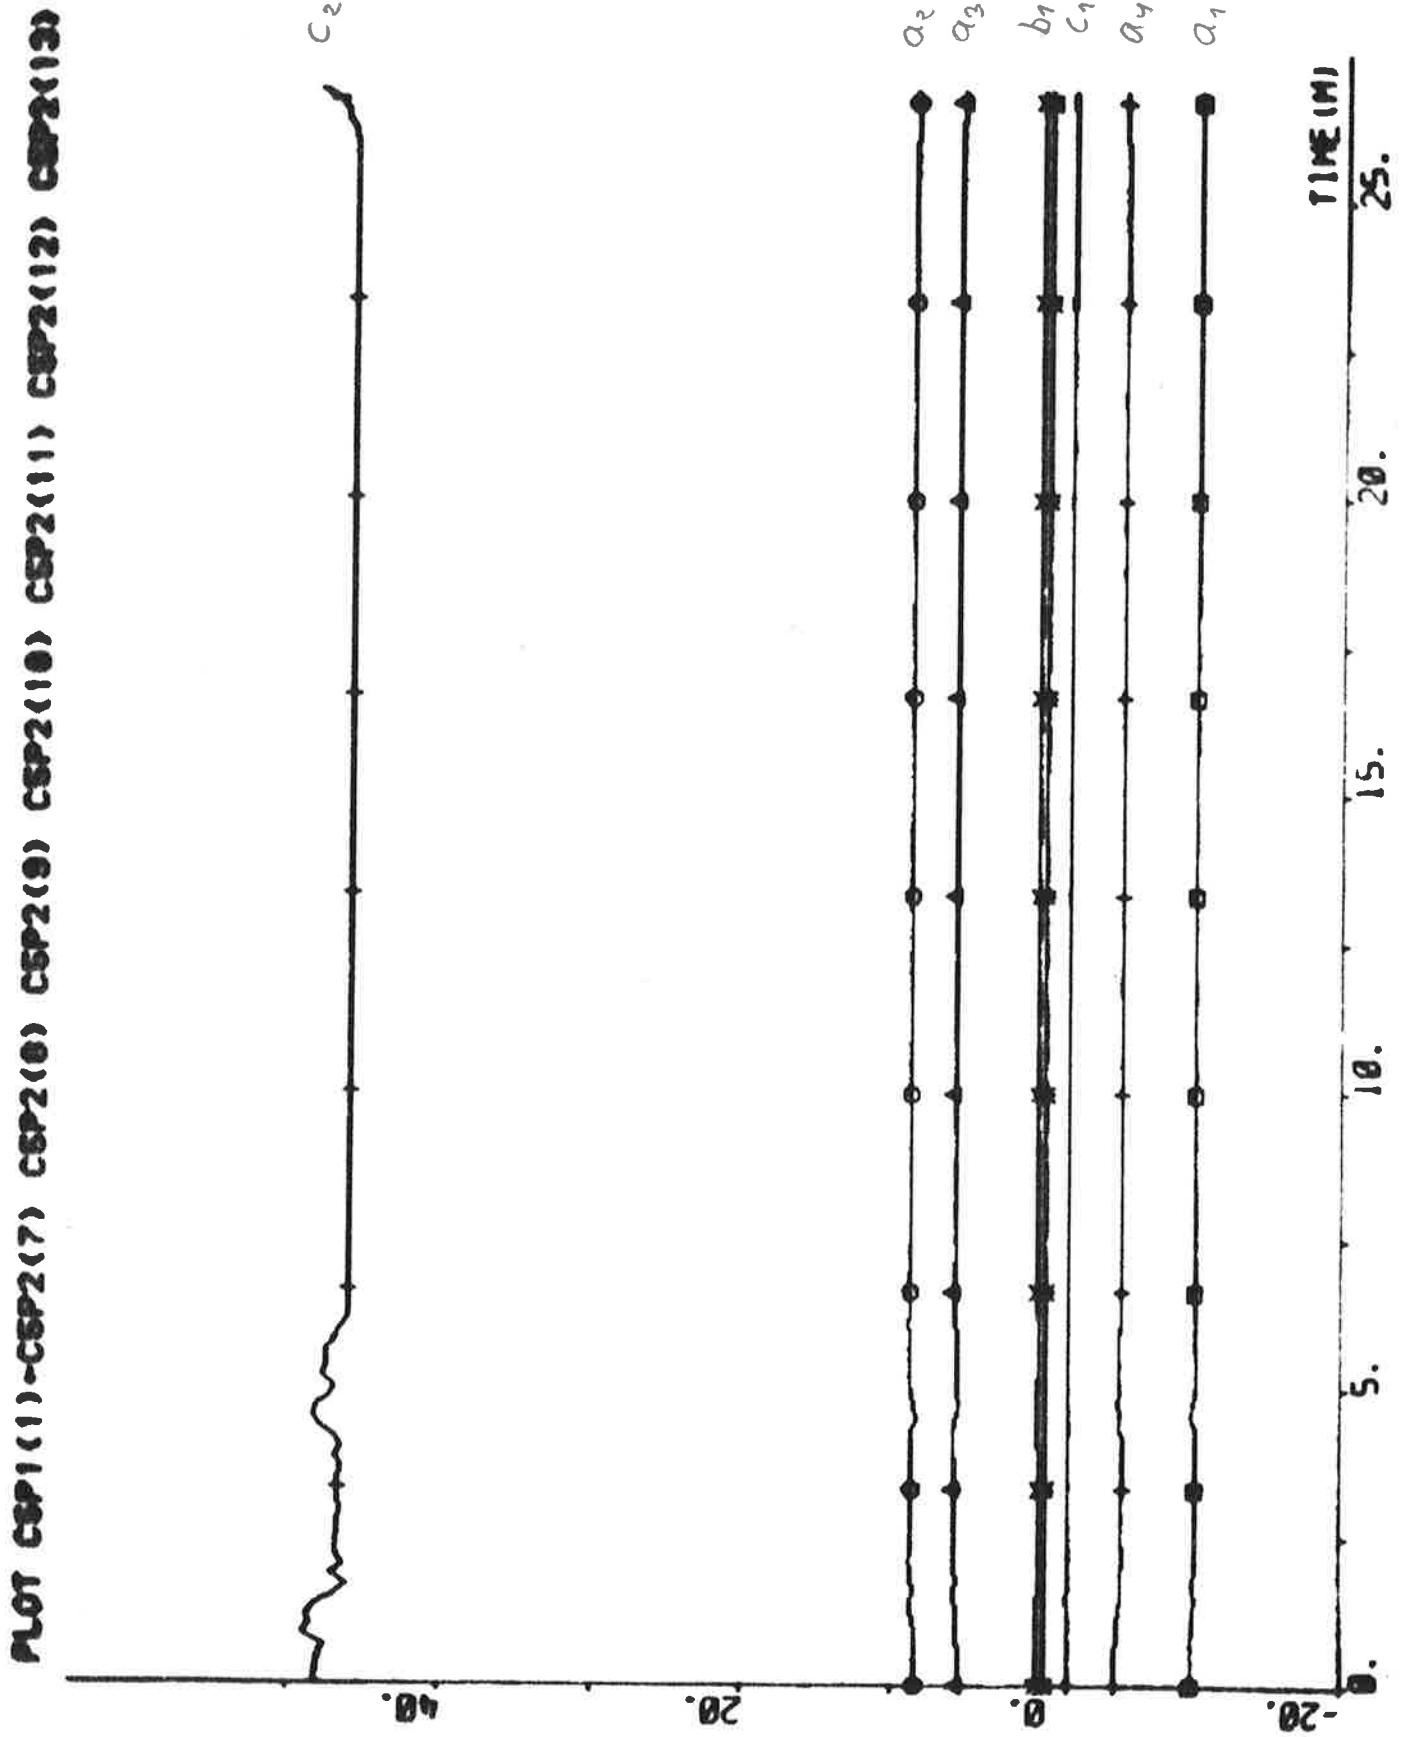

EXPERIMENT C6

| | | | |
|--------------|--|-----------------|------------------------|
| Date | 1976-04-27 | Forward draught | 10.9 m |
| Time | 14.51 | Aft draught | 12.9 m |
| Duration | 72 min | Wind direction | S (1; see App. A) |
| Position | S 10°34' W 03°09' | Wind velocity | 12 m/s (strong breeze) |
| ψ_{ref} | 144, (145), 146,
142, 144, 145, 143,
144 deg | Wave height | - |
| r_{ref} | 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from
the Kalman filter

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{array}{l|l|l} \begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \end{bmatrix} = \begin{bmatrix} -11.31 \\ 11.45 \\ 4.34 \\ -4.95 \end{bmatrix} & P = \begin{bmatrix} 9.13 \\ -19.56 & 63.44 \\ 12.93 & -67.50 & 95.10 \\ -2.45 & 23.89 & -41.28 & 20.14 \\ 0.37 \\ 0.08 \\ -0.96 \\ 61.38 \end{bmatrix} & \end{array}$$


$$a_1 + a_2 + a_3 + a_4 = -0.47$$

$$\hat{\delta}_0 = -0.1 \text{ deg} \quad \hat{d}_v = 0.19 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$


$$\bar{\delta}_c = -0.2 \text{ deg} \quad (\text{Initial value: } 0.2 \text{ deg})$$

Statistics (mean value and standard deviation)


| | | | |
|----------------|------------------------------|-------------------|-------------------------------|
| n | $69.0 \pm 0.4 \text{ rpm}$ | ϵ_v | $0.00 \pm 0.02 \text{ knots}$ |
| u | $13.0 \pm 0.1 \text{ knots}$ | ϵ_r | $0.00 \pm 0.02 \text{ deg/s}$ |
| P _s | $14.4 \pm 0.1 \text{ MW}$ | ϵ_ψ | $0.00 \pm 0.03 \text{ deg}$ |
| | | ϵ_δ | $0.0 \pm 0.6 \text{ deg}$ |

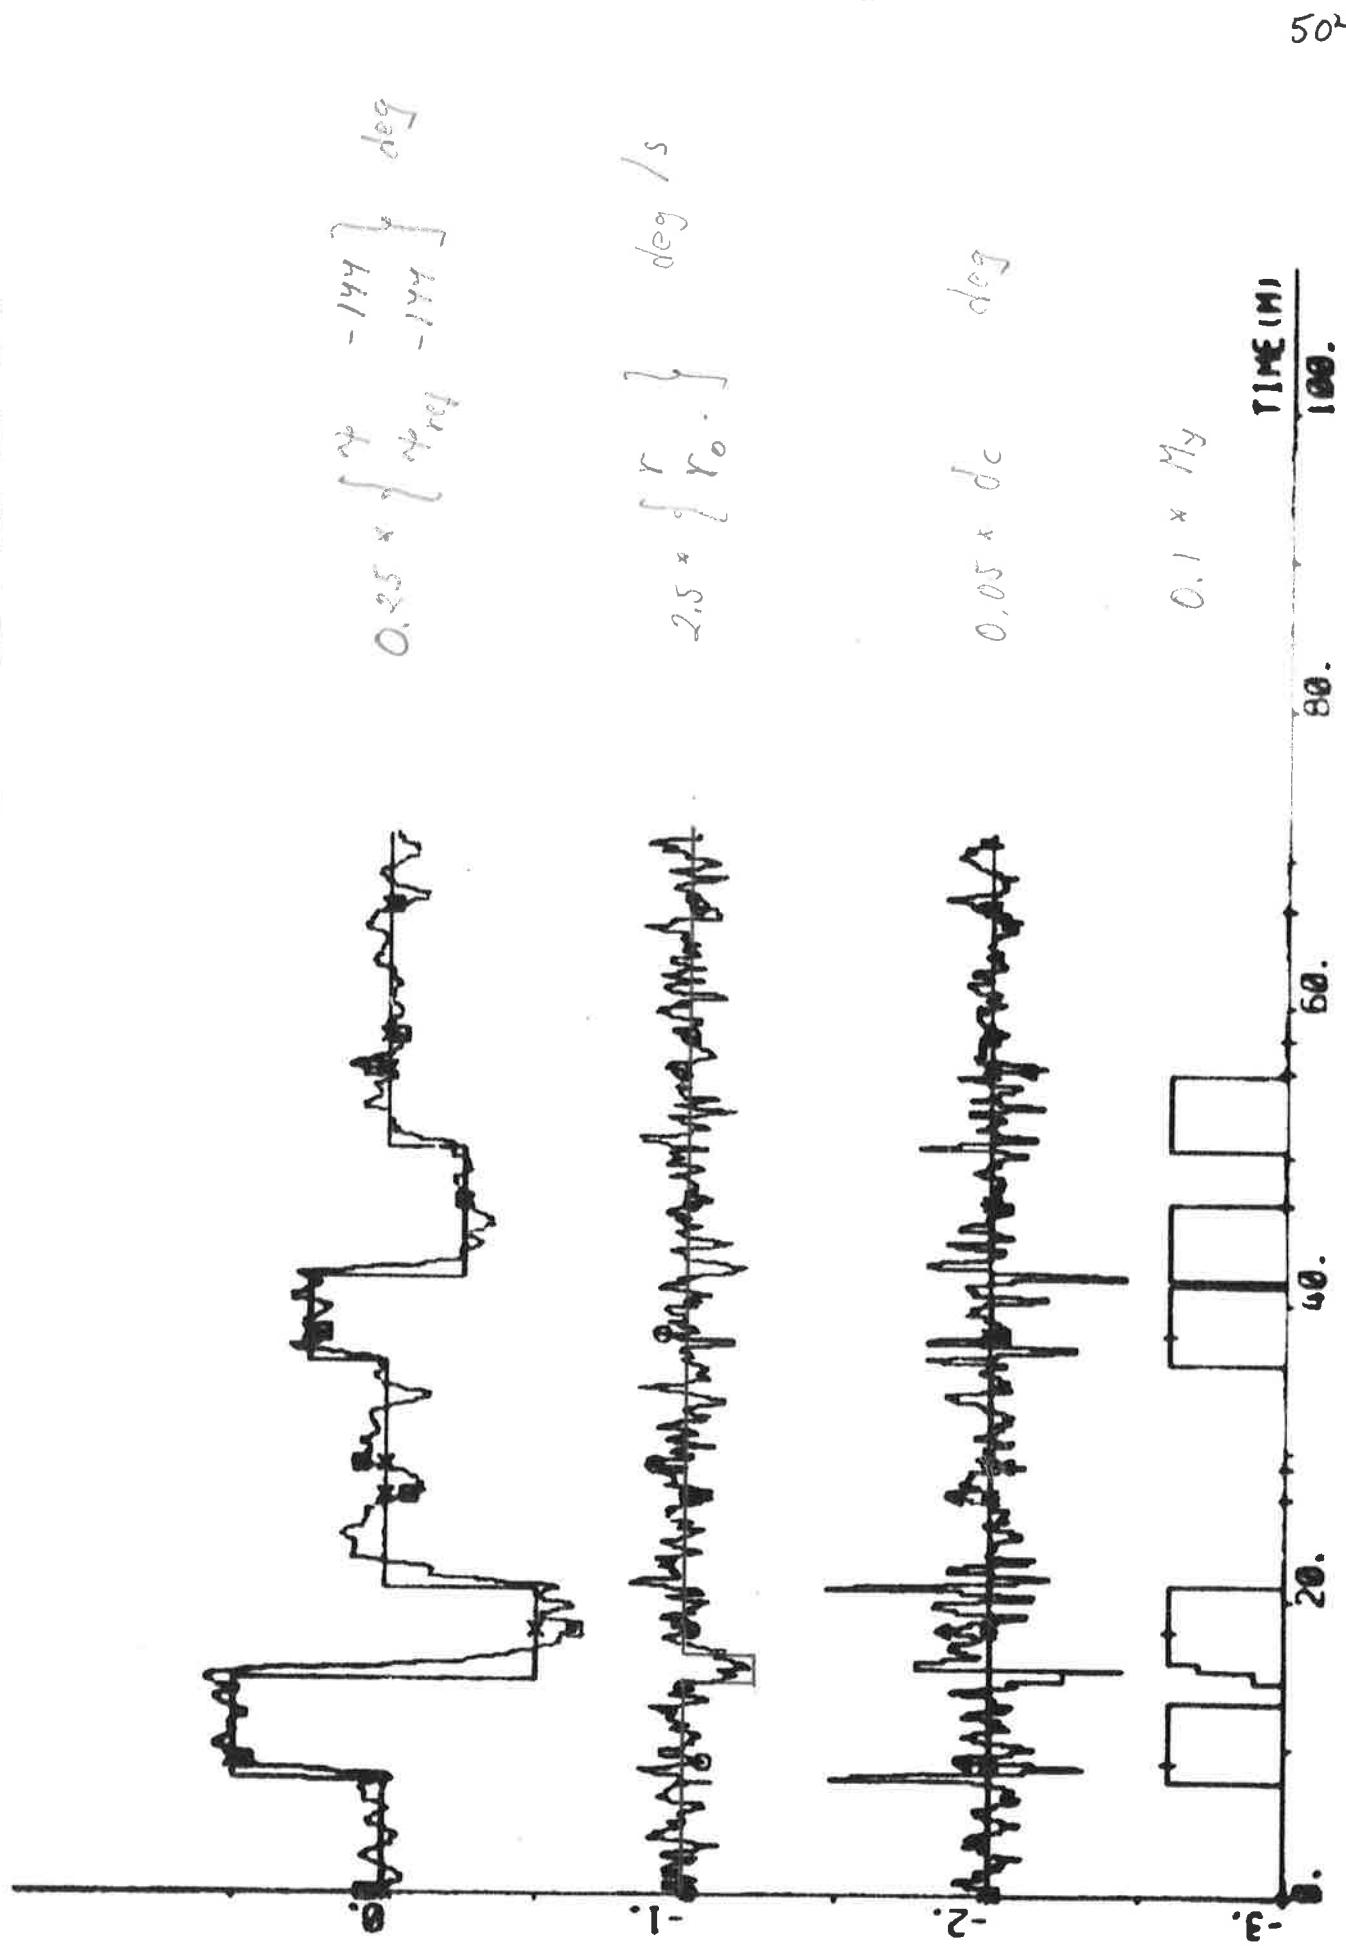


PLOT CSP1(11)-CSP1(13) CSP1(12) CSP1(14) CSP1(11) 08 -20 68

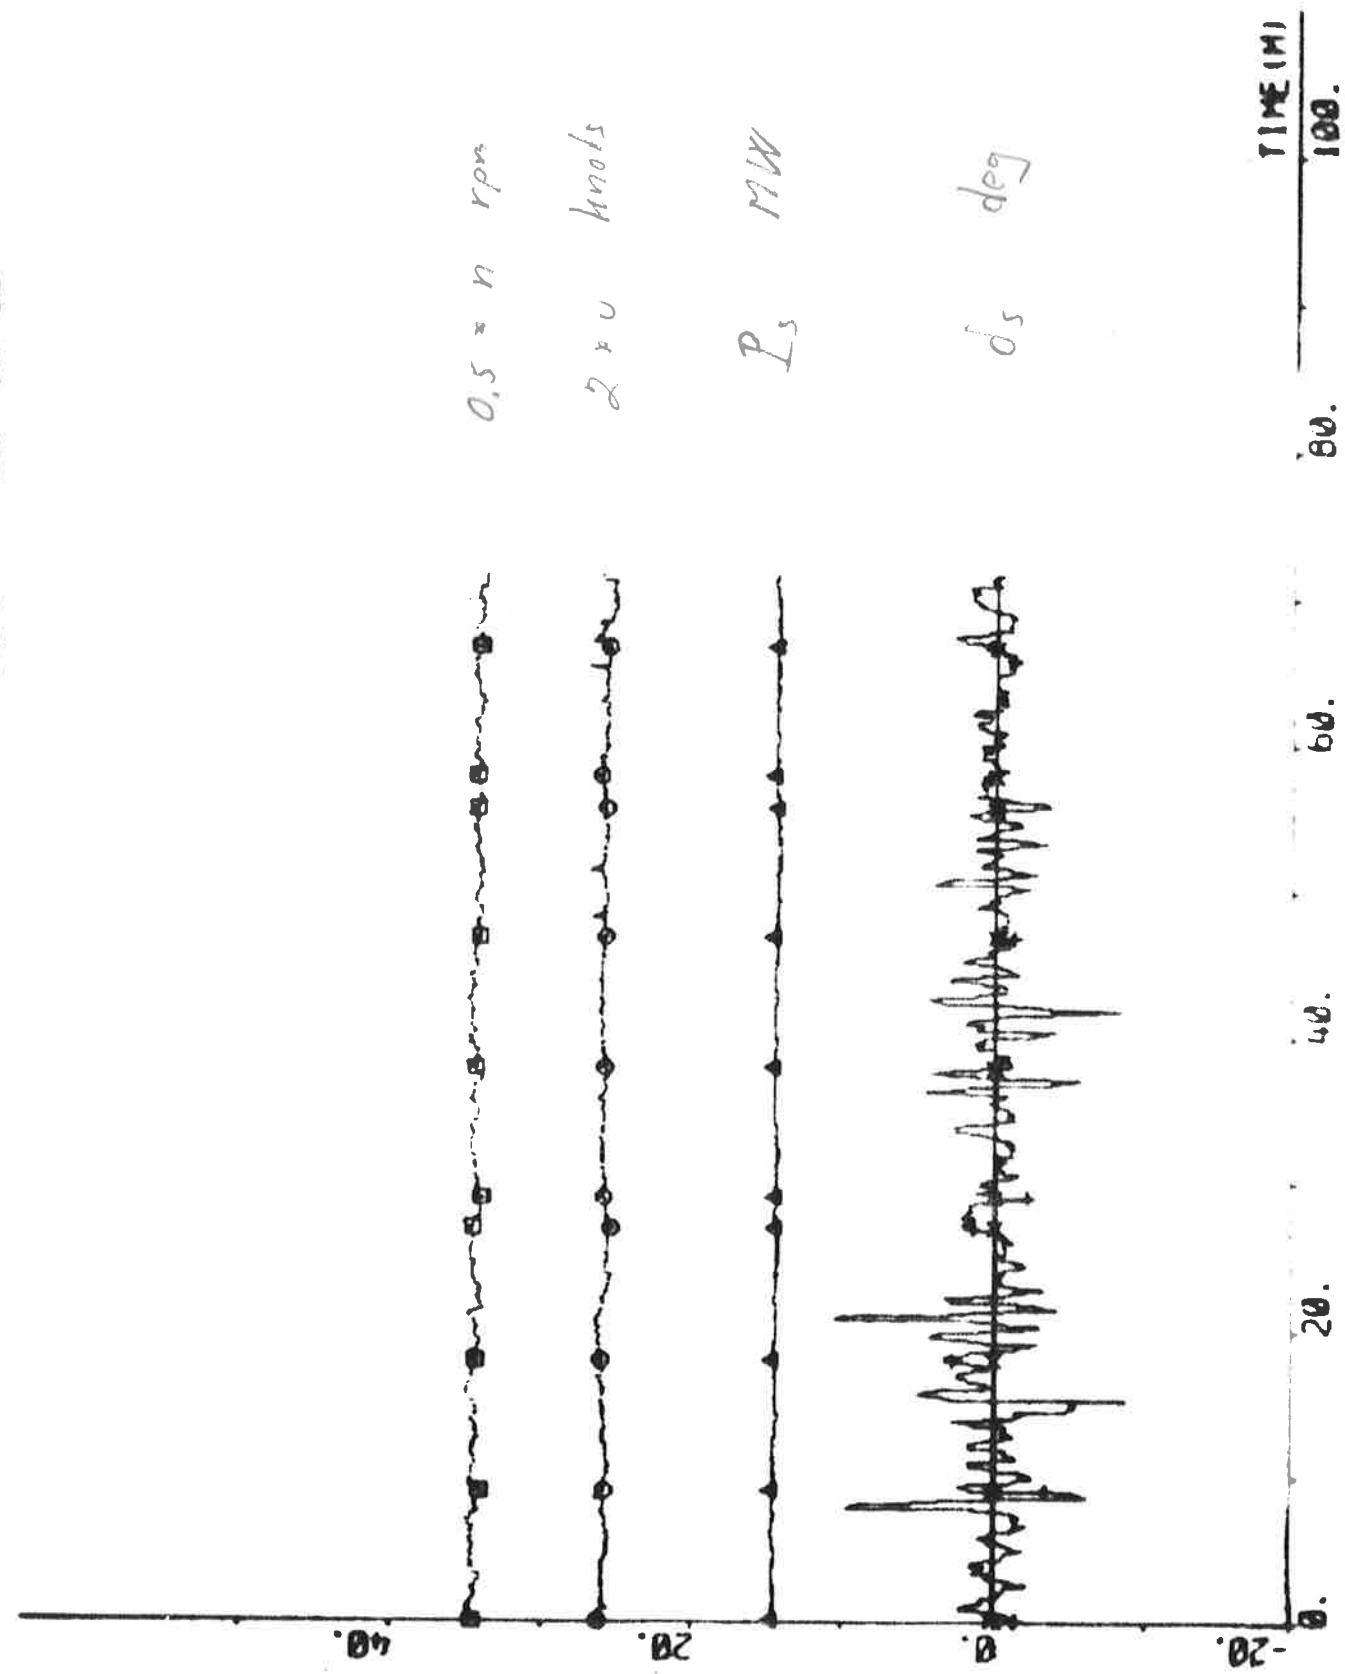

PLOT CSP1(1) - CSP2(1) CSP2(2) ERRS 00 01 02 -3.4 0.3 - KNOTS

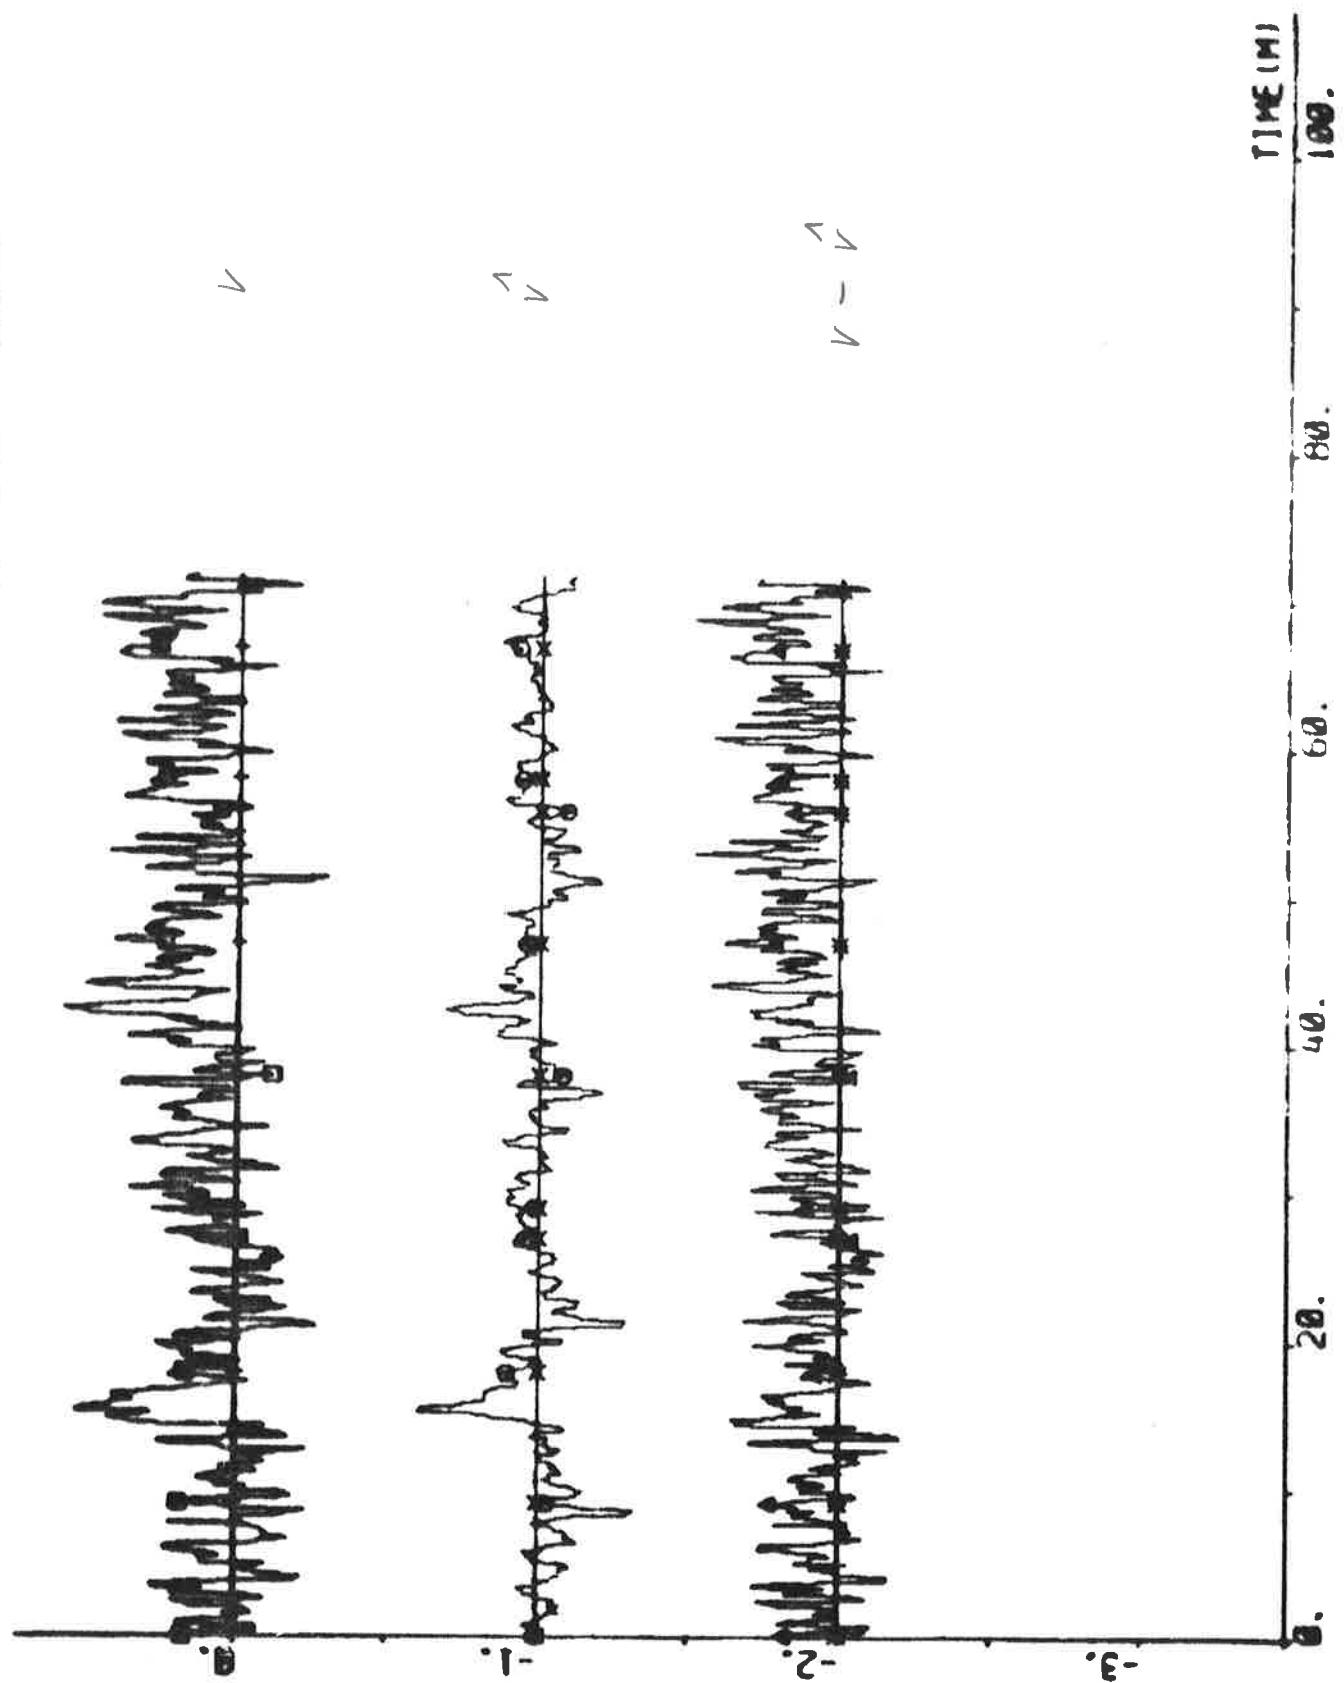


PLAT COP1 (1) - COP1 (4) COP1 (5) EPI2 EPI2 00 01 02 03 - 3.4 0.0 - REPORTS

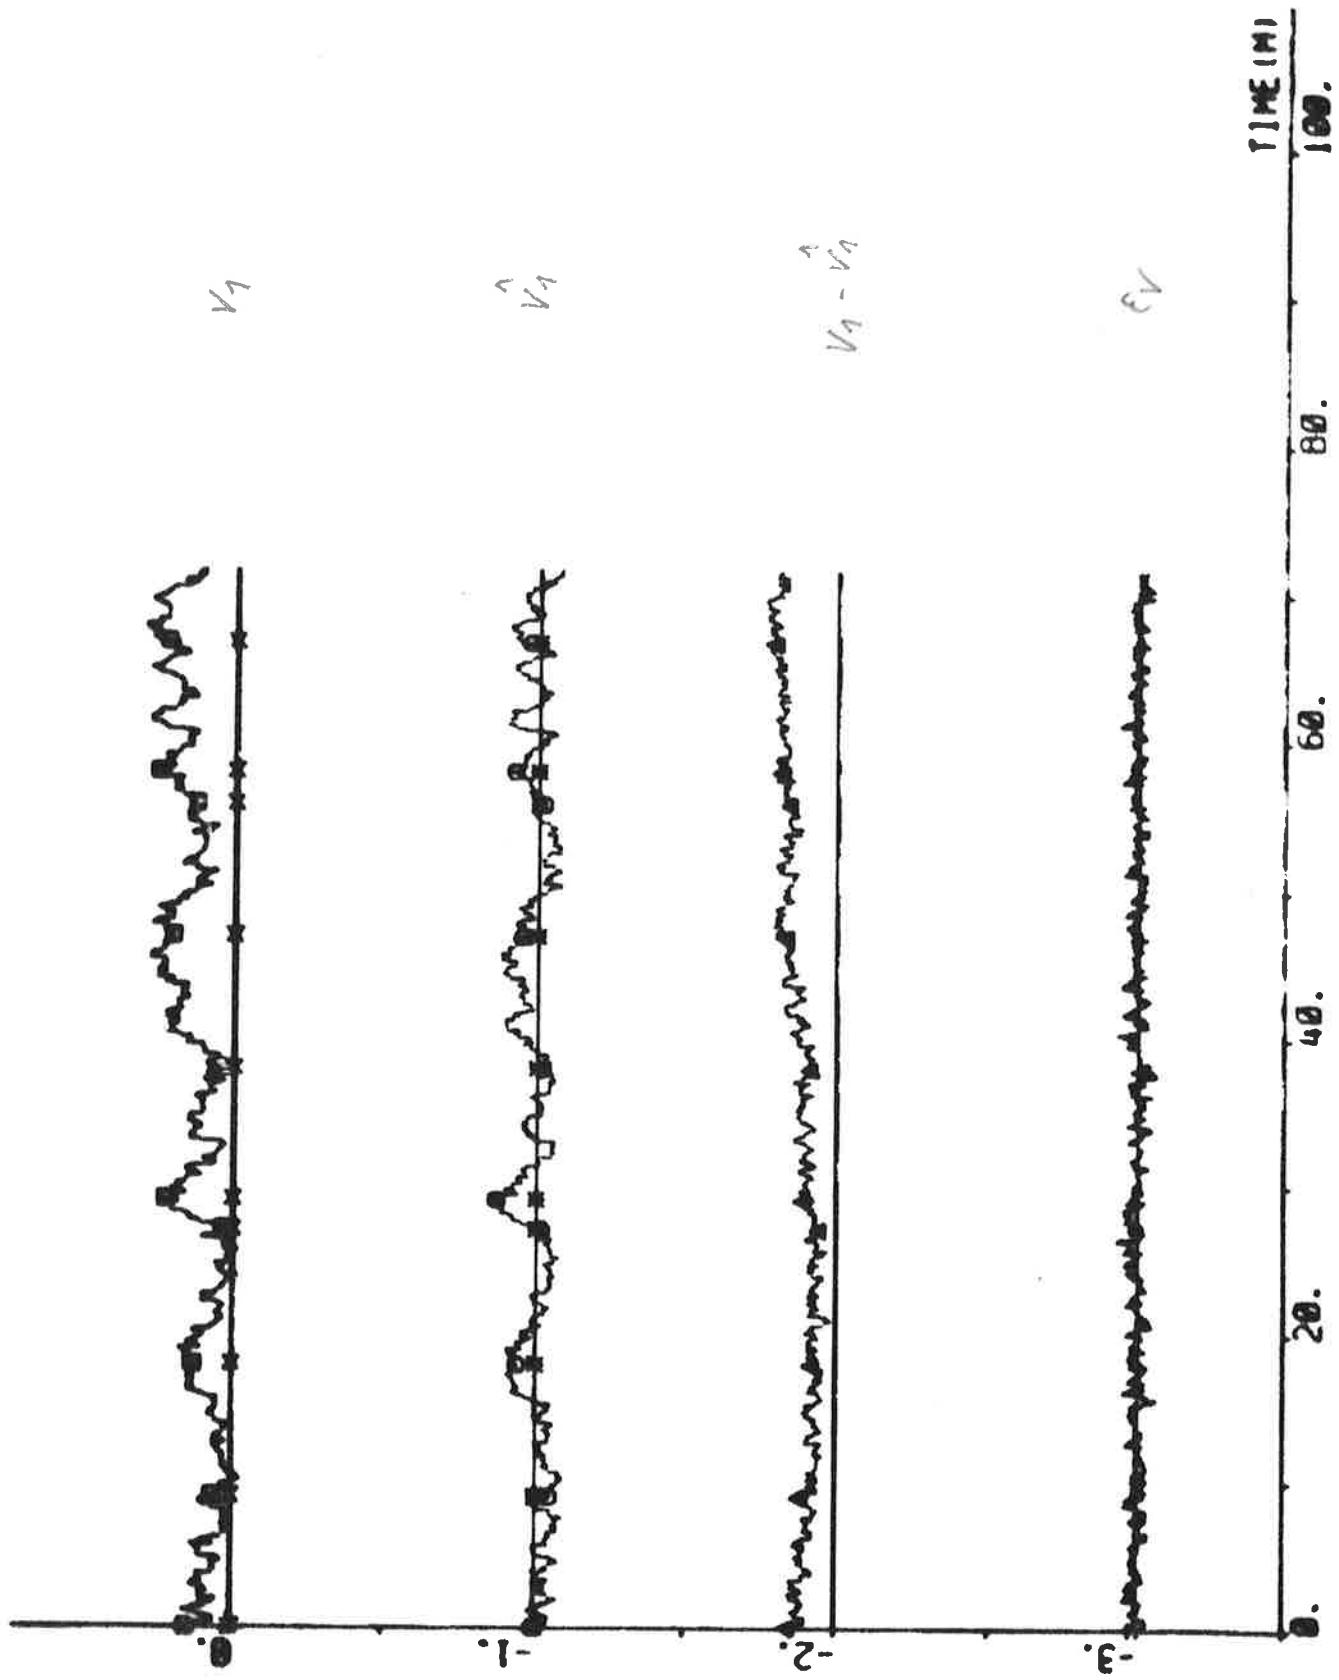





NOT CAPTURED (1) ~ C0001 (0) C001 (7) C002 C003 C004 C005 C006 C007 0. - 0.25


PLOT C201(1), C201(2) C201(3) E201 E202 E203 - 3.4 0.0 - 0.0

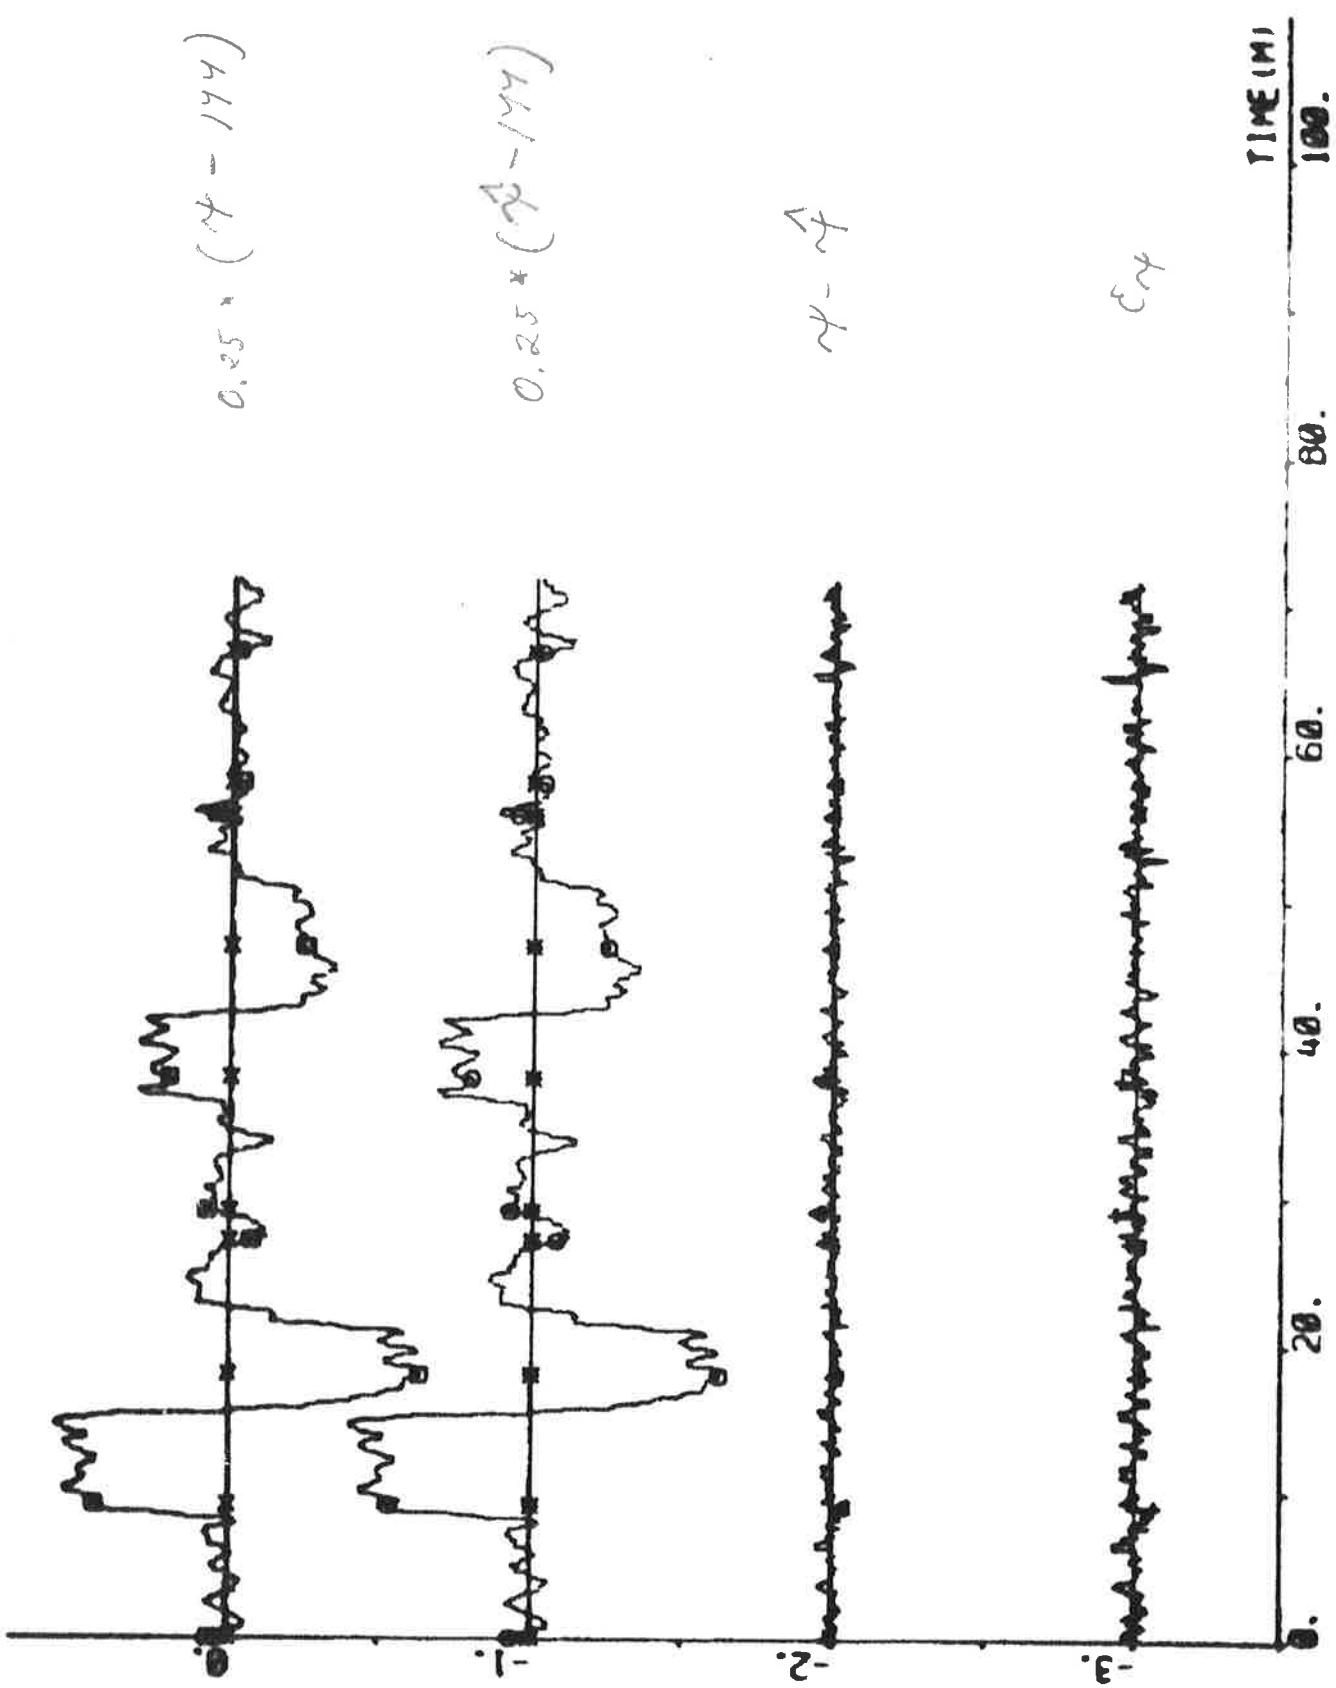

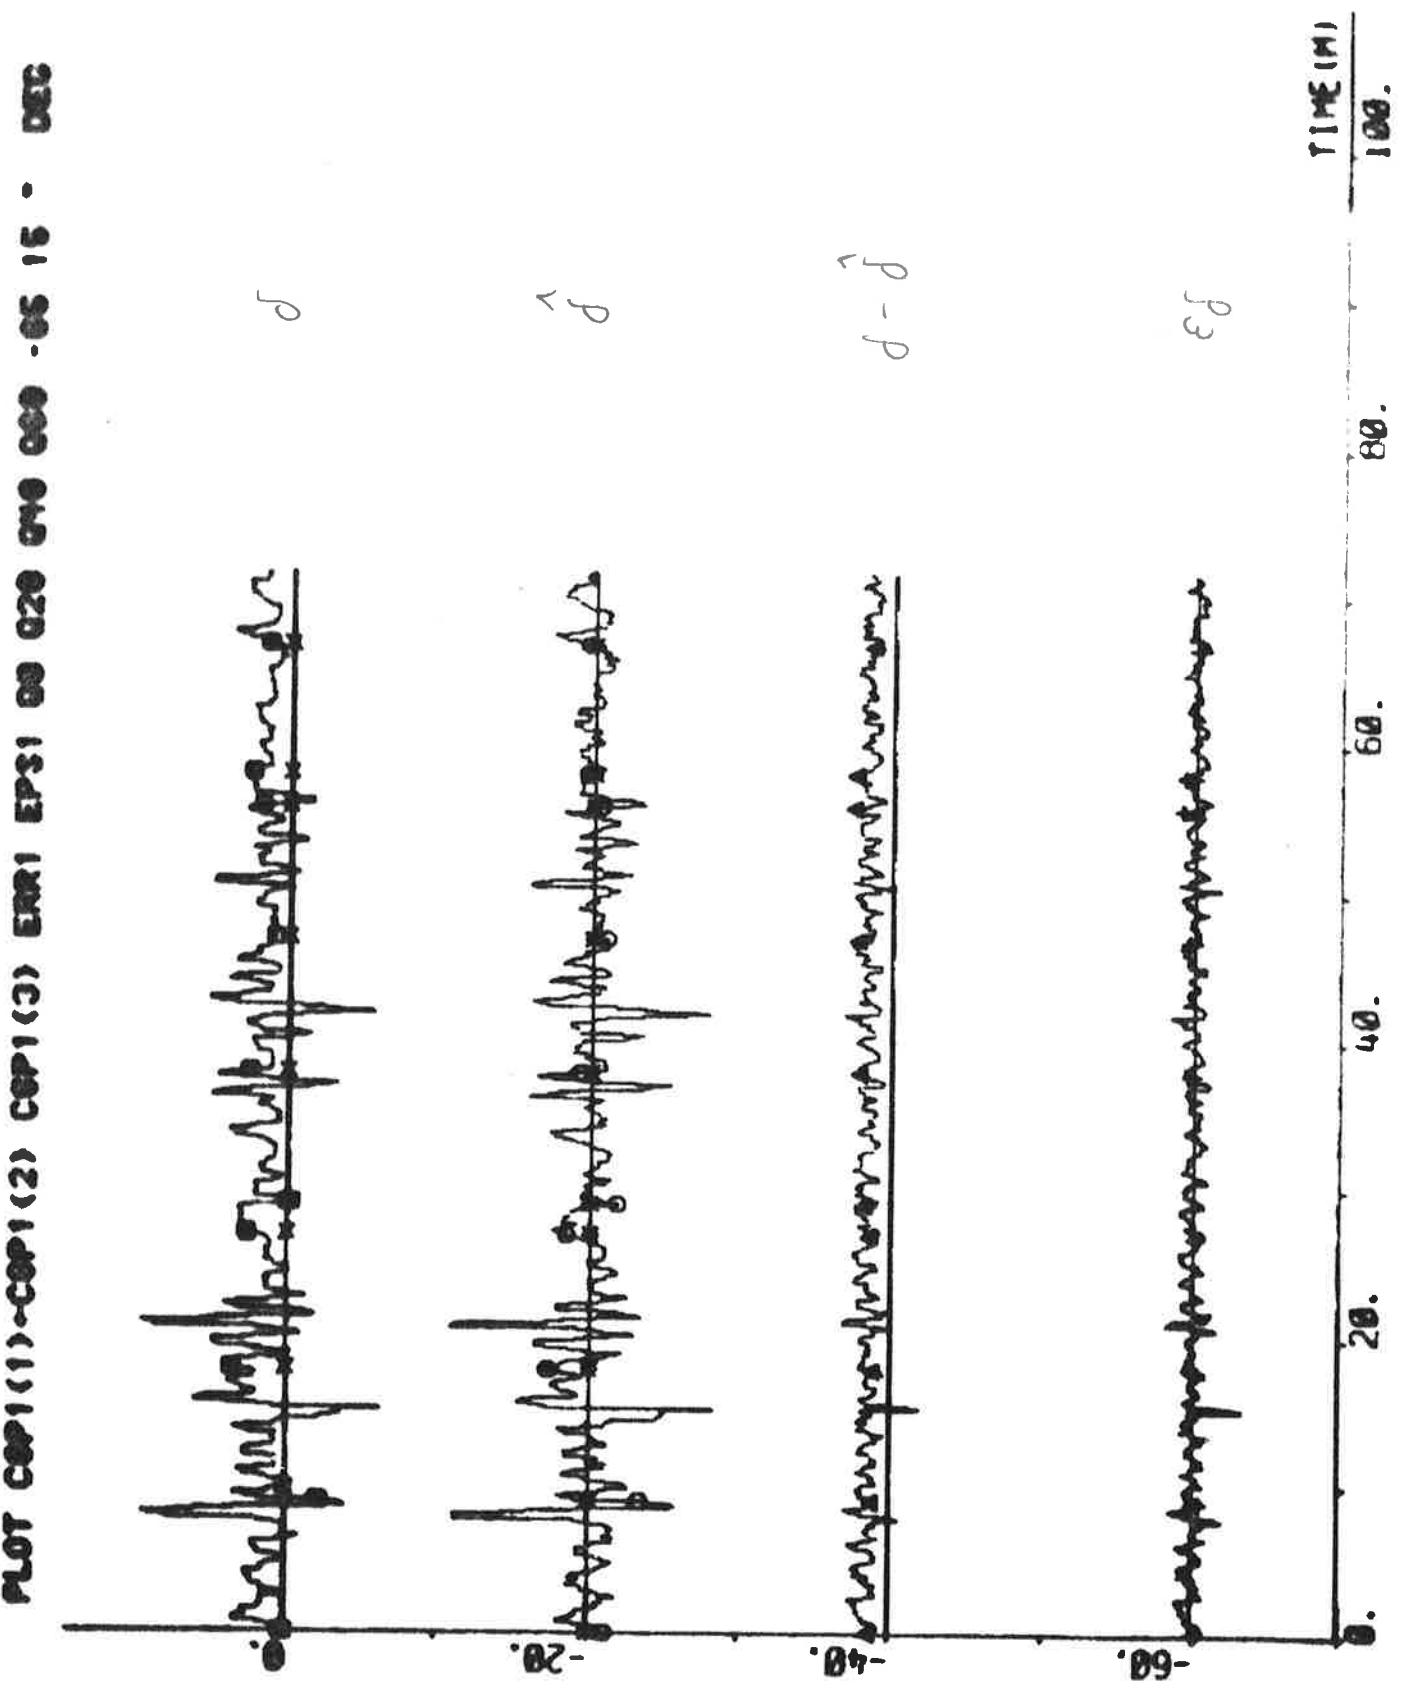

plot cap1(1)-cap2(3) cap2(4) cap2(5) cap2(6) cap2(7) cap2(8) cap2(9) cap2(10)

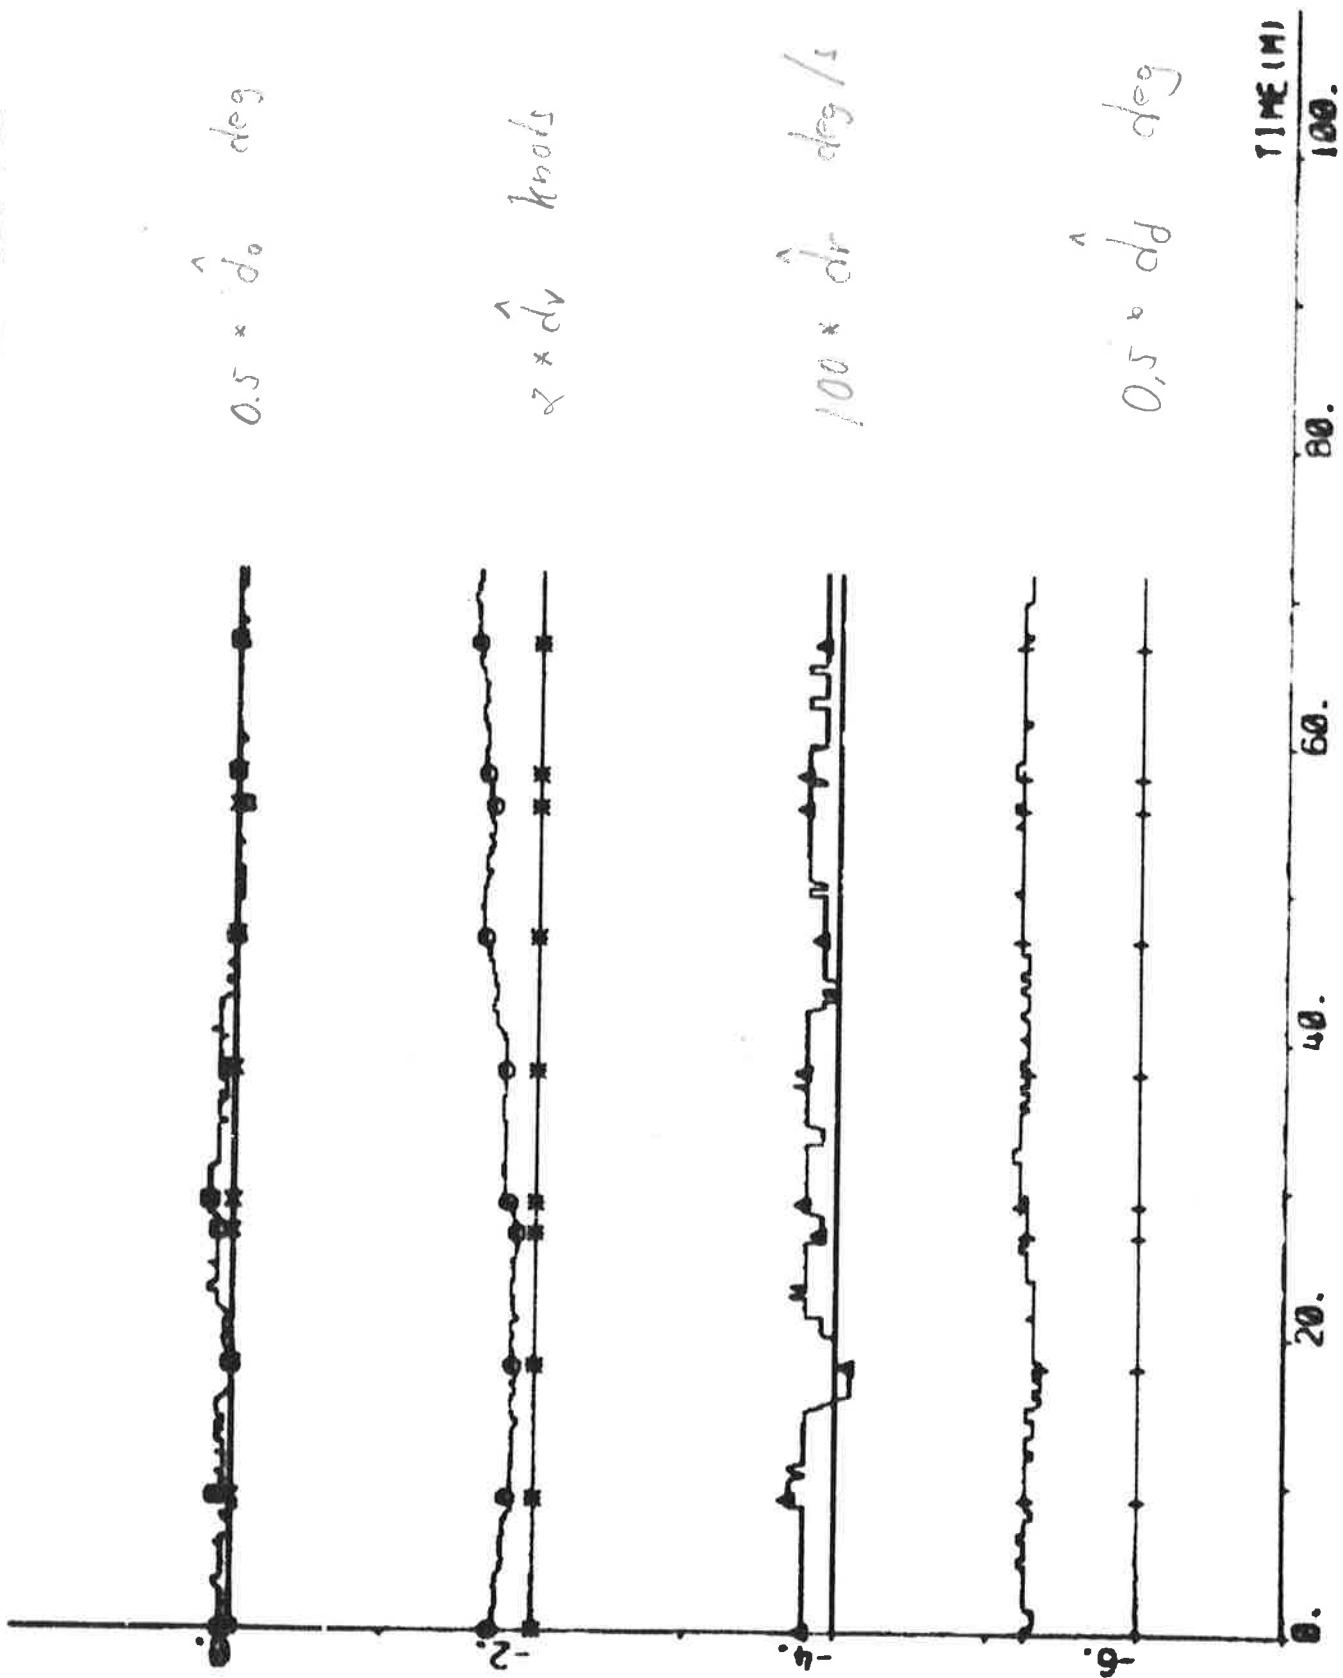

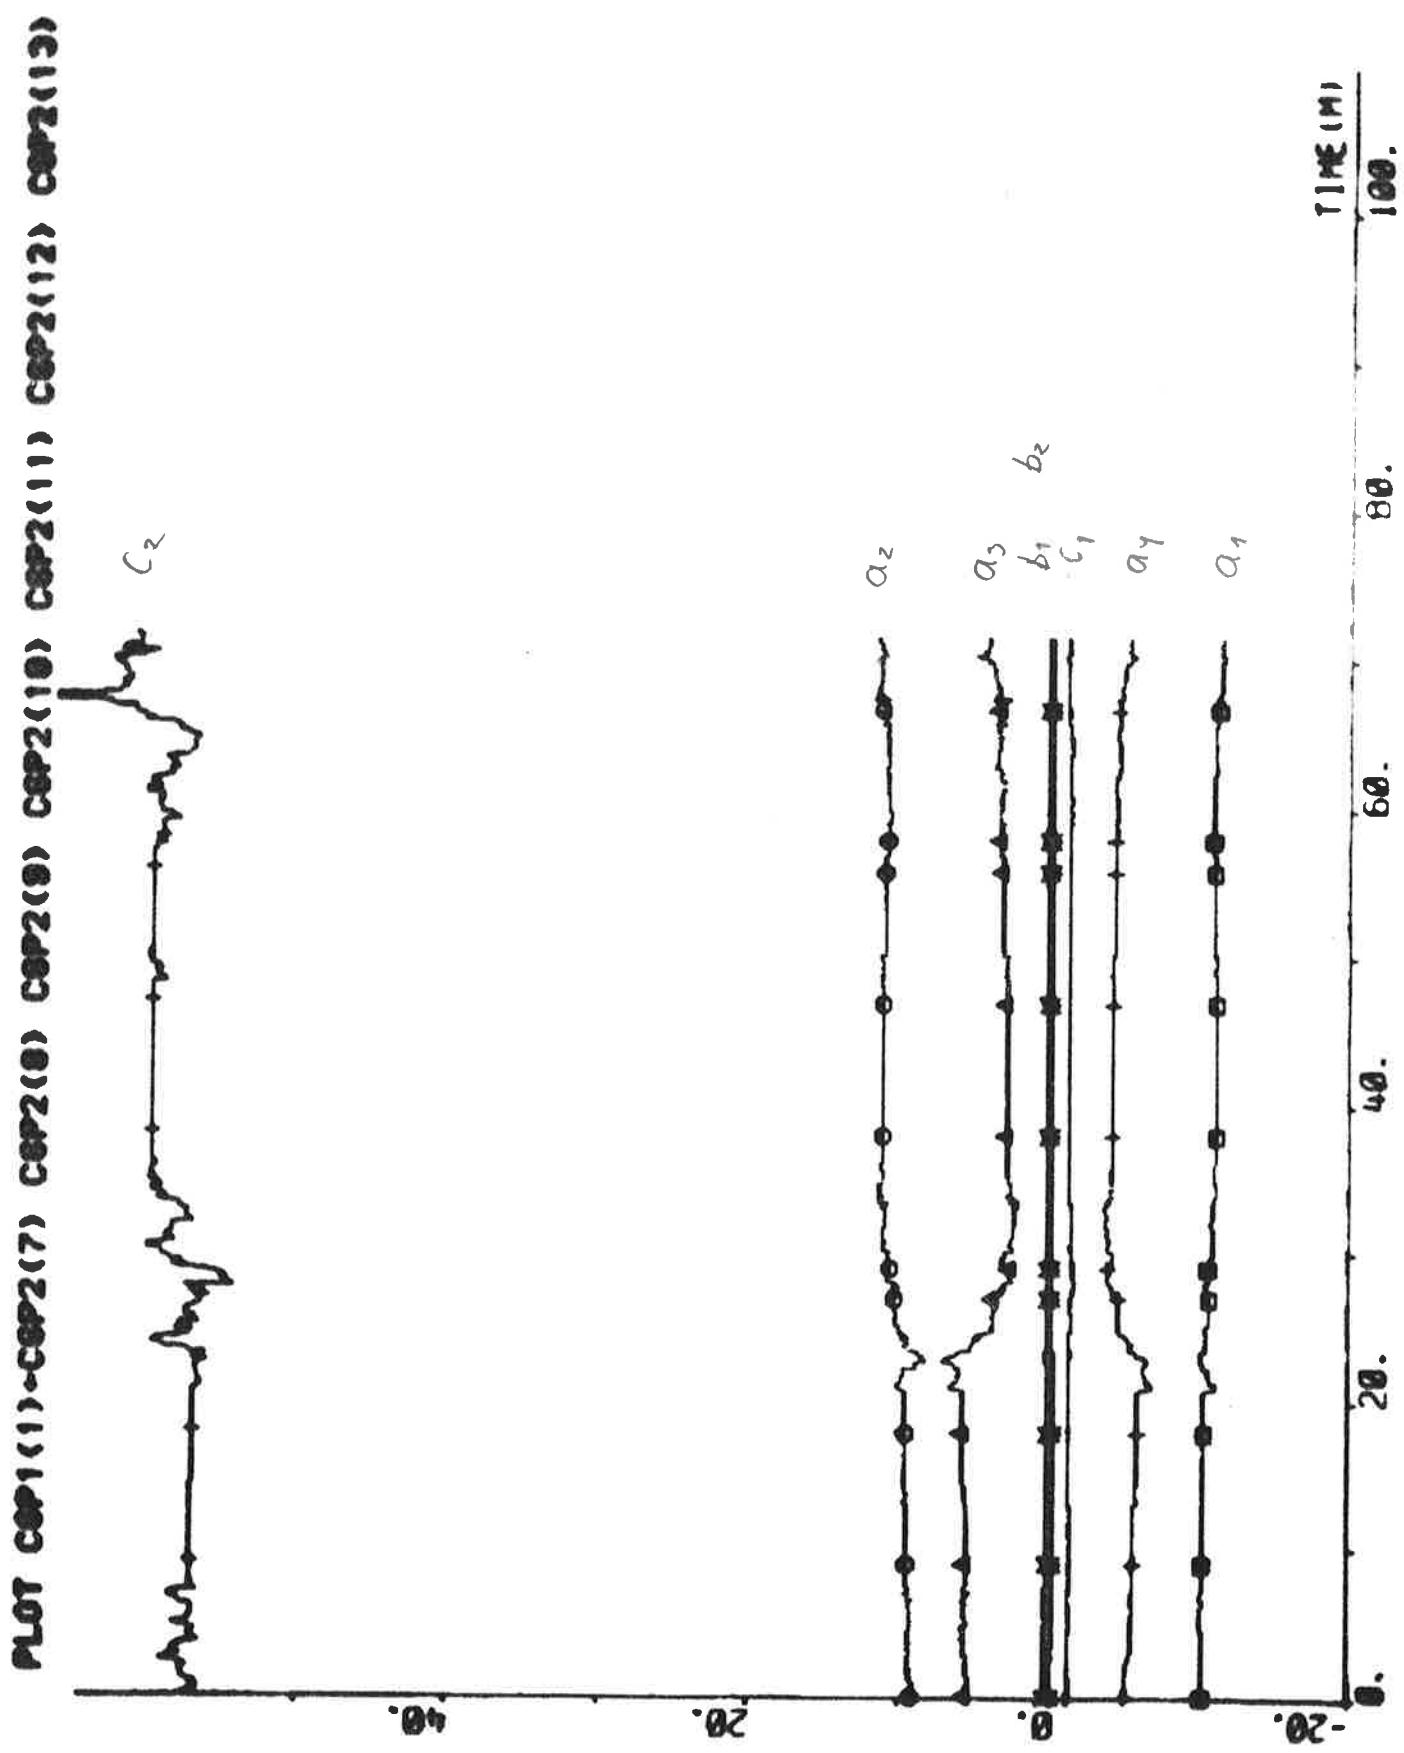

EXPERIMENT D1

| | | | |
|--------------|---|-----------------|-----------------------|
| Date | 1976-04-19 | Forward draught | 8.5 m |
| Time | 13.38 | Aft draught | 12.5 m |
| Duration | 83 min | Wind direction | E (7; see App. A) |
| Position | N 28°09' W 15°17' | Wind velocity | 5 m/s (gentle breeze) |
| ψ_{ref} | 205, (201), 200,
(183), 180, (184),
204, (202), 200 deg | Wave height | Low swell from ESE |
| r_{ref} | 0.1 deg/s | | |

The forward speed u was measured by Sperry's log. The sway velocity v_1 was not measured during the experiment. The water depth was about 100 m during the last 15 min of the experiment. The rudder limit was 15 deg during the experiment.

Self-tuning regulator and yaw regulator using estimates from the Kalman filter.

The sway velocity v_1 was not used by the Kalman filter.

Tuning time before the experiment started: > 120 min.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & v_0 = 8 \text{ m/s} & IVVC = 3 & v_c = 7 \text{ m/s} \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.32 \\ 6.37 \\ 3.37 \\ -2.70 \\ 0.38 \\ 0.02 \\ 1.41 \\ 112.69 \end{bmatrix} \quad P = \begin{bmatrix} 105.55 \\ -109.01 & 130.35 \\ -21.87 & -8.40 & 68.77 \\ 23.83 & -10.89 & -38.41 & 25.71 \\ 0.50 & -1.62 & 2.56 & -1.48 & 0.26 \\ 1.22 & -1.26 & -0.17 & 0.16 & 0.12 & 0.15 \\ -112.05 & 111.66 & 22.33 & -19.14 & -2.19 & -2.54 & 135.86 \\ 1859.95 & 1907.60 & 198.28 & -179.47 & -55.06 & -51.19 & 2527.61 & 48427.16 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.28$$


$$\hat{\delta}_0 = 1.3 \text{ deg} \quad \hat{d}_v = - \quad \hat{d}_r = -0.002 \text{ deg/s} \quad \hat{d}_\delta = 0.9 \text{ deg}$$

$$\bar{\delta}_c = 1.5 \text{ deg} \quad (\text{Initial value: } 0.6 \text{ deg})$$


Statistics (mean value and standard deviation)

| | | | |
|-------|----------------------|-------------------|-----------------------|
| n | 69.6 ± 0.6 rpm | ϵ_v | - |
| u | 14.2 ± 0.2 knots | ϵ_r | 0.00 ± 0.01 deg/s |
| P_s | 14.7 ± 0.1 MW | ϵ_ψ | 0.00 ± 0.02 deg |
| | | ϵ_δ | 0.0 ± 0.9 deg |


PLANT DIPLOIDY AND POLYPLOIDY 31

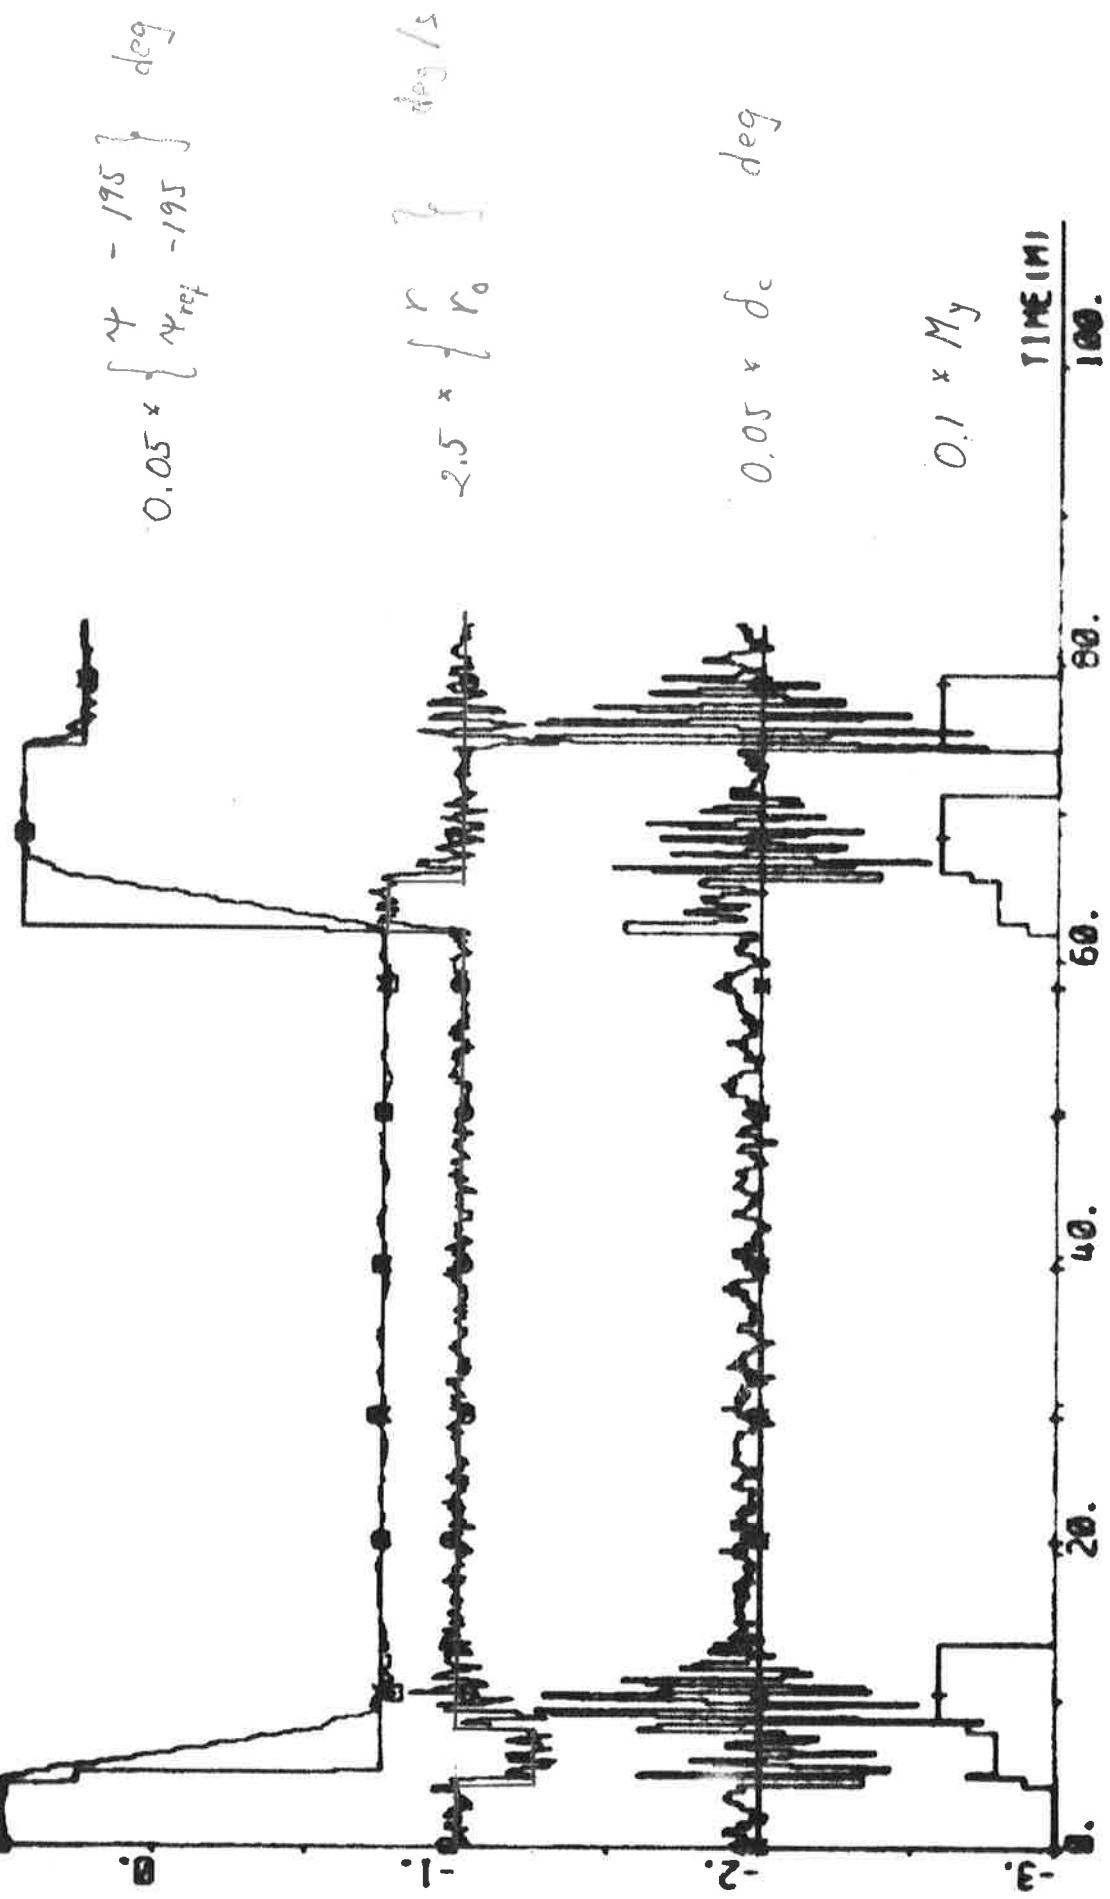


PILOT DIP1(11) DIP1(12) DIP1(13) DIP1(14) DIP1(11) 00-28 88

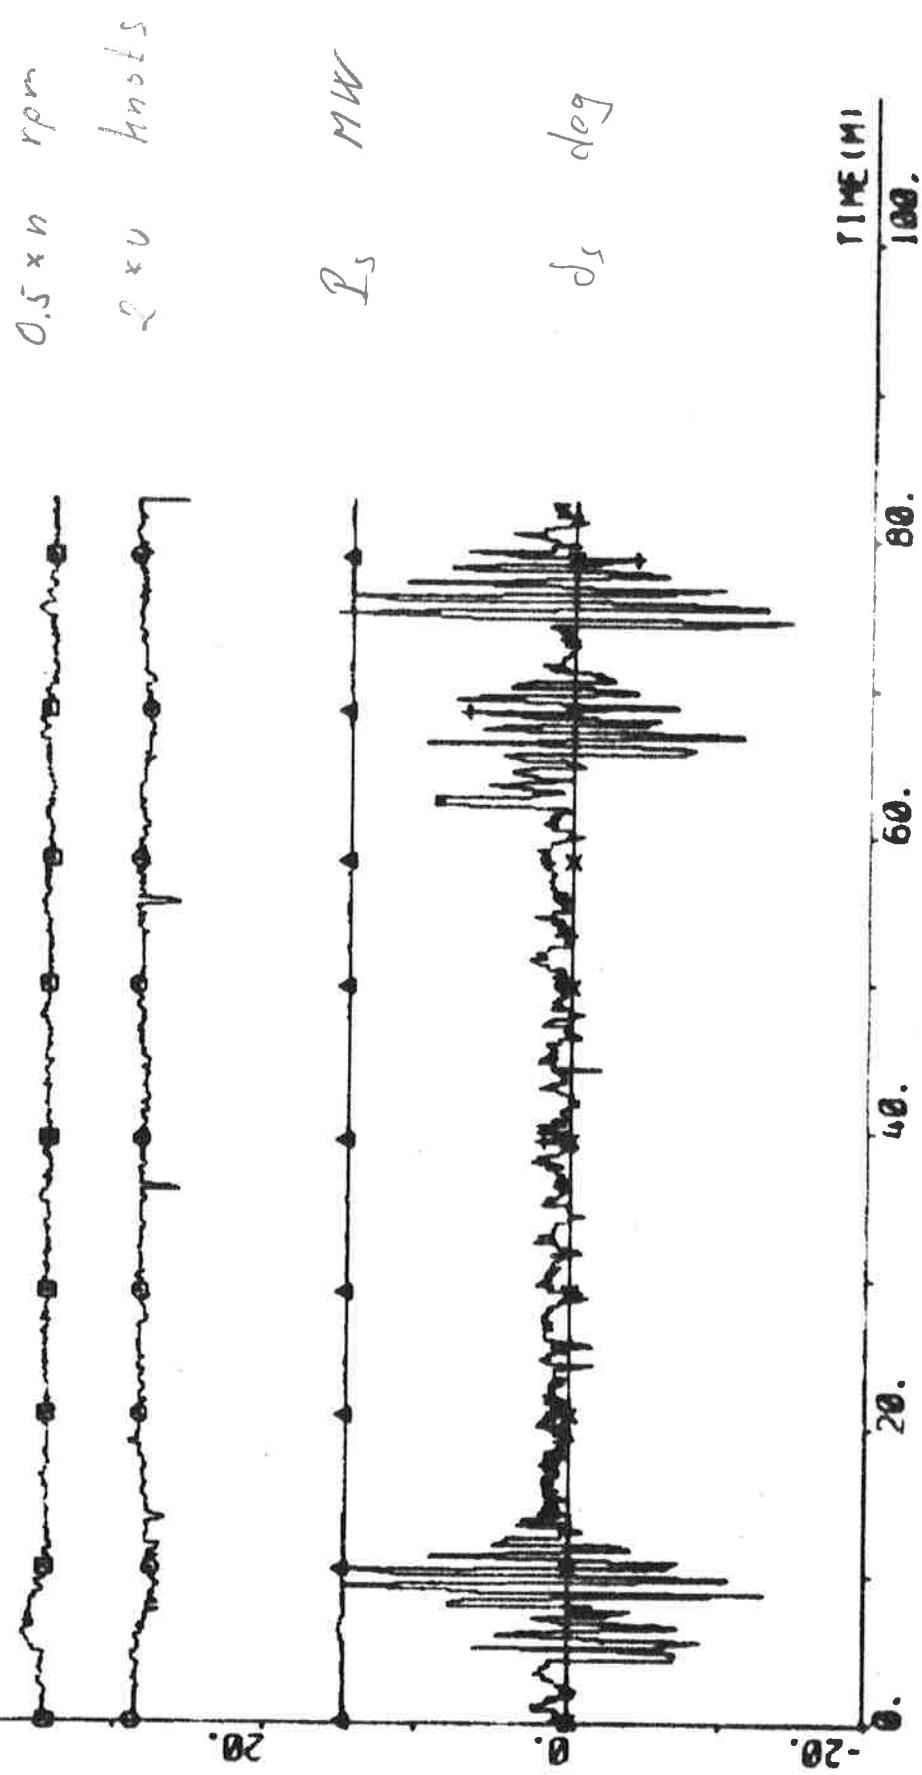



NET 01P1-01P2(2) 01 -3.4 0.8 - KNOTS

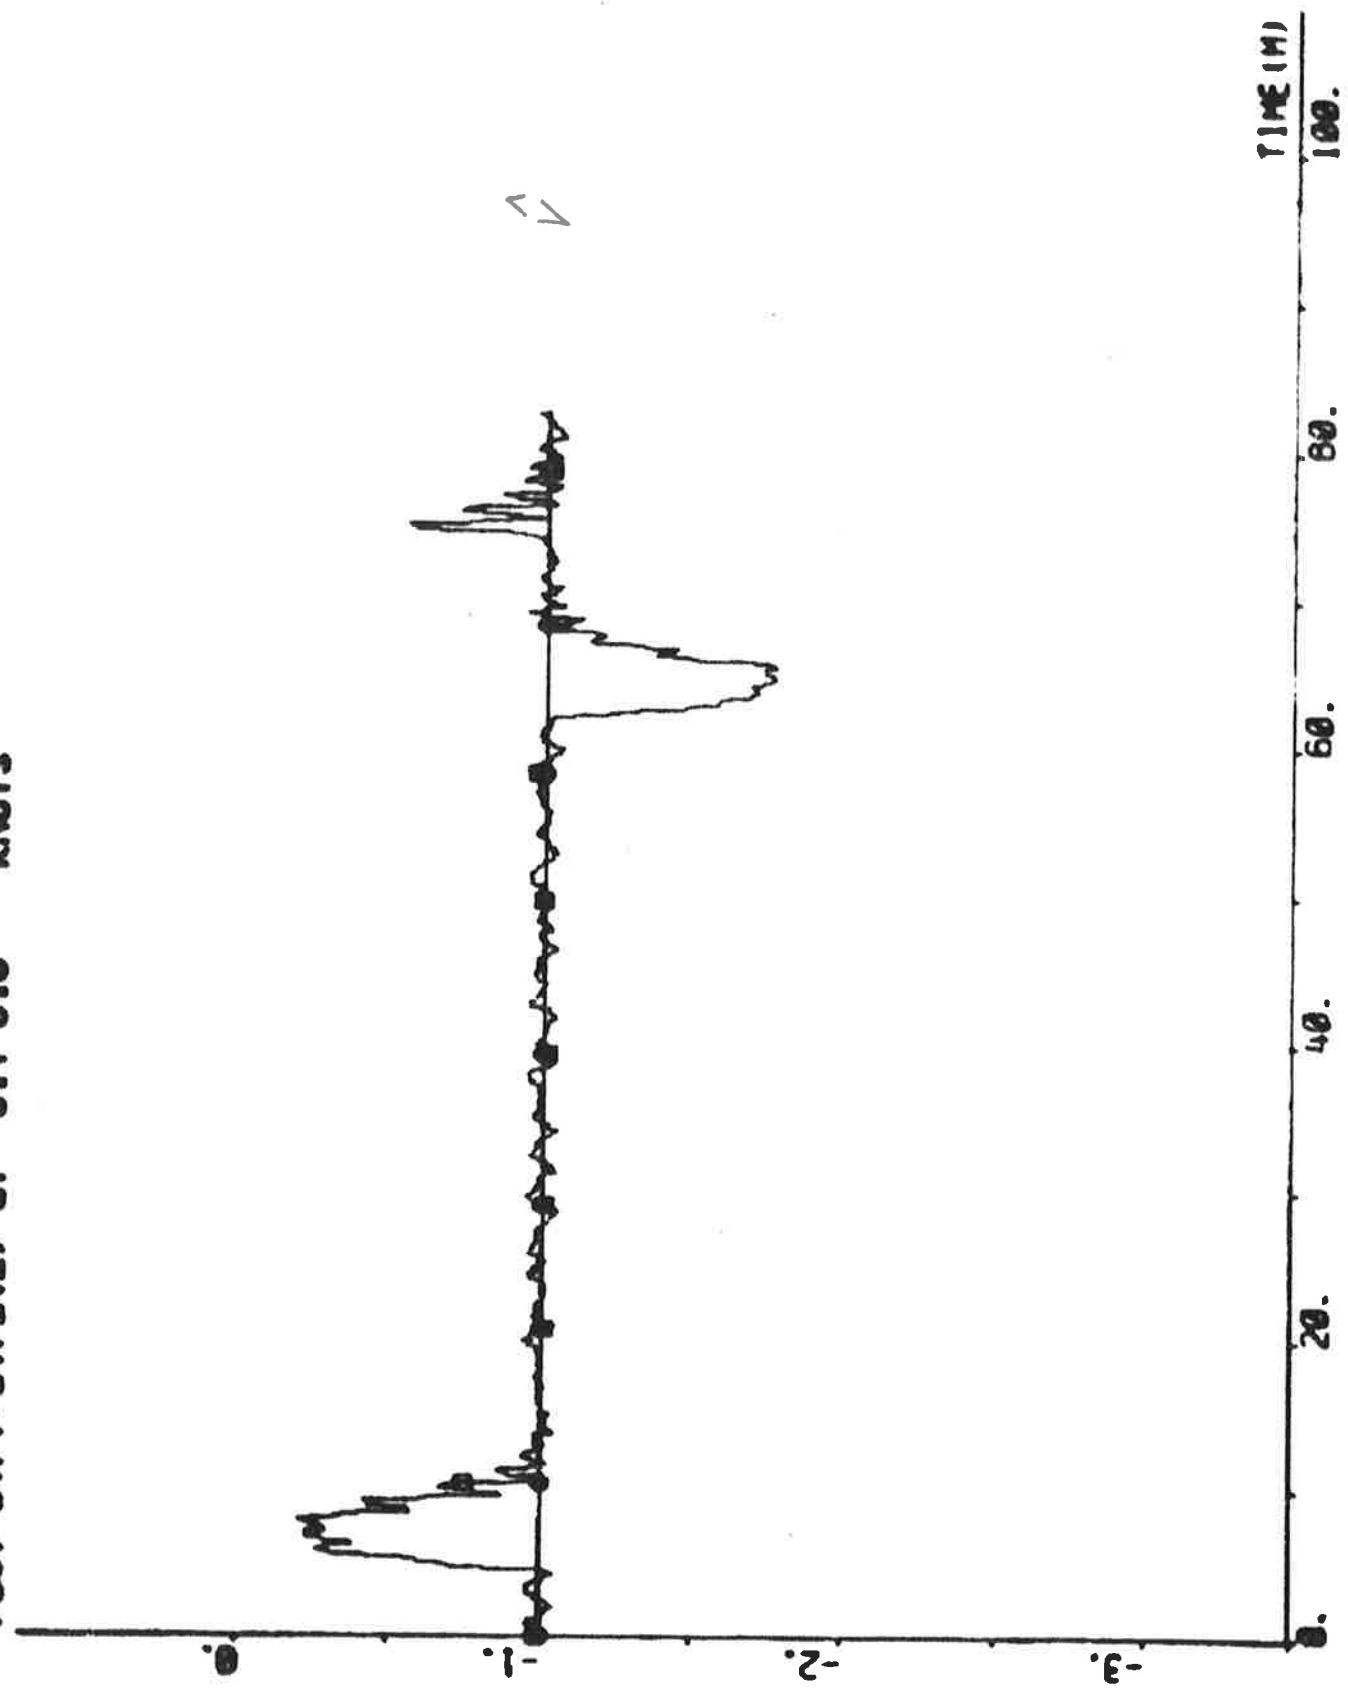

PLT D1P1(1)-D1P1(5) 01 -3.4 0.0 - KNOTS

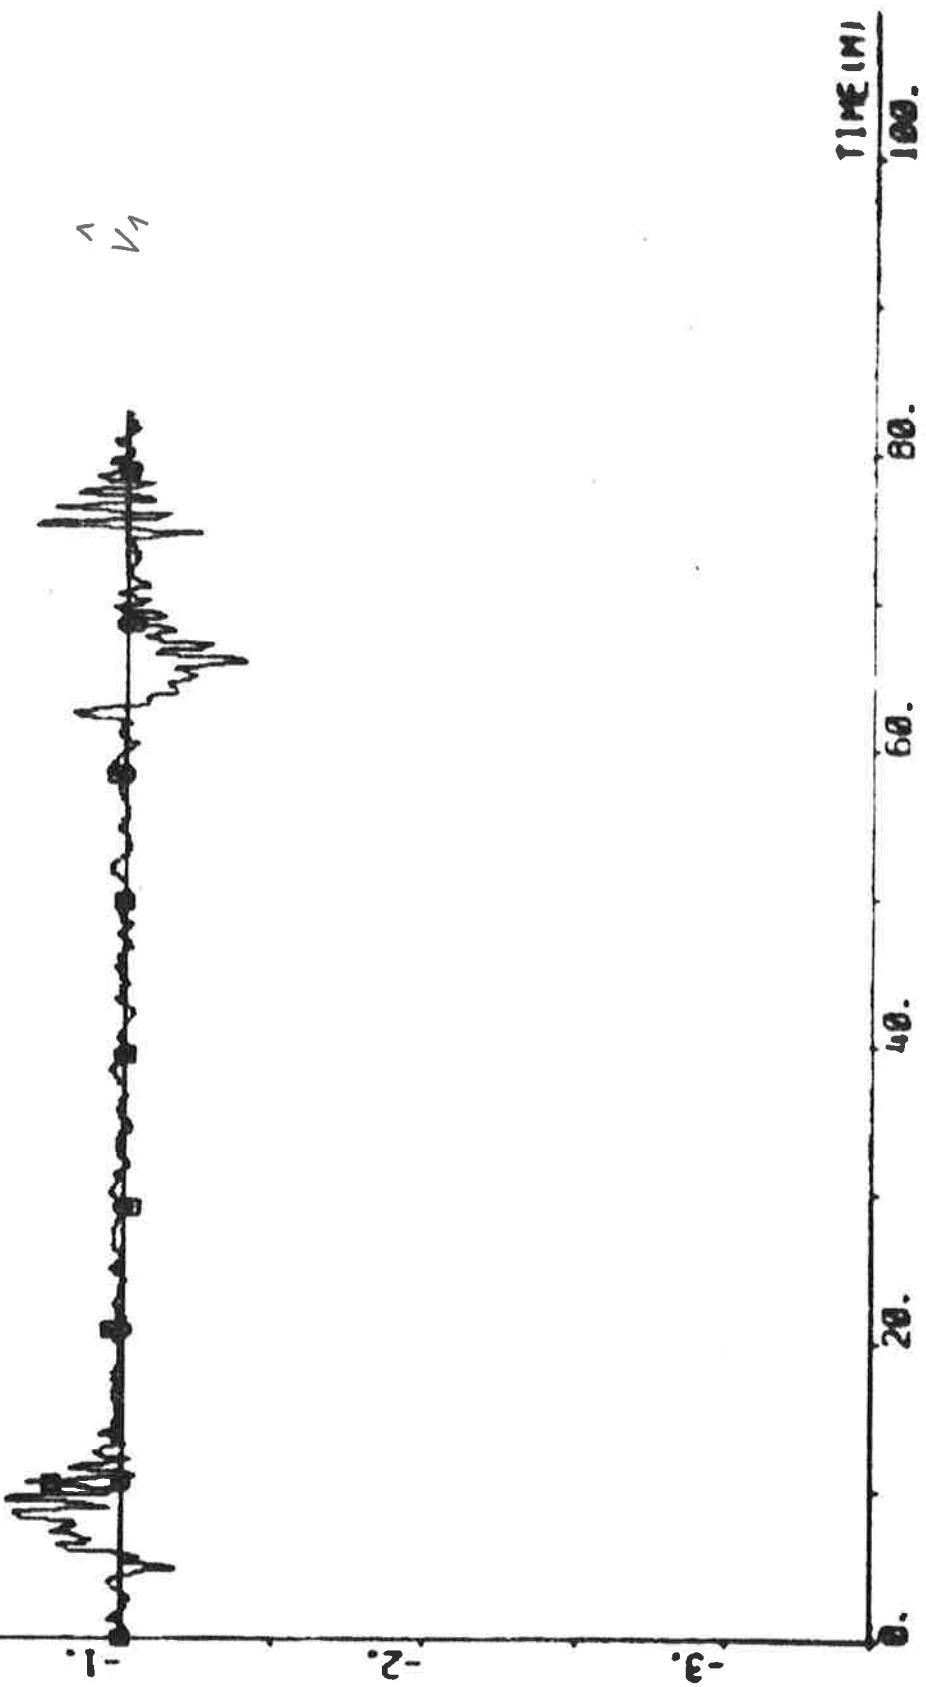


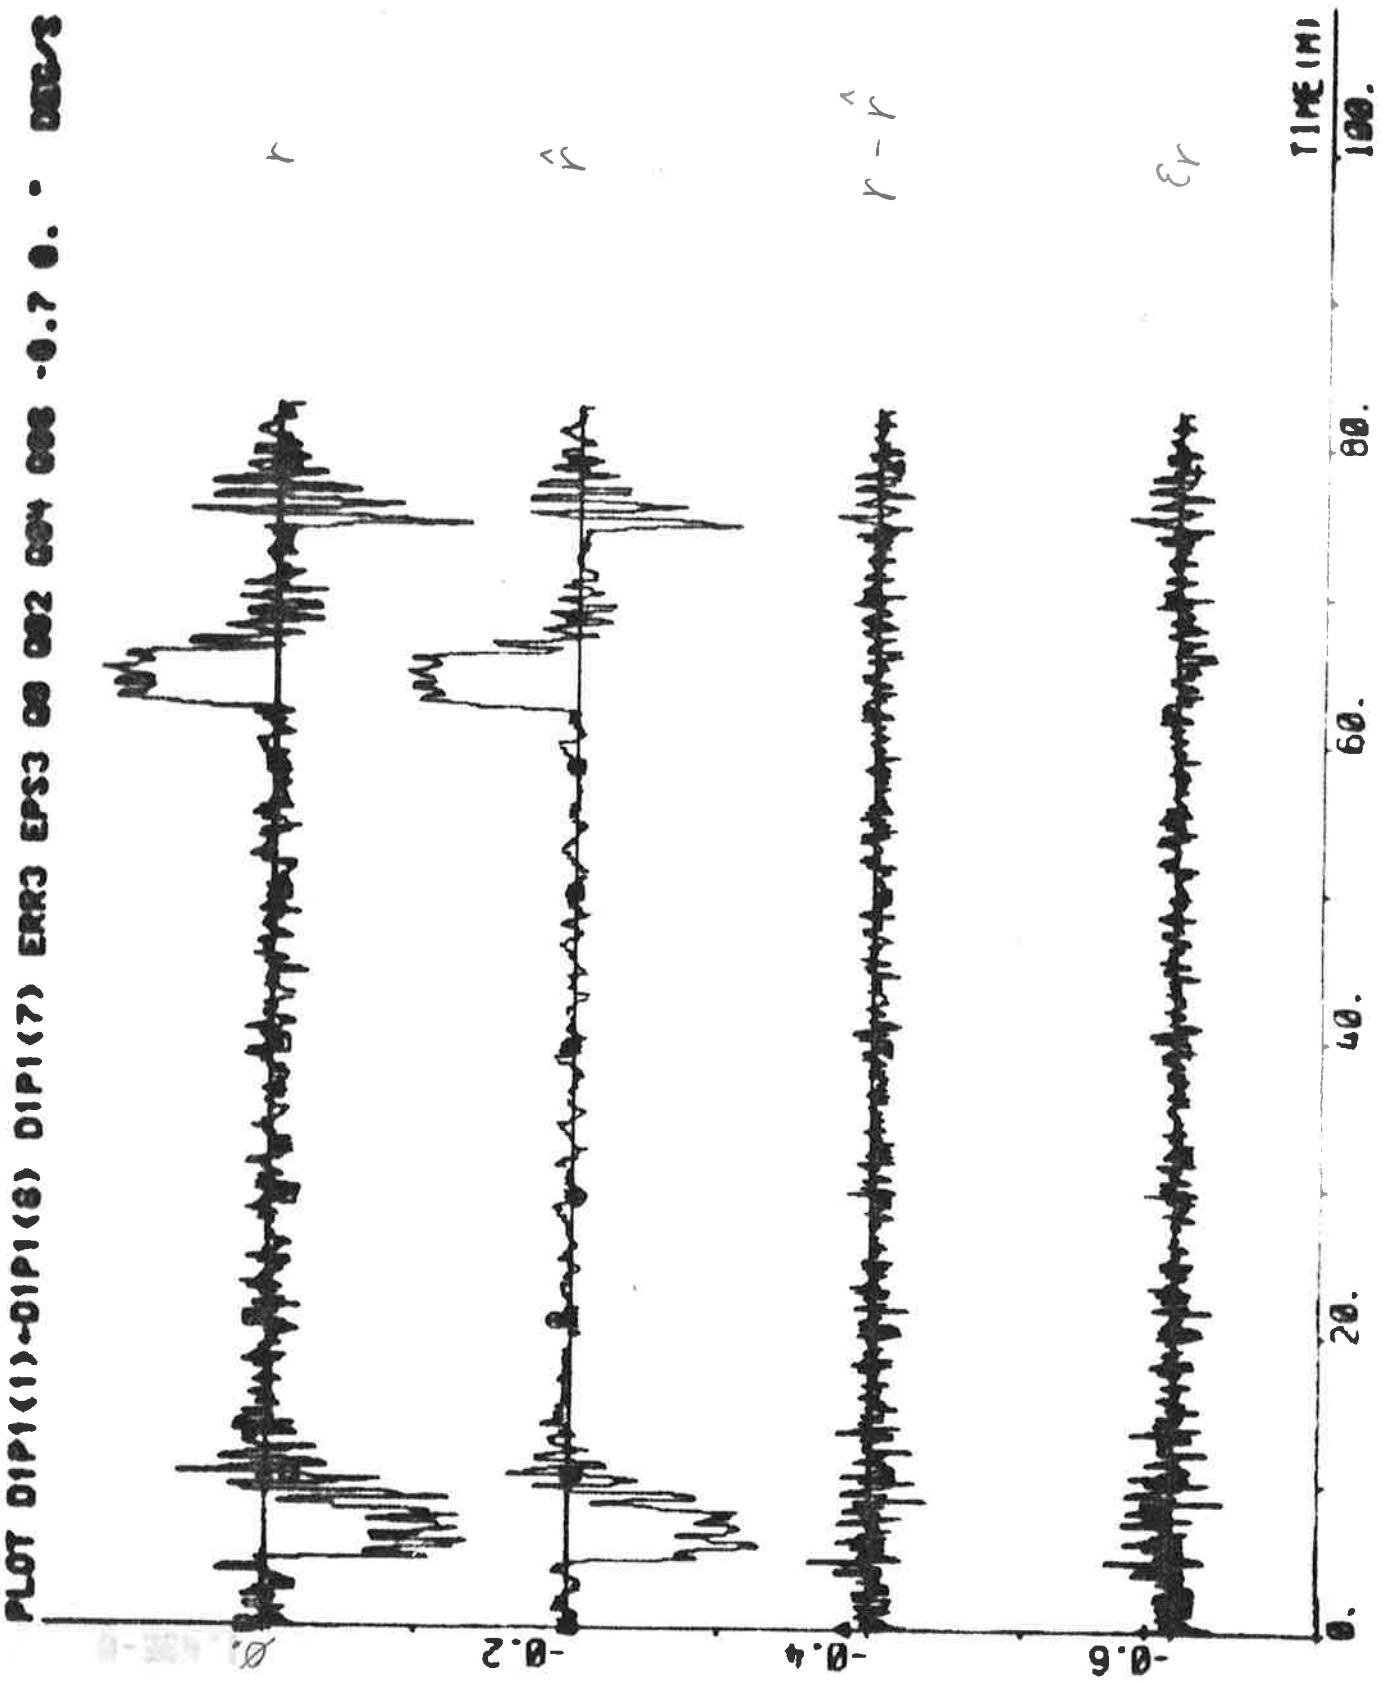

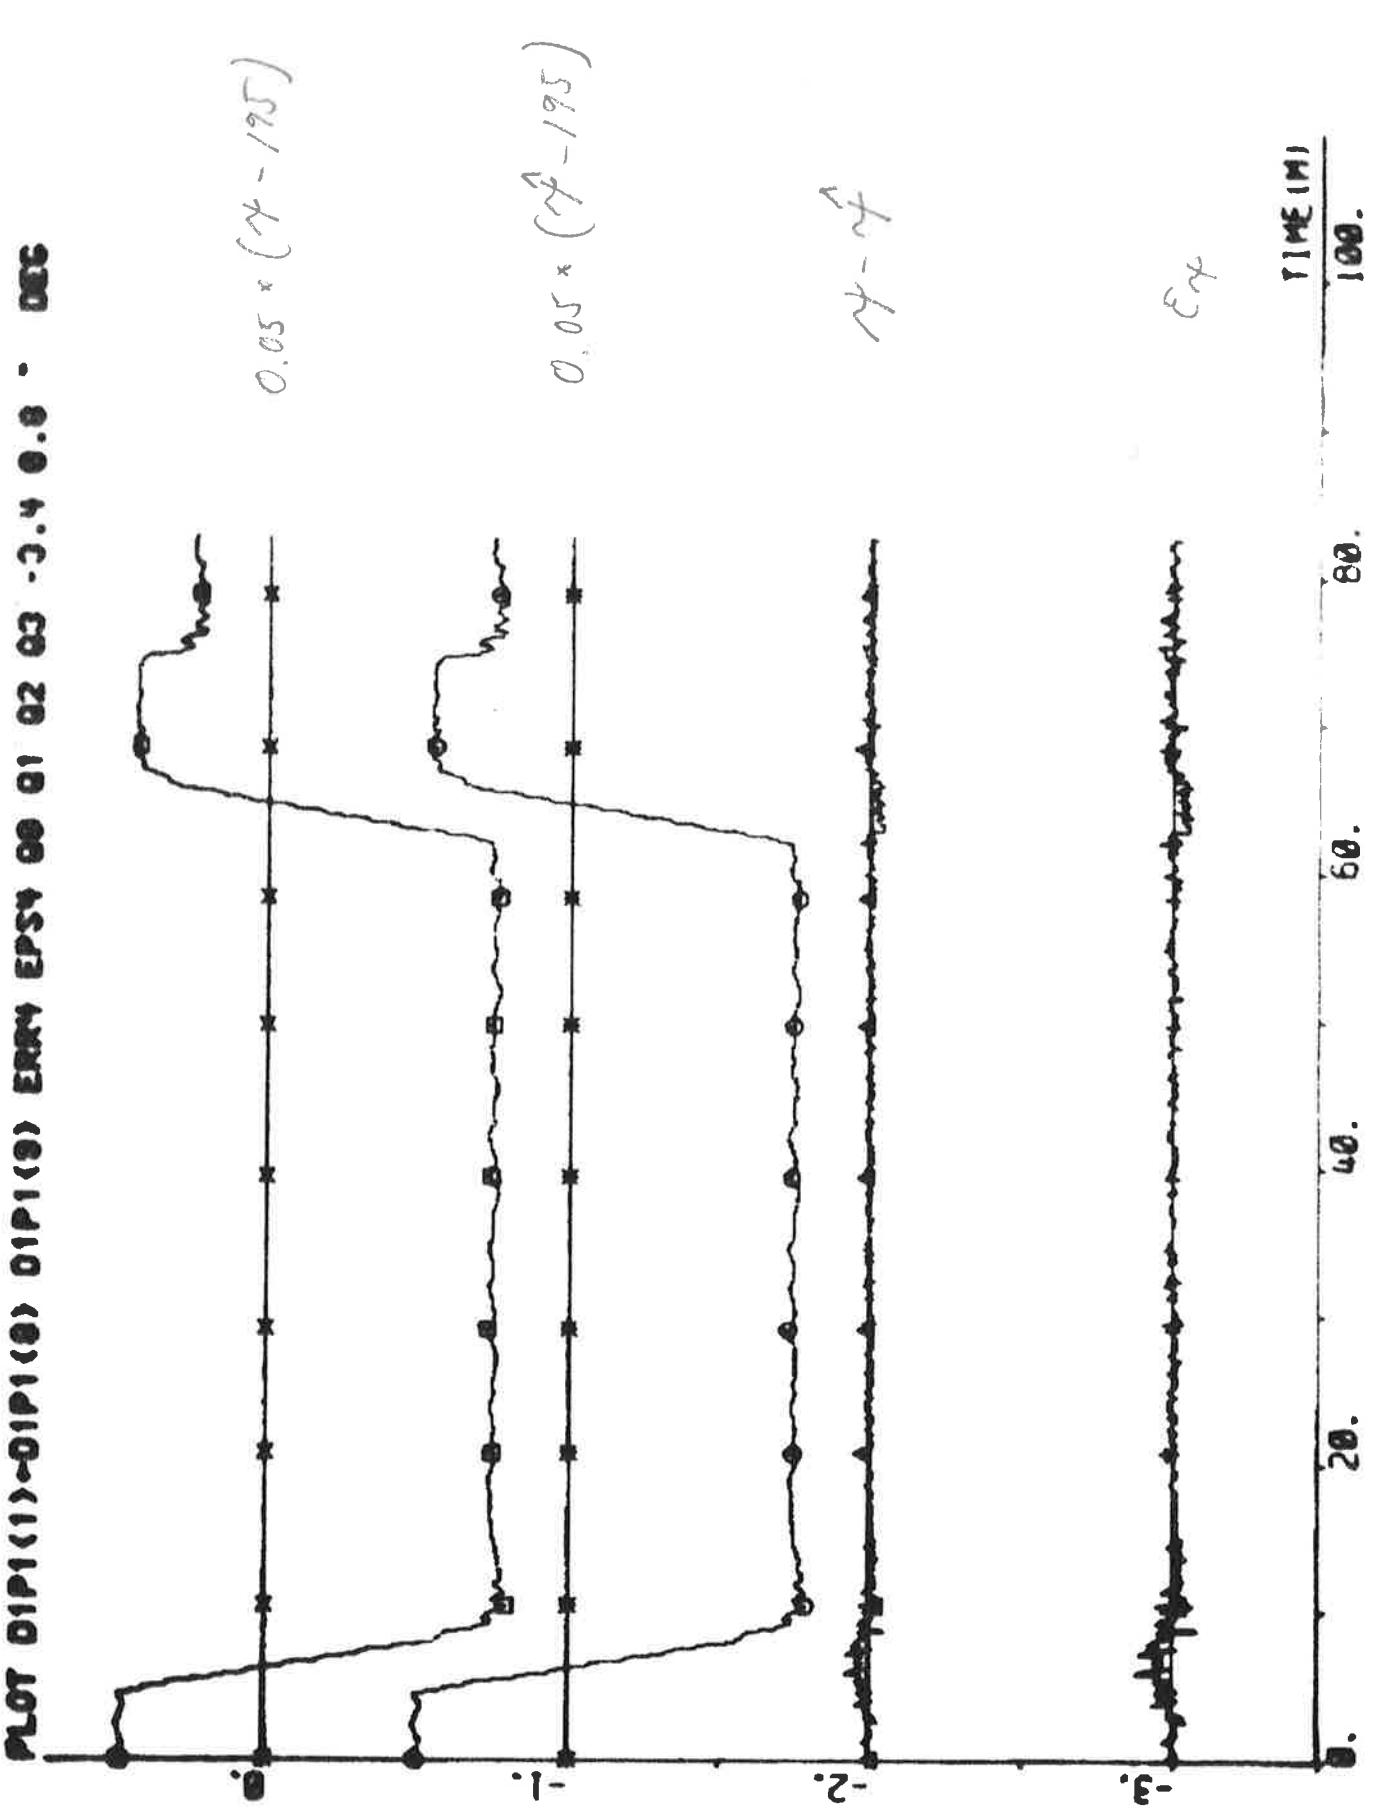



PLOT D1P1(1)-D1P1(2) D1P1(3) EPS1 EPS1 00 020 040 060 080 090 100 110

520

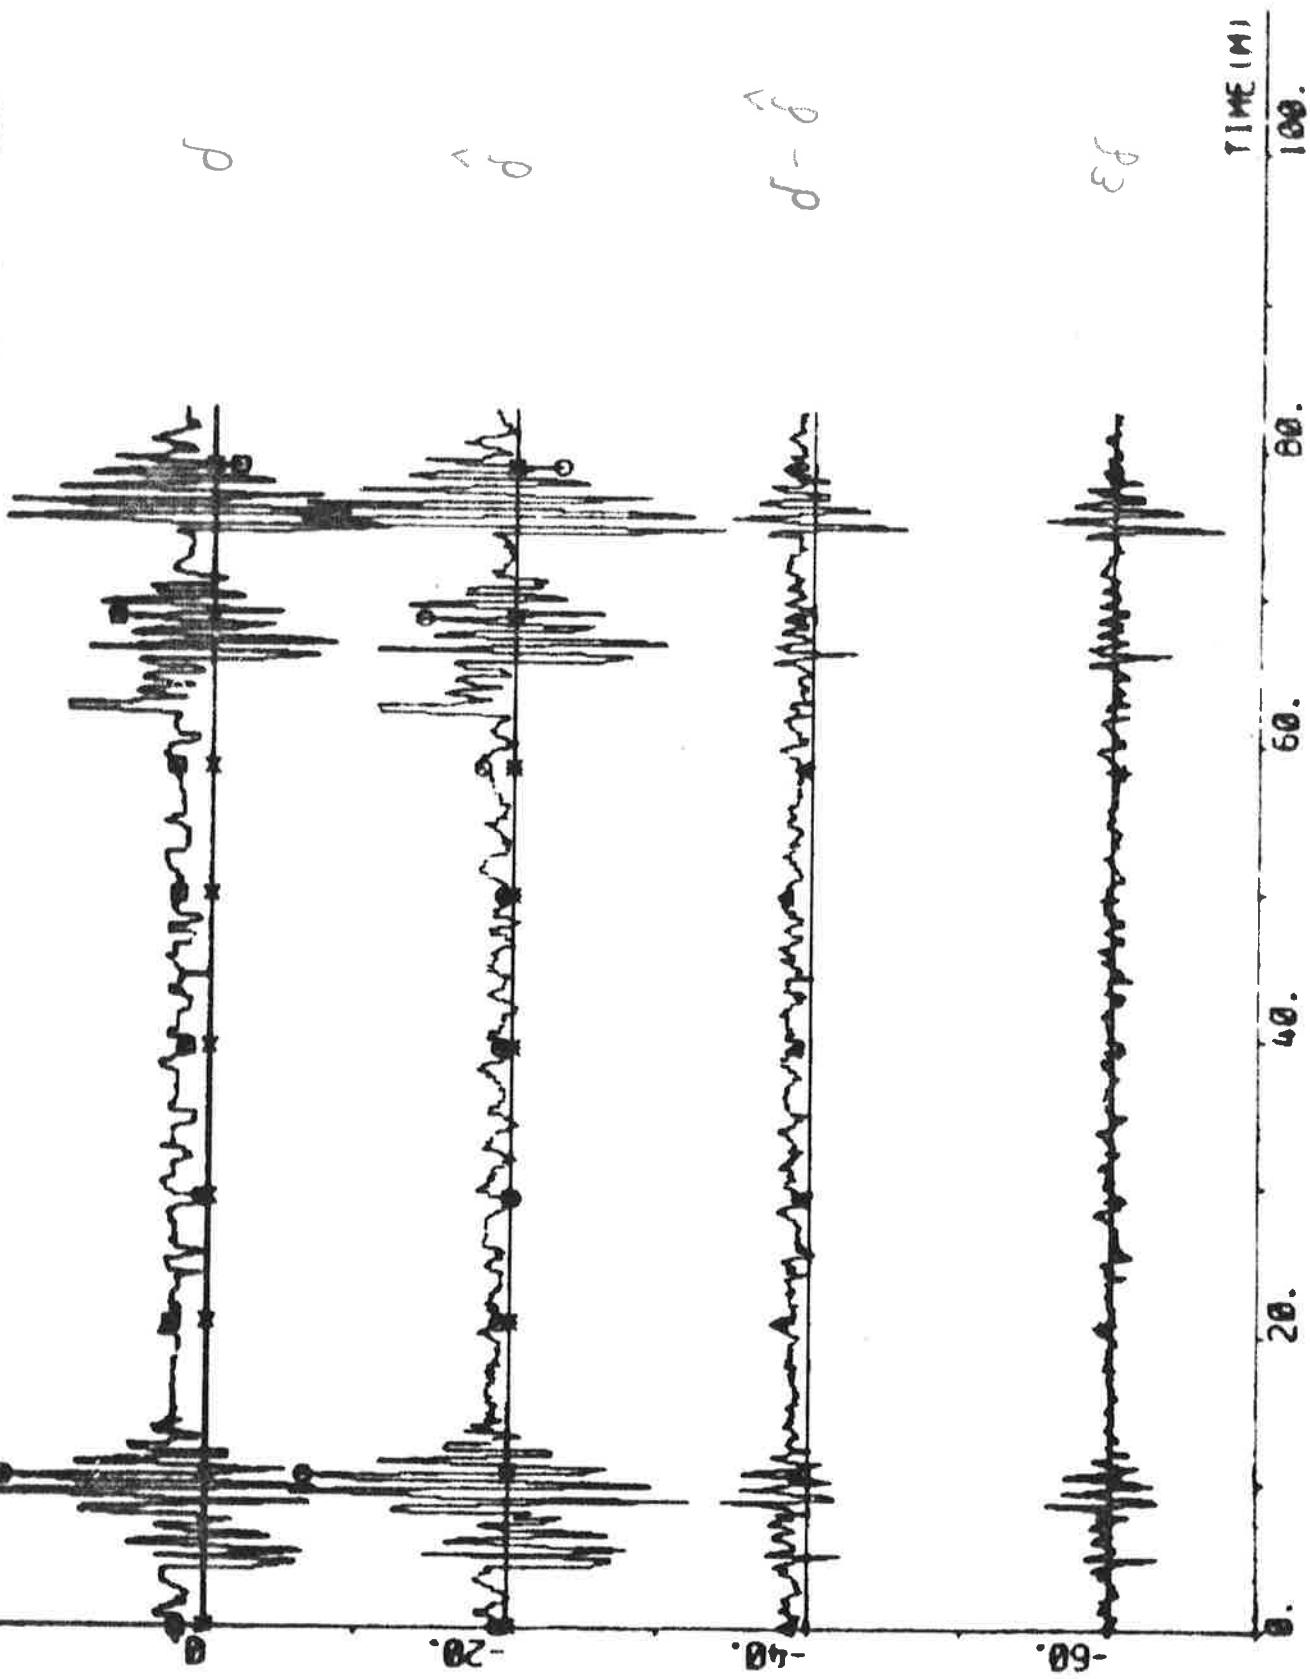

NOTE 81P1(1)-81P2(3) 81P2(5) 81P2(8) 81P4 81P5 81P6

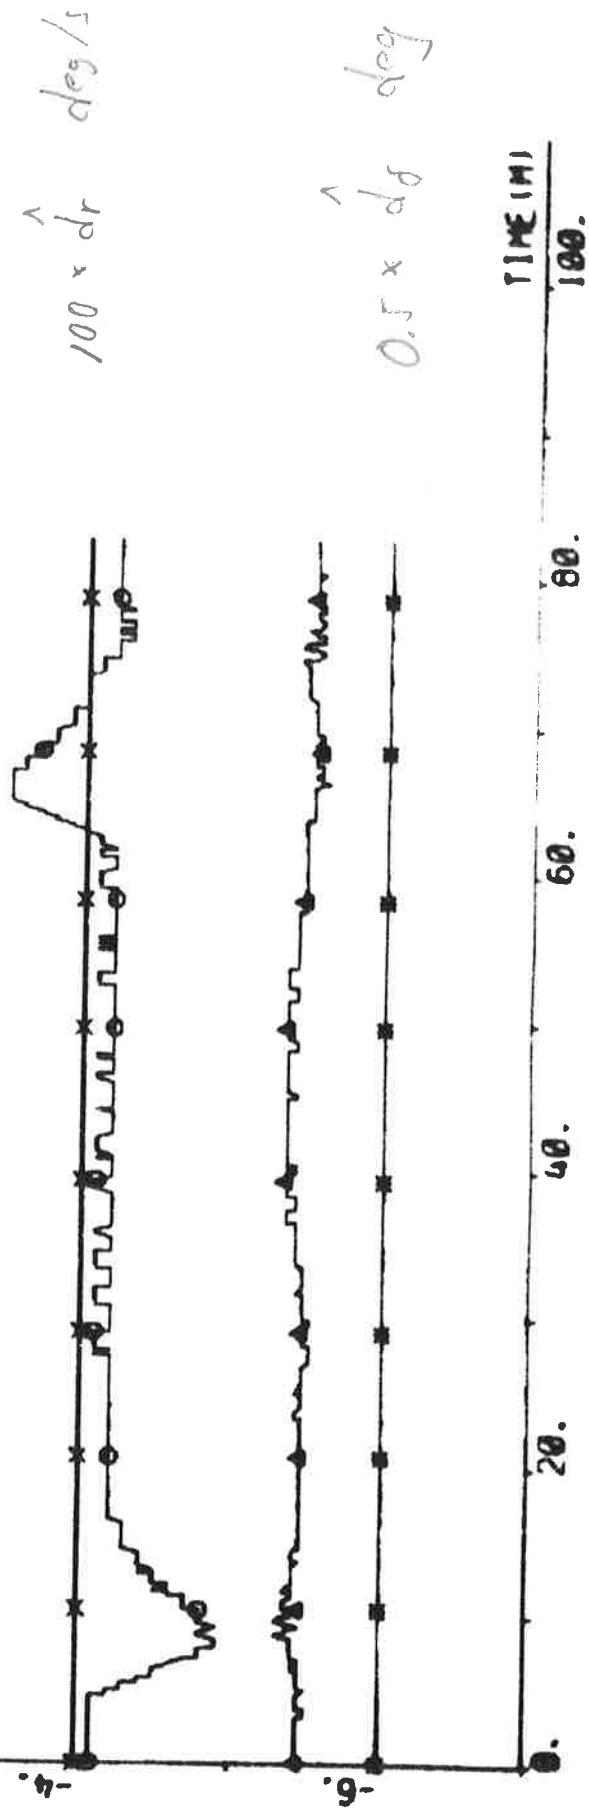

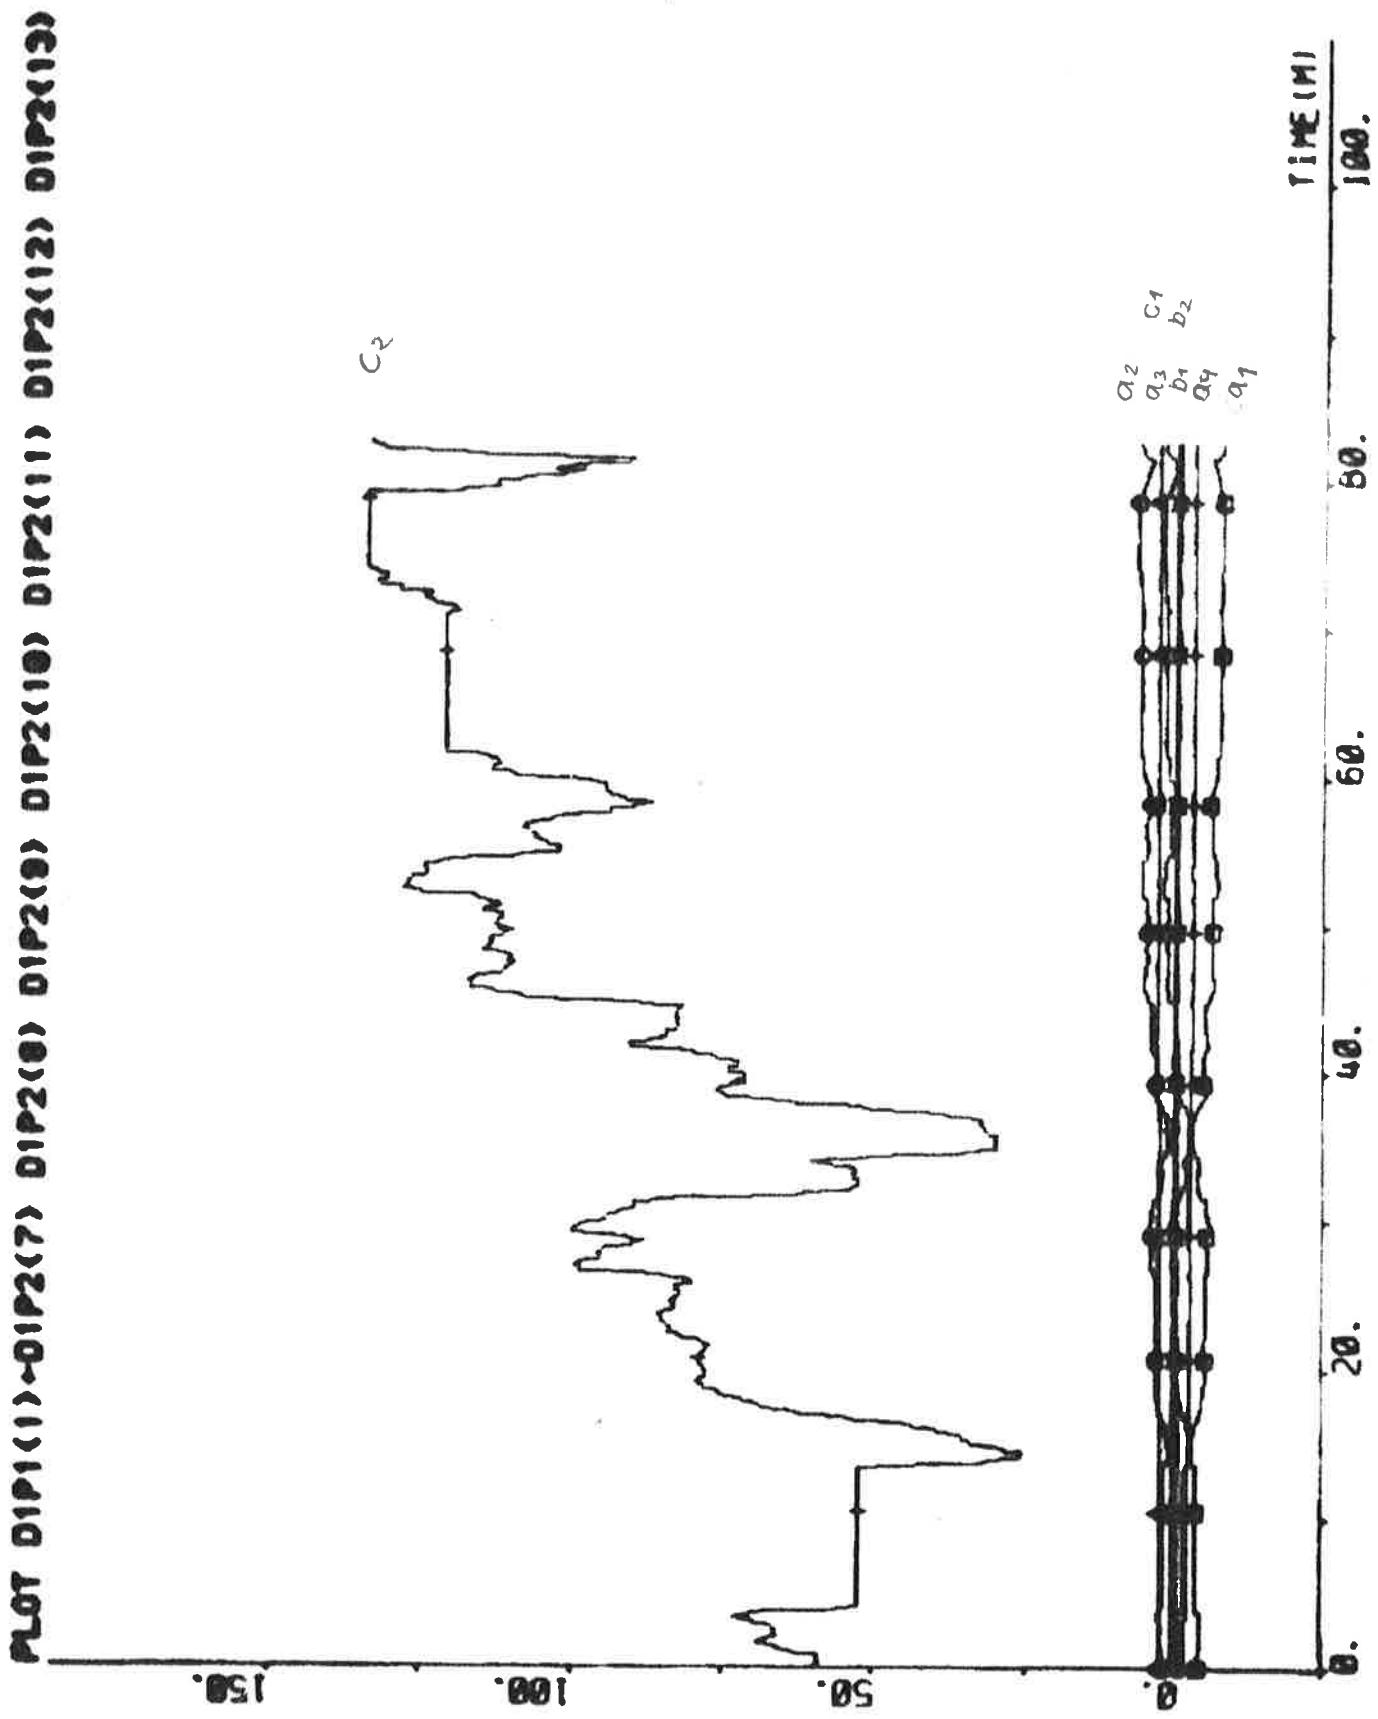

1000. 900. 800. 700. 600. 500. 400. 300. 200. 100. 0.

EXPERIMENT D2

| | | | |
|--------------|-------------------|-----------------|-----------------------|
| Date | 1976-04-21 | Forward draught | 8.5 m |
| Time | 14.21 | Aft draught | 12.5 m |
| Duration | 40 min | Wind direction | N (5; see App. A) |
| Position | N 16°54' W 18°30' | Wind velocity | 10 m/s (fresh breeze) |
| ψ_{ref} | 180 deg | Wave height | 2 m |
| r_{ref} | 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from the Kalman filter

Tuning time before the experiment started: 0 min

| | | | |
|--------------|---------------|----------|-------|
| NC1 = 1 | NC2 = 1 | k = 7 | q = 0 |
| $T_s = 10$ s | $V_0 = 7$ m/s | IVVC = 1 | |

Final values:

$$\begin{array}{|c|c|c|} \hline a_1 & -7.57 & 3.34 \\ \hline a_2 & 5.86 & -3.76 \quad 7.08 \\ \hline a_3 & 4.14 & -0.75 \quad -2.95 \quad 7.69 \\ \hline a_4 & -2.95 & 1.44 \quad -0.47 \quad -4.09 \quad 3.41 \\ \hline b_1 & 0.51 & -0.10 \quad -0.04 \quad 0.24 \quad -0.09 \quad 0.02 \\ \hline b_2 & 0.12 & -0.09 \quad 0.04 \quad -0.01 \quad 0.07 \quad 0.01 \quad 0.02 \\ \hline c_1 & -1.69 & -0.56 \quad 0.81 \quad 0.38 \quad -0.62 \quad 0.00 \quad -0.02 \quad 0.74 \\ \hline c_2 & 39.59 & 7.71 \quad -10.70 \quad -6.14 \quad 7.67 \quad -0.33 \quad -0.27 \quad 10.77 \quad 636.32 \\ \hline \end{array}$$

$$a_1 + a_2 + a_3 + a_4 = -0.52$$

$$\hat{\delta}_0 = 0.5 \text{ deg} \quad \hat{d}_v = 0.18 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$


$$\bar{\delta}_c = 0.4 \text{ deg} \quad (\text{Initial value: } 0.0 \text{ deg})$$

Statistics (mean value and standard deviation)

| | | | |
|---------------------|------------------------|-------------------|-----------------------|
| δ_c | 0.56 \pm 1.34 deg | P_s | 14.7 \pm 0.1 MW |
| δ | 1.96 \pm 1.25 deg | ϵ_v | 0.00 \pm 0.02 knots |
| $\psi - \psi_{ref}$ | -0.063 \pm 0.319 deg | ϵ_r | 0.00 \pm 0.01 deg/s |
| n | 69.7 \pm 0.5 rpm | ϵ_ψ | 0.00 \pm 0.02 deg |
| u | 14.2 \pm 0.2 knots | ϵ_δ | 0.2 \pm 0.6 deg |
| V_1 | 0.255 | | |

PLT D2P1(11)-D2P1(10) D2P1(9) D2P1(10) D2P1(11) D2P1(10) D2P1(11)

524

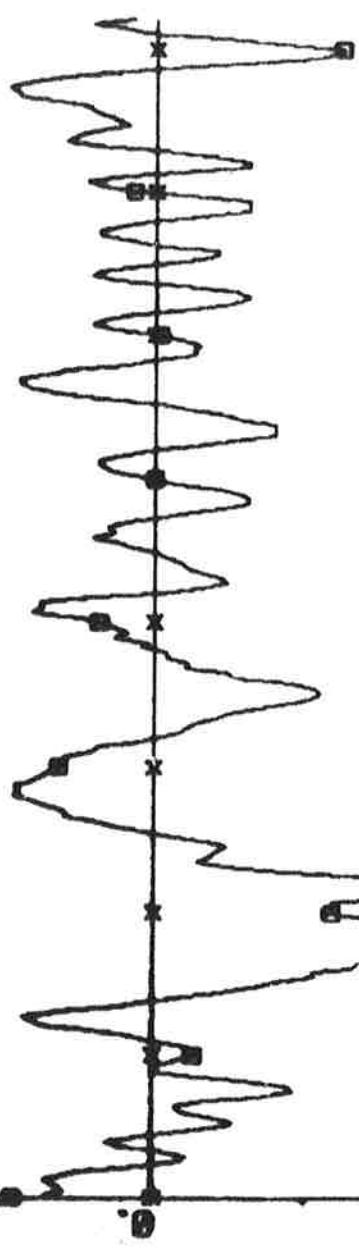


$$2.5 \times \left\{ \frac{r}{r_0} \right\} \cdot \text{deg/s}$$

~~2.5 x {r / r₀} deg/s~~



$$0.1 \times M_y$$



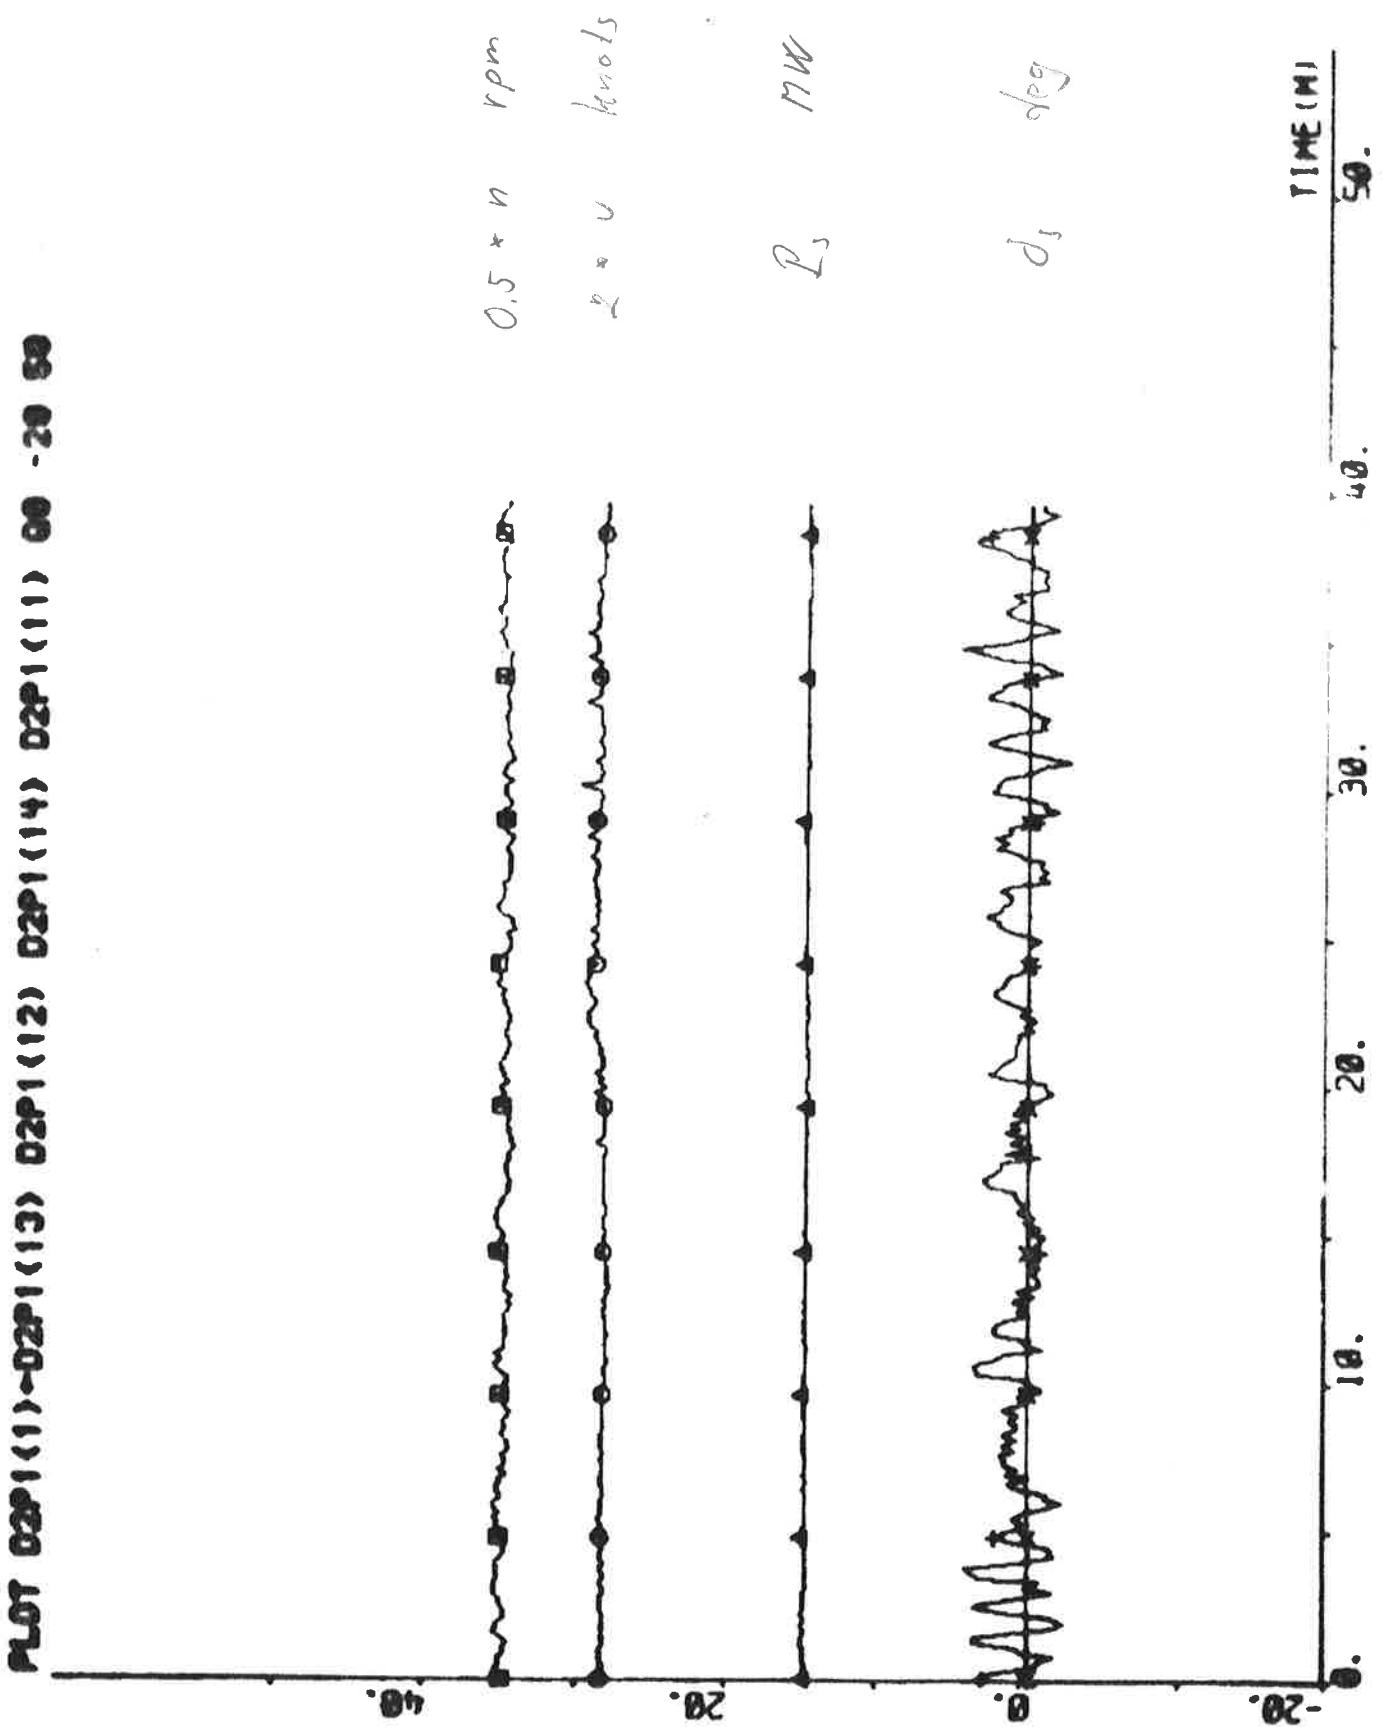

PL01T 02P1(1)-02P2(1) 02P2(2) ERRE 00 01 02 - 3.4 0.3 - 1000



V



V



V



526

60.

30.


20.


10.

-3.


TIME (H)

NET 0201(1)-0201(4) D221(6) EMA E32 00 01 02 03 -3.4 0.0 - means

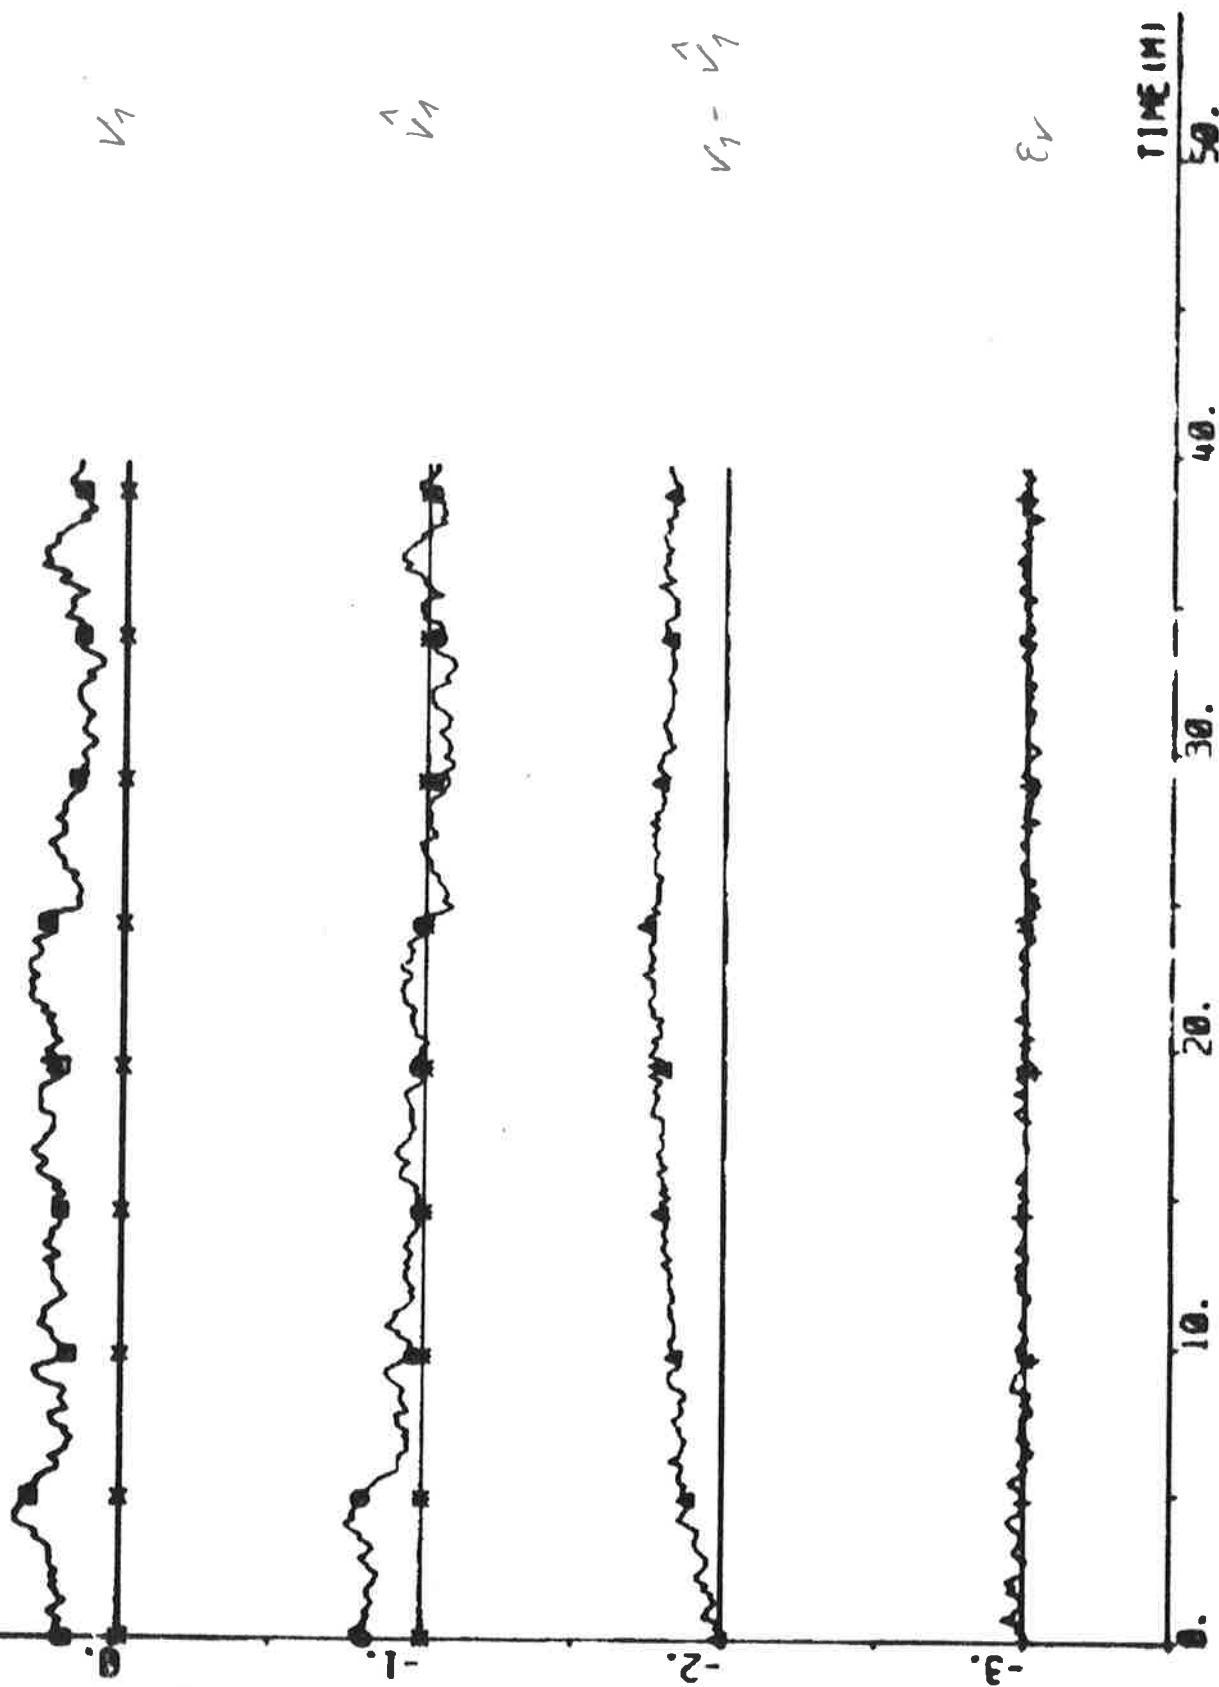

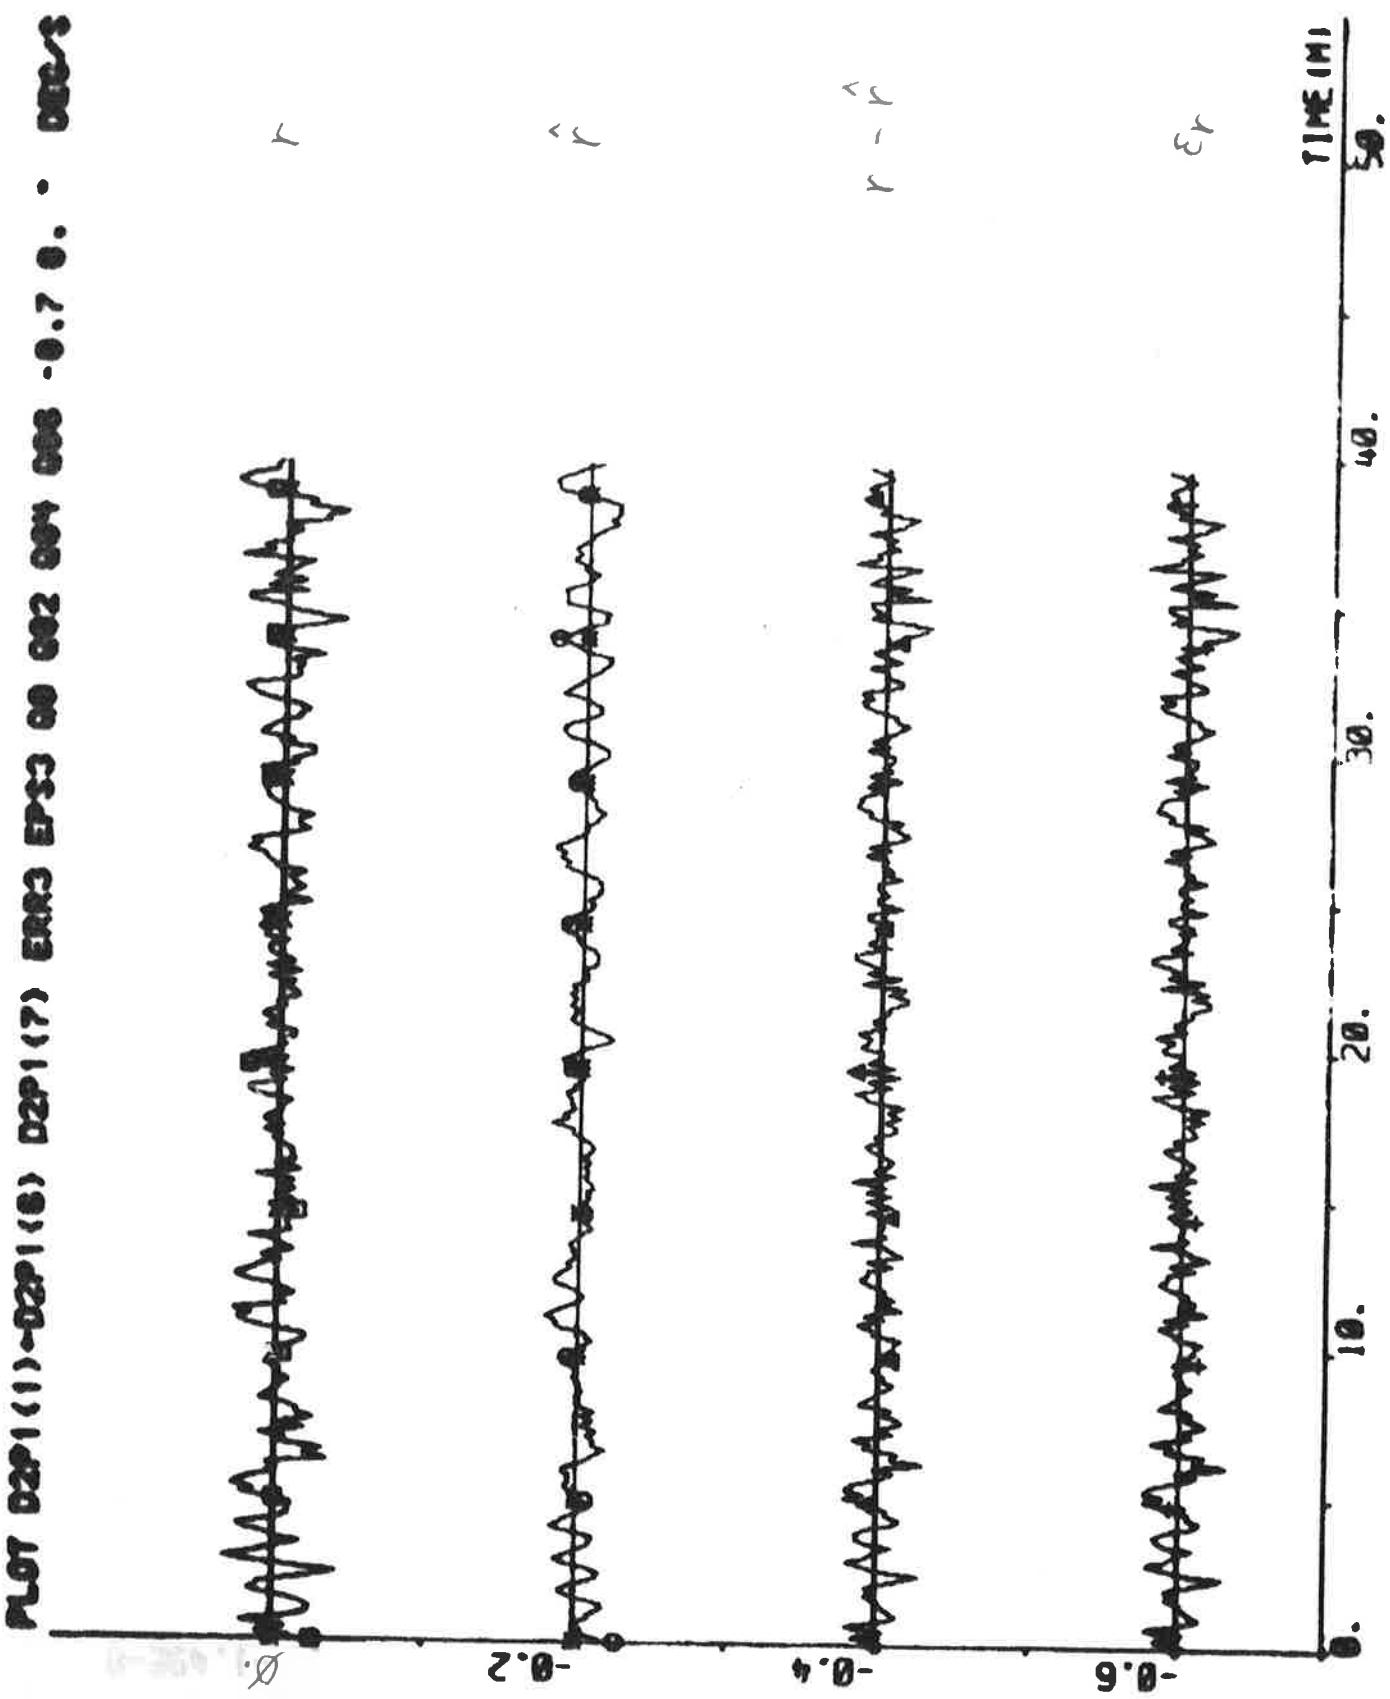



not 0291(1)-0291(8) D291(8) E291(8) 01 02 03 -3.4 0.8 - 00

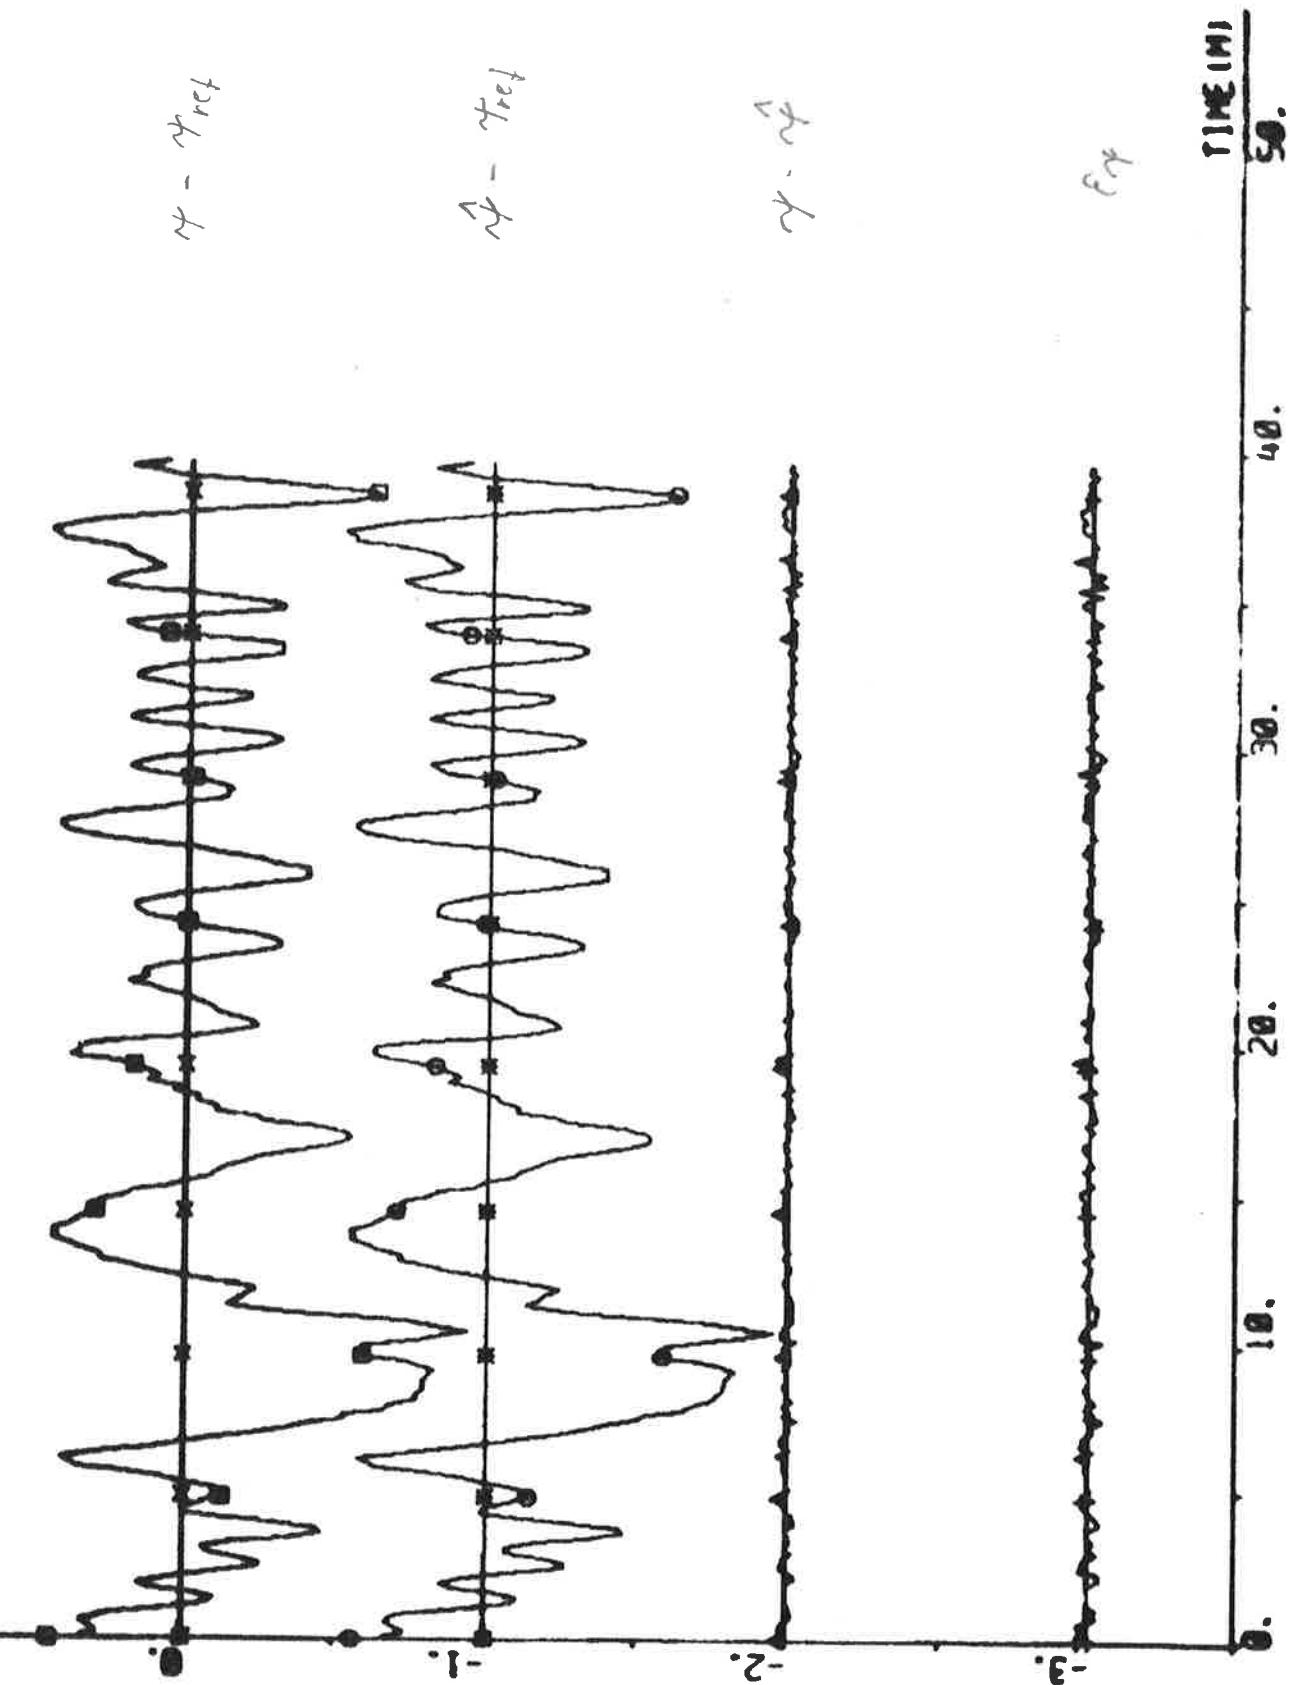

PART D2P1(11)-D2P1(12) D2P1(3) EMI E31 09 020 000 000 000 000 000

530

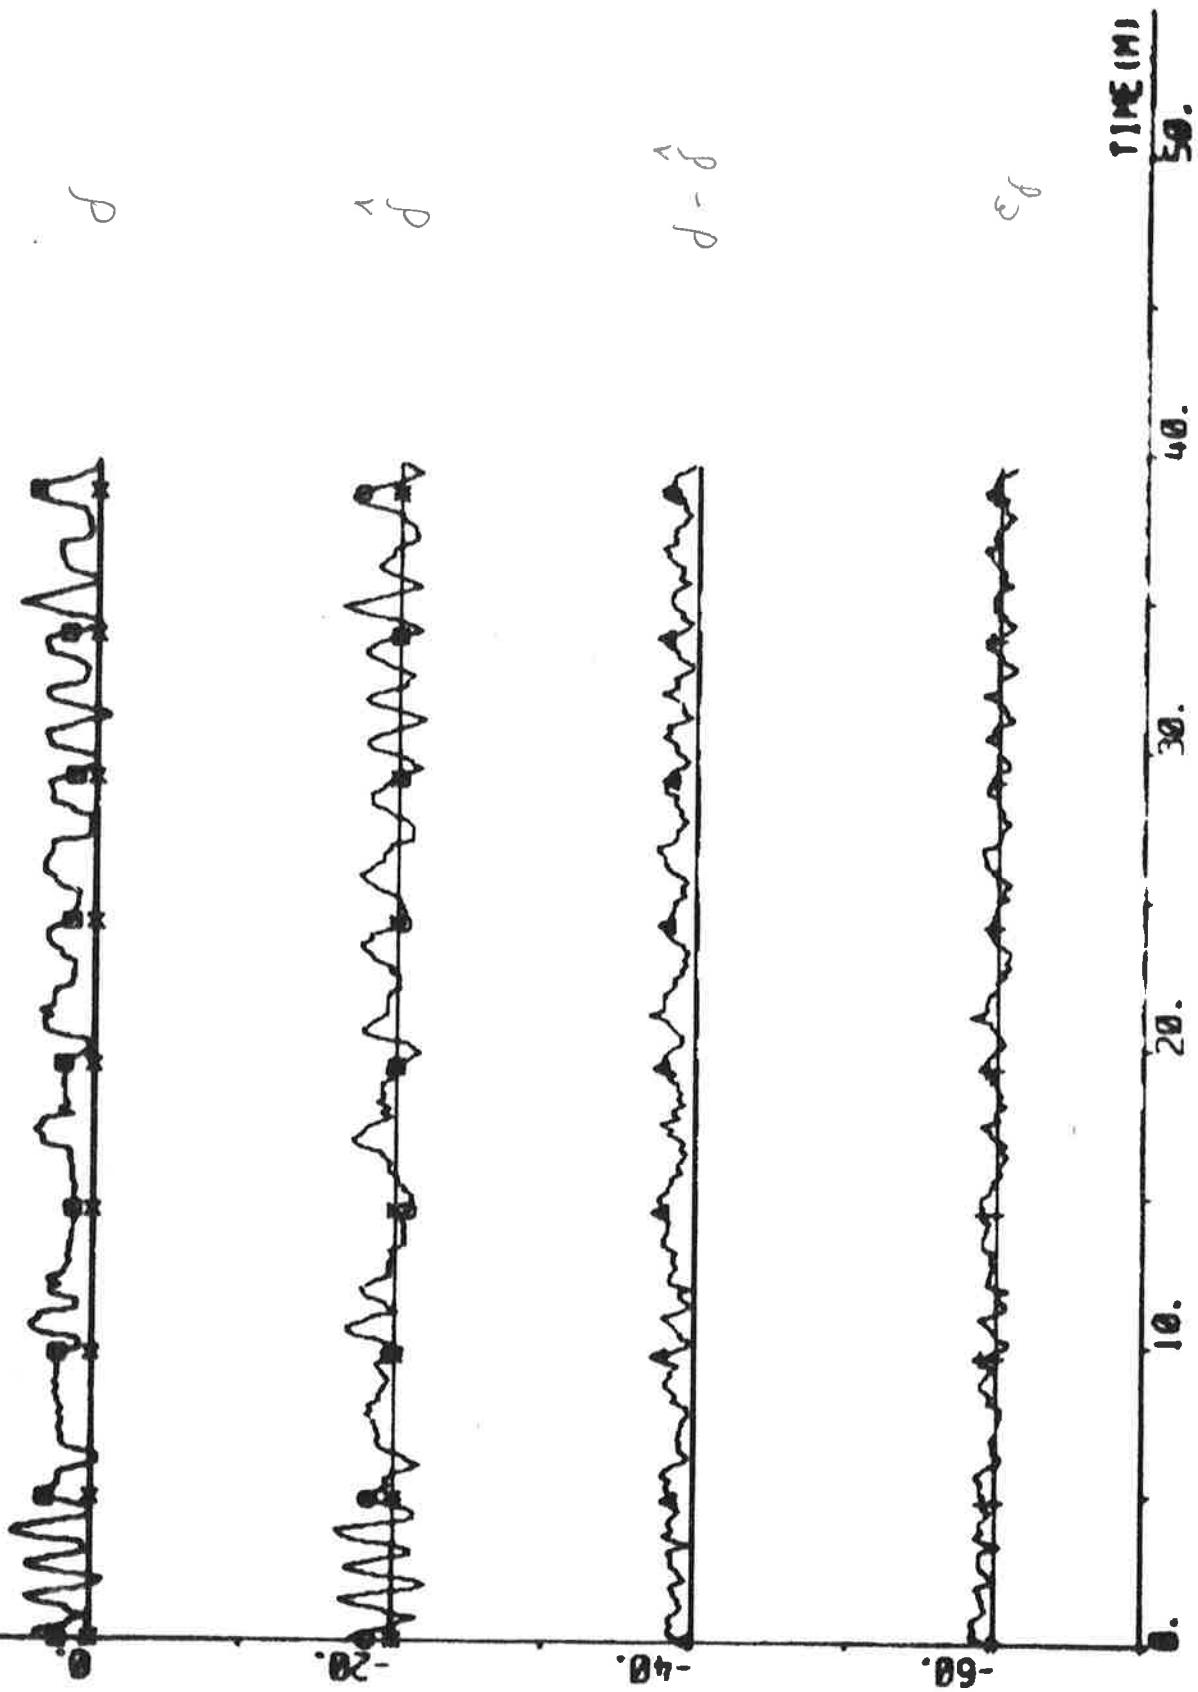

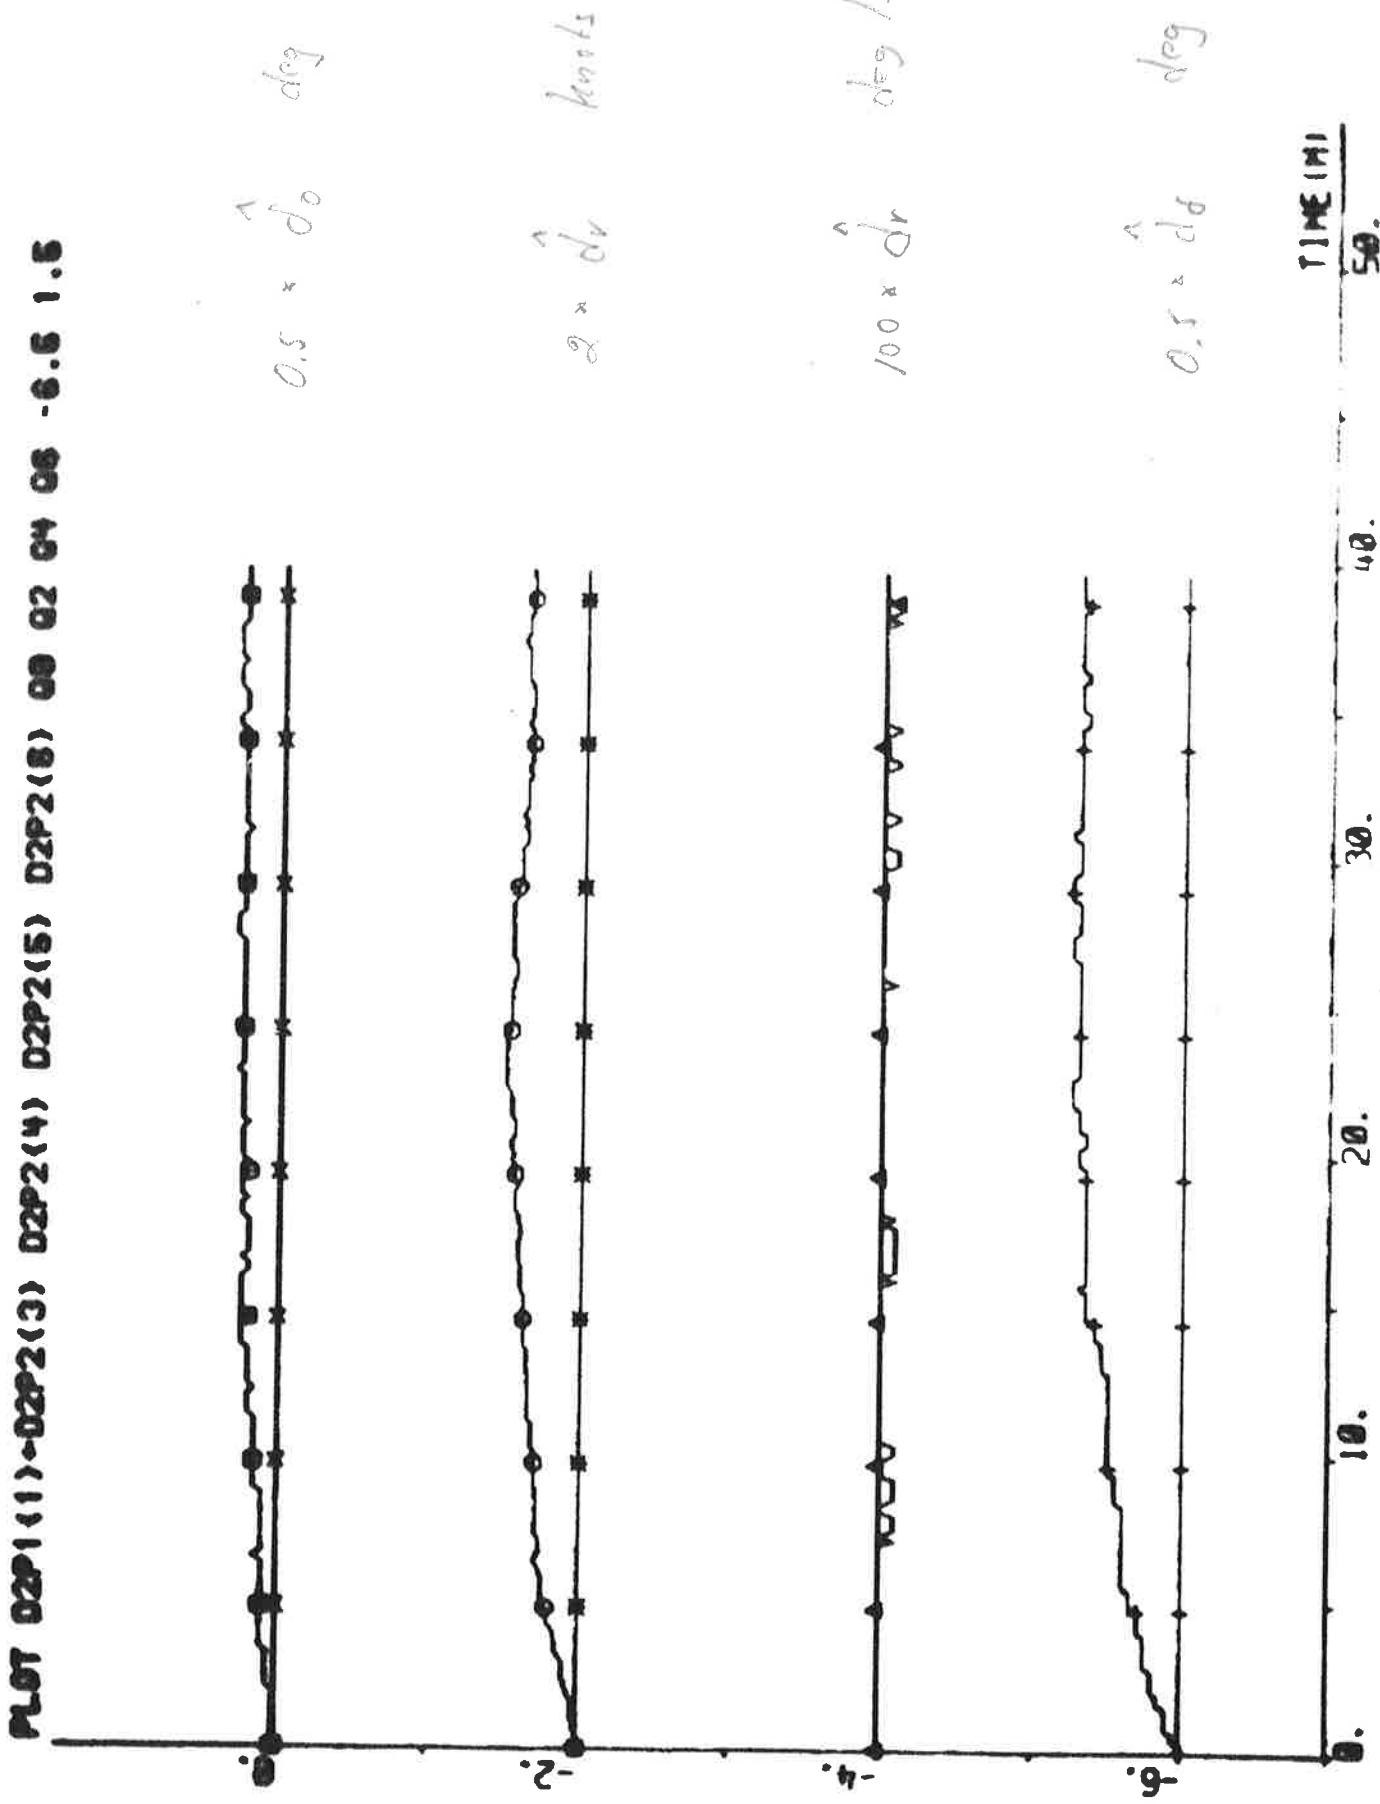

not 02P2(11)-02P2(17) 02P2(8) 02P2(10) 02P2(11) 02P2(12) 02P2(13)



EXPERIMENT D3

| | | | |
|--------------|---|-----------------|----------------------|
| Date | 1976-04-30 | Forward draught | 10.9 m |
| Time | 15.35 | Aft draught | 12.9 m |
| Duration | 68 min | Wind direction | S (1; see App. A) |
| Position | S 22°43' E 08°25' | Wind velocity | 9 m/s (fresh breeze) |
| ψ_{ref} | 144.3-147.0 deg
(Sailmaster,
Course Correction) | Wave height | - |
| r_{ref} | 0.1 deg/s | | |

Self-tuning regulator and yaw regulator using estimates from the Kalman filter.

Tuning time before the experiment started: 0 min

NC1 = 1 NC2 = 1 k = 7 q = 0
T_s = 10 s V₀ = 6 m/s IVVC = 1

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -8.24 \\ 6.08 \\ 4.67 \\ -2.61 \\ 0.52 \\ 0.16 \\ -1.30 \\ 46.13 \end{bmatrix} \quad P = \begin{bmatrix} 2.47 \\ -2.79 & 7.74 \\ -0.60 & -5.55 & 11.39 \\ 1.15 & 0.41 & -5.33 & 4.13 \\ -0.06 & -0.24 & 0.46 & -0.15 & 0.04 \\ 0.01 & -0.07 & -0.08 & 0.16 & 0.00 & 0.02 \\ -0.04 & 0.34 & -0.25 & -0.09 & -0.03 & -0.02 & 0.60 \\ 13.22 & -18.44 & -6.72 & 10.98 & -0.76 & 0.32 & 13.50 & 701.56 \end{bmatrix}$$


$$a_1 + a_2 + a_3 + a_4 = -0.10$$

$$\hat{\delta}_0 = -0.5 \text{ deg} \quad \hat{d}_v = 0.13 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.6 \text{ deg}$$

$\bar{\delta}_C = -0.4$ deg (Initial value: 0.0 deg)

Statistics (mean value and standard deviation)

1 C-2 (21) place at noon at (01) and 0200 (02) and 0300 (03) and 0400 (04)

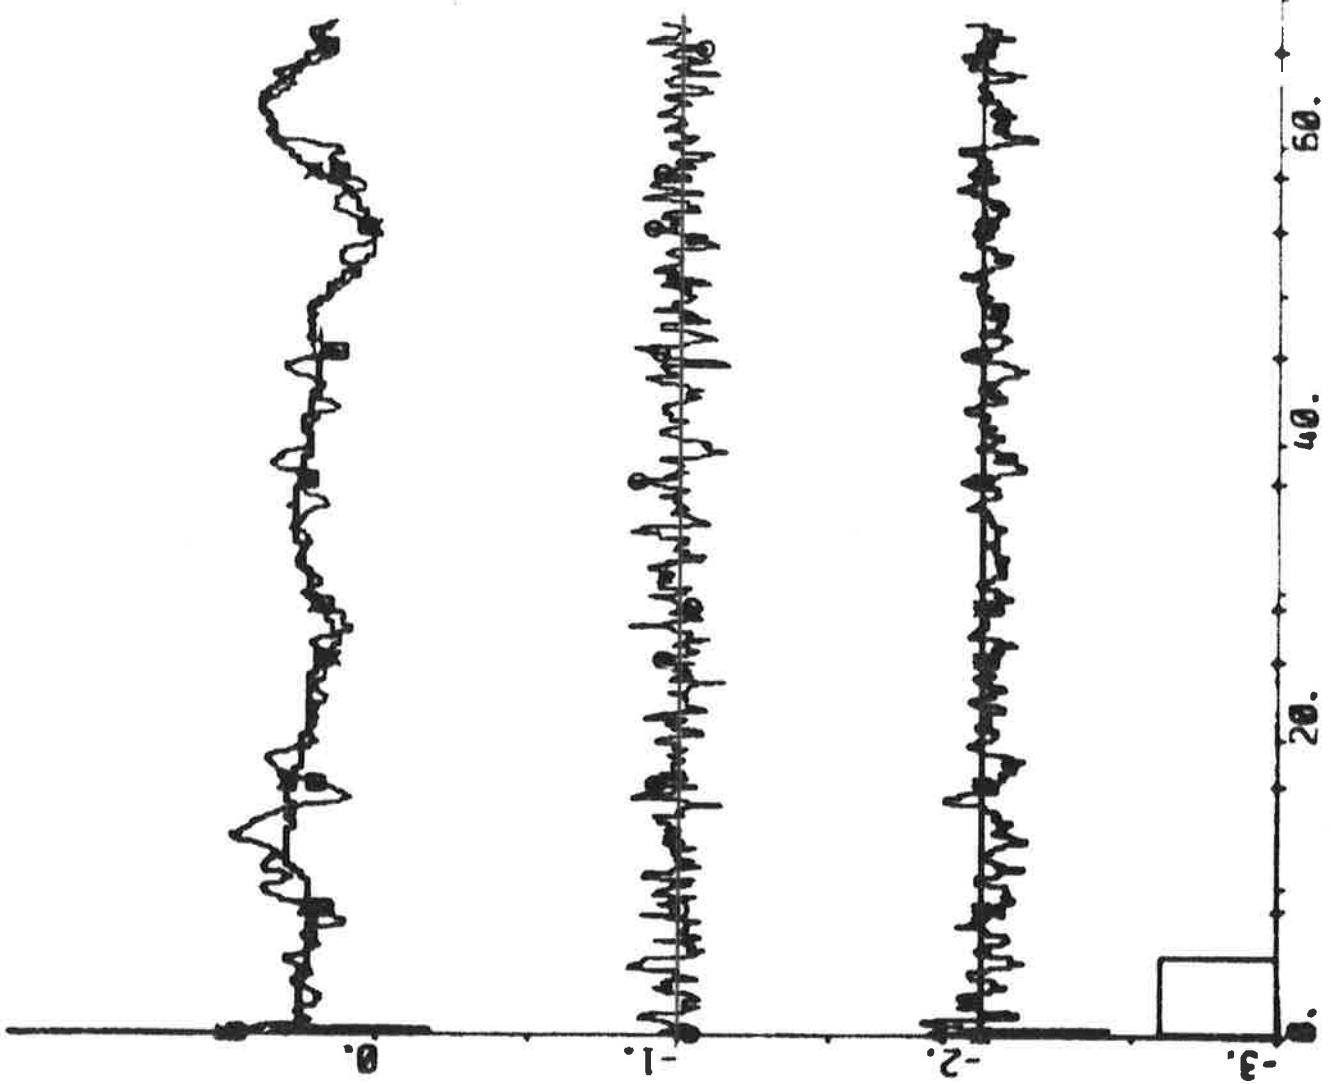

$$0.25 \times \left\{ \begin{array}{l} r_0 = 175 \\ r_{ref} = 175 \end{array} \right\} \log$$

$$2.5 \times \left\{ \begin{array}{l} r \\ r_0 \end{array} \right\} \log / 2$$

$$0.05 \times d_c$$

$$0.1 \times M_J$$

TIME (h)

100.


80.

60.

40.

-3.

1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030

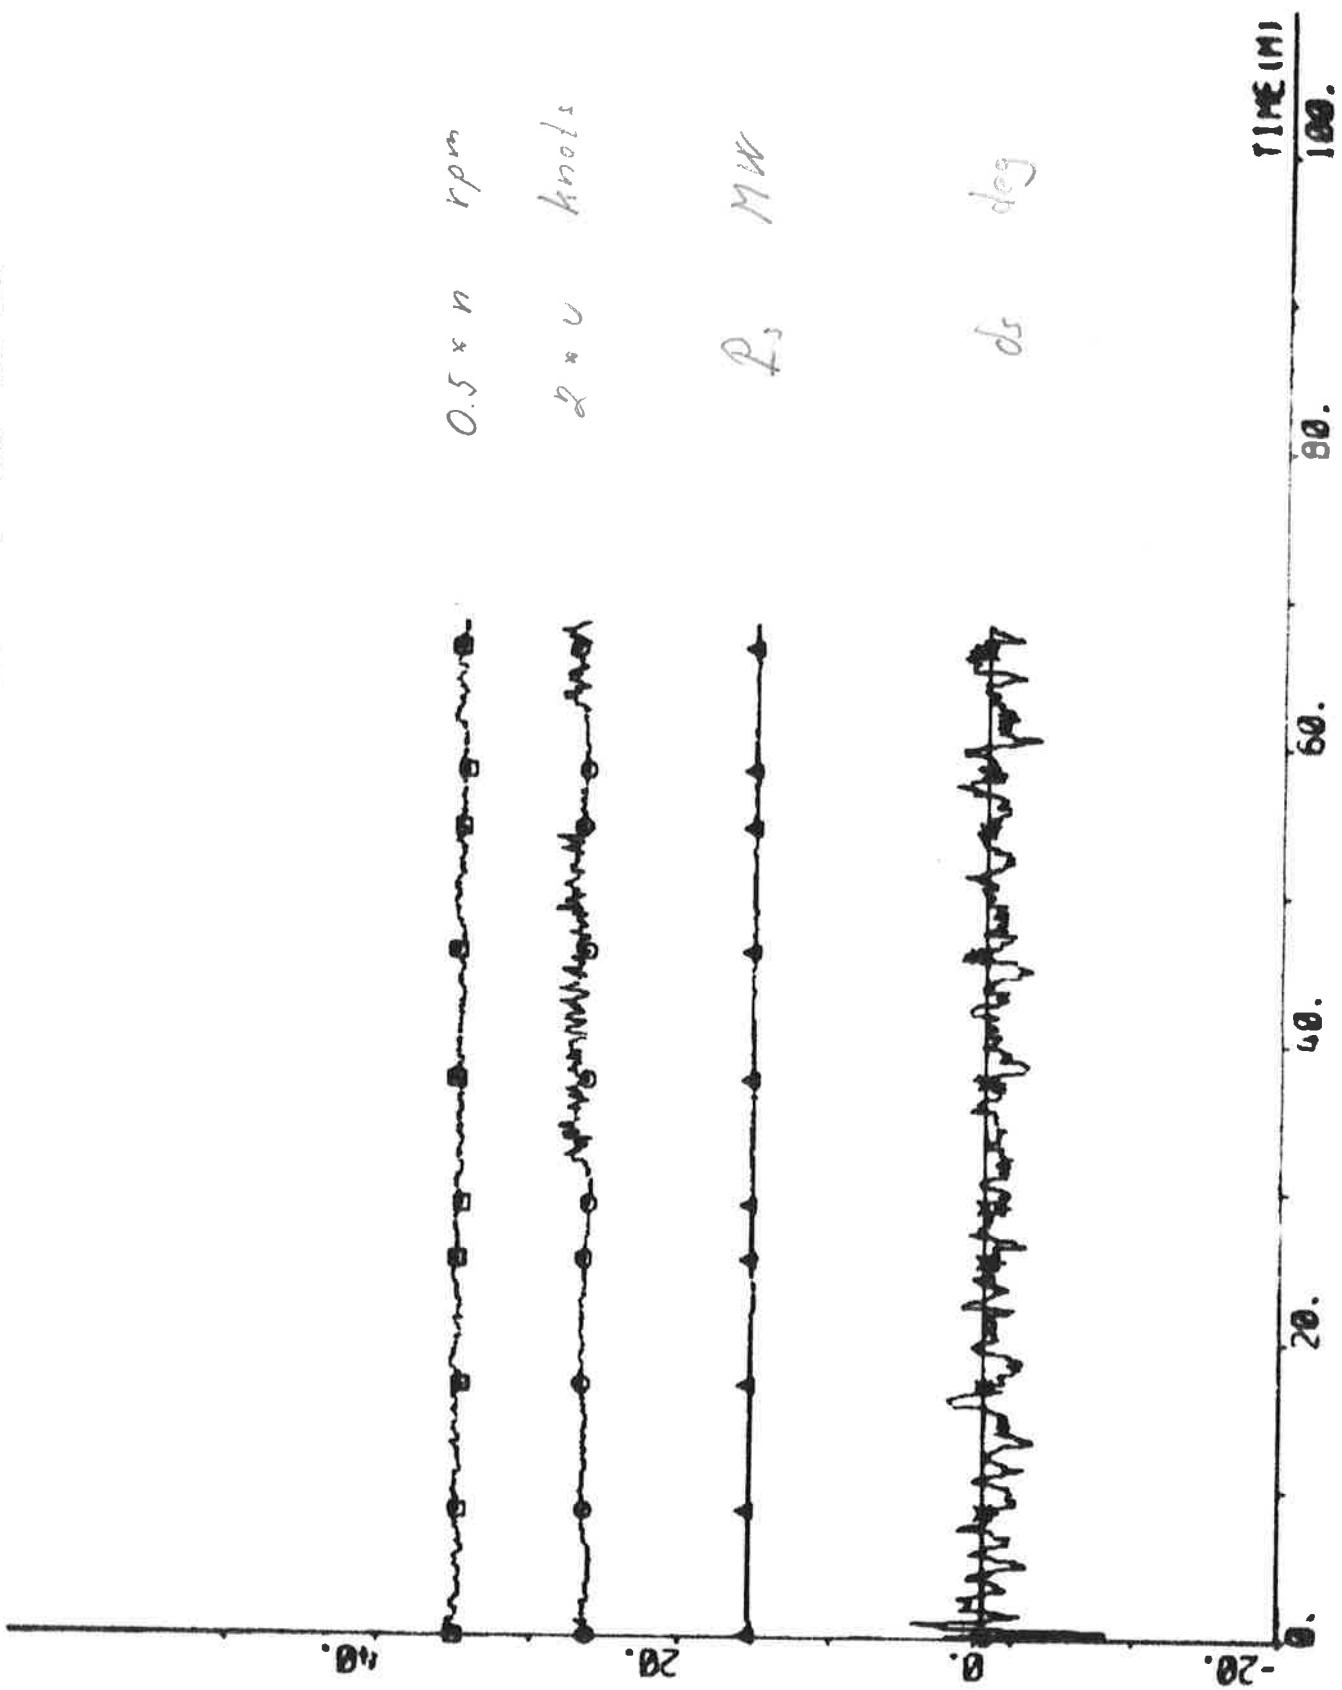

1146 (H)

60.


60.

40.

20.


0.

NOT Sept 11, 1962 (1) Dsp 2 (1) Ears 30 31 32 - 3.4 3.0 - Meters

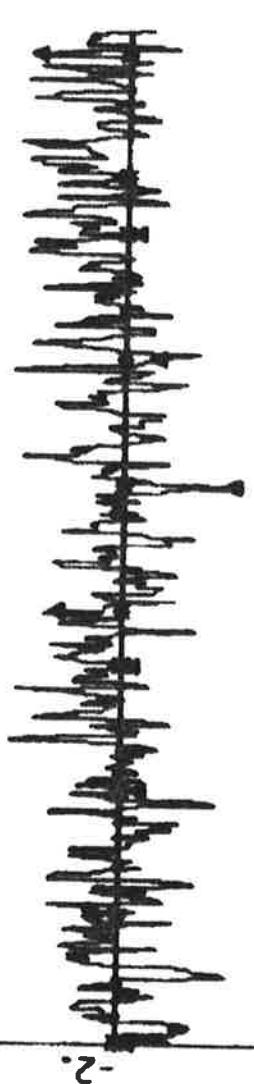



200. 180. 160. 140. 120. 100. 80. 60. 40. 20. 0.




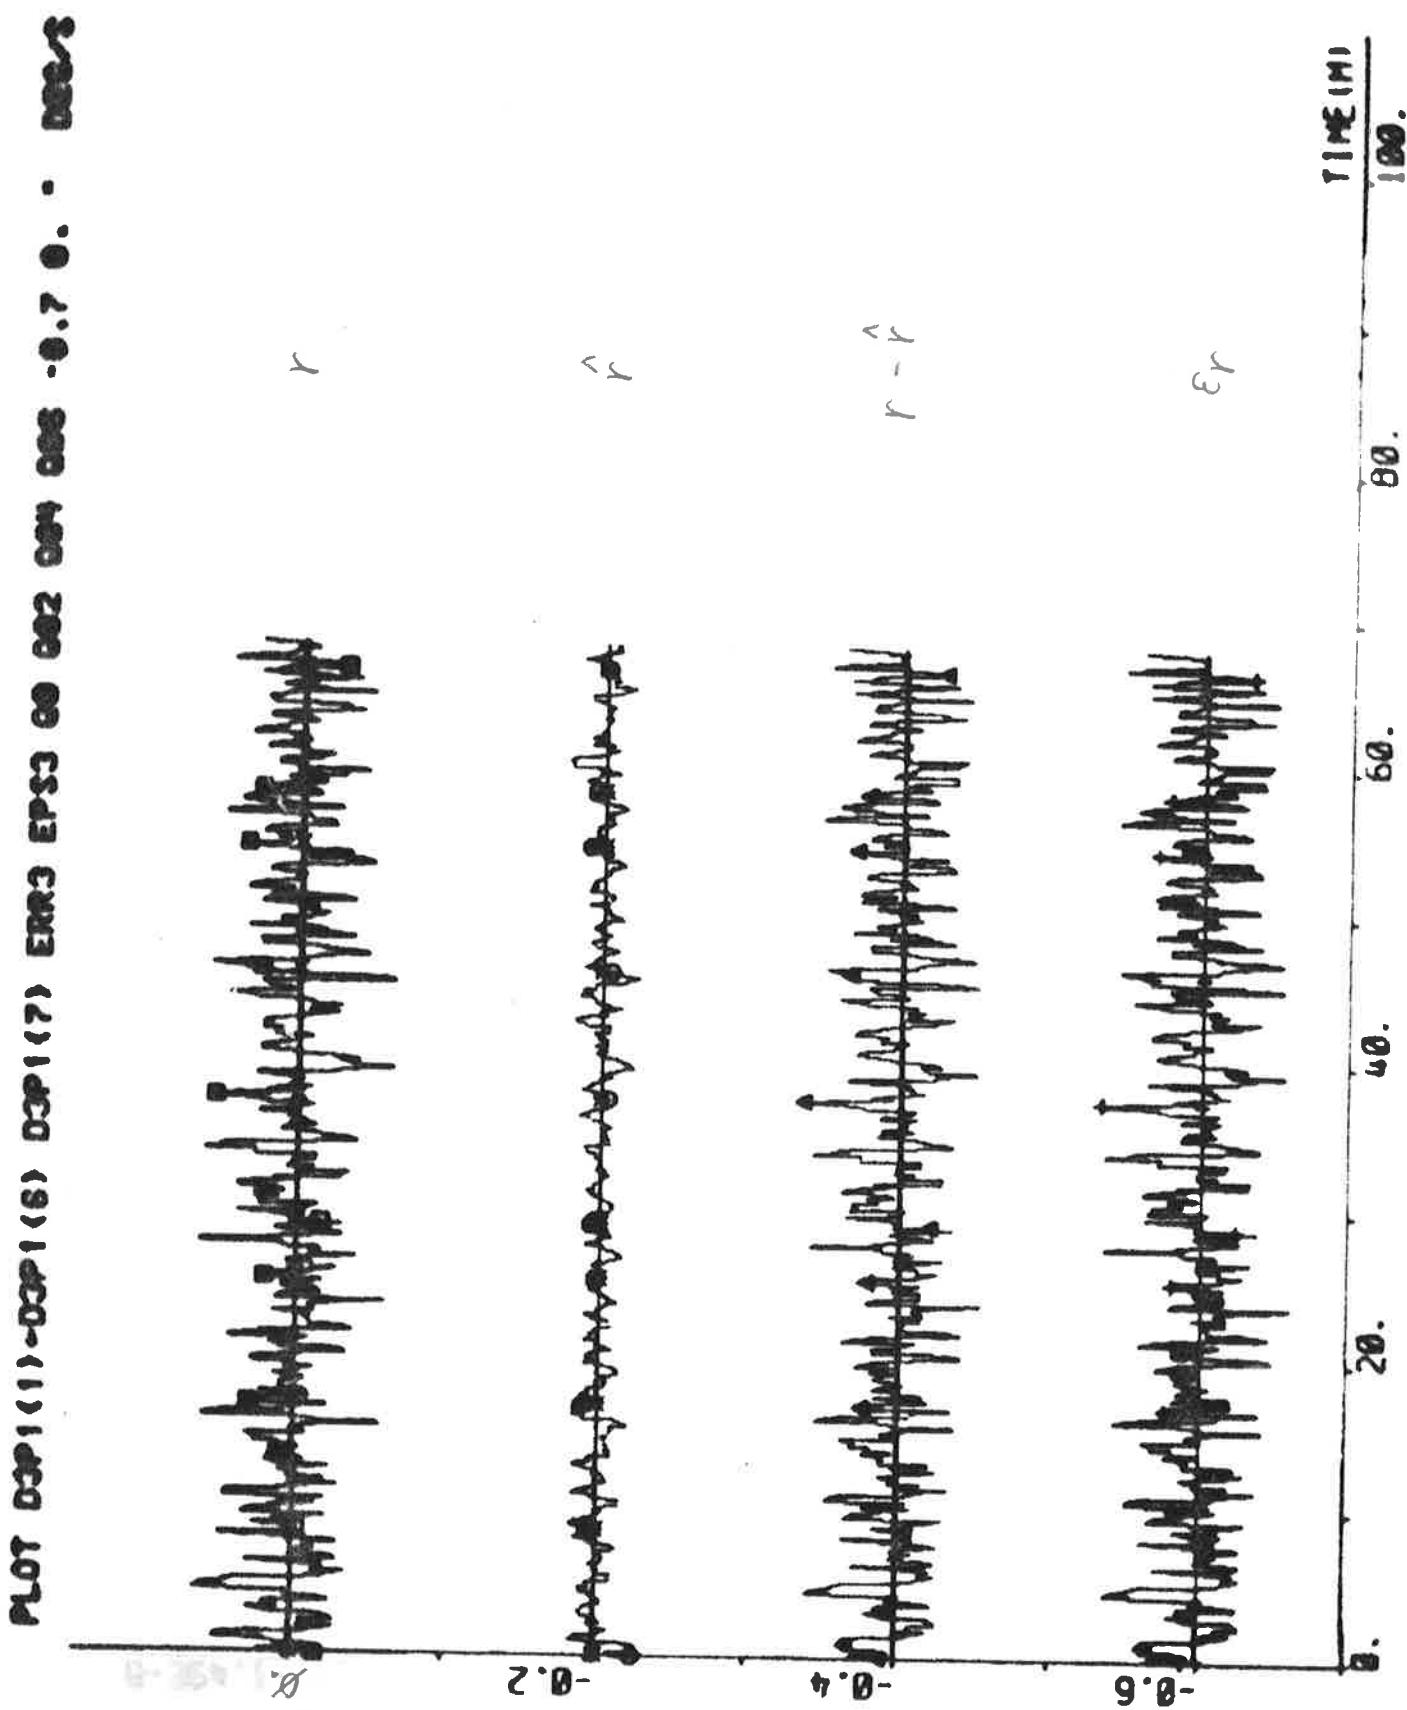


1001 0201(1) -0301(3) D3P1(3) ER4 E3P4 00 01 02 03 -3.4 0.0 - .00

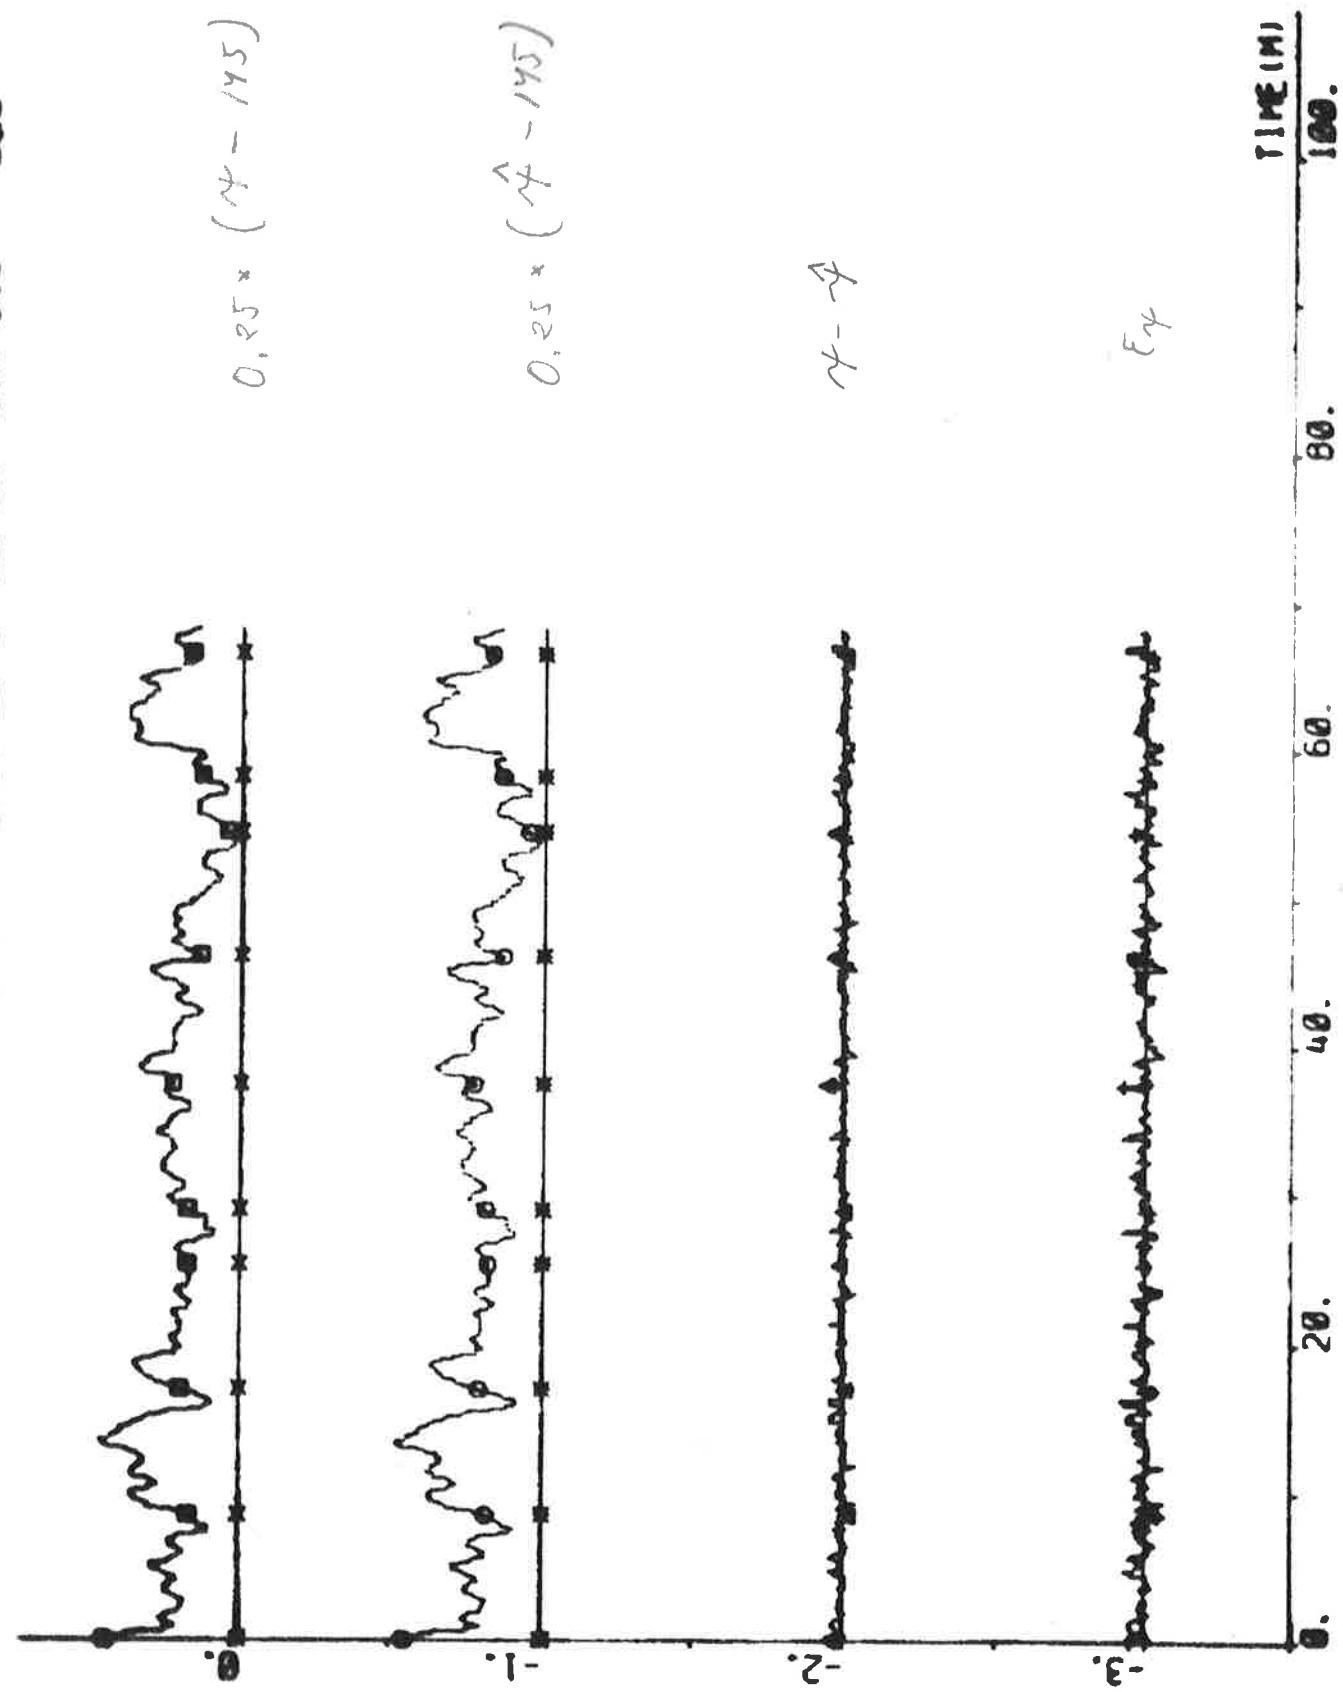

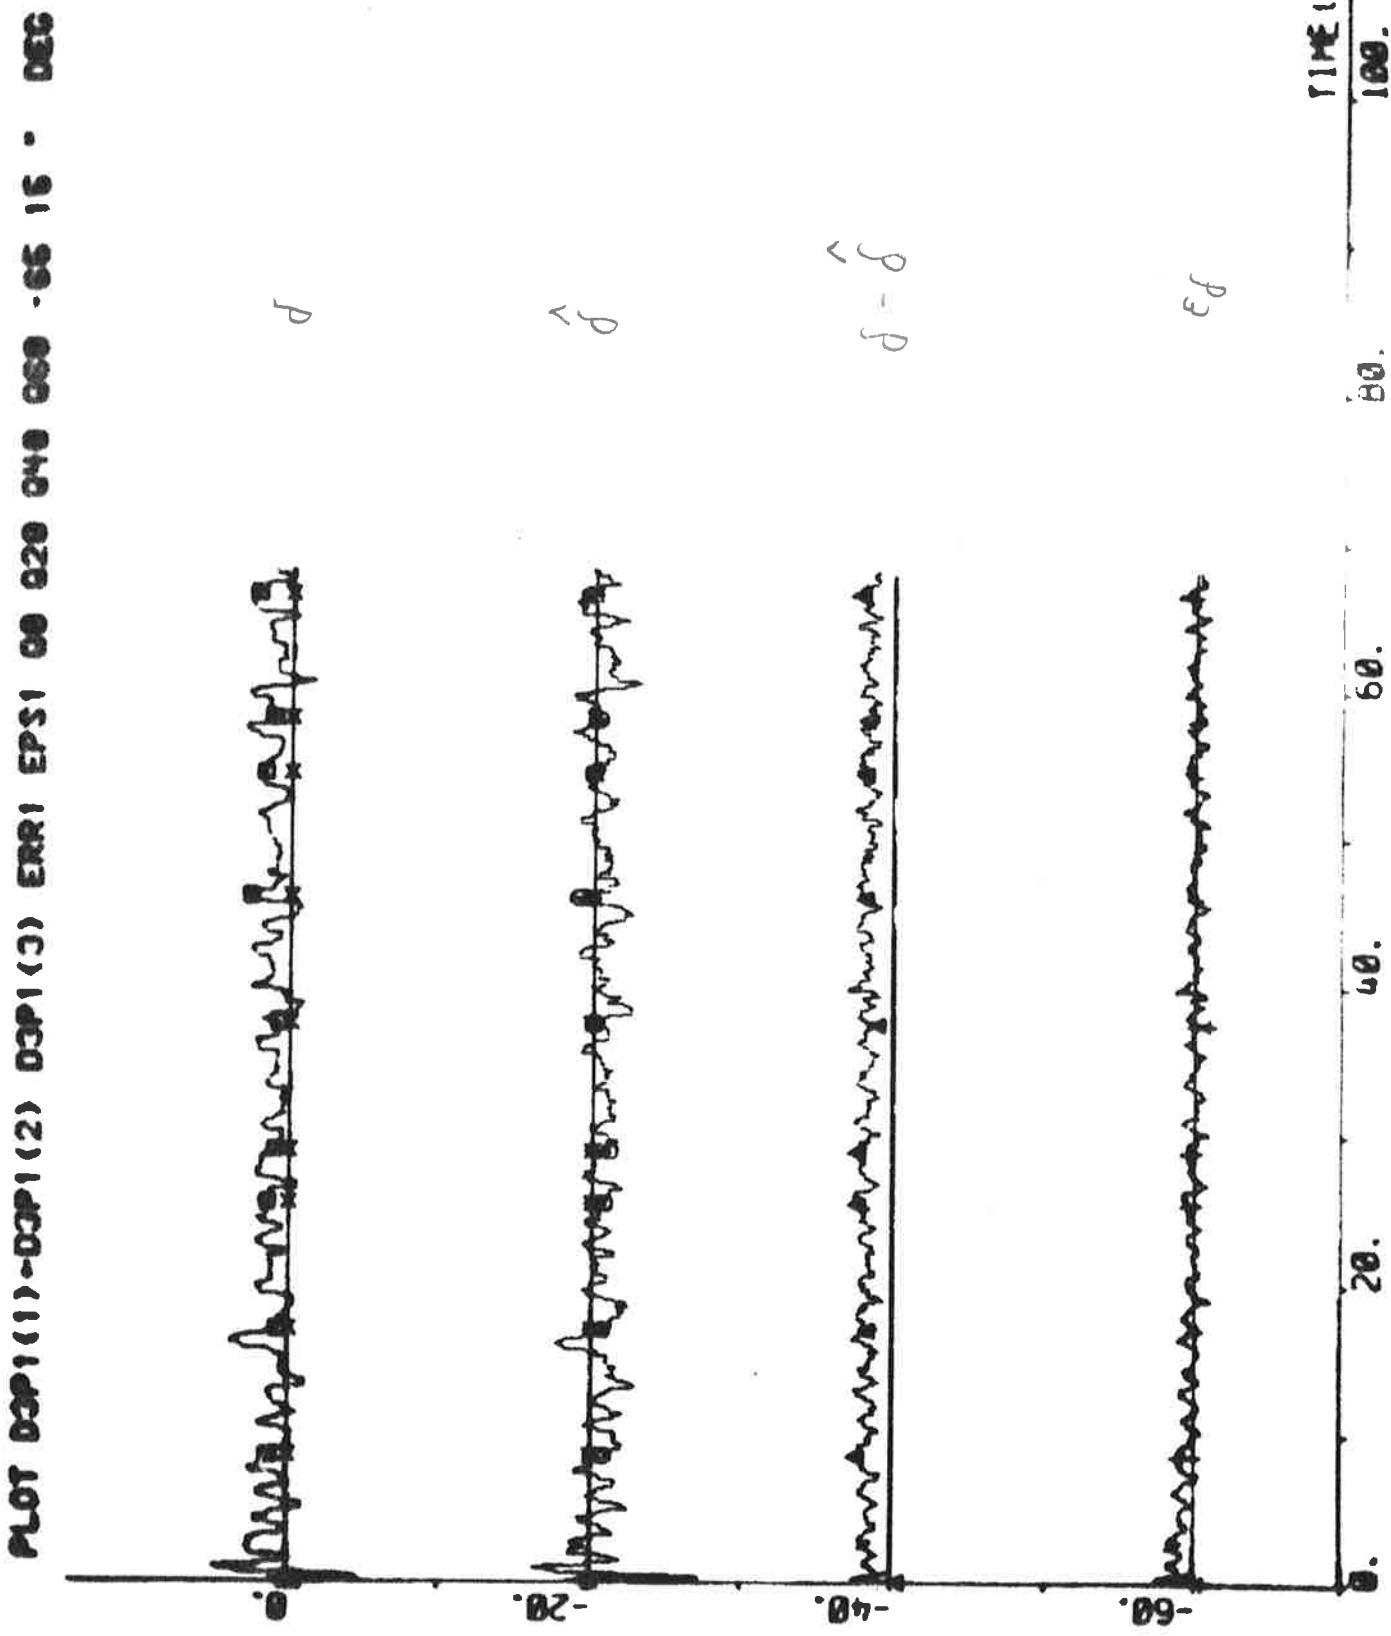

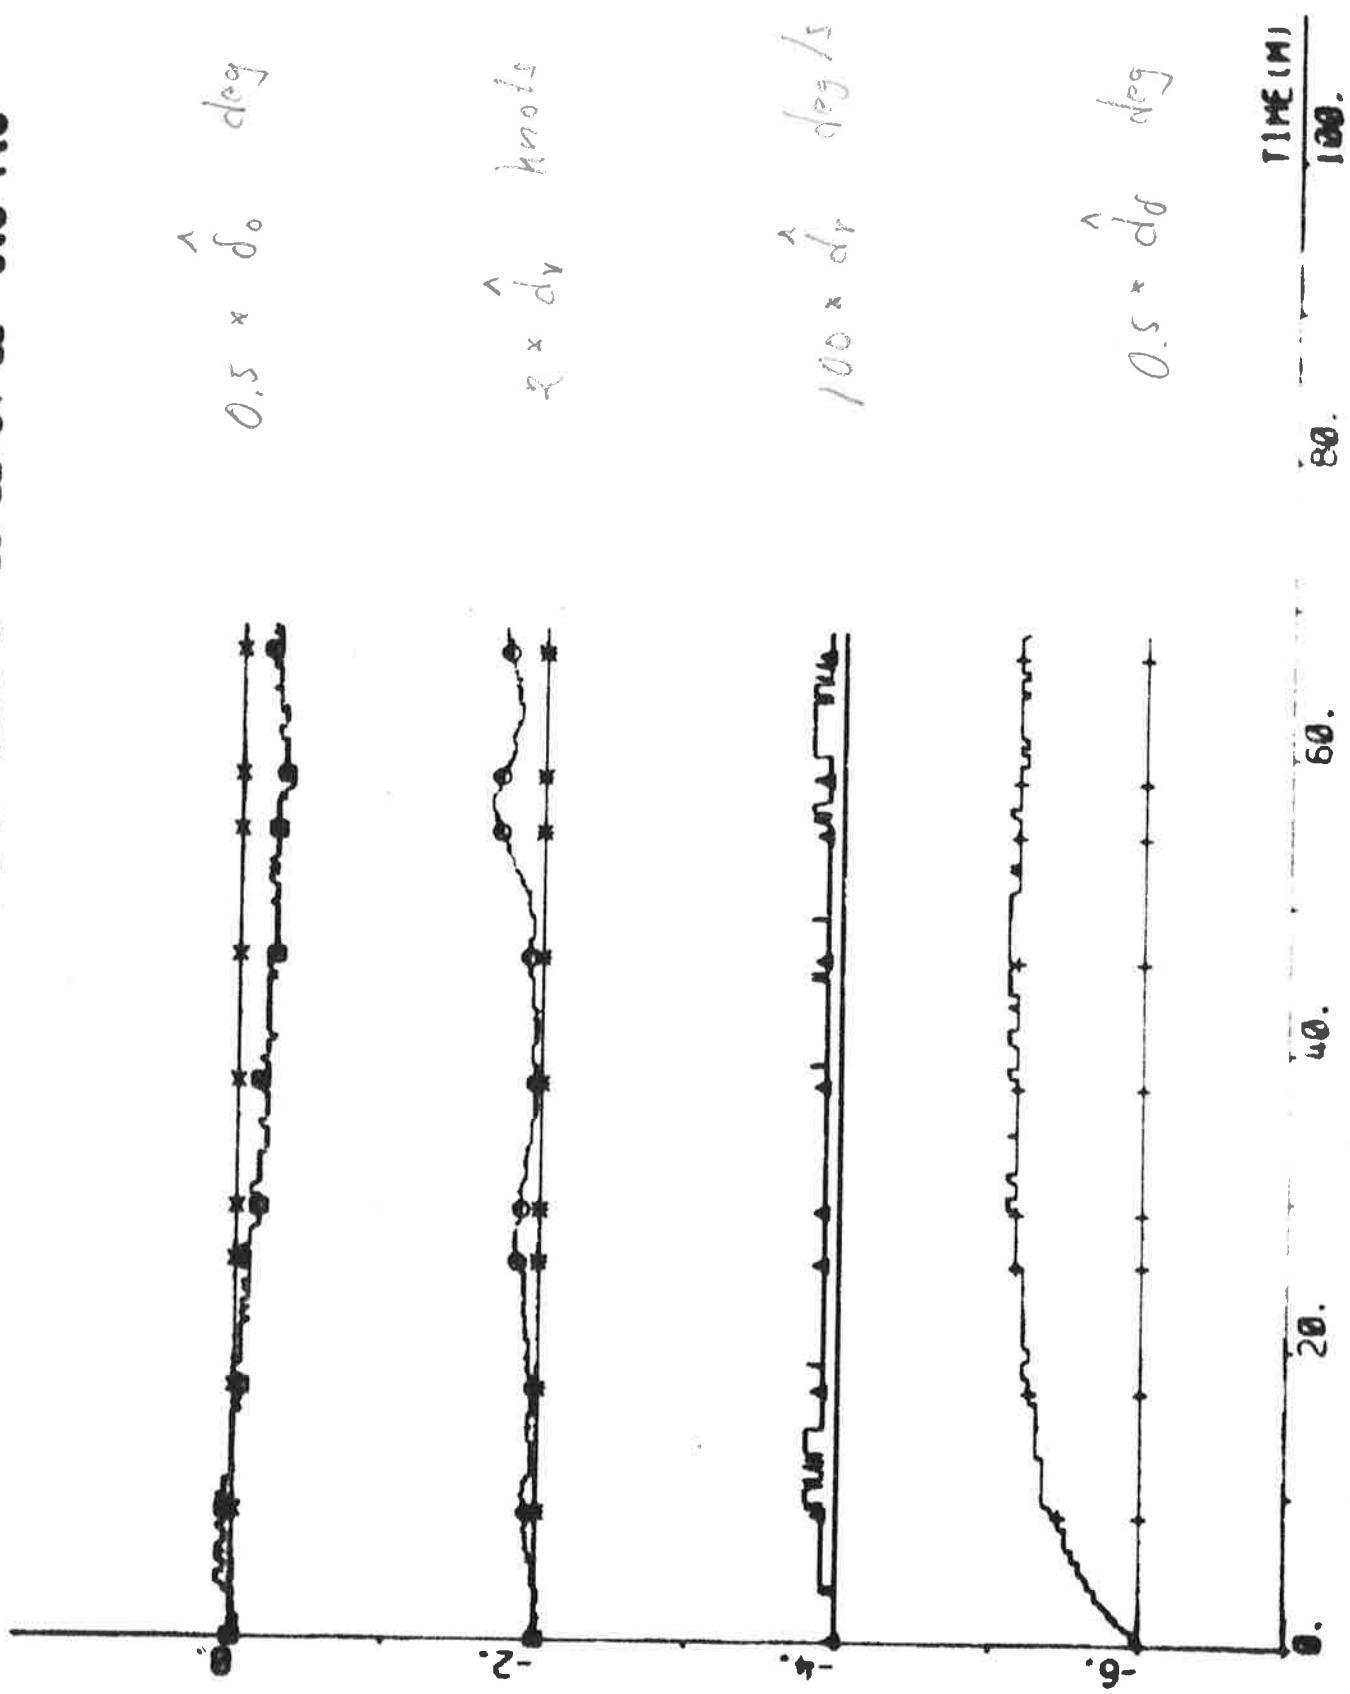

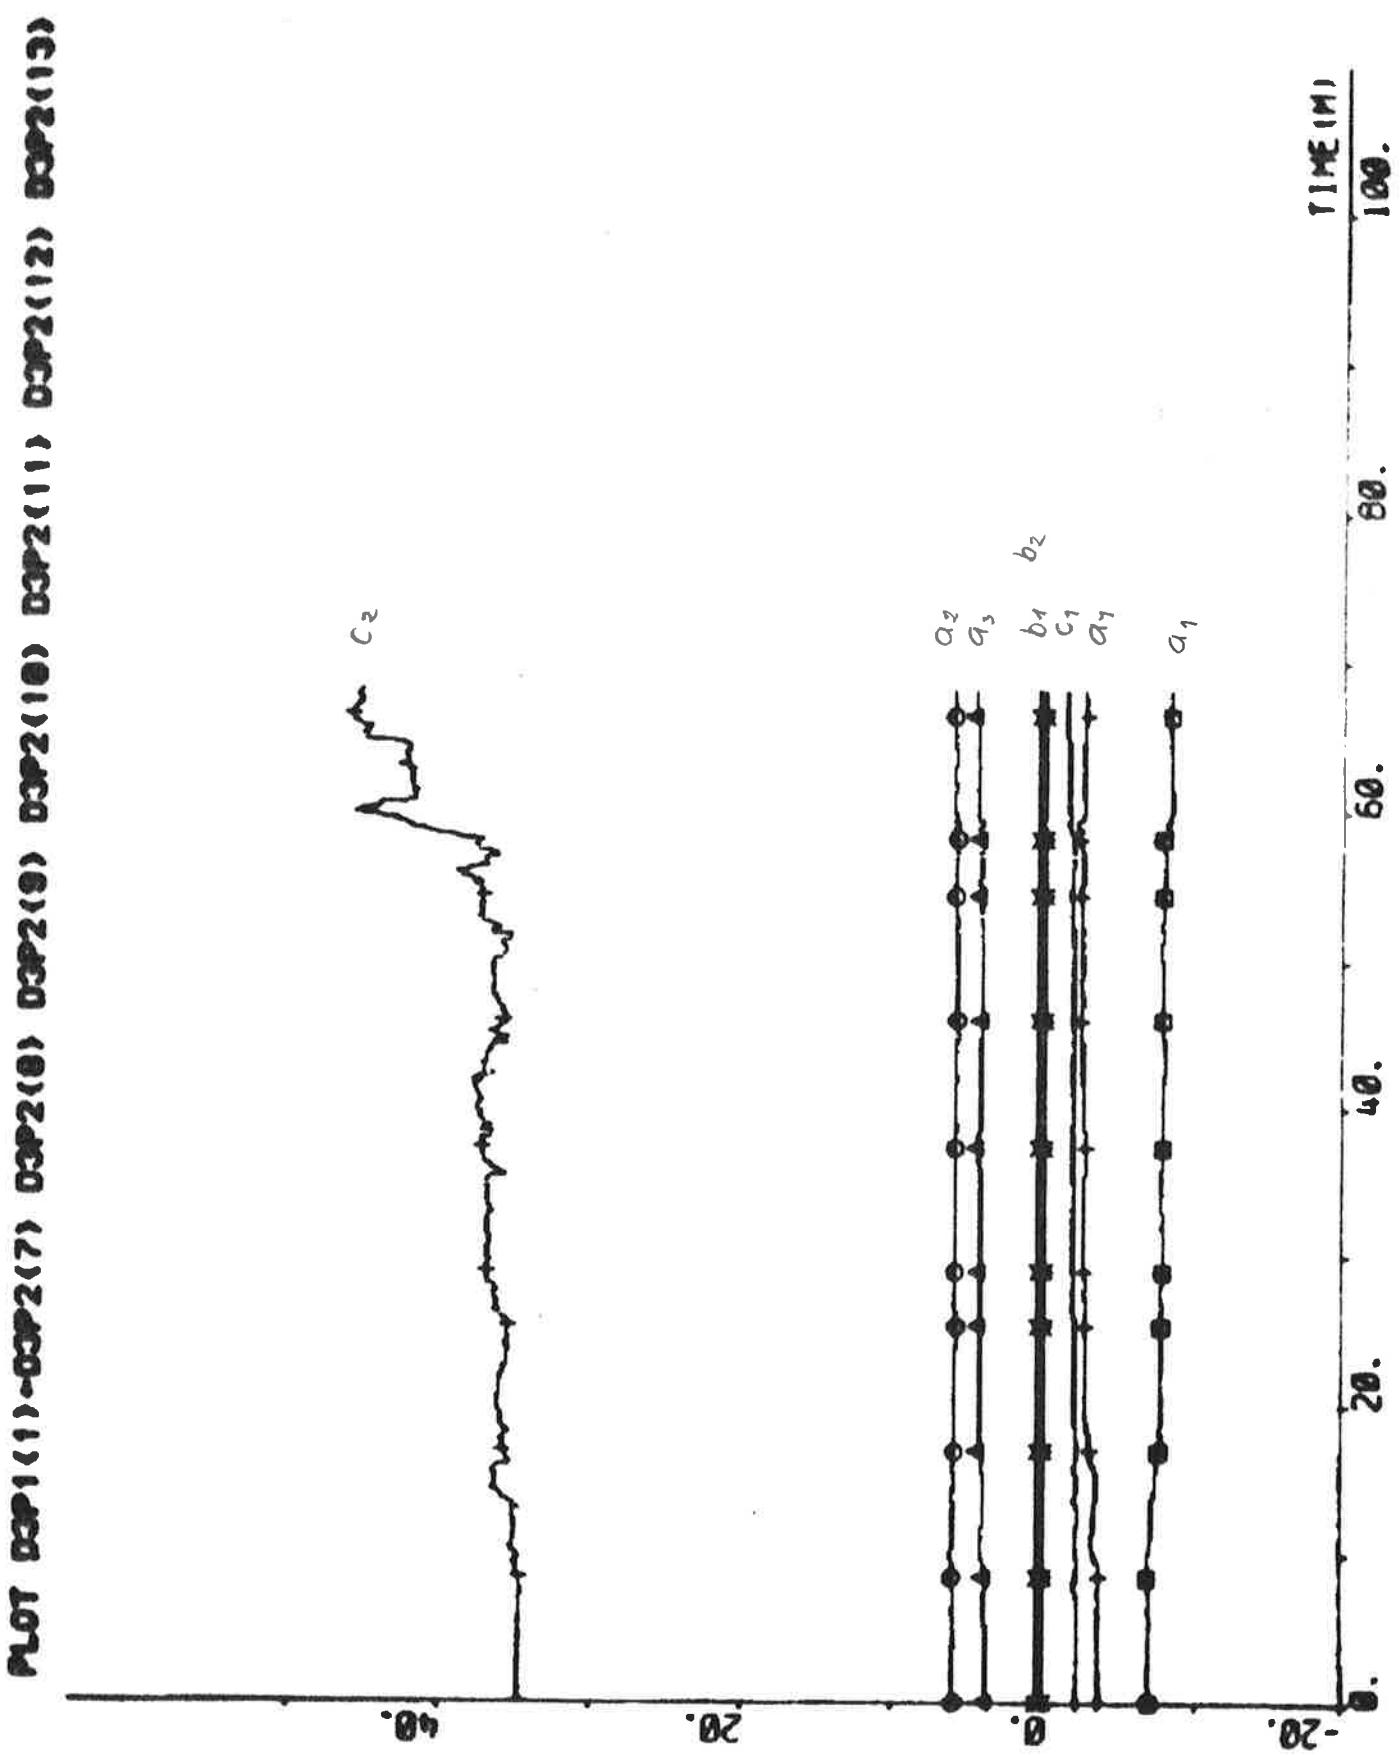

EXPERIMENT E1

| | | | |
|--------------|-------------------|-----------------|------------------------|
| Date | 1976-04-30 | Forward draught | 10.9 m |
| Time | 09.00 | Aft draught | 12.9 m |
| Duration | 89 min | Wind direction | SE (1; see App. A) |
| Position | S 21°35' E 07°34' | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 146 deg | Wave height | - |

Open loop experiment for identification

Tuning time for the Kalman filter before the experiment started: 0 min.

$$\begin{array}{ll} \delta_{amp} = 3, 5 \text{ deg} & k_{id} = 0 \\ T_s = 10 \text{ s} & IVVC = 1 \end{array}$$


Final values:

$$\hat{\delta}_0 = -0.3 \text{ deg} \quad \hat{d}_v = 0.07 \text{ knots} \quad \hat{d}_r = 0.005 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics


| | | Mean value | Stand. dev. | | | Mean value | Stand. dev. |
|-------------------|-------|------------|-------------|-------------------------------|-------|------------|-------------|
| δ_c | deg | -0.28 | 3.77 | r | deg/s | 0.003 | 0.047 |
| δ_s | deg | -0.30 | 3.80 | \dot{r} | deg/s | 0.000 | 0.037 |
| n | rpm | 69.65 | 0.55 | $r-\dot{r}$ | deg/s | 0.003 | 0.023 |
| u | knots | 12.54 | 0.10 | ϵ_r | deg/s | 0.001 | 0.027 |
| P_s | MW | 15.42 | 0.08 | $\psi-\psi_{ref}$ | deg | 1.369 | 3.432 |
| v | knots | -0.026 | 0.253 | $\dot{\psi}-\dot{\psi}_{ref}$ | deg | 1.370 | 3.432 |
| \hat{v} | knots | 0.001 | 0.211 | $\psi-\dot{\psi}$ | deg | 0.000 | 0.027 |
| $\hat{v}-\hat{v}$ | knots | -0.026 | 0.148 | ϵ_ψ | deg | 0.000 | 0.043 |
| v_1 | knots | -0.007 | 0.096 | δ | deg | 1.12 | 3.52 |
| \hat{v}_1 | knots | 0.001 | 0.088 | $\dot{\delta}$ | deg | -0.27 | 3.54 |
| $v_1-\hat{v}_1$ | knots | -0.009 | 0.042 | $\delta-\dot{\delta}$ | deg | 1.38 | 0.64 |
| ϵ_v | knots | 0.001 | 0.029 | ϵ_δ | deg | 0.11 | 0.68 |

PLOT E1P1(1)-E1P1(8) HP E1P1(10) 00 02 -3 1 - DEC

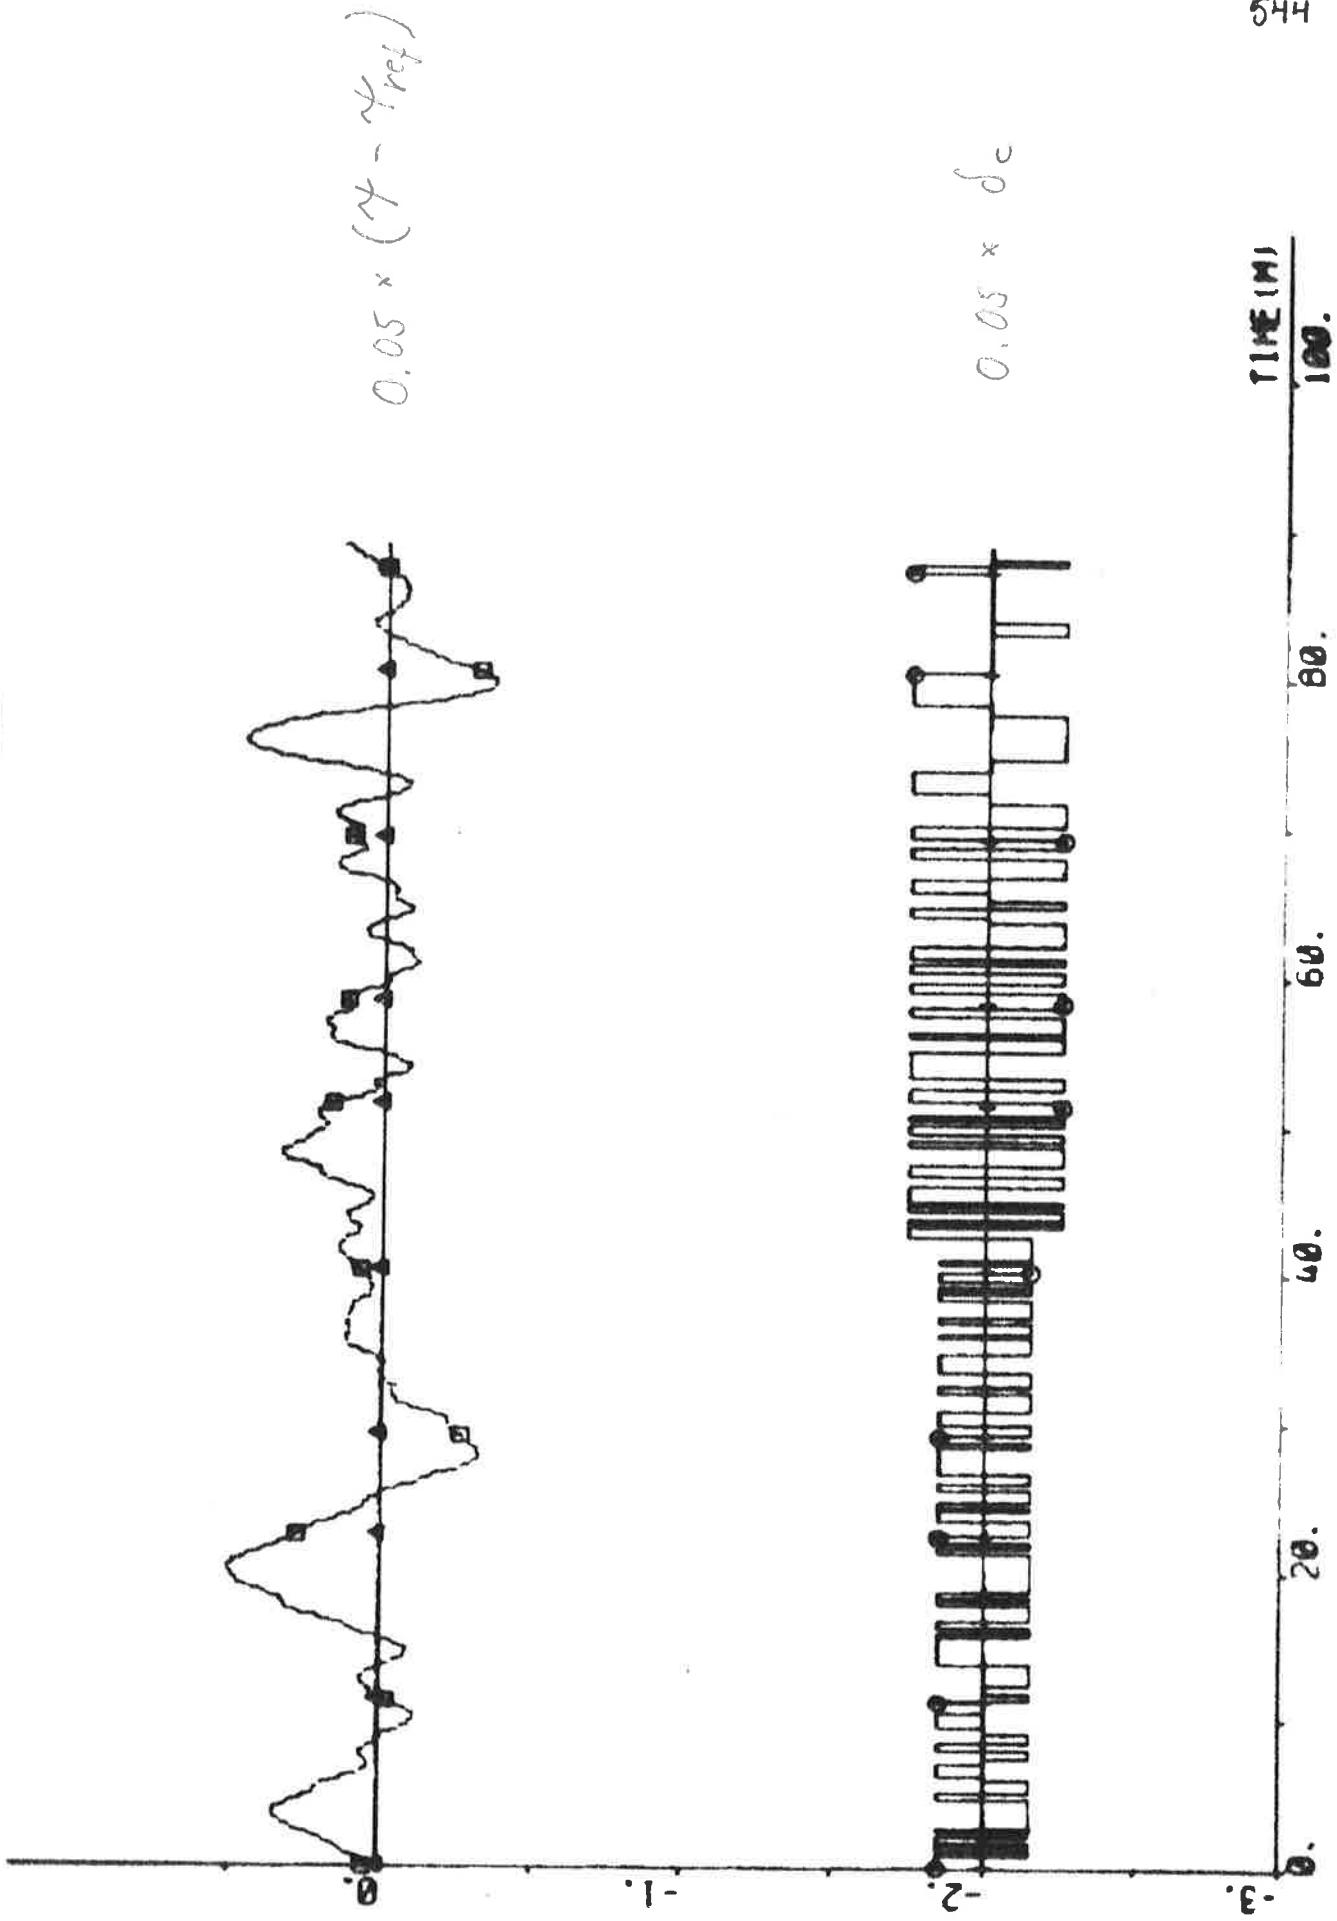


544


PLOT EIP1(1)-EIP1(13) EIP1(12) EIP1(14) EIP1(11) 00 -20 00

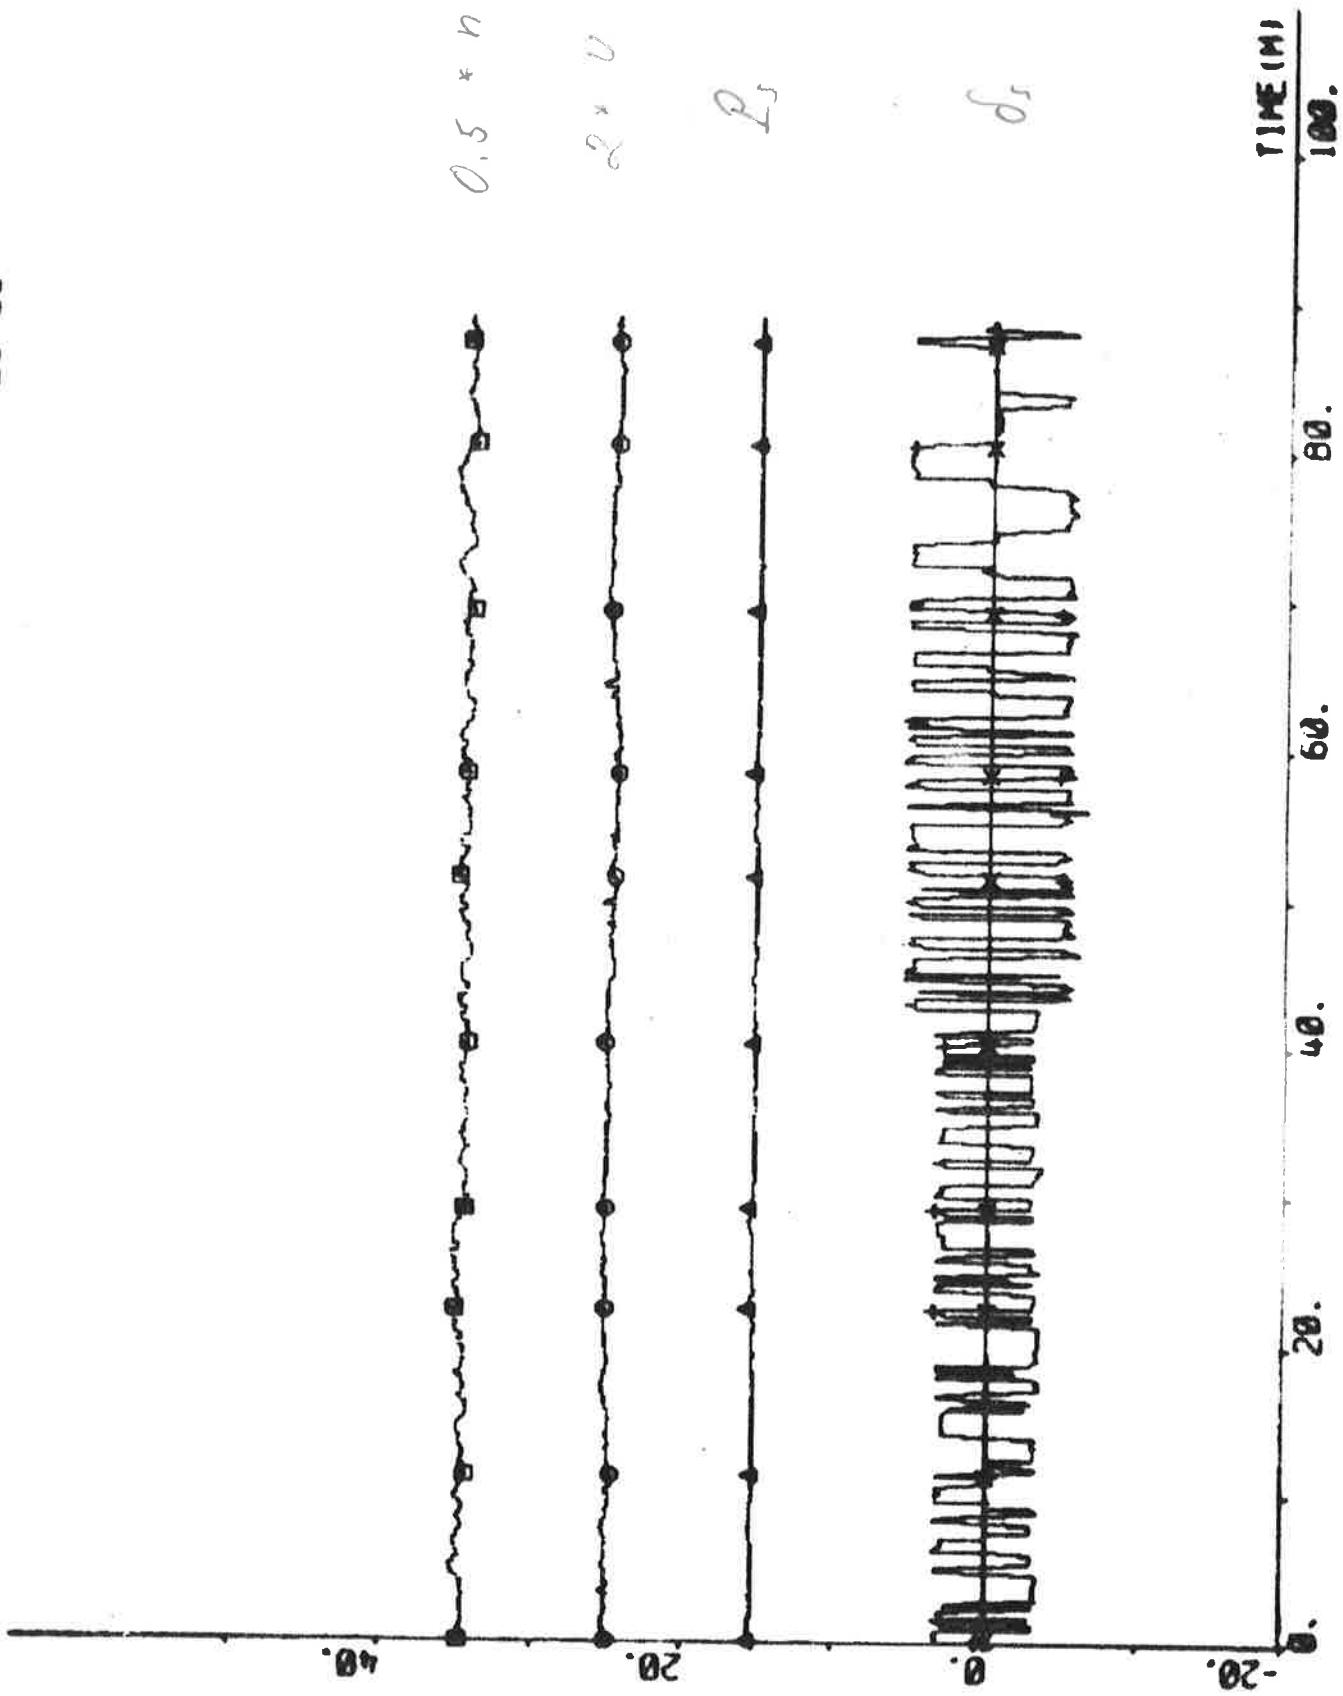


PLOT E1P1(1), E1P2(1), E1P2(2) ERRE 88 81 82 -3.4 0.0 -

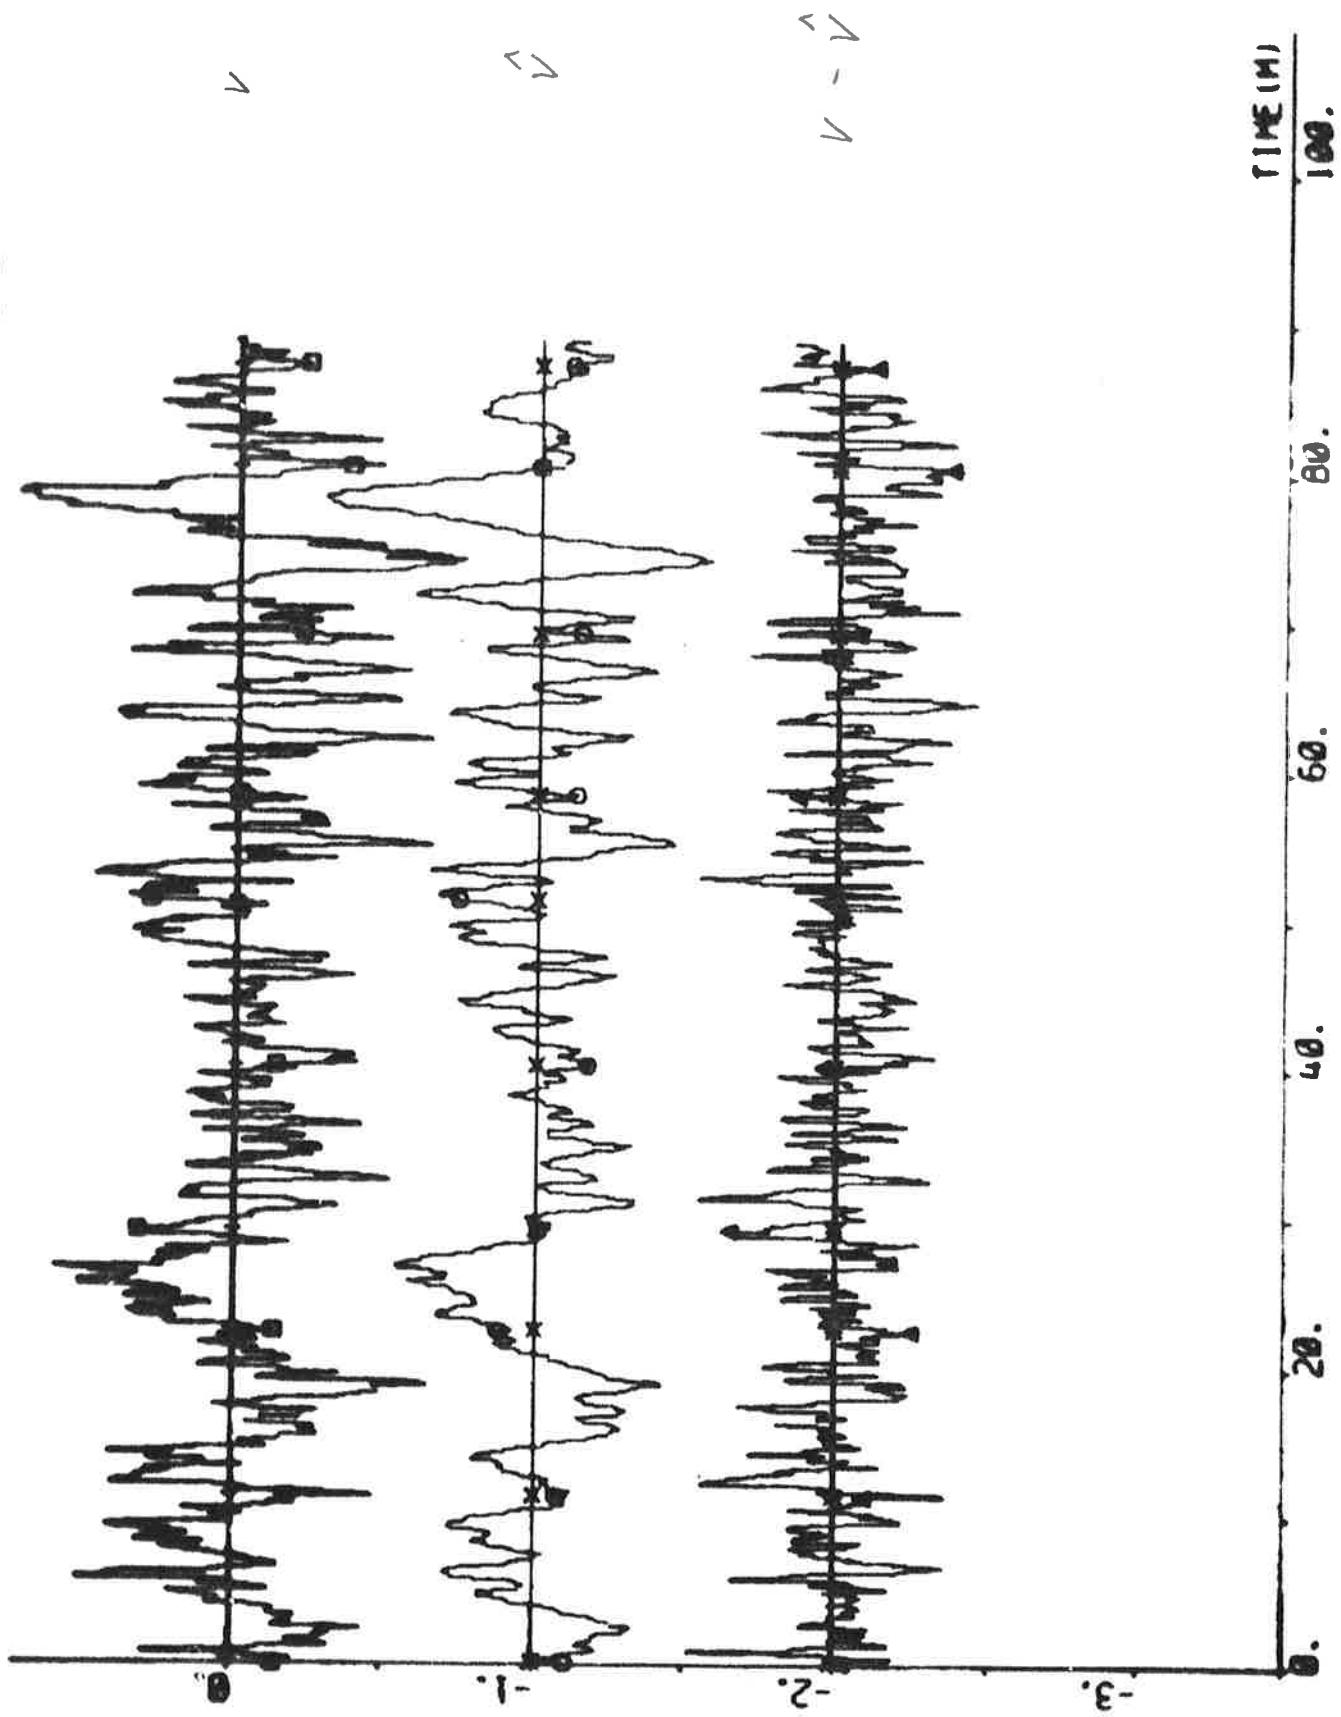

MOT E1P1(11)-E1P1(4) E1P2 E1S2 00 01 02 03 -3.4 0.0 • MOTS

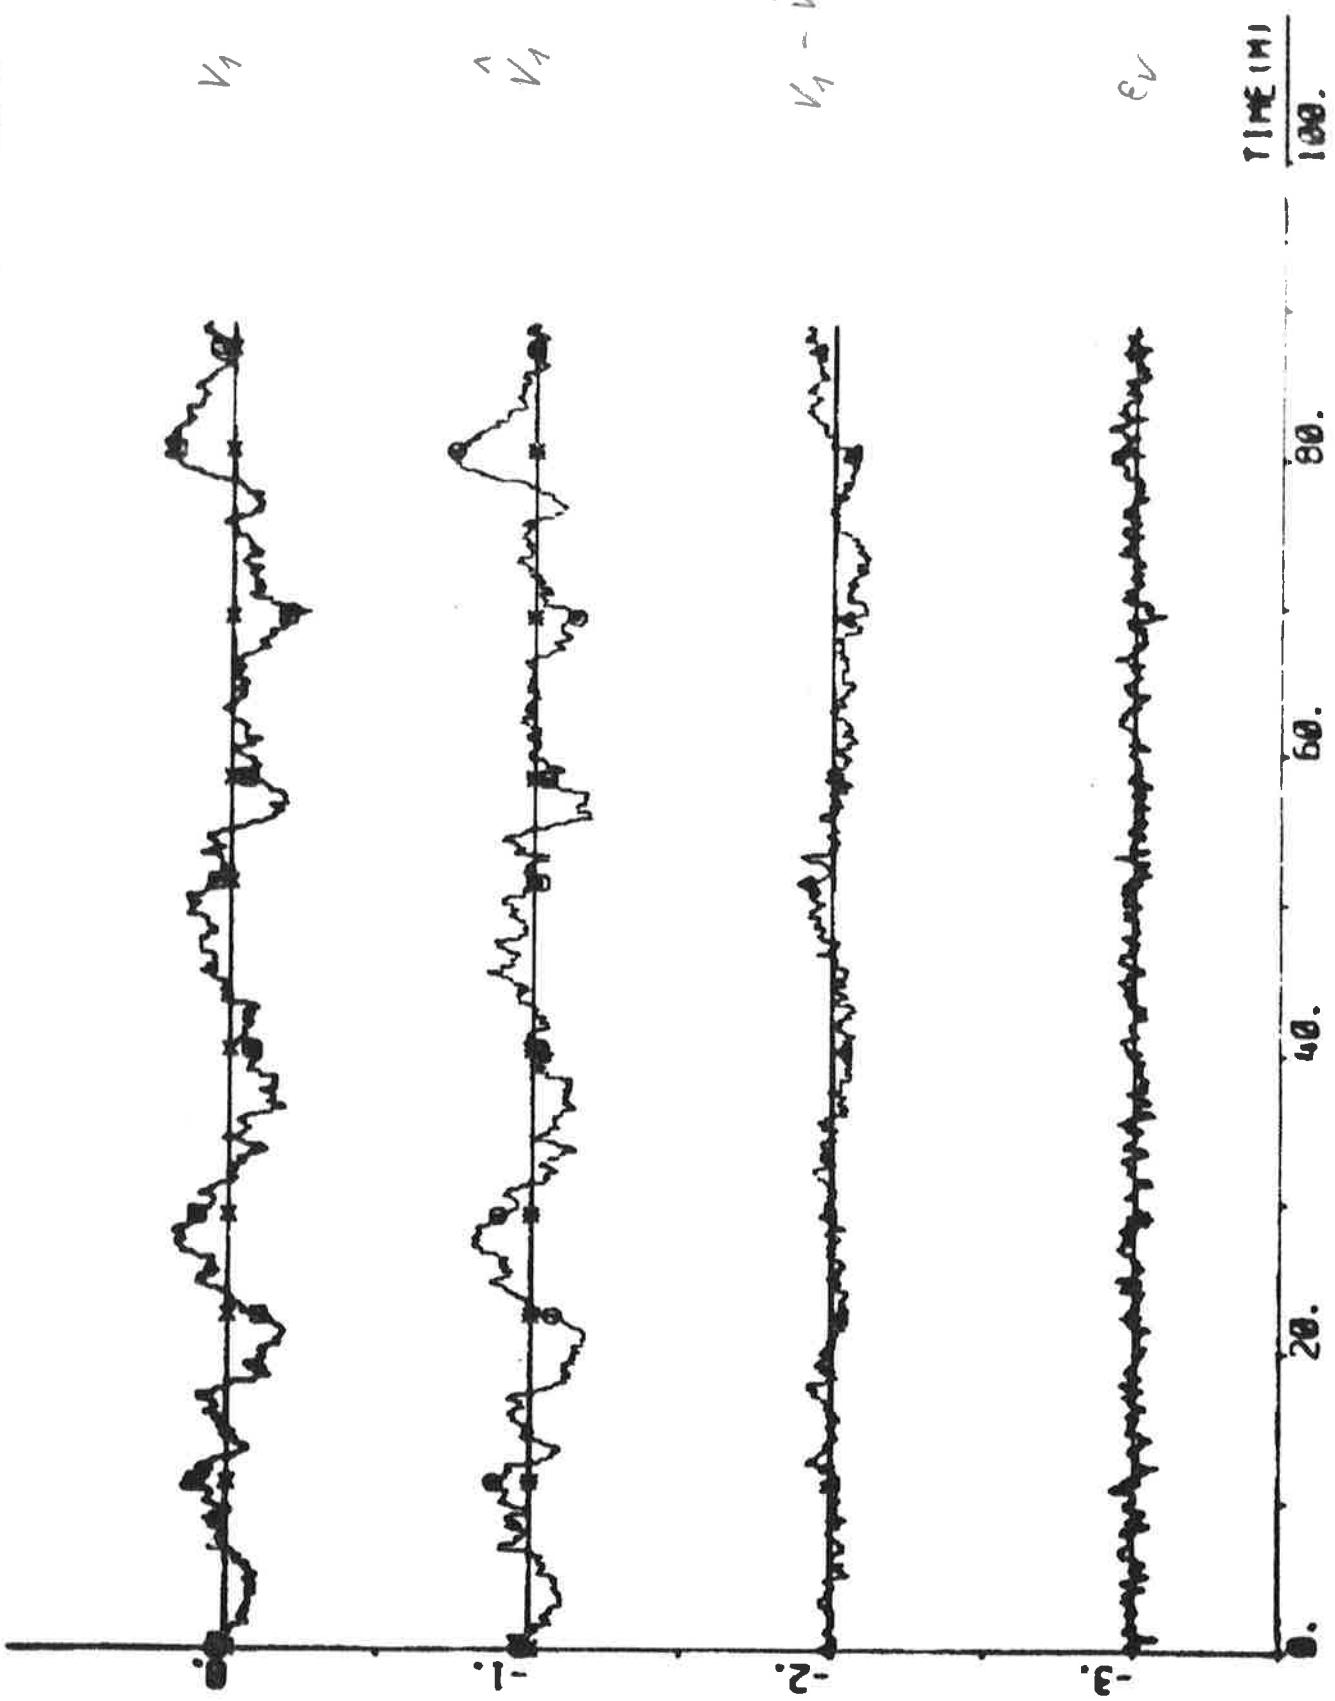


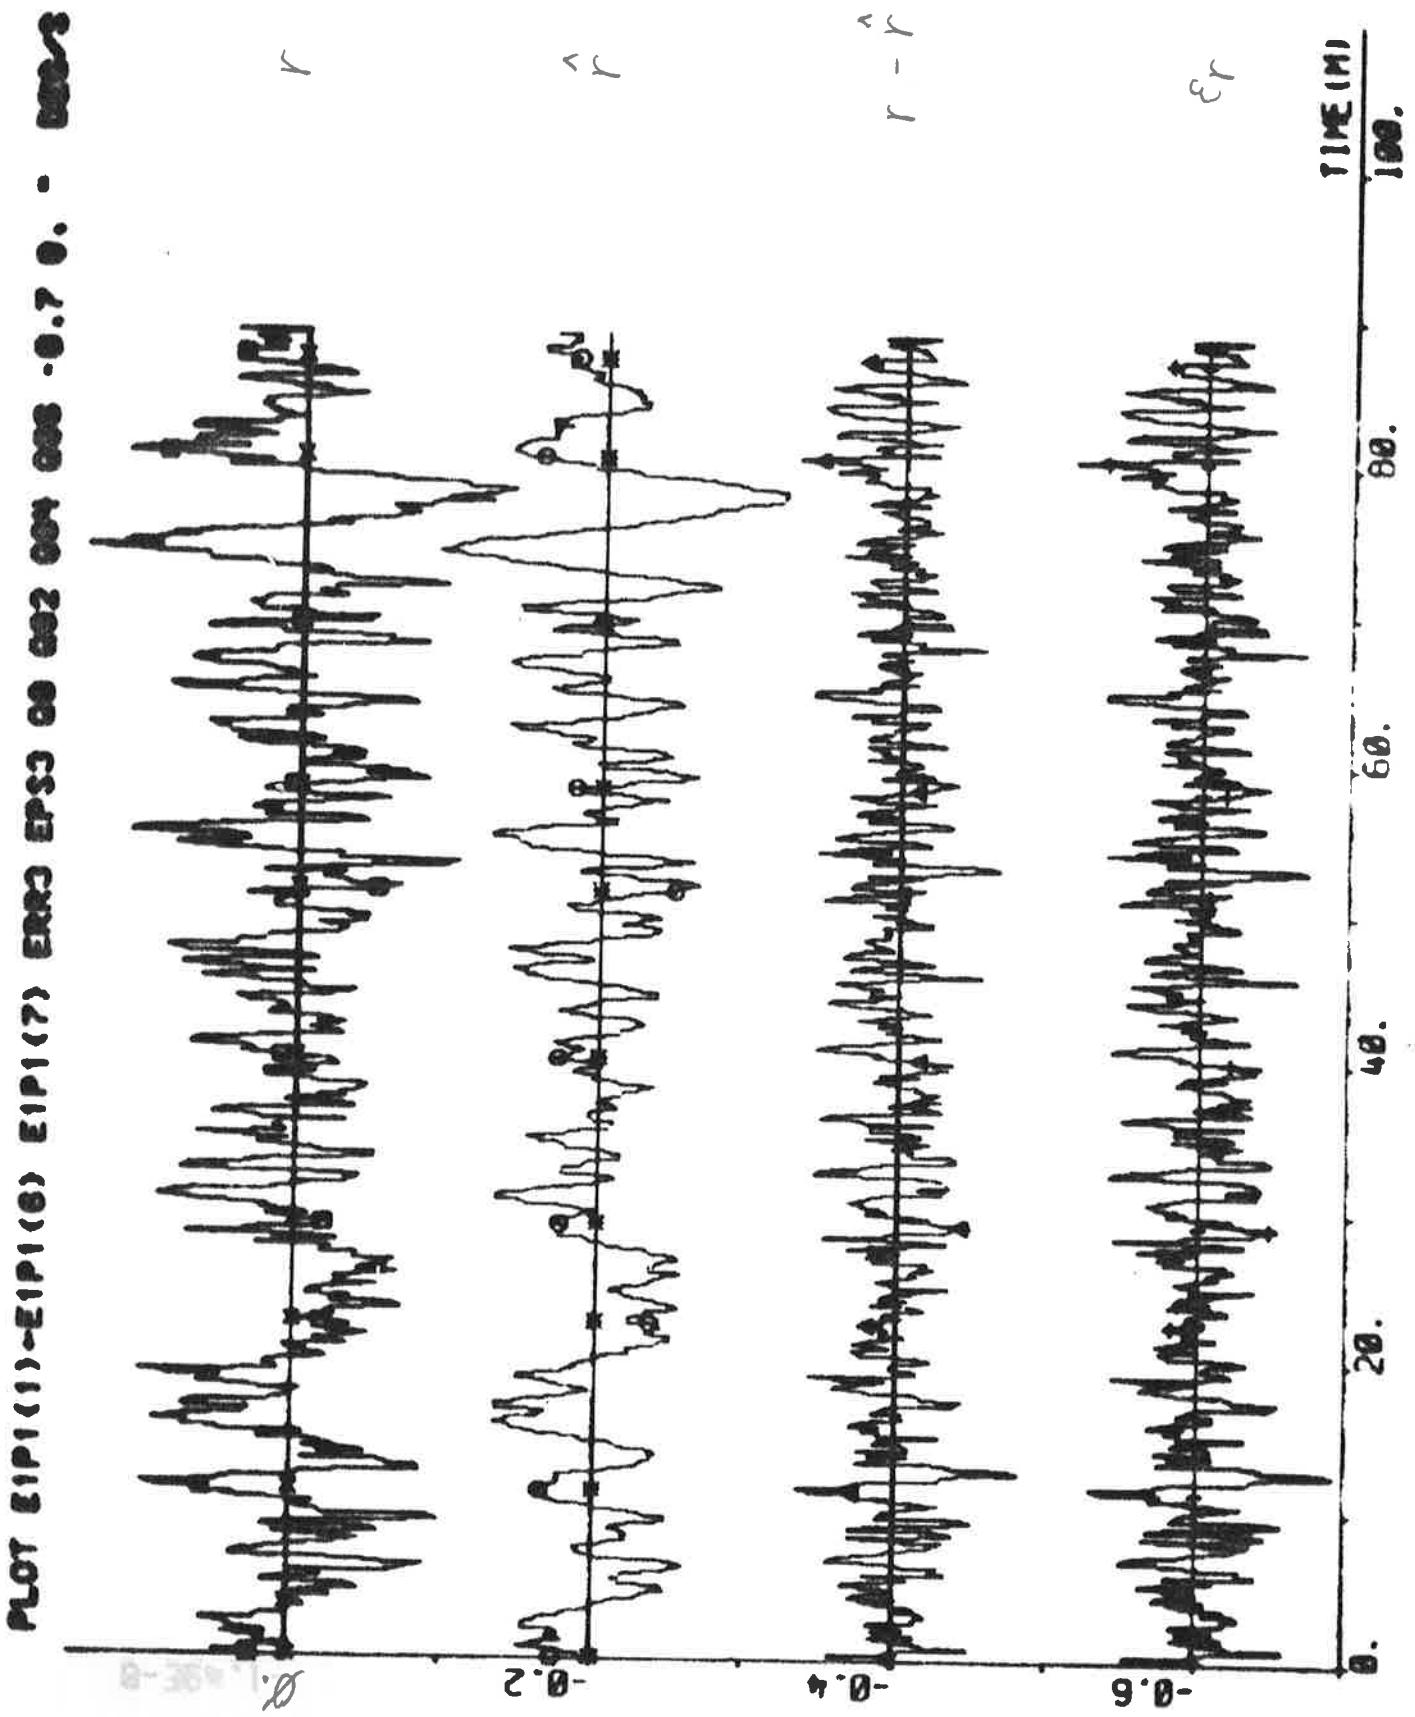




Plot E1P1(1)-E1P1(8) E1P1(9) E1P1(10) E1P1(11)-E1P1(18)

PLOT E1P1(1)-E1P1(2) E1P1(3) ERR1 E1P1 08 020 010 000 - 00 15 - 000

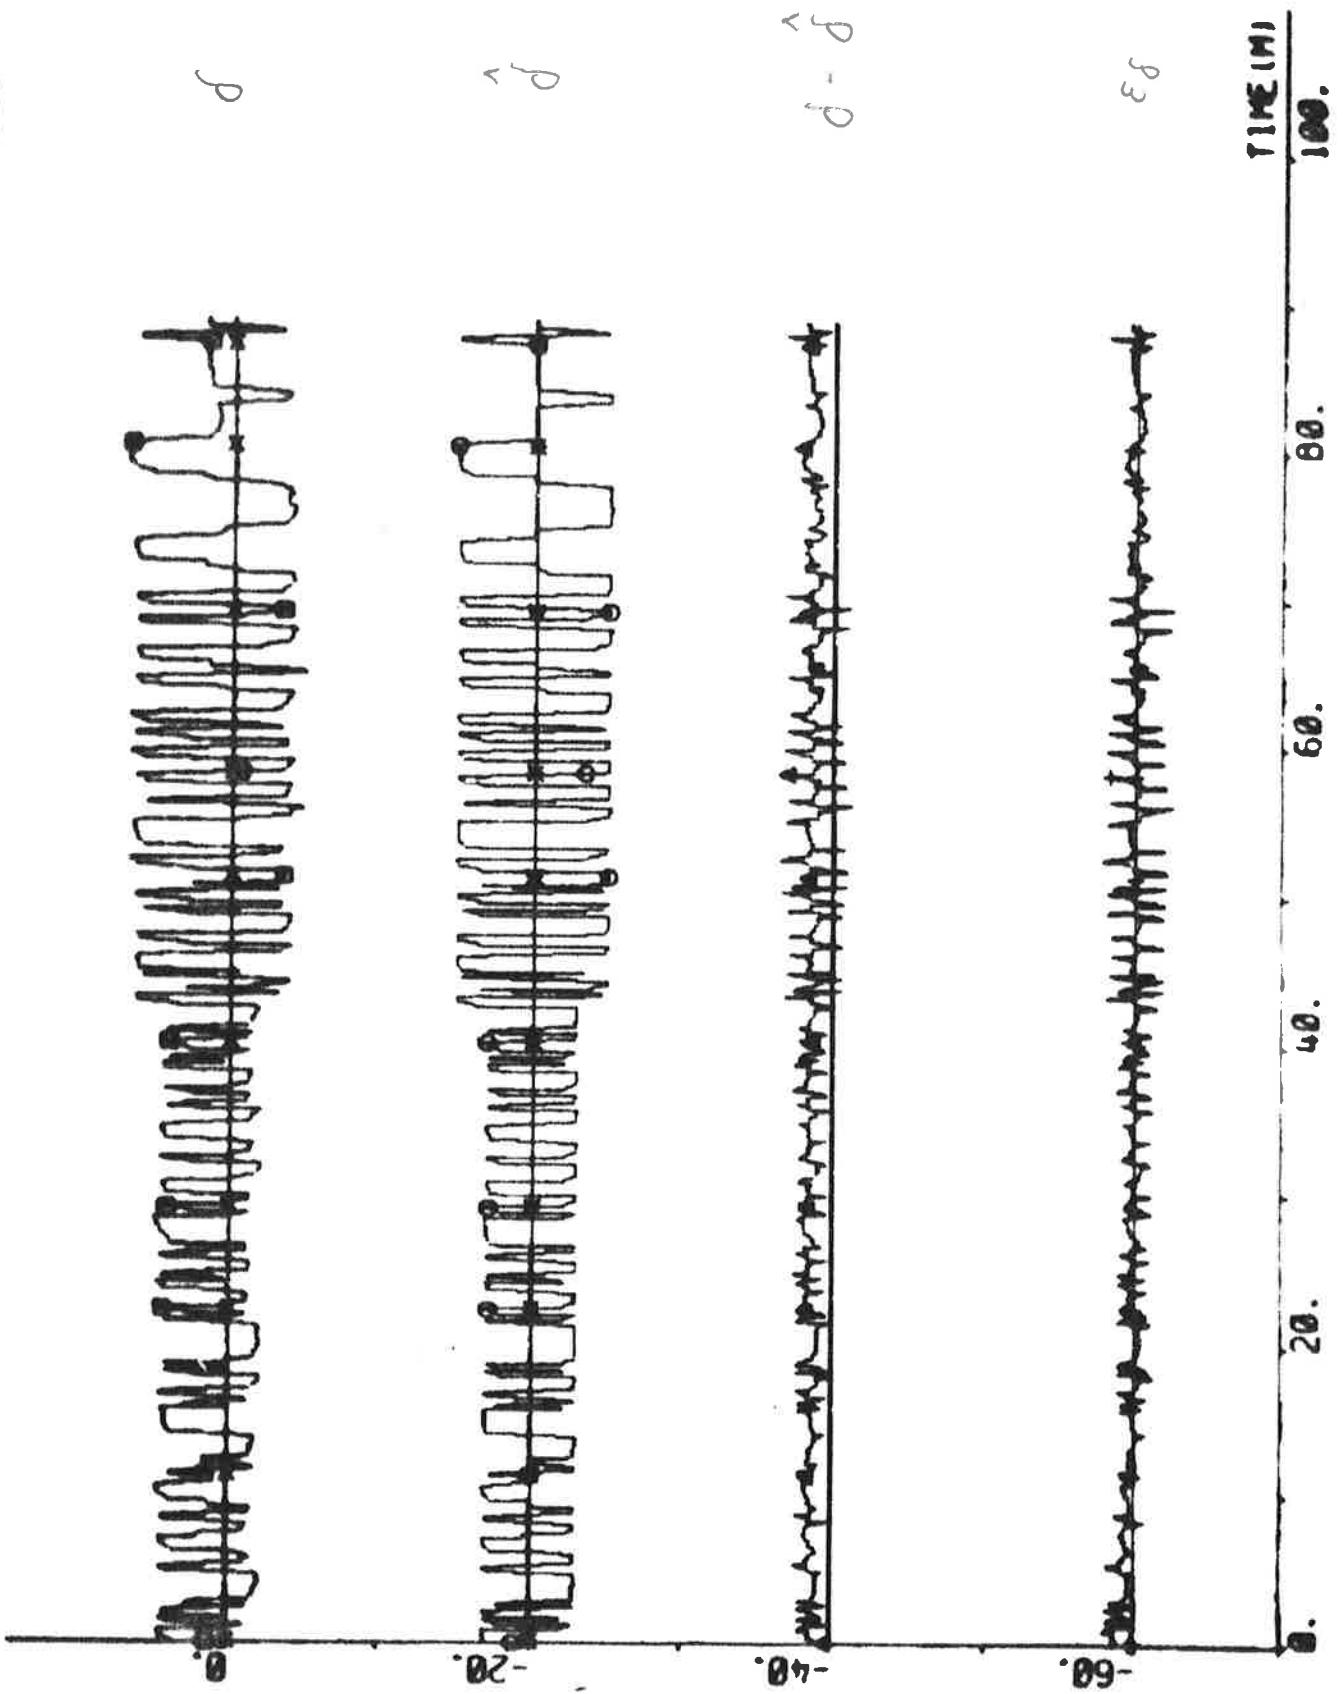

motor E1P1(1), E1P2(3) E1P2(4) E1P2(6) E1P2(8) 00 02 04 06 - 0.5 1.5

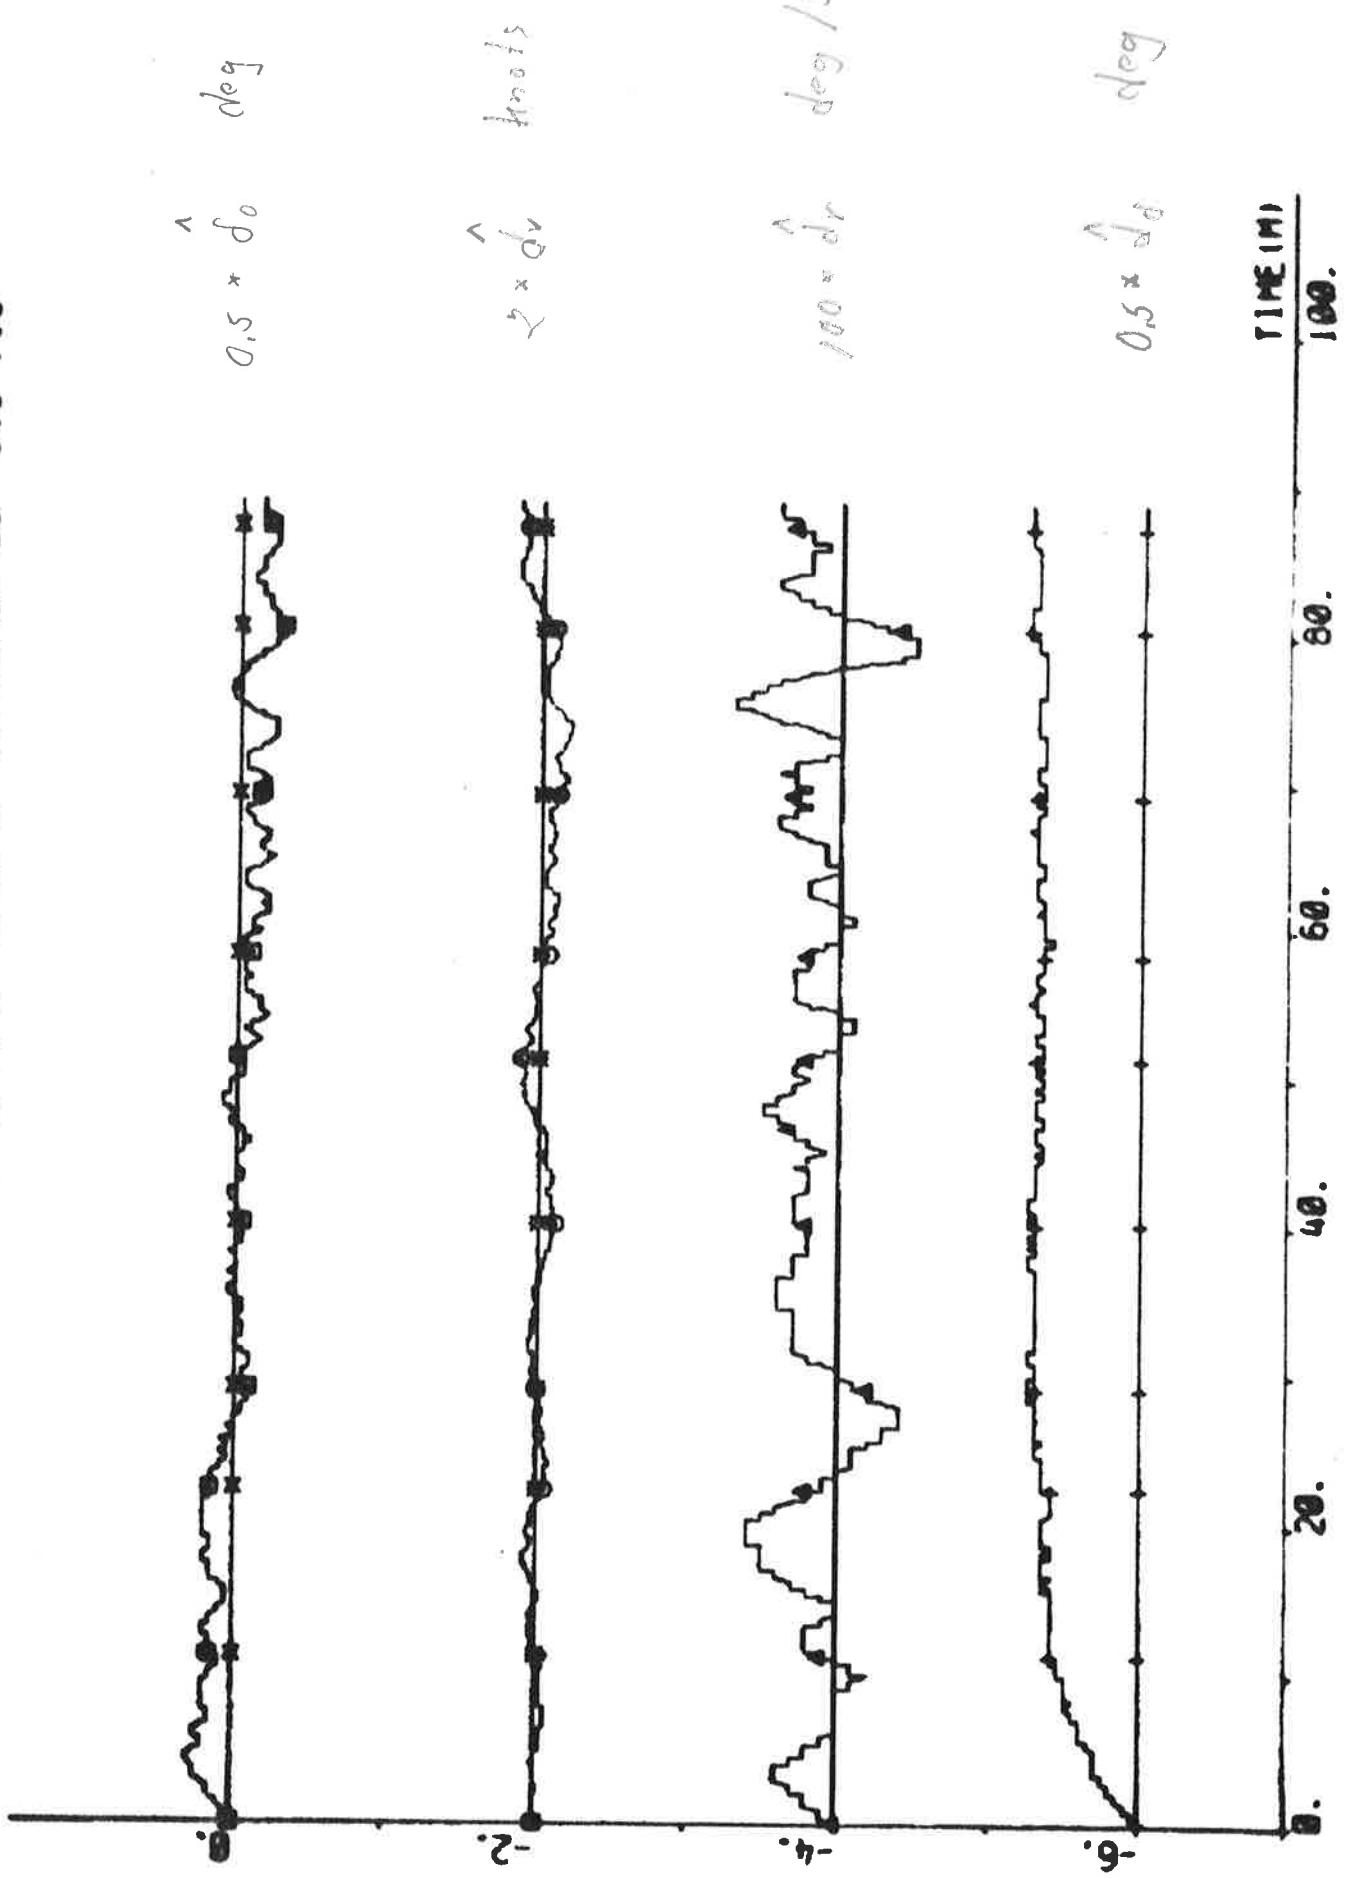

EXPERIMENT E2

| | | | |
|--------------|-------------------|-----------------|--------------------|
| Date | 1976-04-30 | Forward draught | 10.9 m |
| Time | 11.03 | Aft draught | 12.9 m |
| Duration | 19 min | Wind direction | SE (1; see App. A) |
| Position | S 21°56' E 07°49' | Wind velocity | 14 m/s (mod. gale) |
| ψ_{ref} | 143 deg | Wave height | - |

Open loop experiment for identification (5°/5° zig-zag test)

Tuning time for the Kalman filter before the experiment started: 0 min.

$$\begin{array}{ll} \delta_{amp} = 5 \text{ deg} & k_{id} = 0 \\ T_s = 10 \text{ s} & IVVC = 1 \end{array}$$


Final values:

$$\hat{\delta}_0 = 0.4 \text{ deg} \quad \hat{d}_v = 0.00 \text{ knots} \quad \hat{d}_r = -0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.3 \text{ deg}$$

Statistics

| | | Mean value | Stand. dev. | | Mean value | Stand. dev. |
|-----------------------|-------|------------|-------------|-----------------------|------------|-------------|
| δ_c | deg | -0.93 | 4.73 | r | deg/s | 0.005 |
| δ_s | deg | -0.87 | 4.77 | \dot{r} | deg/s | 0.004 |
| n | rpm | 70.53 | 0.79 | $r-\dot{r}$ | deg/s | 0.002 |
| u | knots | 12.48 | 0.35 | ϵ_r | deg/s | 0.001 |
| P_s | MW | 15.66 | 0.08 | $\psi-\psi_{ref}$ | deg | 3.545 |
| v | knots | -0.047 | 0.526 | $\psi-\psi_{ref}$ | deg | 3.546 |
| \hat{v} | knots | -0.038 | 0.509 | $\psi-\hat{\psi}$ | deg | -0.001 |
| $\hat{v}-\hat{v}$ | knots | -0.009 | 0.120 | ϵ_ψ | deg | -0.002 |
| \hat{v}_1 | knots | -0.012 | 0.127 | δ | deg | 0.60 |
| \hat{v}_1 | knots | -0.017 | 0.155 | $\hat{\delta}$ | deg | -0.83 |
| $\hat{v}_1-\hat{v}_1$ | knots | 0.005 | 0.040 | $\delta-\hat{\delta}$ | deg | 1.43 |
| ϵ_v | knots | 0.005 | 0.028 | ϵ_δ | deg | 0.45 |

201 E221(1)-E221(8) H# E221(10) 00 02 - 31 - DEC

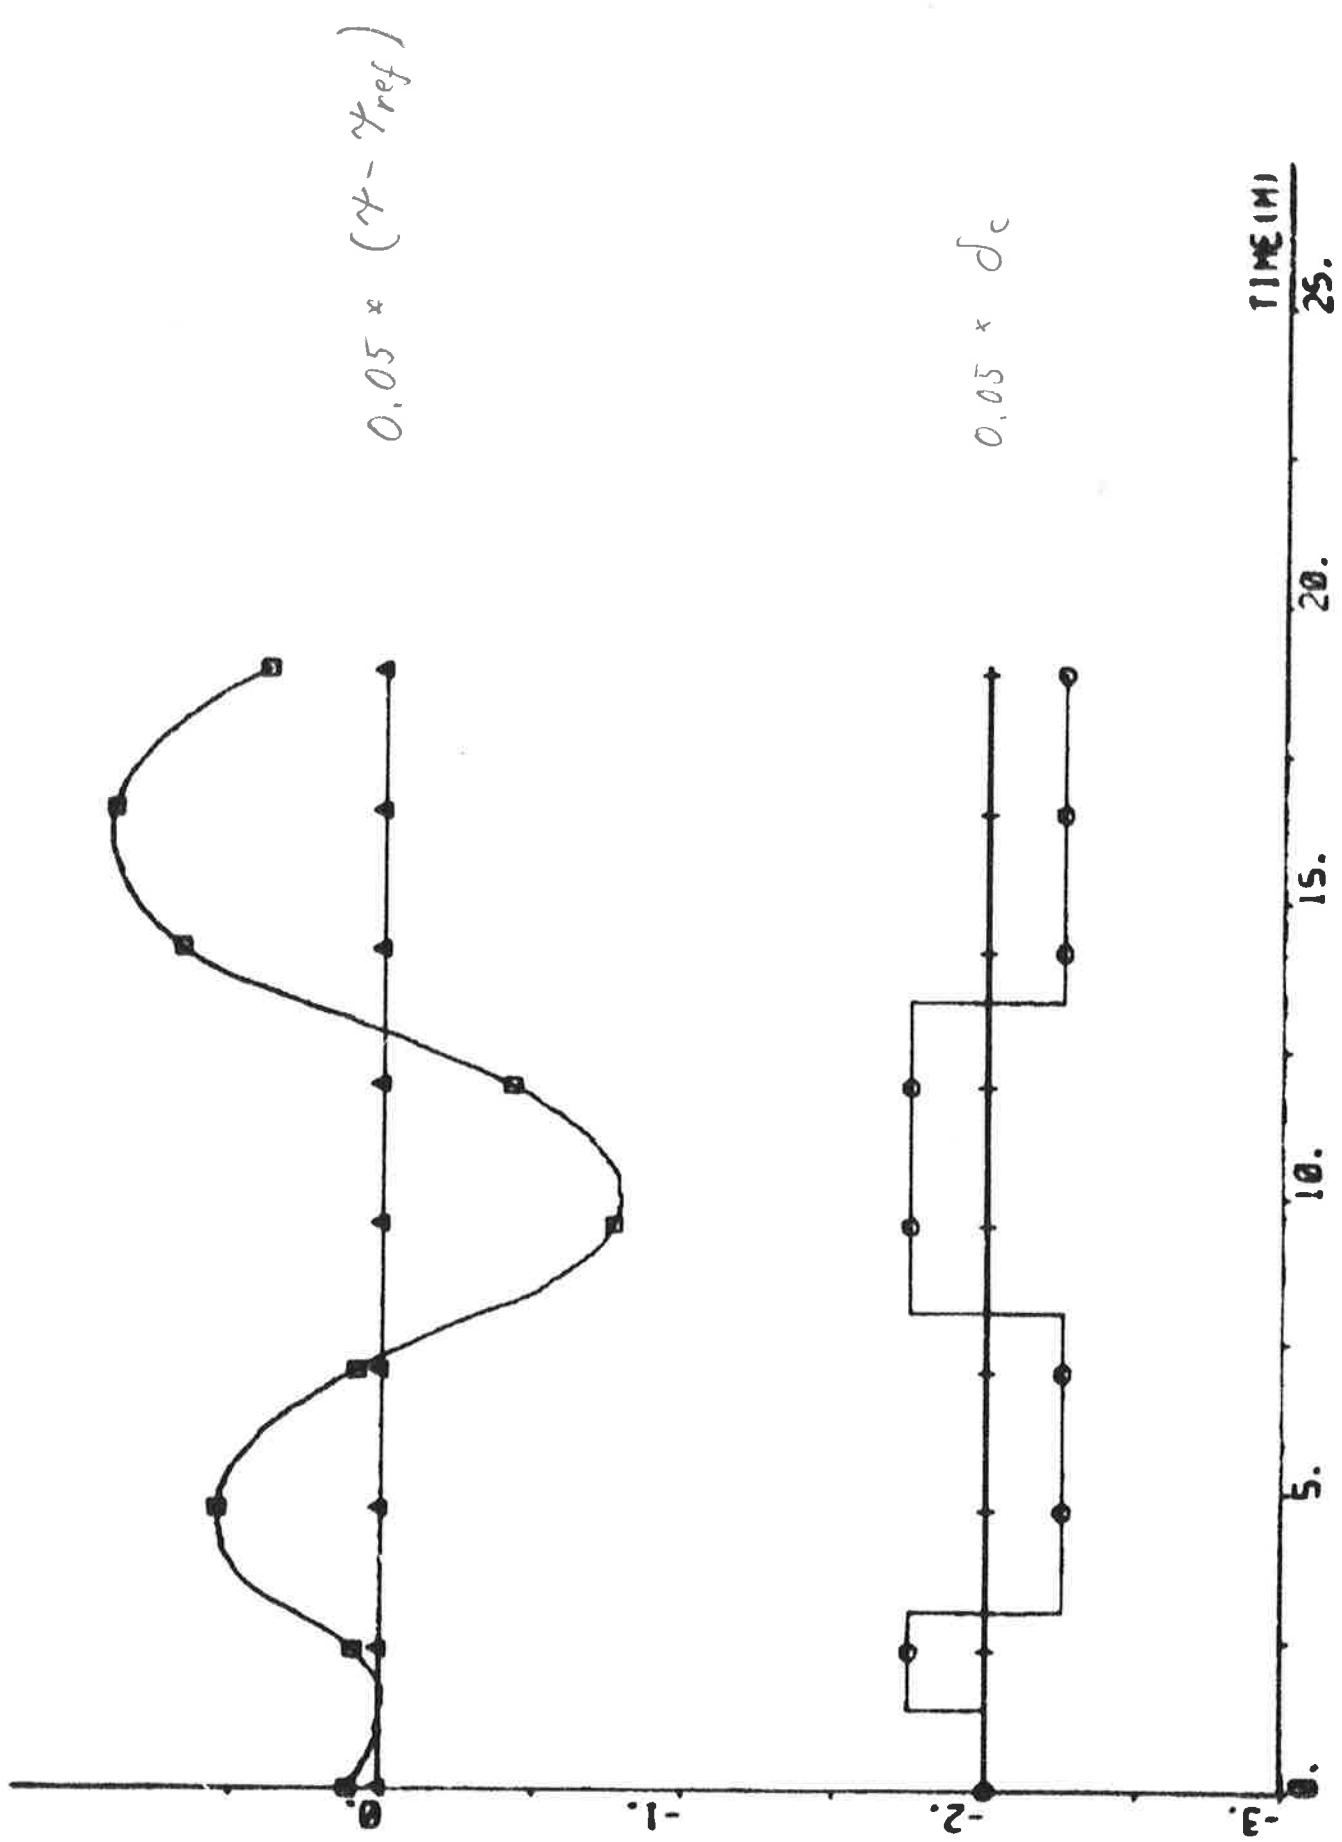

NOT E2P1(11)-E2P1(12) E2P1(13) E2P1(14) E2P1(111) 08 -28 28


0.5 x h rpm


knobs


2 x v


WV


P₁d₅ deg

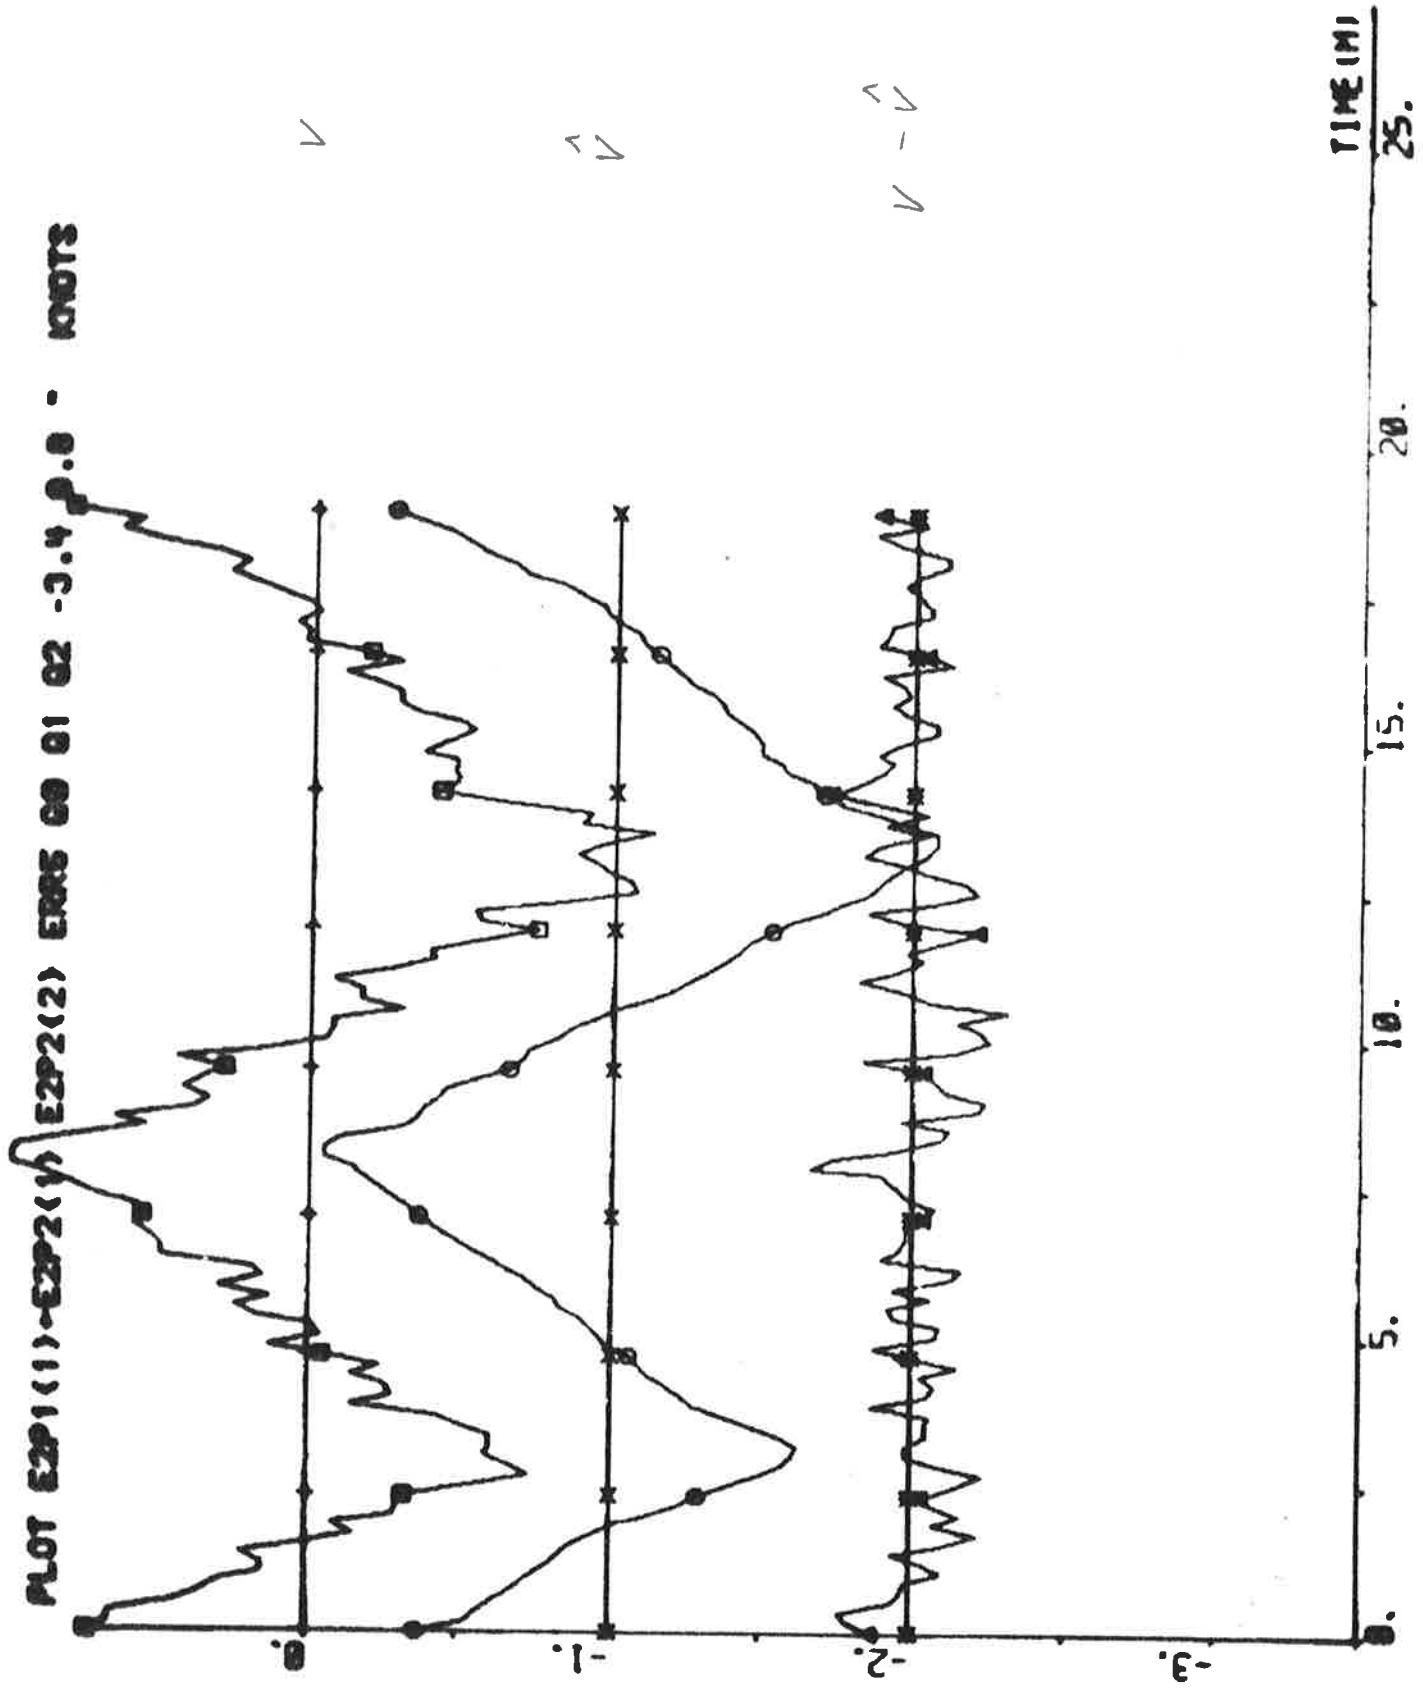

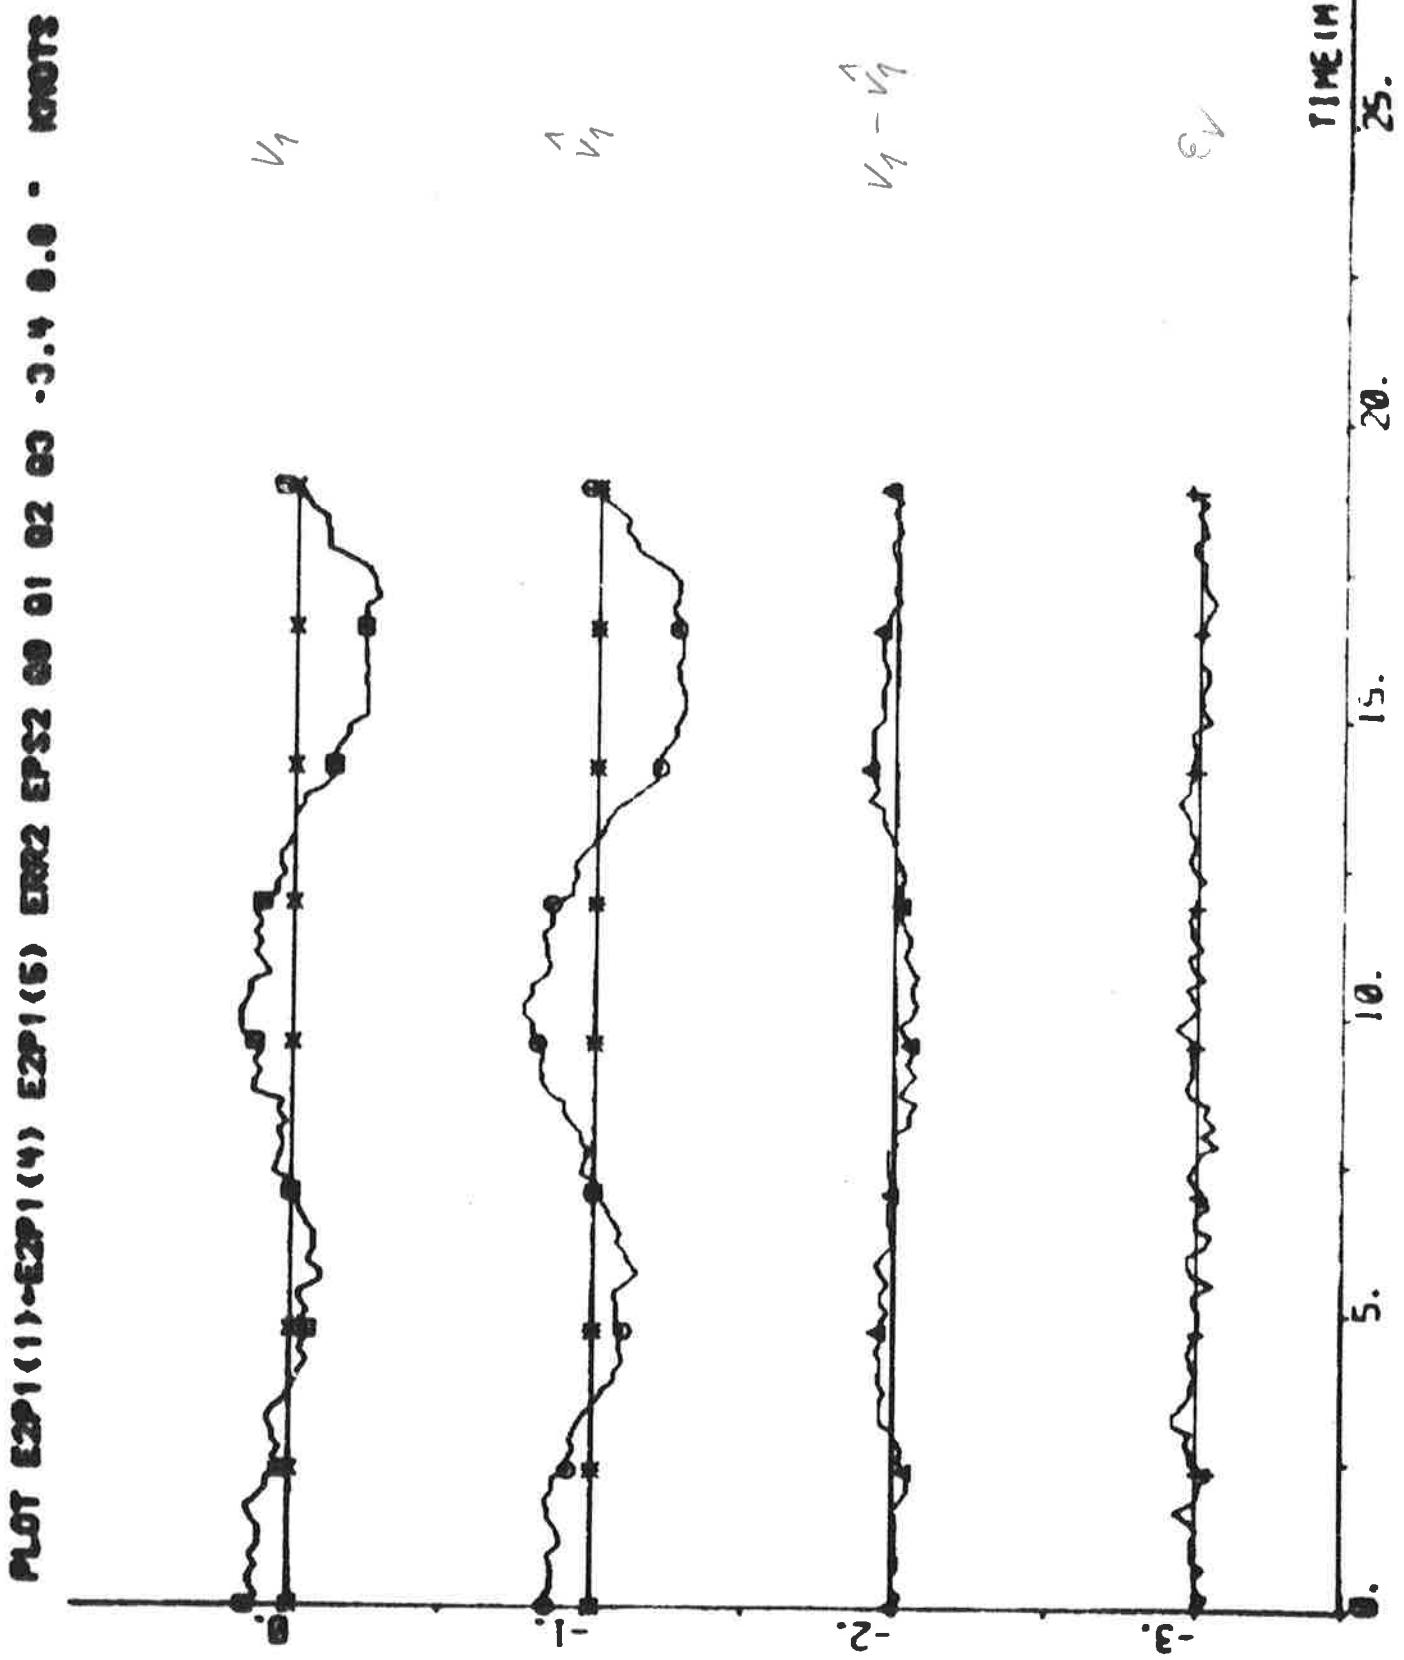


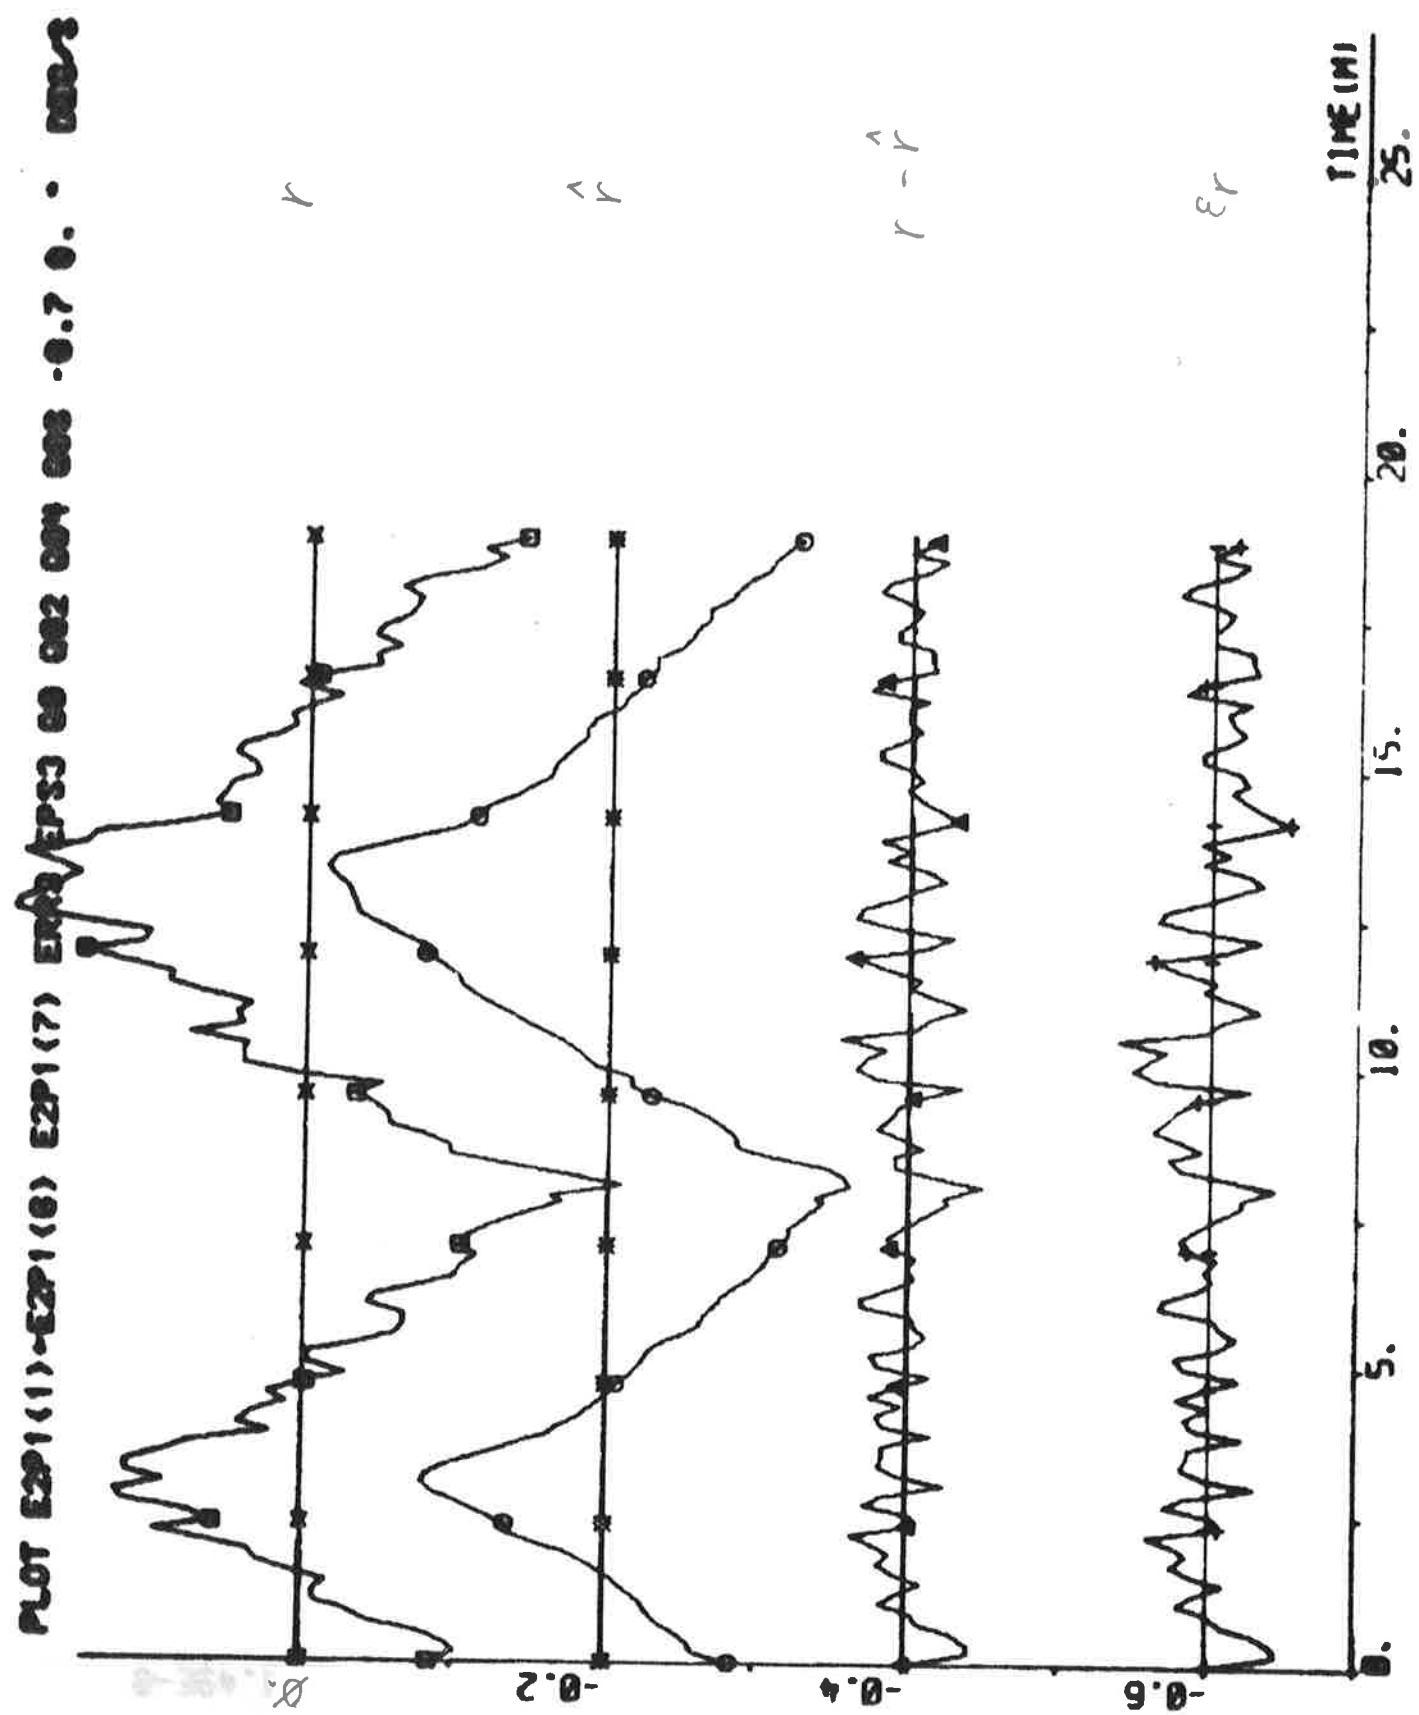

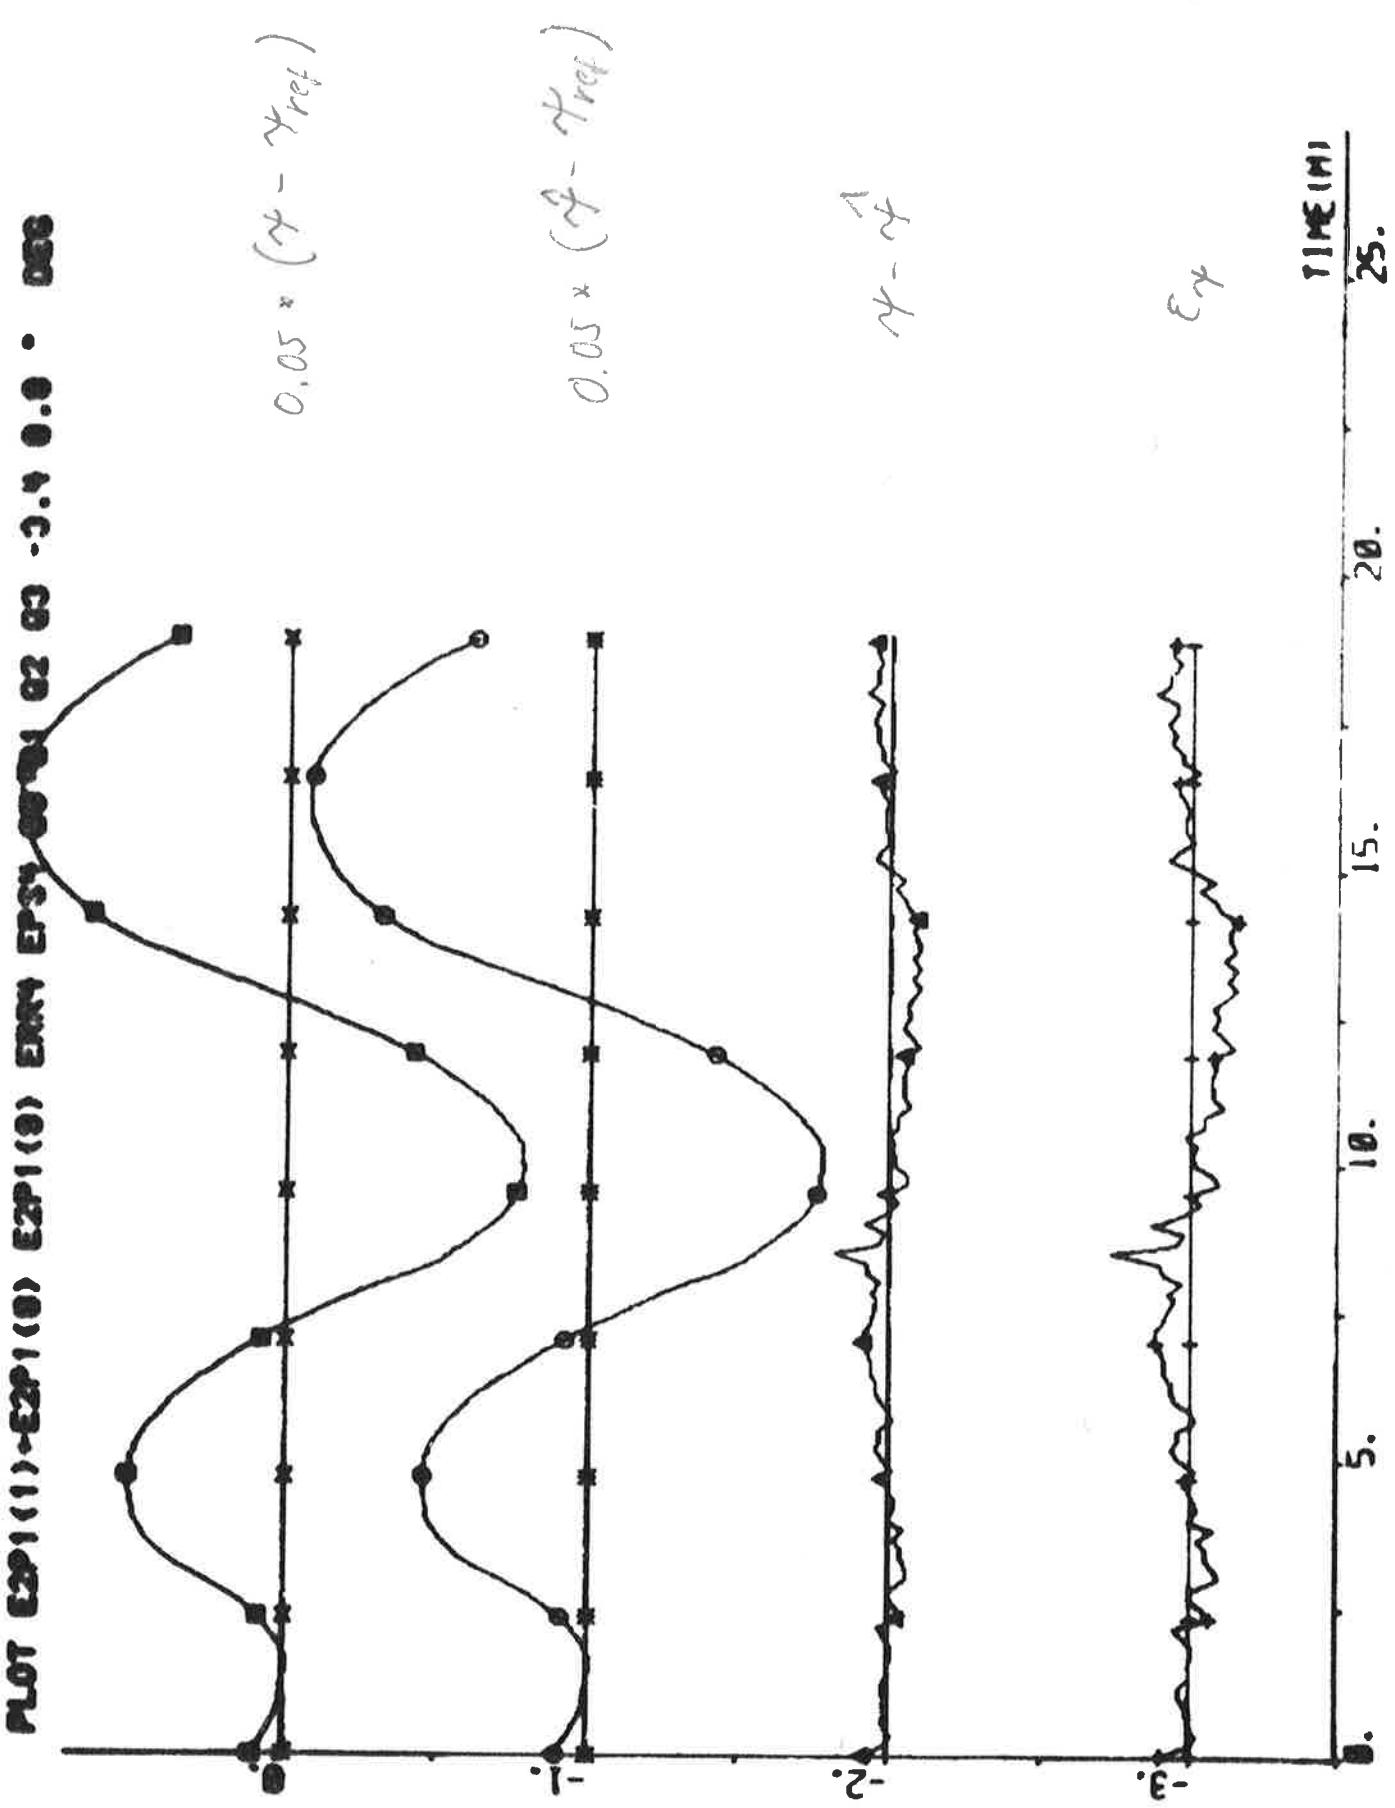

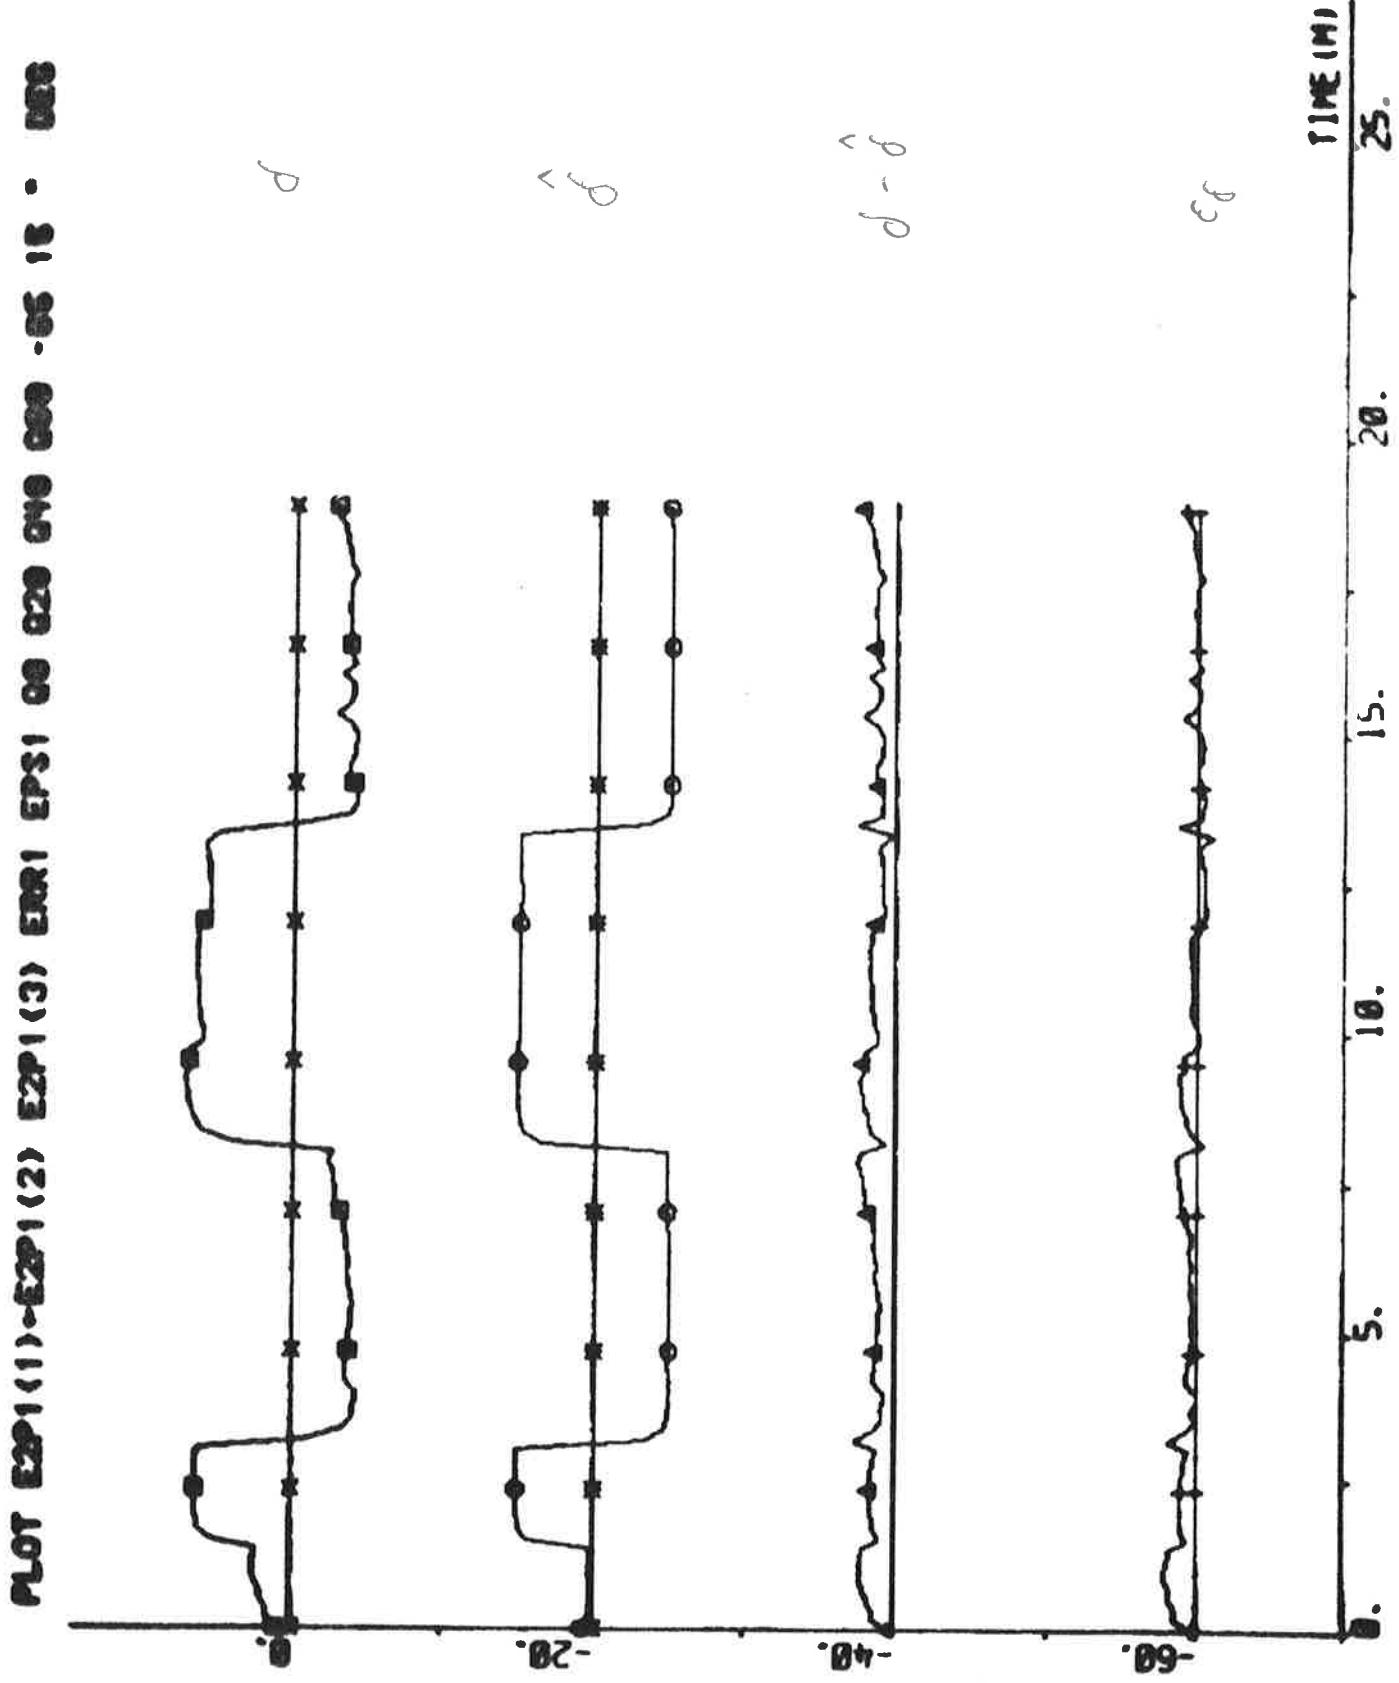

LOT E2P1(1)-E2P2(3) E2P2(4) E2P2(5) E2P2(6) 00 02 04 06 -0.5 1.5

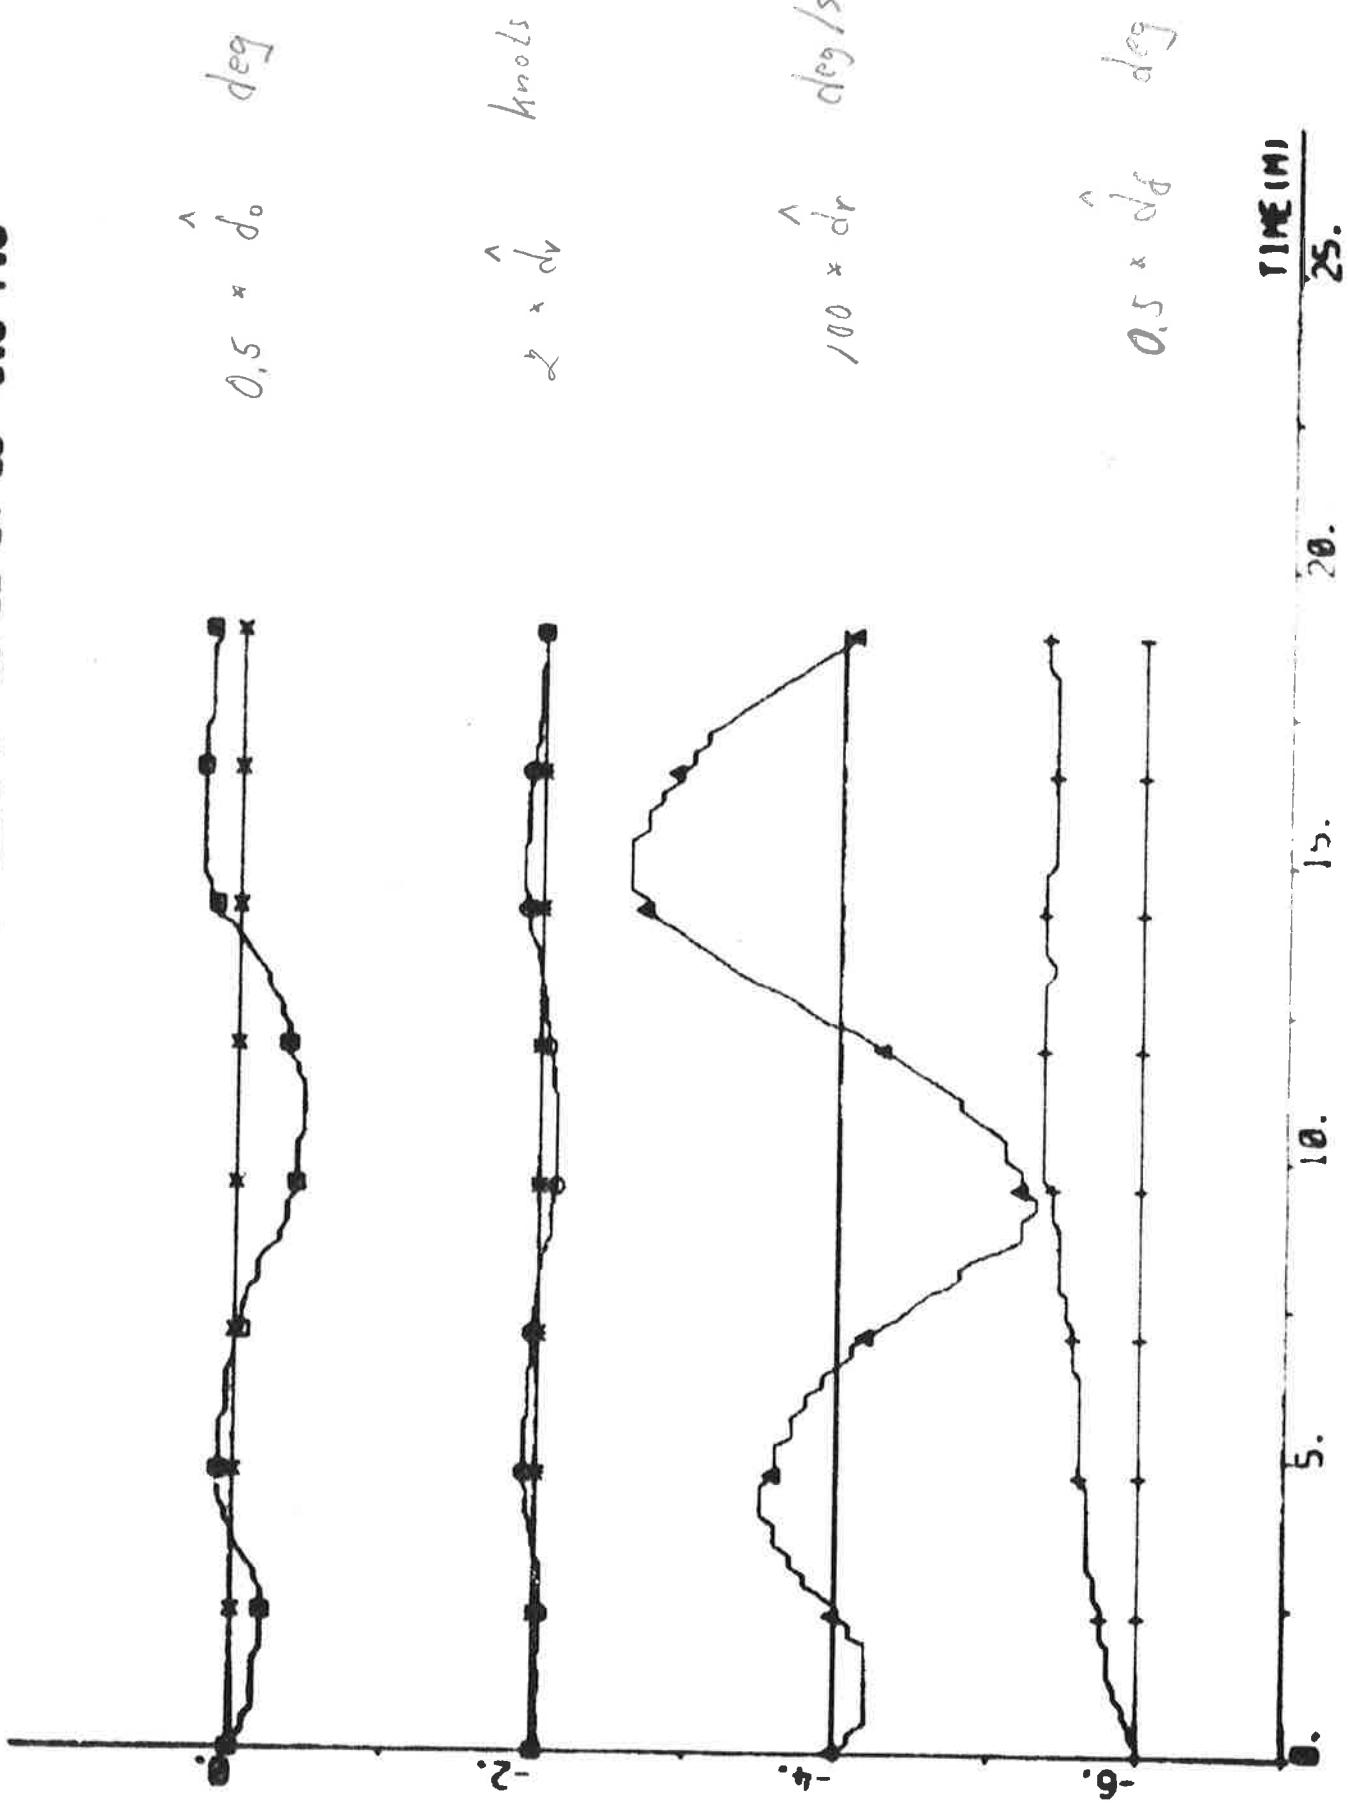

EXPERIMENT E3

| | | | |
|--------------|-------------------|-----------------|----------------------|
| Date | 1976-04-30 | Forward draught | 10.9 m |
| Time | 13.00 | Aft draught | 12.9 m |
| Duration | 90 min | Wind direction | S (2; see App. A) |
| Position | S 22°18' E 08°05' | Wind velocity | 9 m/s (fresh breeze) |
| ψ_{ref} | 146 deg | Wave height | - |

The rudder limit was 15 deg during the experiment.

Closed loop experiment for identification using additive rudder disturbances.

Tuning time for the Kalman filter before the experiment started: 1 min.

$$\begin{array}{ll} \delta_{amp} = 5 \text{ deg} & k_{id} = 2 \\ T_s = 10 \text{ s} & IVVC = 1 \end{array}$$


Final values:

$$\hat{\delta}_0 = -0.3 \text{ deg} \quad \hat{d}_v = -0.03 \text{ knots} \quad \hat{d}_r = 0.002 \text{ deg/s} \quad \hat{d}_{\delta} = 1.5 \text{ deg}$$


Statistics

| | | Mean value | Stand. dev. | | | Mean value | Stand. dev. |
|-----------------|-------|------------|-------------|-------------------------------|-------|------------|-------------|
| δ_{add} | deg | 0.12 | 4.29 | r | deg/s | 0.001 | 0.057 |
| δ_c | deg | -0.42 | 6.21 | \dot{r} | deg/s | 0.000 | 0.053 |
| δ_s | deg | -0.43 | 6.17 | $r-\dot{r}$ | deg/s | 0.002 | 0.021 |
| n | rpm | 70.03 | 0.68 | ϵ_r | deg/s | 0.000 | 0.024 |
| u | knots | 12.89 | 0.21 | $\psi-\psi_{ref}$ | deg | 0.273 | 2.211 |
| P_s | MW | 15.37 | 0.08 | $\dot{\psi}-\dot{\psi}_{ref}$ | deg | 0.272 | 2.220 |
| v | knots | -0.021 | 0.290 | $\psi-\dot{\psi}$ | deg | 0.001 | 0.034 |
| \hat{v} | knots | -0.002 | 0.253 | ϵ_ψ | deg | 0.001 | 0.053 |
| $v-\hat{v}$ | knots | -0.019 | 0.136 | δ | deg | 1.09 | 5.59 |
| v_1 | knots | -0.014 | 0.076 | $\dot{\delta}$ | deg | -0.41 | 5.85 |
| \hat{v}_1 | knots | -0.004 | 0.076 | $\delta-\hat{\delta}$ | deg | 1.50 | 0.95 |
| $v_1-\hat{v}_1$ | knots | -0.010 | 0.040 | ϵ_δ | deg | 0.10 | 0.98 |
| ϵ_v | knots | 0.002 | 0.032 | | | | |


ROT EXP(11)-DEG - 04-04-00 0730 AM

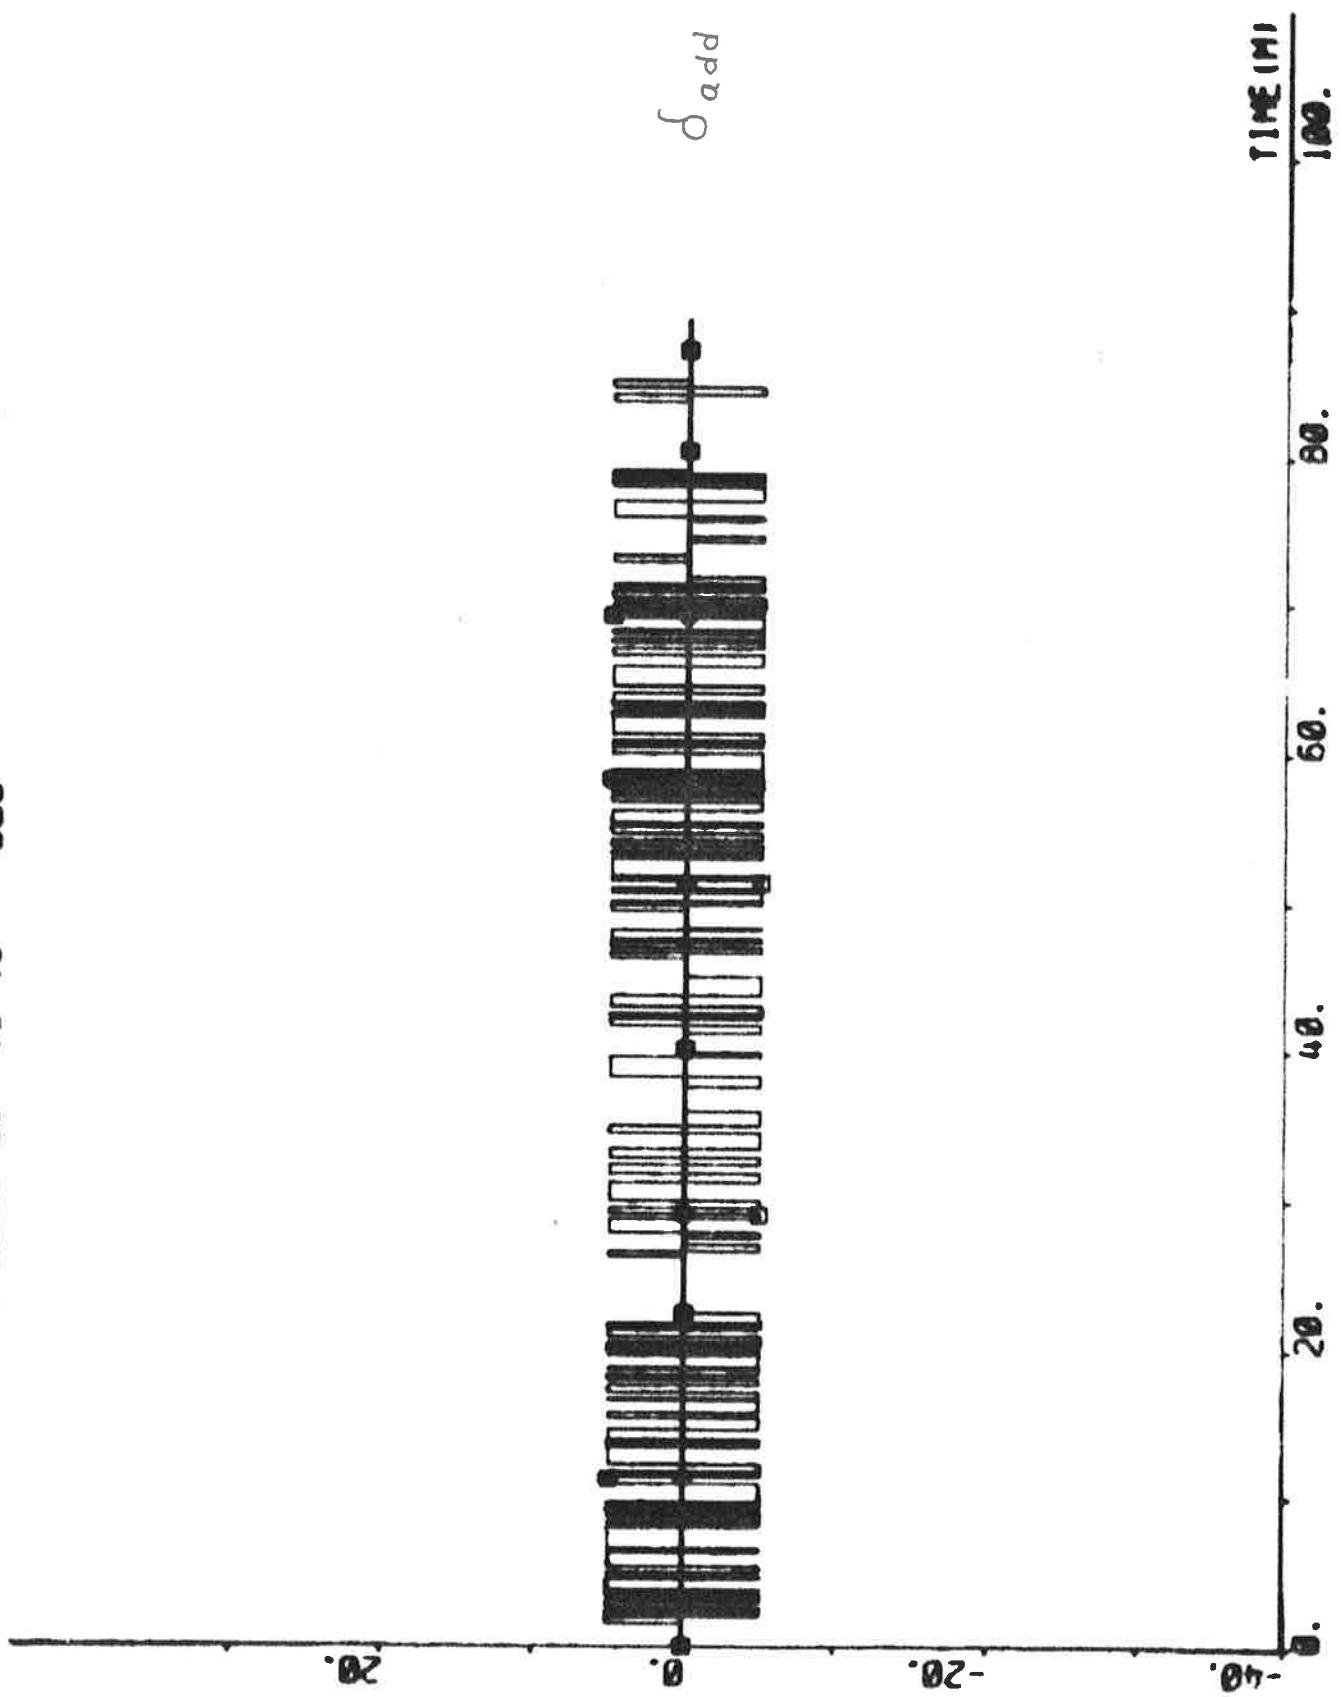


NET EXP1(1) (8) HR EXP1(10) 00 02 - 31 - DEC

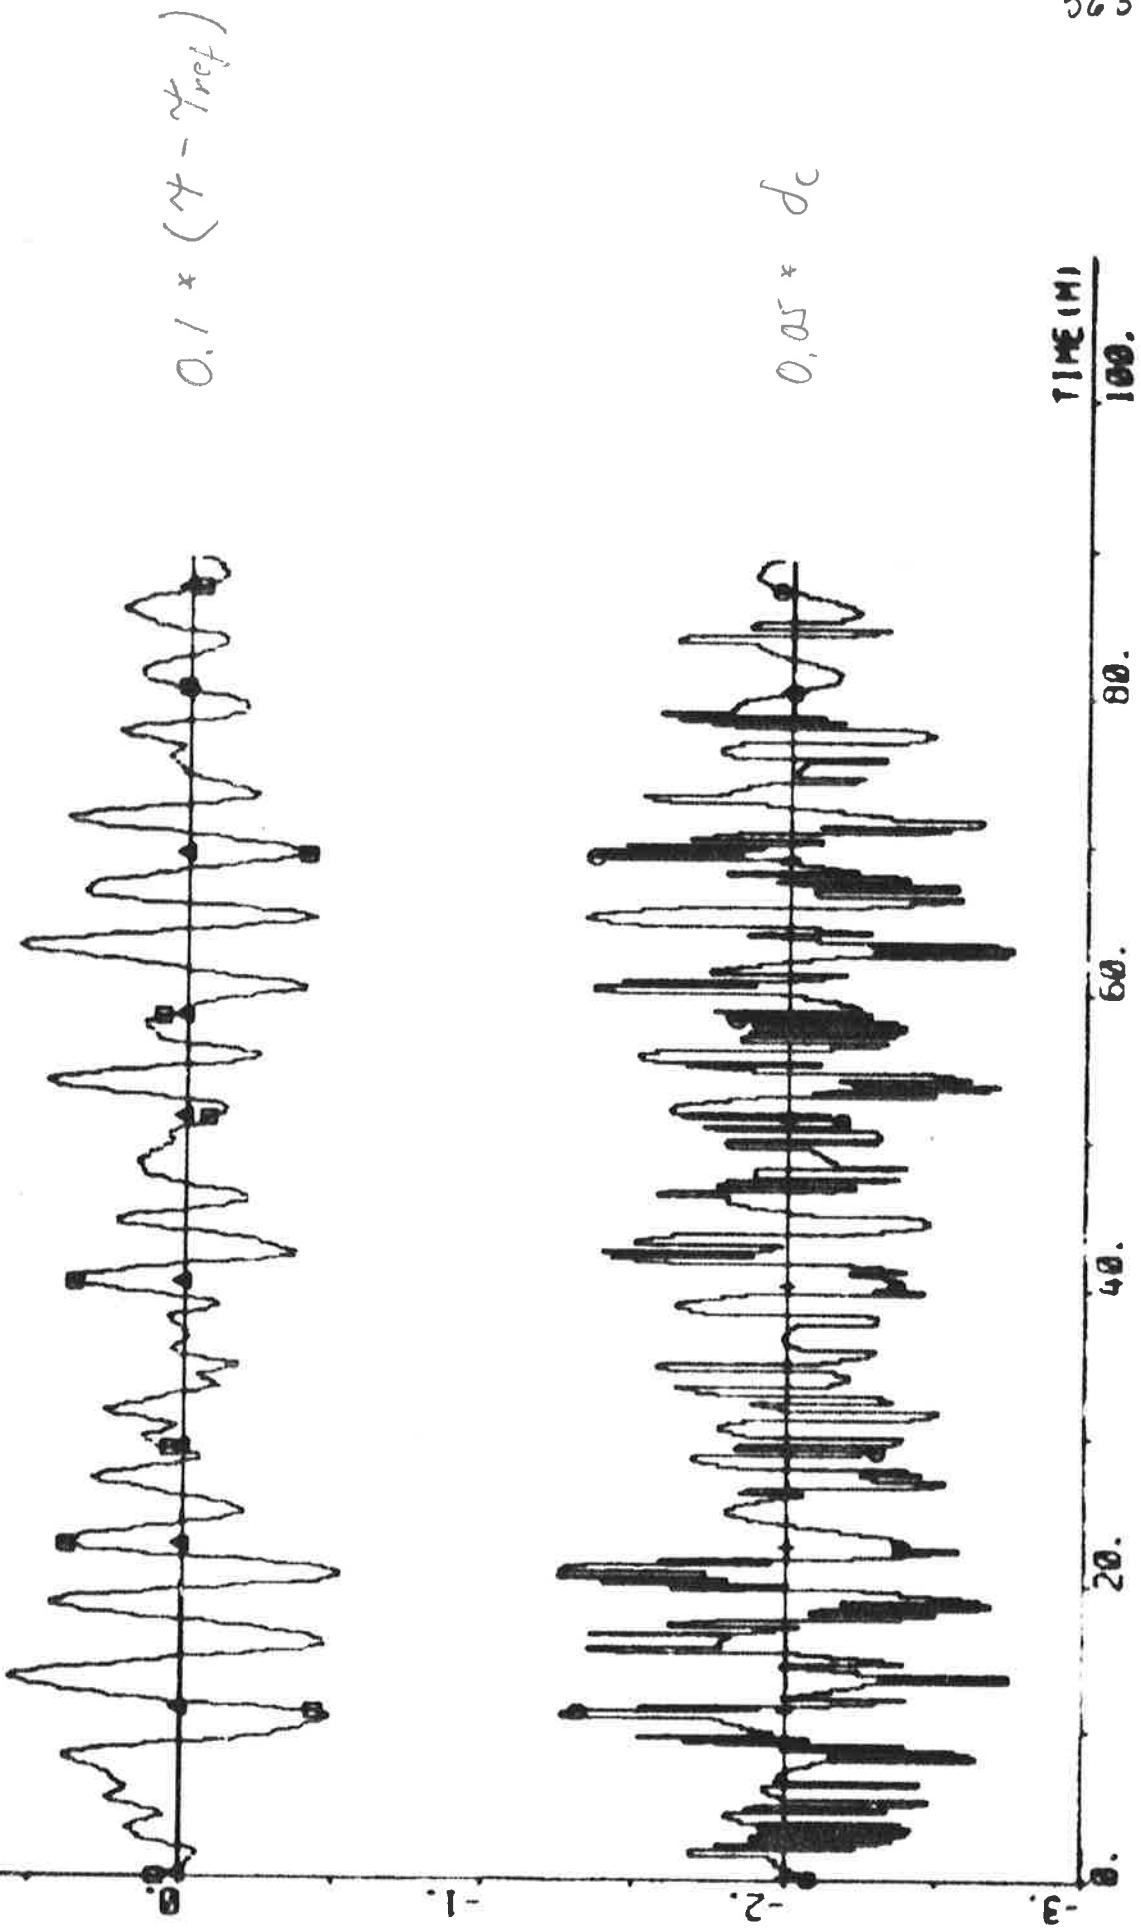



564

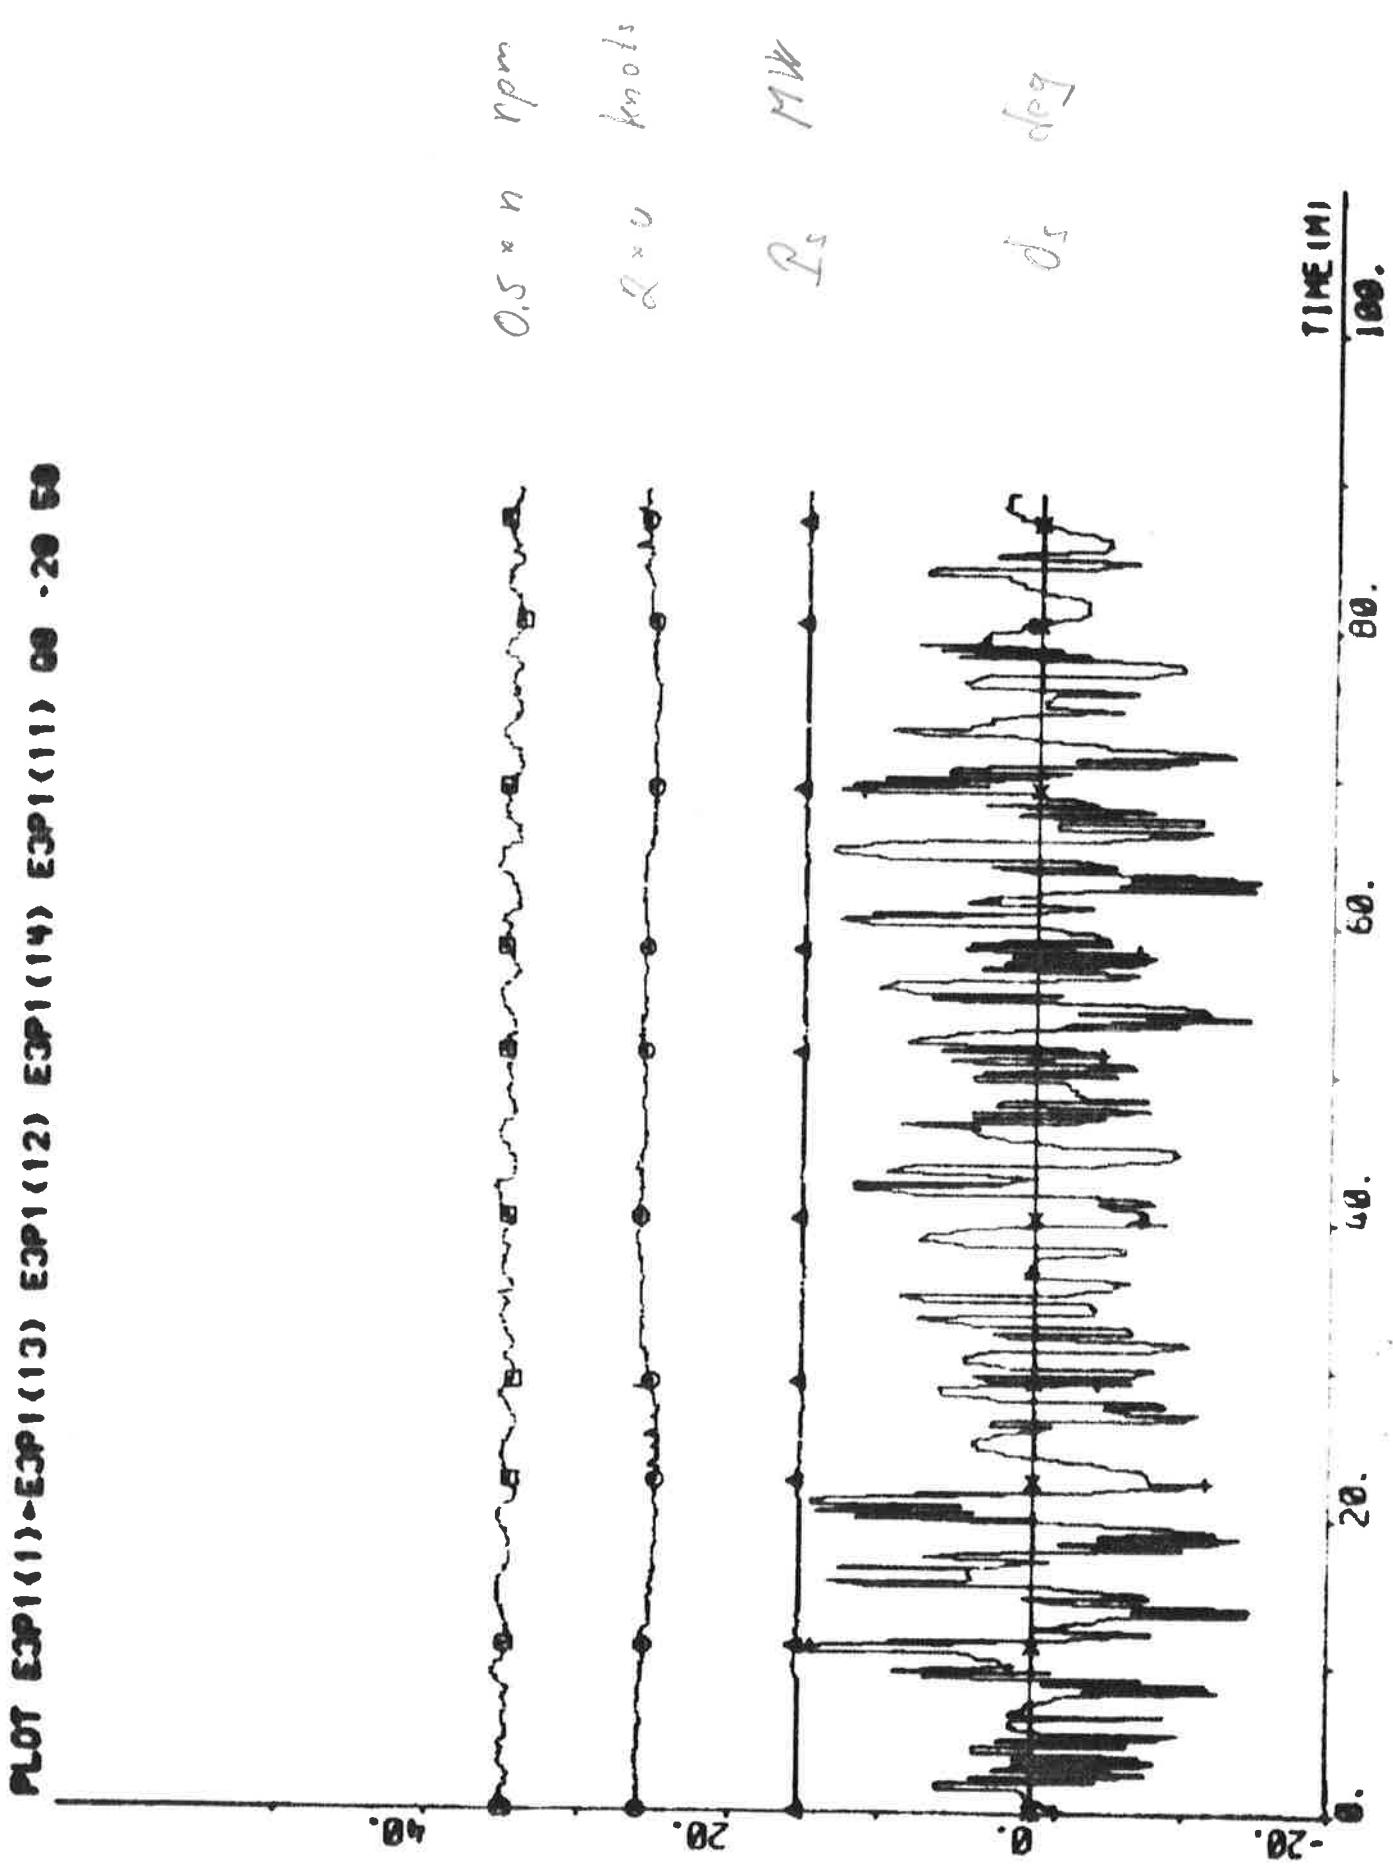

NOT ESP1(1)-ESP2(1) ESP2(2) ESS 00 01 02 - 3.4 0.8 - MOTS

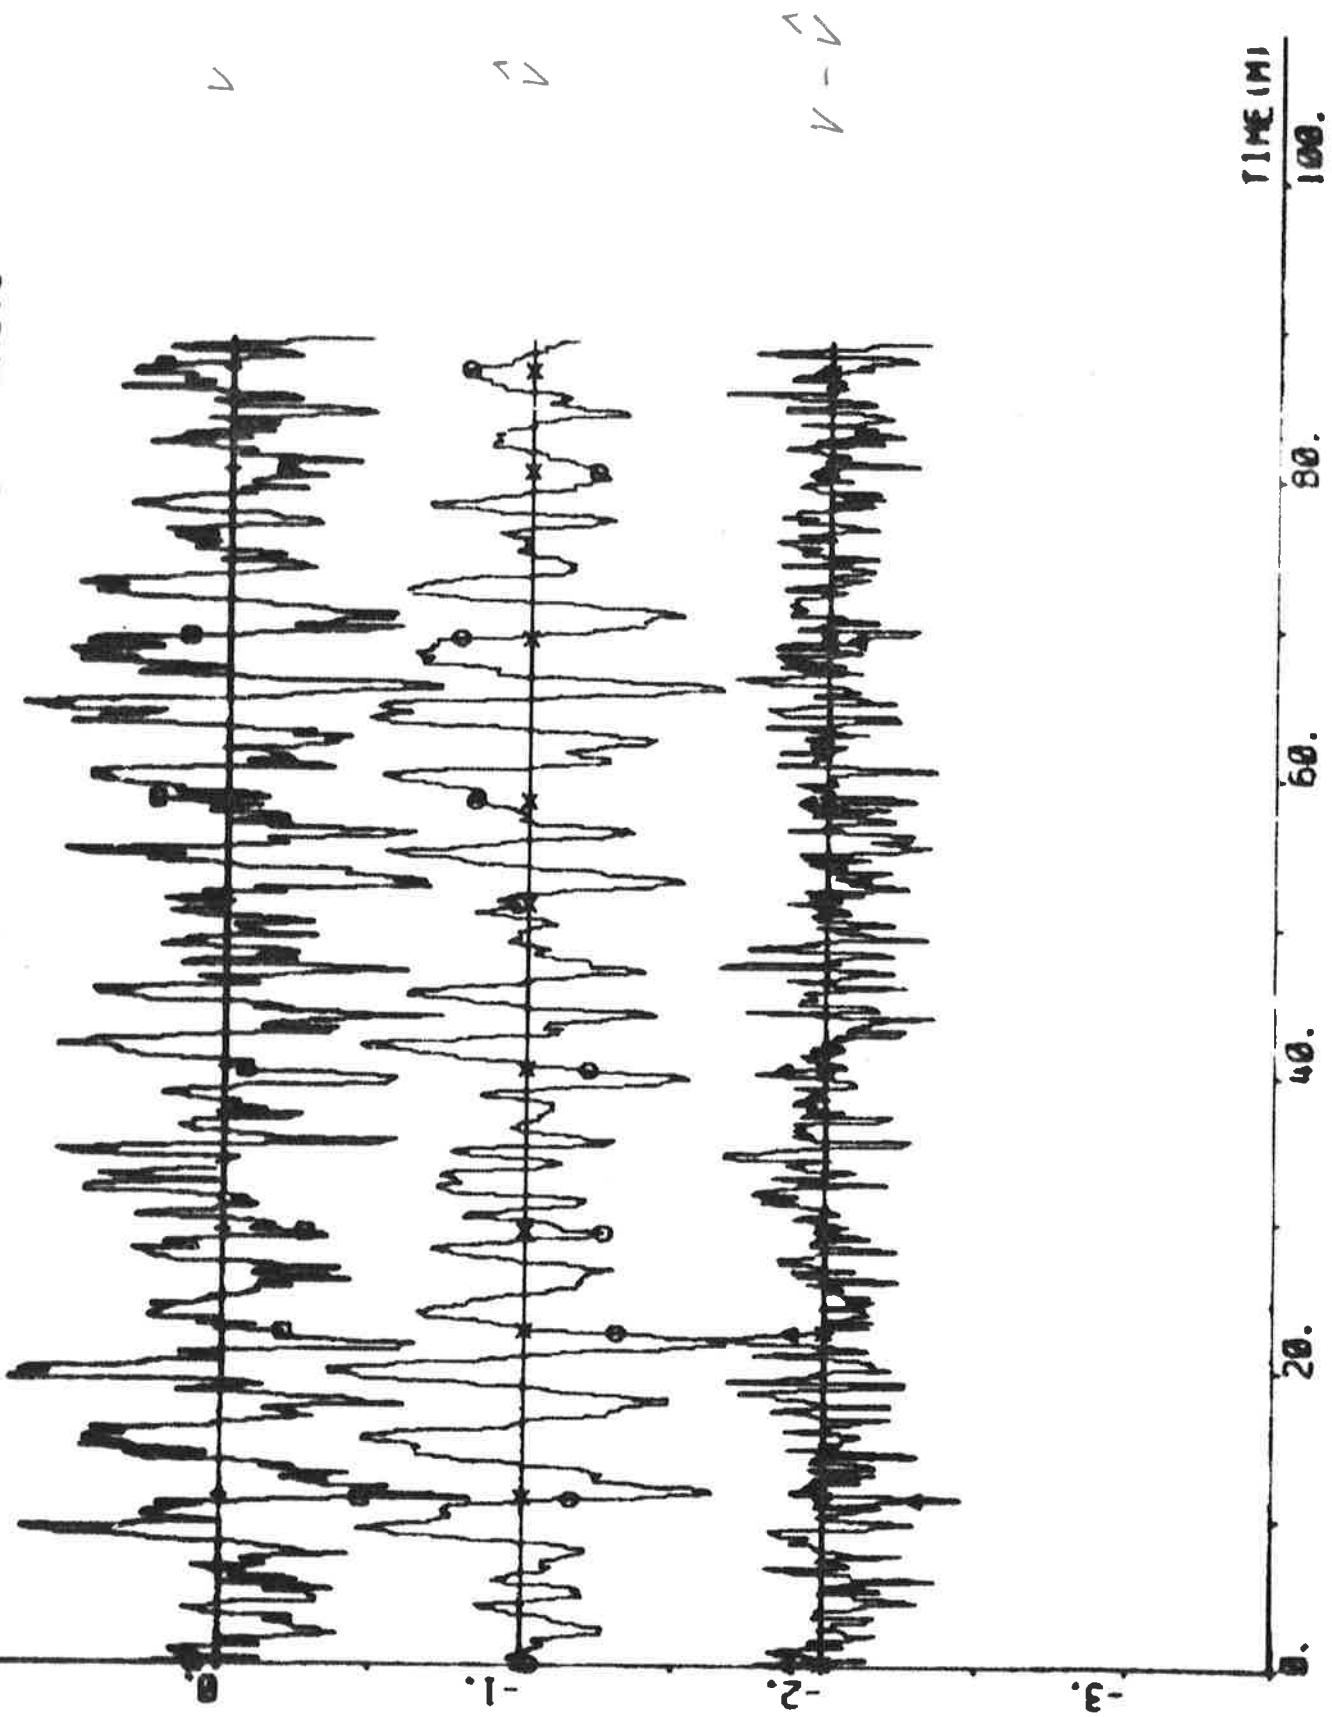

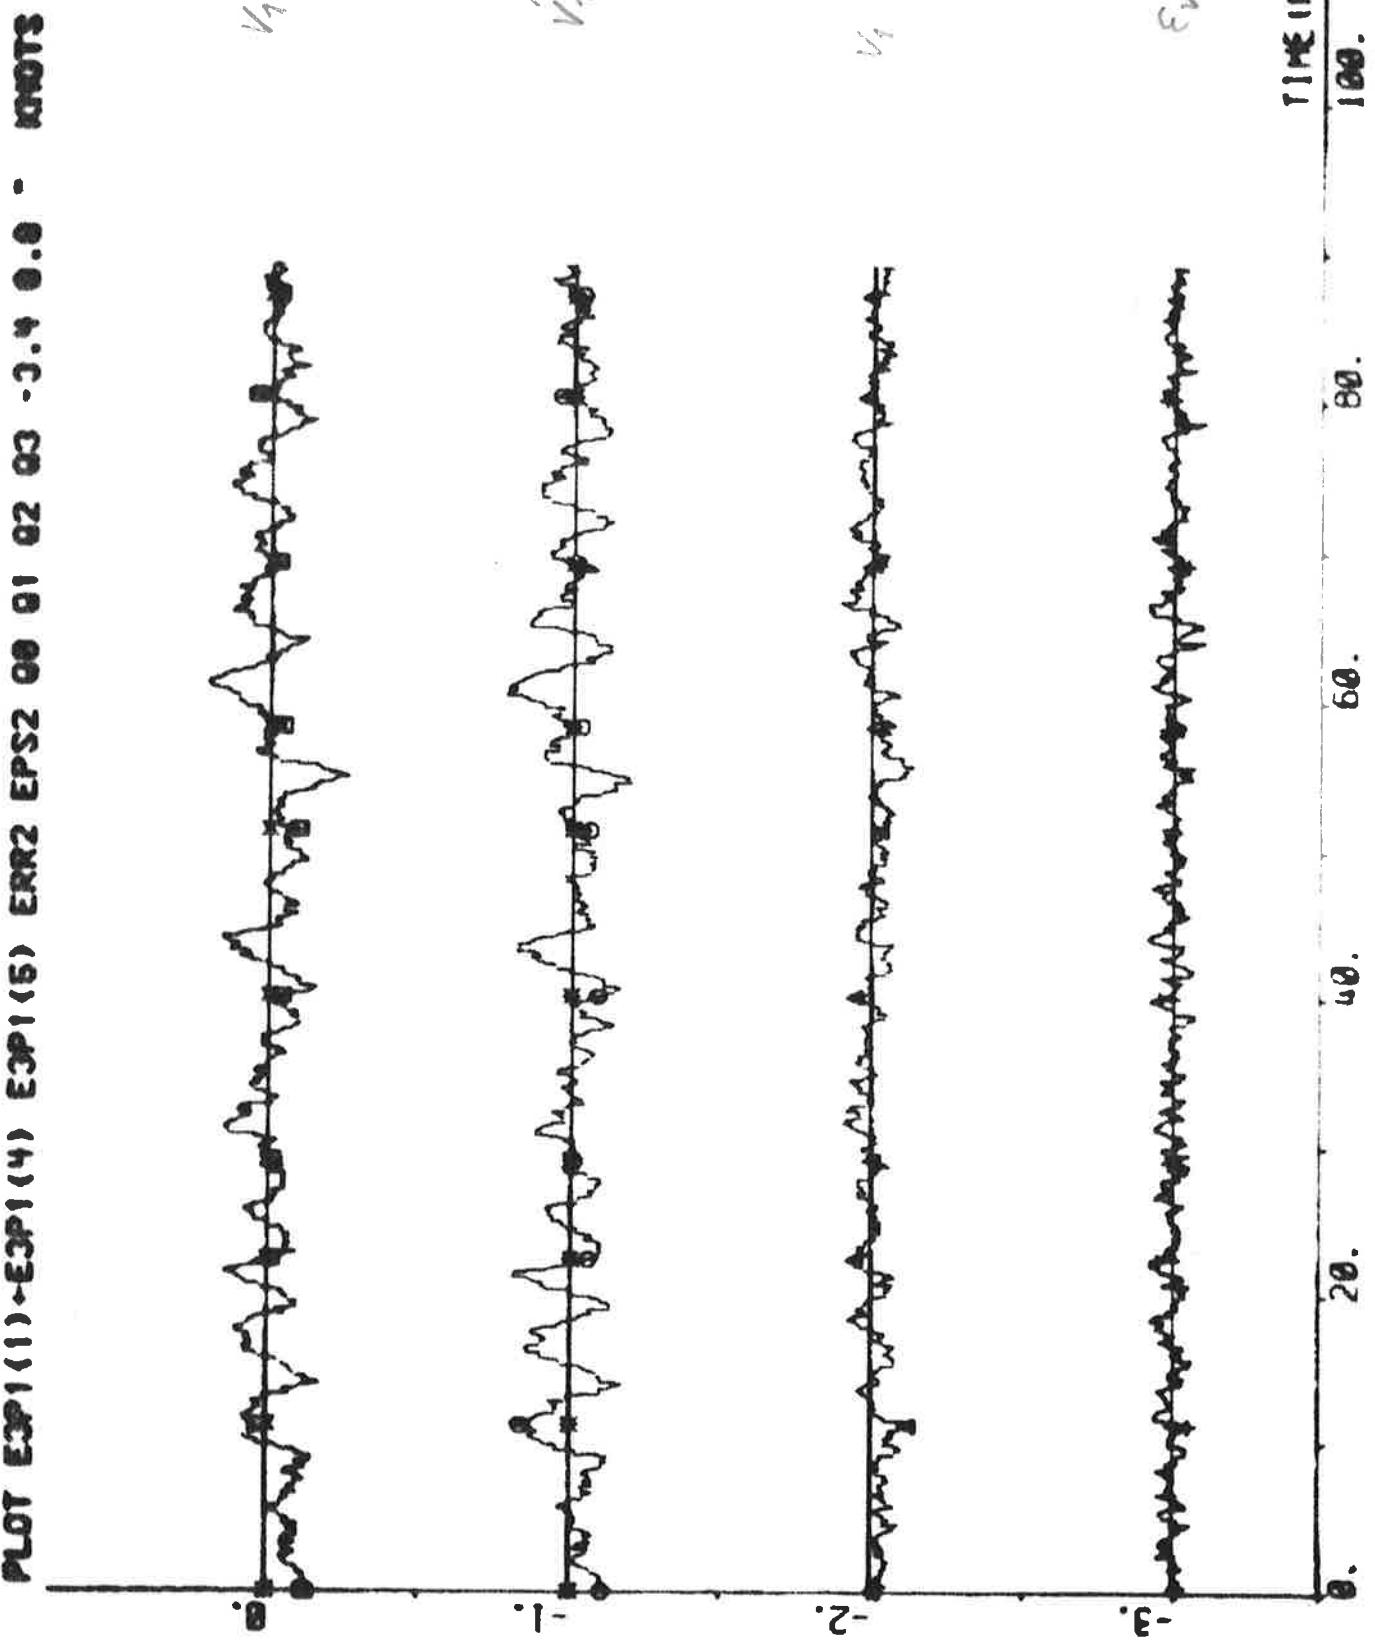

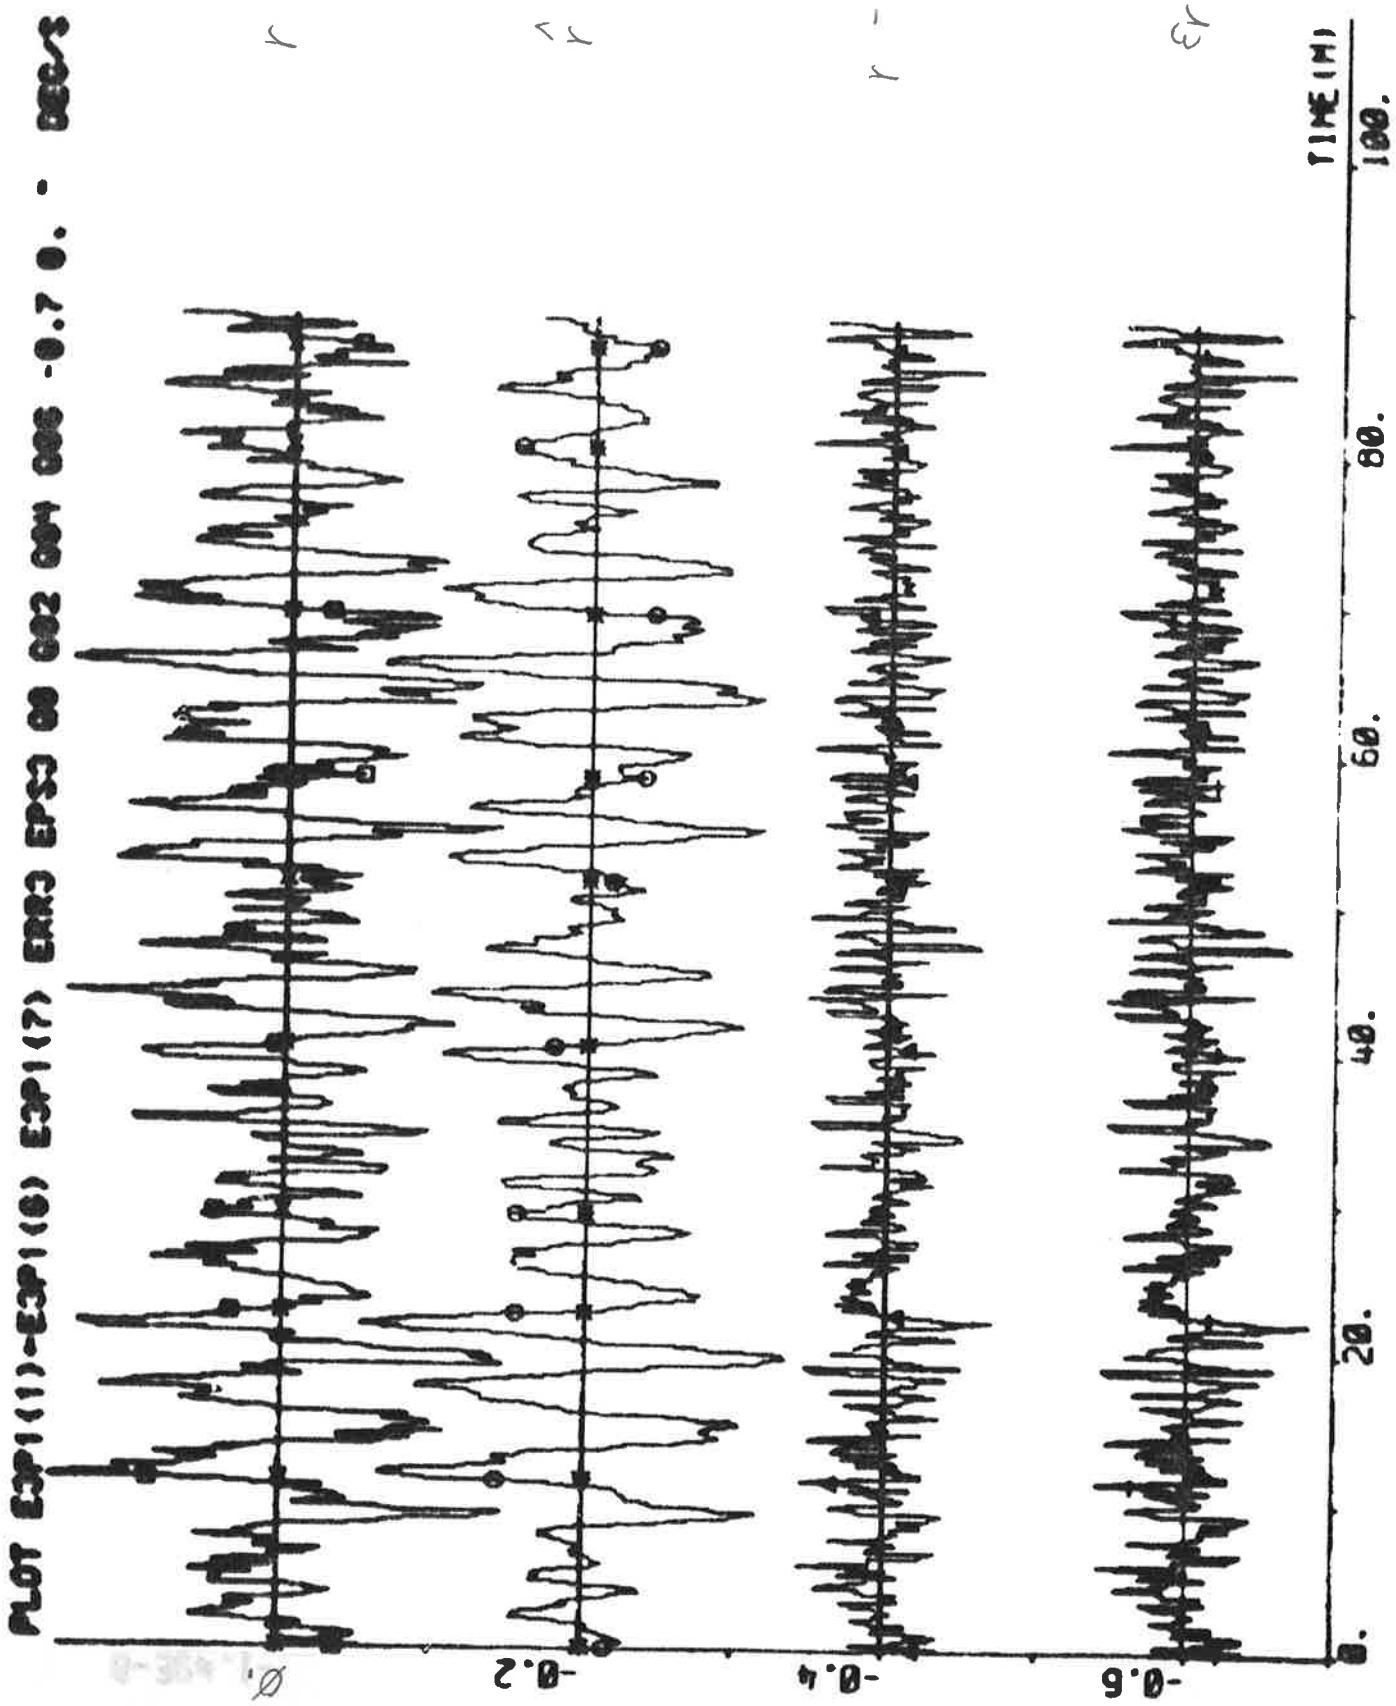

TIME (m)


60.

60.

60.

20.


0.

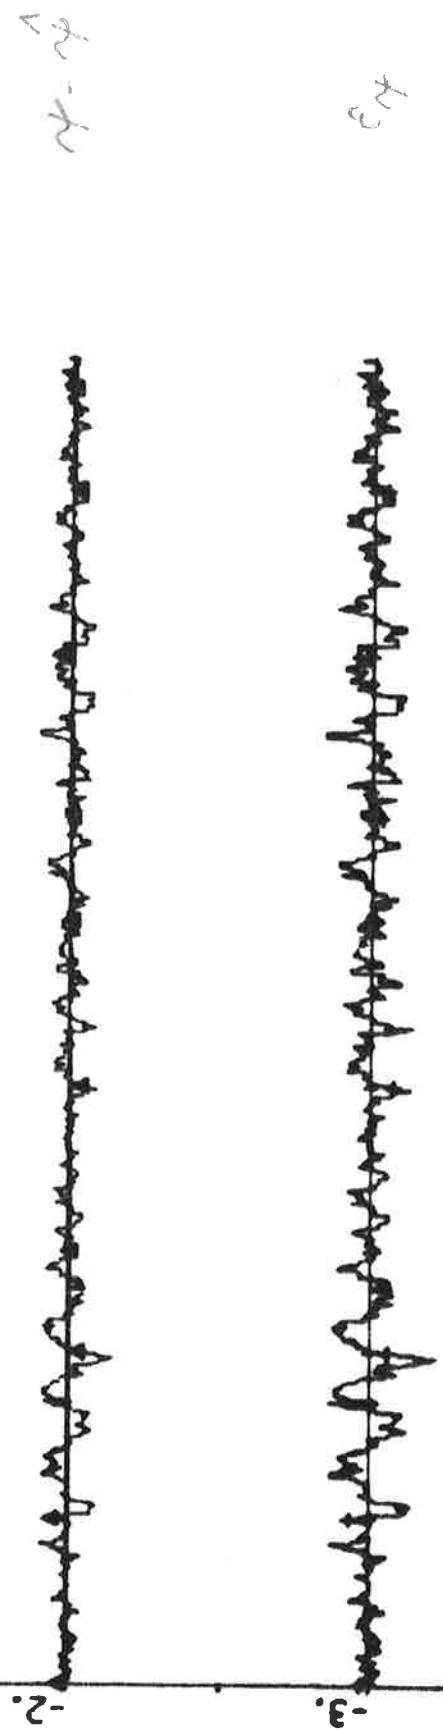

NOTE EXP 1 (1) - EXP 1 (8) EXP 1 (9) EXP 1 (10) EXP 1 (11) EXP 1 (12) EXP 1 (13) -3.4 0.8 -0.8



NOTE EXP1(11)-EXP1(12) EXP1(3) ERRI ERSI 00 020 040 060 080 090 095 098

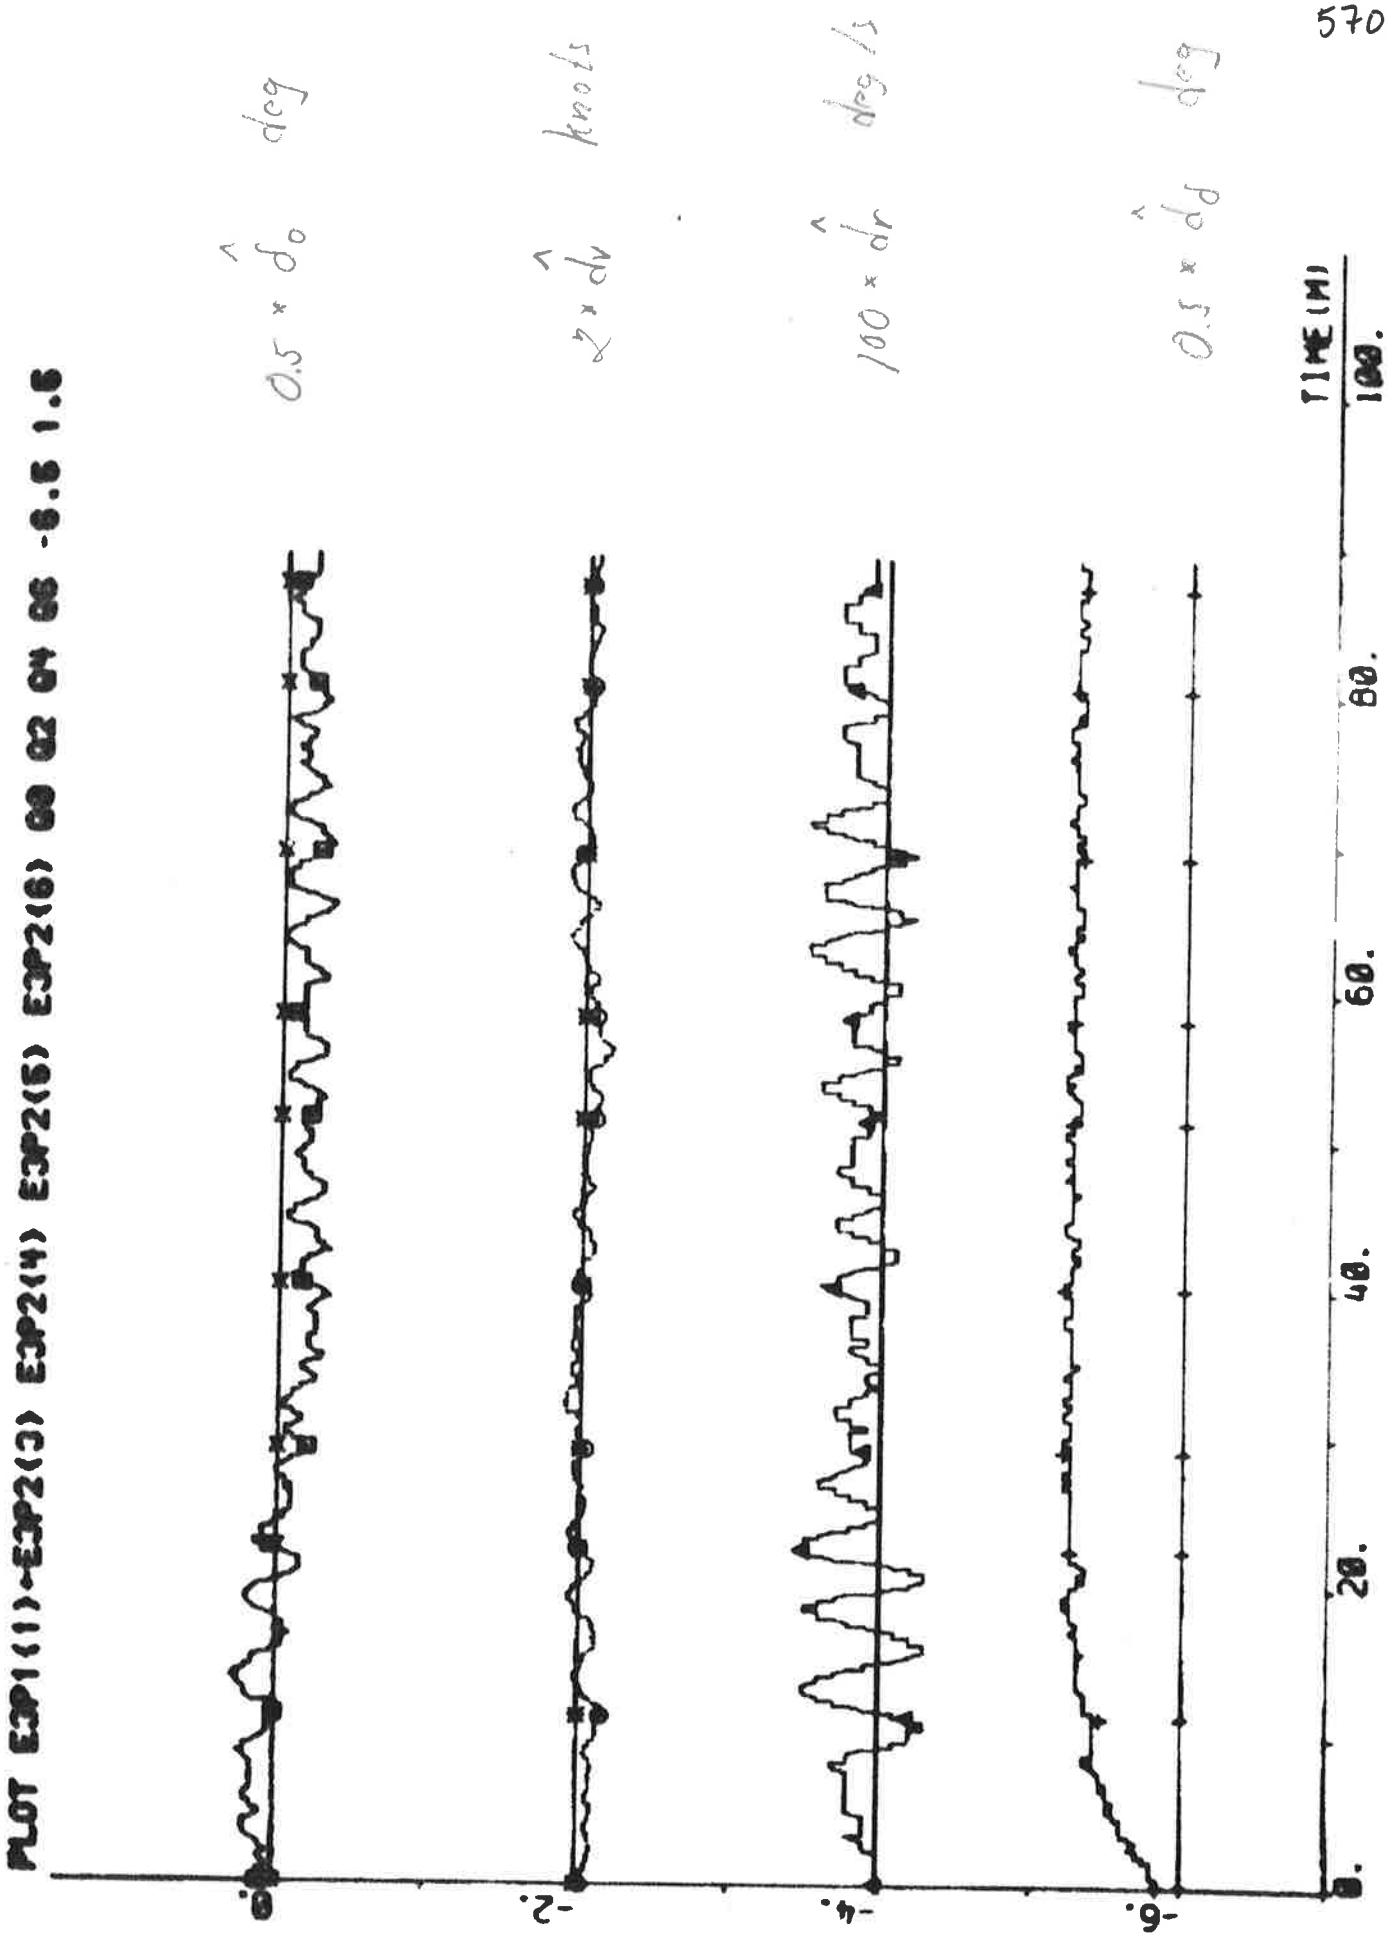

EXPERIMENT E4

| | | | |
|--------------|-------------------|-----------------|------------------------|
| Date | 1976-04-30 | Forward draught | 10.9 m |
| Time | 14.43 | Aft draught | 12.9 m |
| Duration | 26 min | Wind direction | S (1; see App. A) |
| Position | S 22°36' E 08°18' | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 146 deg | Wave height | - |

Open loop experiment for identification

Tuning time for the Kalman filter before the experiment started: 0 min.

$$\begin{array}{ll} \delta_{amp} = 10 \text{ deg} & k_{id} = 0 \\ T_s = 10 \text{ s} & IVVC = 1 \end{array}$$



Final values:

$$\hat{\delta}_0 = 0.1 \text{ deg} \quad \hat{d}_v = 0.01 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.4 \text{ deg}$$


Statistics

| | Mean value | Stand. dev. | | Mean value | Stand. dev. |
|-------------------------------|------------|-------------|-------------------------------|------------|-------------|
| δ_c deg | -0.52 | 8.59 | r deg/s | -0.001 | 0.061 |
| δ_s deg | -0.57 | 8.17 | \dot{r} deg/s | -0.002 | 0.054 |
| n rpm | 69.81 | 0.70 | $r - \dot{r}$ deg/s | 0.001 | 0.024 |
| u knots | 12.69 | 0.20 | ϵ_r deg/s | 0.000 | 0.026 |
| P_s MW | 15.34 | 0.08 | $\psi - \psi_{ref}$ deg | 1.393 | 3.058 |
| v knots | -0.013 | 0.332 | $\hat{\psi} - \psi_{ref}$ deg | 1.395 | 3.061 |
| \hat{v} knots | 0.003 | 0.285 | $\psi - \hat{\psi}$ deg | -0.001 | 0.040 |
| $\hat{v} - v$ knots | -0.016 | 0.155 | ϵ_ψ deg | -0.002 | 0.063 |
| \hat{v}_1 knots | -0.017 | 0.073 | δ deg | 0.92 | 7.35 |
| \hat{v}_1 knots | -0.006 | 0.080 | $\hat{\delta}$ deg | -0.48 | 8.00 |
| $\hat{v}_1 - \hat{v}_1$ knots | -0.010 | 0.040 | $\delta - \hat{\delta}$ deg | 1.40 | 2.45 |
| ϵ_v knots | 0.002 | 0.043 | ϵ_δ deg | 0.36 | 2.49 |


MLOT E4P1(1) - E4P1(8) MPE E4P1(10) 08 02 - 31 - DEC

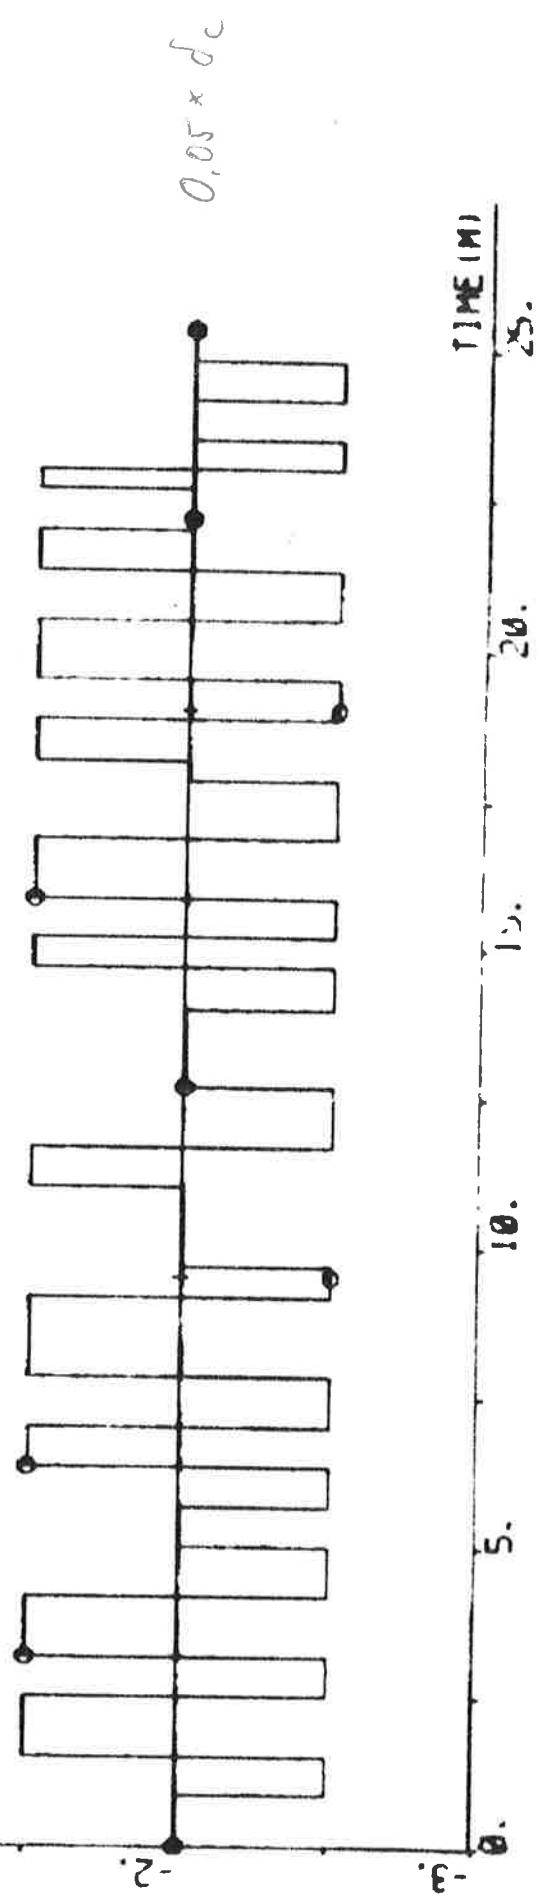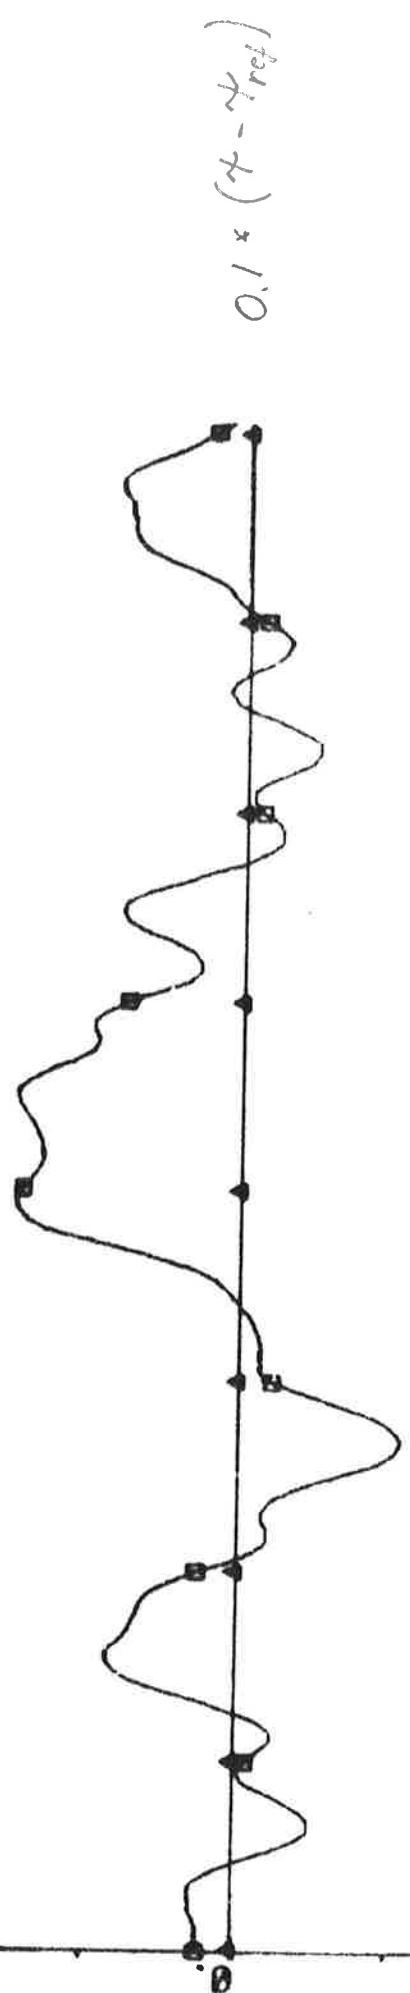


PLOT EHP1(1)-EHP1(13) EHP1(12) EHP1(14) EHP1(11) 00 - 20 59

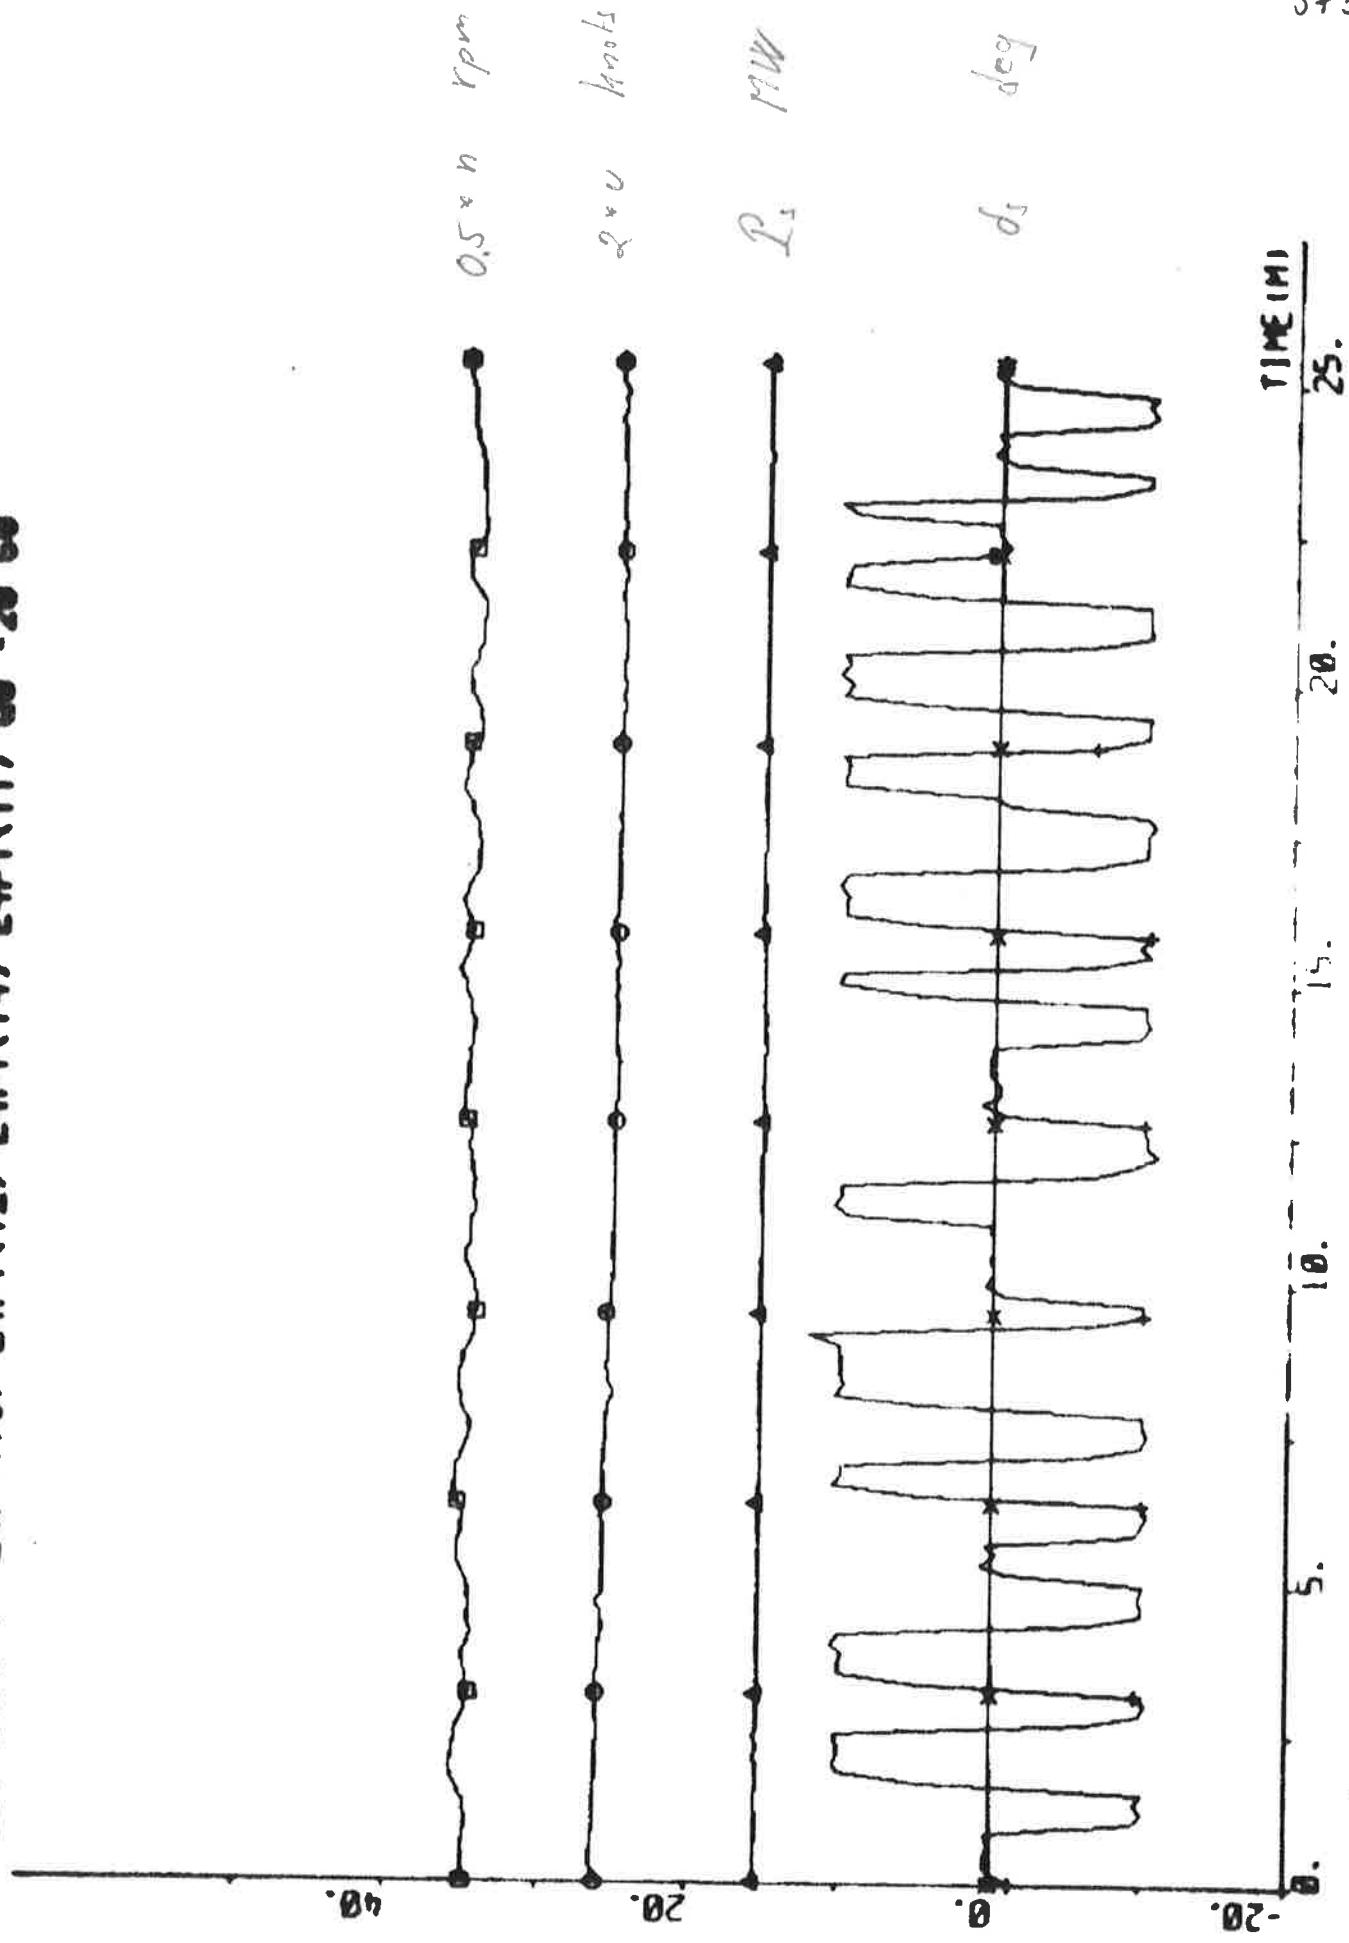

Plot E4P1(1) - E4P2(1) E4P2(2) E4P3 00 01 02 - 3.4 0.8 - KNOTS

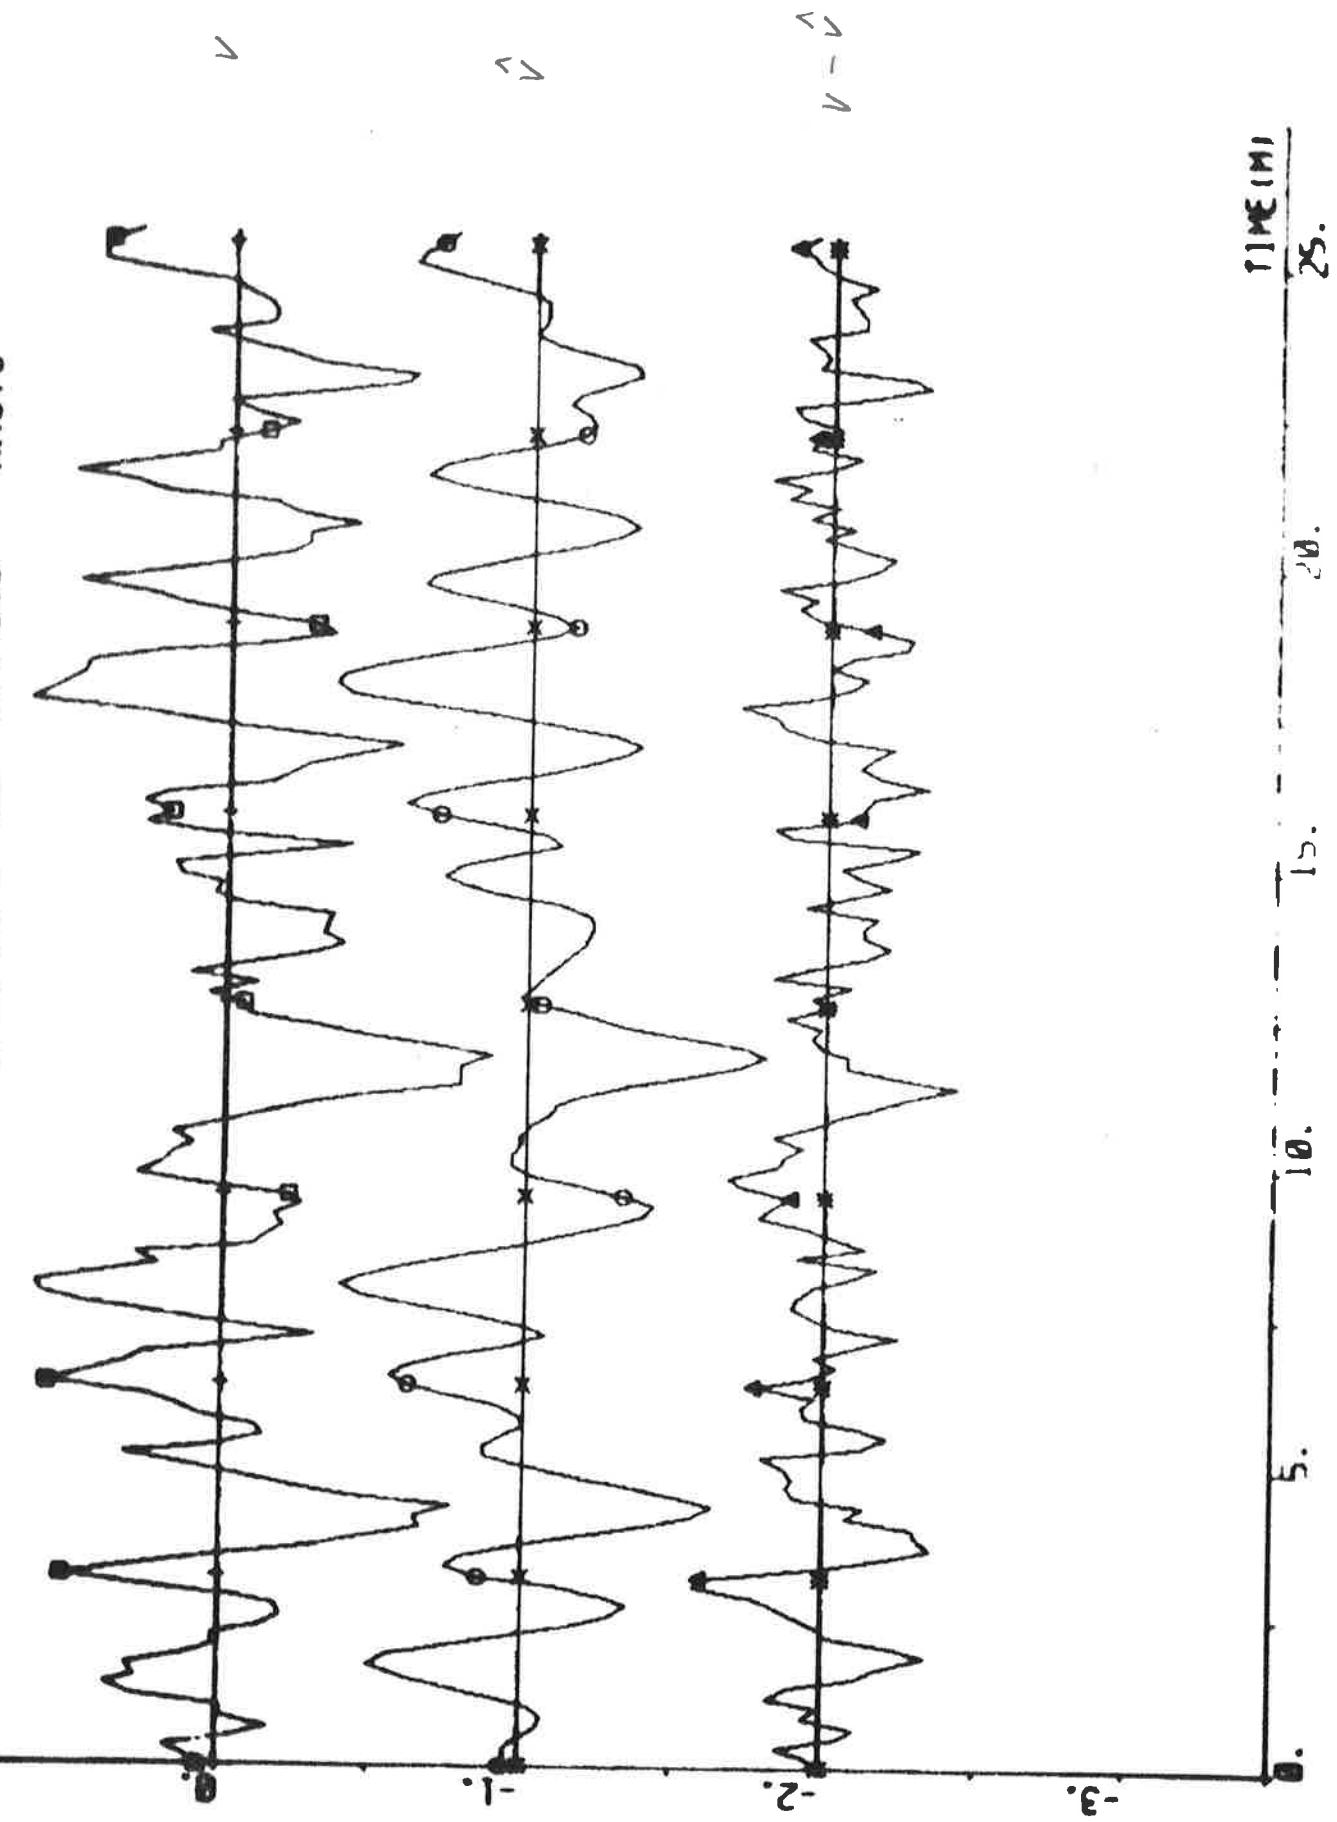

MOT E4P1 (1) - E4P1 (4) E4P1 (5) E4R2 E4S2 00 01 02 03 - 3.4 0.0 - 0002

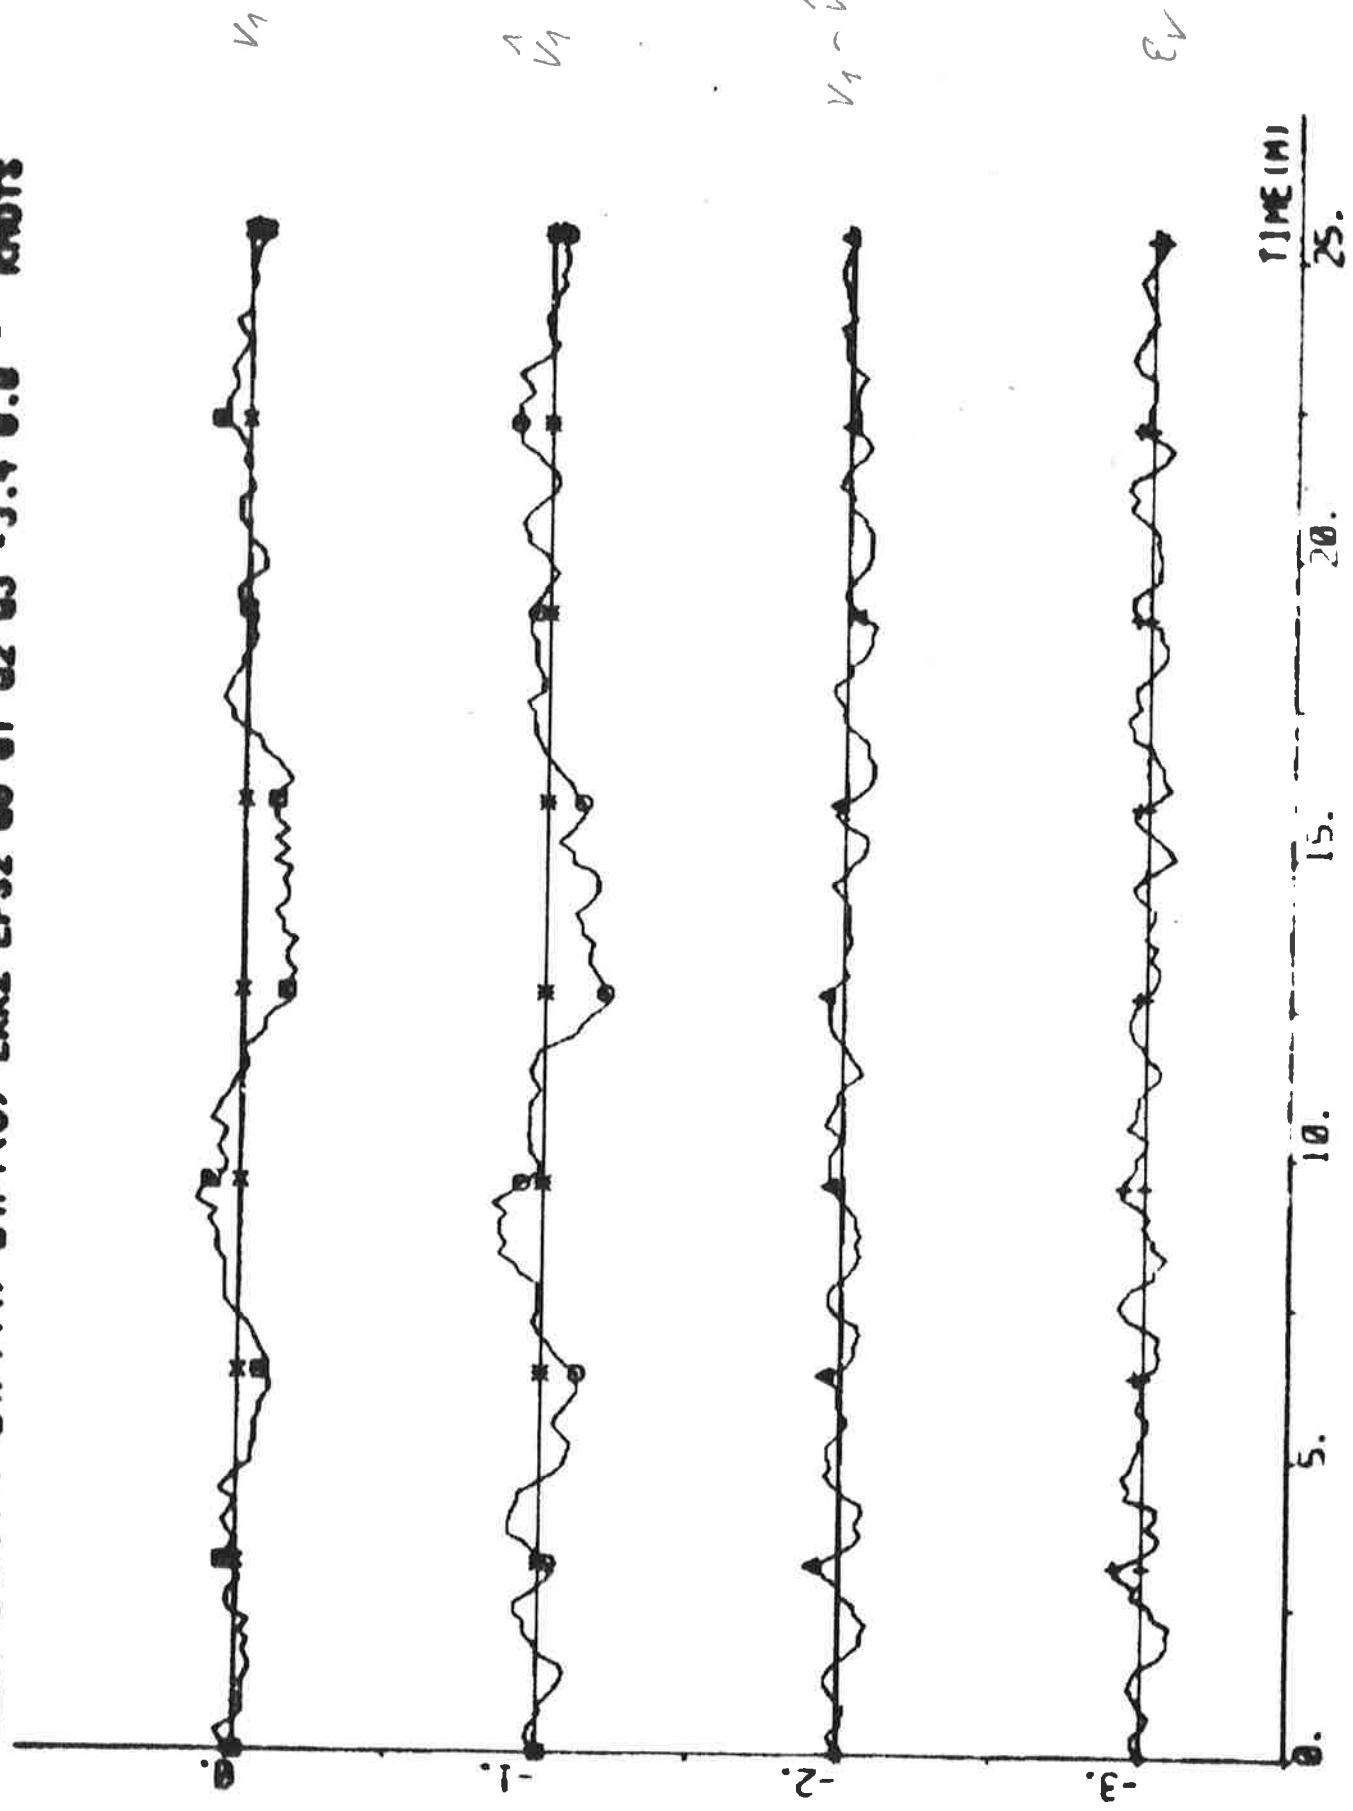

TIME (m)

16. 15. 14.


5. 4. 3.

TIME (m)

16. 15. 14.

5. 4. 3.

LOR E4P1(1)-E4P1(8) E4P1(7) E4P1(6) E4P1(5) E4P1(4) E4P1(3) E4P1(2) E4P1(1) - waves

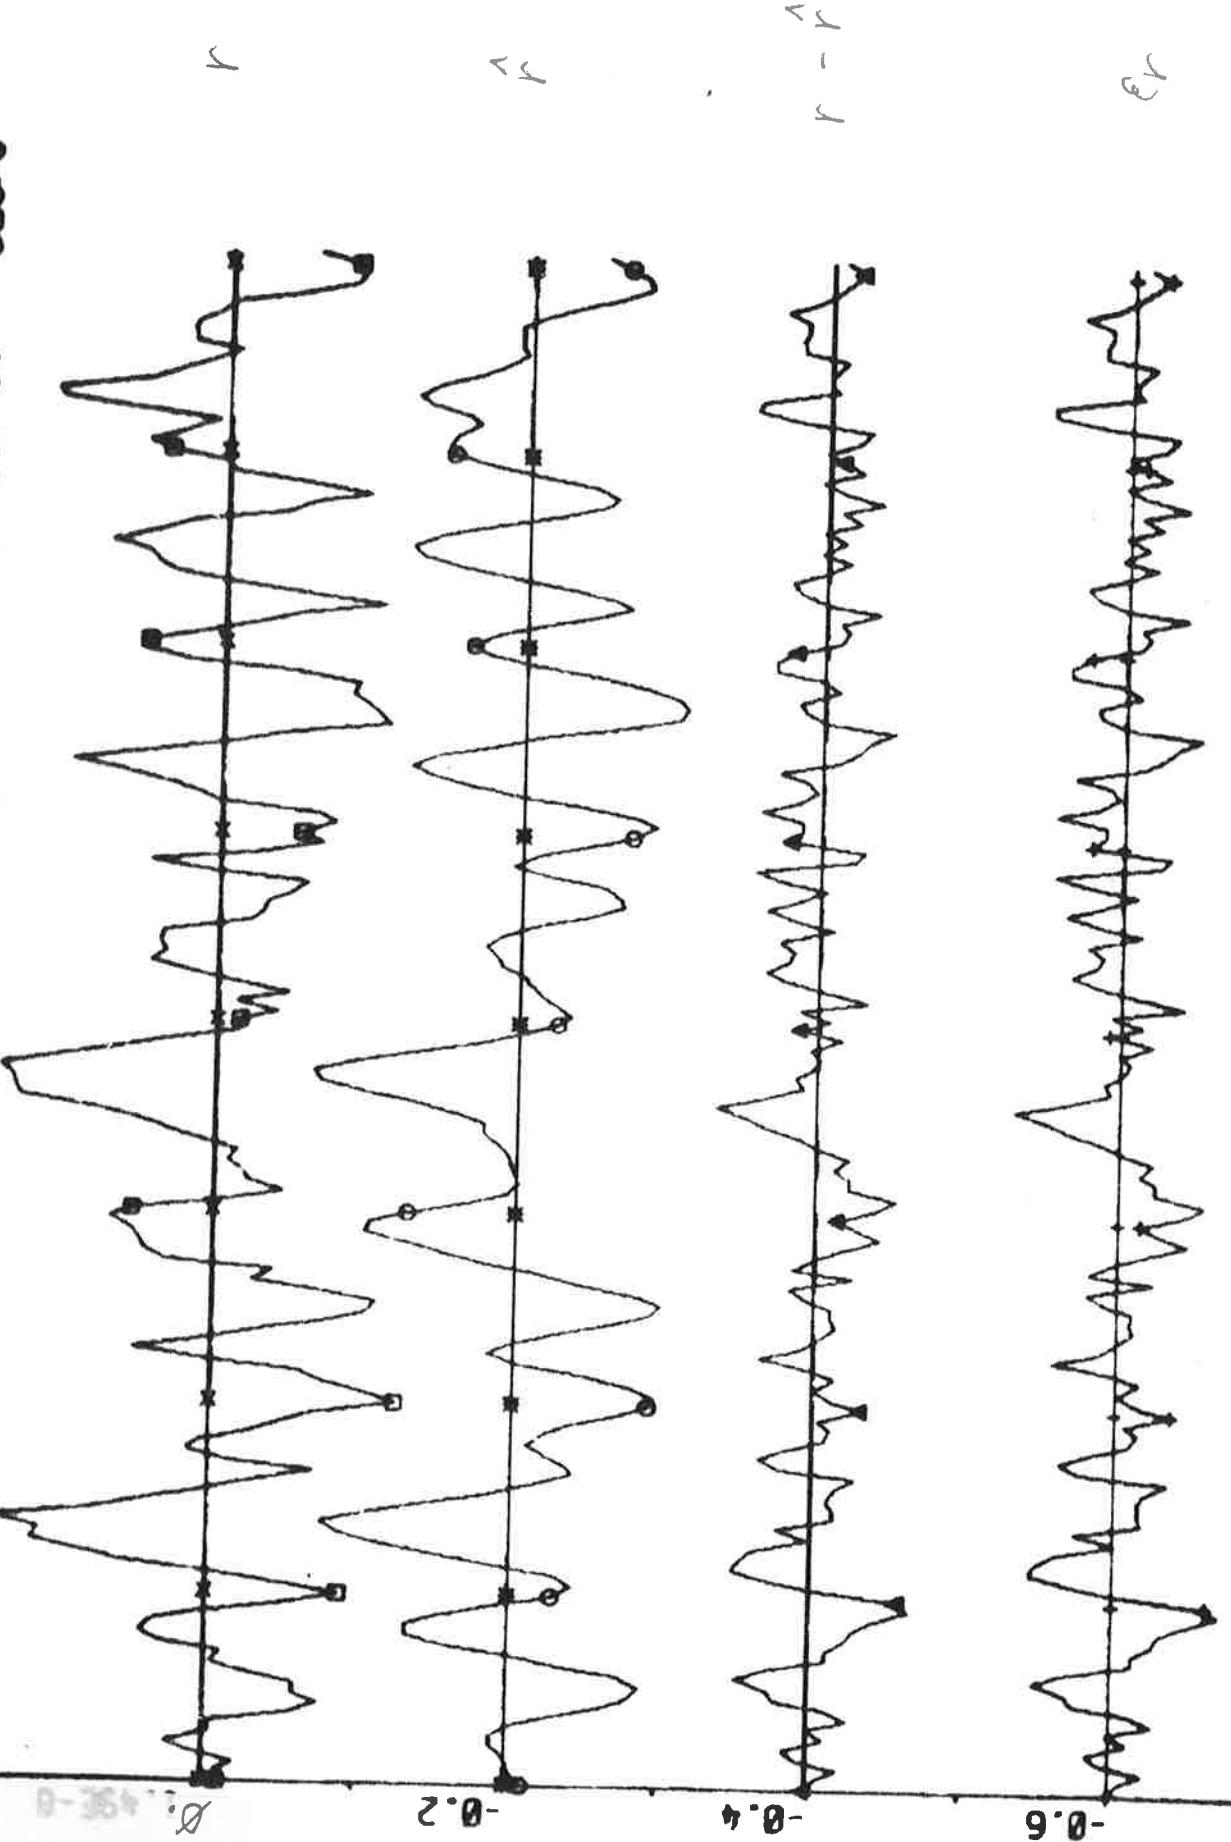

MOTOR EMB 1 (1) - EMB 1 (8) EMB 1 (9) EMB 1 (10) EMB 1 (11) EMB 1 (12) EMB 1 (13) EMB 1 (14) EMB 1 (15)

$0.1 \times (\theta - \theta_{ref})$

$0.1 \times (\theta - \theta_{ref})$

$\theta - \theta_f$

E_M



20.


15.

10.

5.

0.

PLOT E4P1(1)-E4P1(2) E4P1(3) E4R1 E4S1 00 020 040 060 080 10 - 000

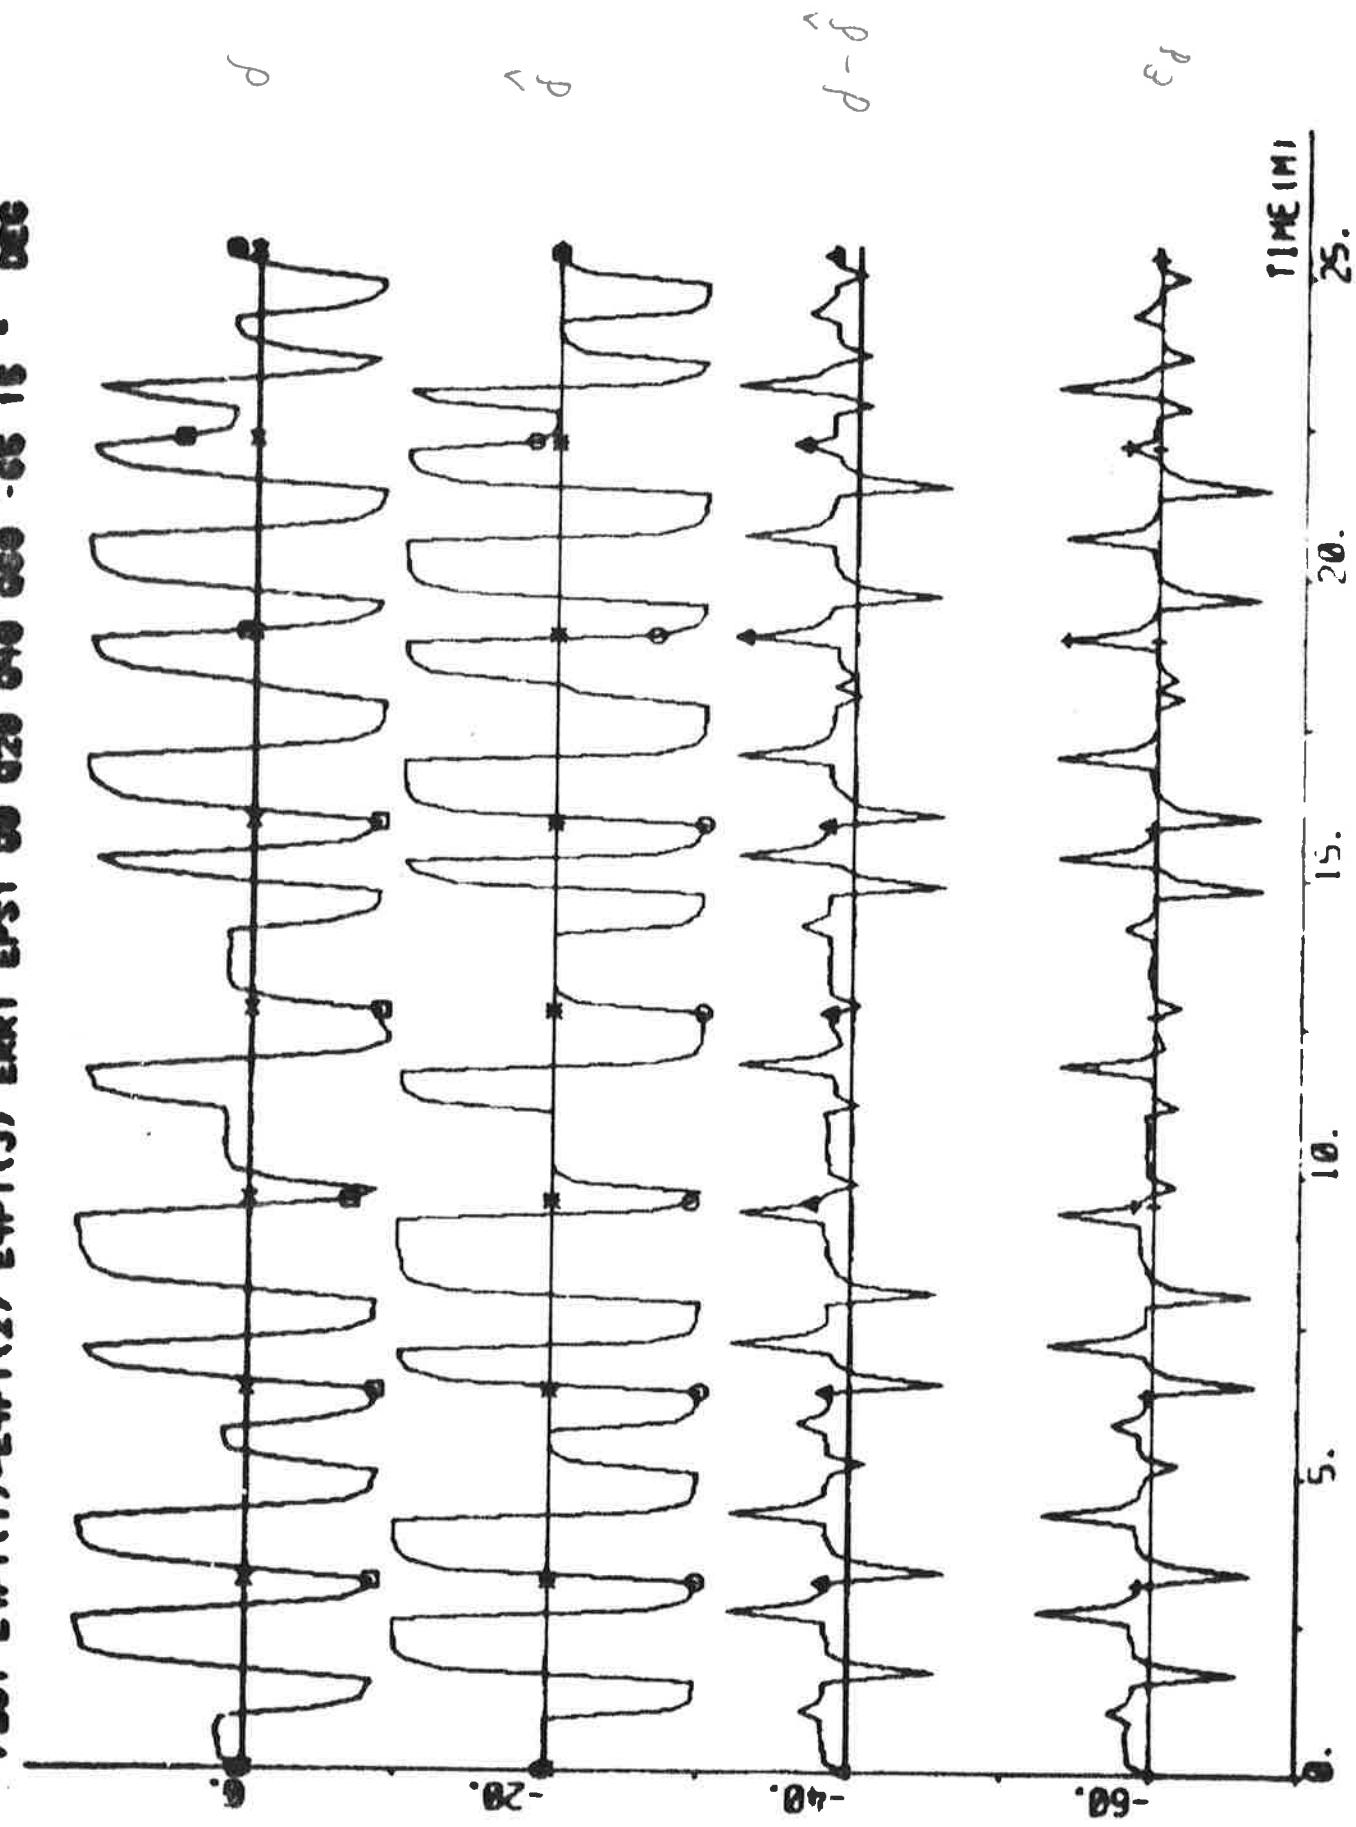

NOTE E4P1 (1) - E4P2(3) E4P2(4) E4P2(5) 00 02 04 06 - 0.0. 1. 1. 5

0.5 x d_6 deg




2 x d_4 knot



100. x d_5 deg / s



0.5 x d_5 deg

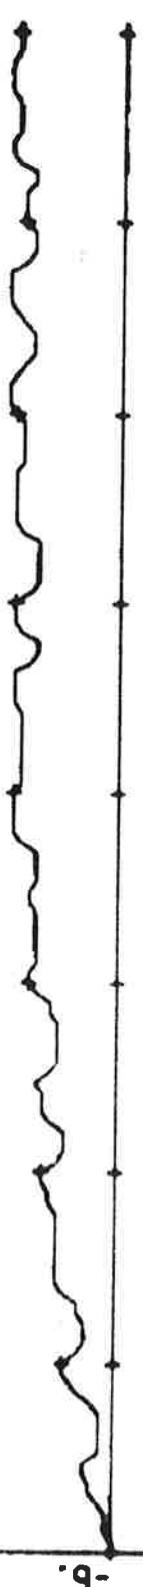

TIME (min) 5. 10. 15. 20.

EXPERIMENT F1

| | | | |
|--------------|-----------------------------------|-----------------|----------------------|
| Date | 1976-04-19 | Forward draught | 8.5 m |
| Time | 09.03 | Aft draught | 12.5 m |
| Duration | 60 min | Wind direction | E (6; see App. A) |
| Position | N 29°11' W 14°46' | Wind velocity | 3 m/s (light breeze) |
| ψ_{ref} | 204.4 - 204.5 deg
(Sailmaster) | Wave height | - |

The rudder limit was 15 deg during the experiment.

Self-tuning regulator using estimates from the Kalman filter

The sway velocity v_1 was not used by the Kalman filter.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & v_0 = 8 \text{ m/s} & IVVC = 3 & v_c = 7 \text{ m/s} \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -7.05 \\ 5.88 \\ 3.03 \\ -1.67 \\ 0.46 \\ 0.06 \\ 3.88 \\ 152.75 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = 0.19$$

$$\hat{\delta}_0 = 0.4 \text{ deg} \quad \hat{d}_y = - \quad \hat{d}_r = -0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.3 \text{ deg}$$

Statistics

$$\begin{array}{lll} \text{Mean value of } \delta & = 1.71 \text{ deg} & n \approx 69.8 \text{ rpm} \\ \text{Mean value of } \psi - \psi_{ref} & = -0.002 \text{ deg} & u \approx 14.4 \text{ knots} \\ V_2 & = 0.038 & P_s \approx 14.7 \text{ MW} \end{array}$$

EXPERIMENT F2

| | | | |
|--------------|-----------------------------------|-----------------|----------------------|
| Date | 1976-04-19 | Forward draught | 8.5 m |
| Time | 10.20 | Aft draught | 12.5 m |
| Duration | 49 min | Wind direction | E (7; see App. A) |
| Position | N 28°54' W 14°55' | Wind velocity | 3 m/s (light breeze) |
| ψ_{ref} | 204.1 - 204.3 deg
(Sailmaster) | Wave height | - |

The rudder limit was 15 deg during the experiment.

PID-regulator using non-filtered measurements

$$\begin{array}{lll} k_p = 3 & k_D = 75 \text{ s} & k_I = 0.02 \text{ l/s} \\ T_s = 10 \text{ s} & V_0 = 8 \text{ m/s} & IVVC = 3 \\ & & V_c = 7 \text{ m/s} \end{array}$$

Standard parameter values were used.

Statistics

$$\begin{array}{llll} \text{Mean value of } \delta & = 1.86 \text{ deg} & n & \approx 69.6 \text{ rpm} \\ \text{Mean value of } \psi - \psi_{ref} & = -0.016 \text{ deg} & u & \approx 14.4 \text{ knots} \\ V_2 & = 0.259 & P_s & \approx 14.7 \text{ MW} \end{array}$$

EXPERIMENT F3

| | | | |
|--------------|-------------------|-----------------|------------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 17.00 | Aft draught | 12.9 m |
| Duration | 57 min | Wind direction | SE (1; see App. A) |
| Position | S 18°49' E 05°31' | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 147 deg | Wave height | High sea from SE |

The rudder limit was 15 deg during the experiment.

Self-tuning regulator using estimates from the Kalman filter.

$$\begin{array}{llll} NC1 = 1 & NC2 = 1 & k = 7 & q = 0 \\ T_s = 10 \text{ s} & V_0 = 6 \text{ m/s} & IVVC = 1 & \end{array}$$

Final values:

$$\begin{bmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ b_1 \\ b_2 \\ c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} -11.47 \\ 13.11 \\ 0.48 \\ -2.31 \\ 0.58 \\ 0.31 \\ -0.07 \\ 79.27 \end{bmatrix}$$

$$a_1 + a_2 + a_3 + a_4 = -0.19$$

$$\hat{\delta}_0 = 0.2 \text{ deg} \quad \hat{d}_v = 0.13 \text{ knots} \quad \hat{d}_r = 0.001 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics

$$\begin{array}{lll} \text{Mean value of } \delta & = 1.67 \text{ deg} & n \approx 69.1 \text{ rpm} \\ \text{Mean value of } \psi - \psi_{ref} & = -0.073 \text{ deg} & u \approx 12.1 \text{ knots} \\ V_2 & = 0.160 & P_s \approx 15.1 \text{ MW} \end{array}$$

EXPERIMENT F4

| | | | |
|--------------|-------------------|-----------------|------------------------|
| Date | 1976-04-29 | Forward draught | 10.9 m |
| Time | 18.04 | Aft draught | 12.9 m |
| Duration | 54 min | Wind direction | SE (1; see App. A) |
| Position | S 18°49' E 05°31' | Wind velocity | 11 m/s (strong breeze) |
| ψ_{ref} | 147 deg | Wave height | High sea from SE |

The rudder limit was 15 deg during the experiment.

PID-regulator using estimates from the Kalman filter

$$\begin{array}{lll} k_P = 3 & k_D = 140 \text{ s} & k_I = 0.02 \text{ l/s} \\ T_s = 10 \text{ s} & v_0 = 6 \text{ m/s} & \text{IVVC} = 1 \end{array}$$

The parameters were manually tuned before the experiment started.

Final values:

$$\hat{\delta}_0 = 0.0 \text{ deg} \quad \hat{d}_v = 0.14 \text{ knots} \quad \hat{d}_r = 0.000 \text{ deg/s} \quad \hat{d}_\delta = 1.5 \text{ deg}$$

Statistics

$$\begin{array}{lll} \text{Mean value of } \delta & = 1.54 \text{ deg} & n \approx 69.7 \text{ rpm} \\ \text{Mean value of } \psi - \psi_{ref} & = -0.009 \text{ deg} & u \approx 12.2 \text{ knots} \\ v_2 & = 0.304 & P_s \approx 15.5 \text{ MW} \end{array}$$