



# LUND UNIVERSITY

## Sum rules and physical bounds for a particulate slab

Kristensson, Gerhard

2024

*Document Version:*

Publisher's PDF, also known as Version of record

[Link to publication](#)

*Citation for published version (APA):*

Kristensson, G. (2024). *Sum rules and physical bounds for a particulate slab*. Abstract from Bremen Workshop on Light Scattering 2024, Bremen, Germany.

*Total number of authors:*

1

*Creative Commons License:*

Unspecified

**General rights**

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

**Take down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

# Sum rules and physical bounds for a particulate slab

Gerhard Kristensson<sup>1</sup>

<sup>1</sup>*Department of Electrical and Information Technology, Lund University, Sweden, gerhard.kristensson@eit.lth.se*

## 1 Coherent transmitted field by a slab

In recent years, many useful sum rules and physical bounds have been developed for electromagnetic applications [1, 3]. In this paper, we develop two sum rules and corresponding physical bounds for the coherent transmitted electromagnetic field by a particulate slab, and we predict the bandwidth for a given transmission level.

The geometry of the problem is depicted in Figure 1, and for the application in this paper, we specialize to an incident plane wave at normal incidence polarized in the  $x$ -direction. For simplicity and to fix ideas, we assume all particles are identical, homogeneous spheres of radius  $a$ . The incident and the transmitted coherent (average) field of the slab are

$$\mathbf{E}_i(z) = \hat{\mathbf{x}}e^{ikz}, \quad \langle \mathbf{E}_t(z) \rangle = \hat{\mathbf{x}}t(k)e^{ikz}, \quad z > z_2 + a$$

The transmission coefficient  $t(k)$  of the slab is [2]

$$t(k) = 1 + \frac{3fkD}{2(ka)^3d} \sum_{\tau,l} i^{-l+\tau-1} \sqrt{\frac{2l+1}{8\pi}} \int_{z_1}^{z_2} e^{-ikz'} f_{\tau l}(z') dz'$$

The volume fraction of the particles is denoted  $f$ . Under the assumption of the Quasi Crystalline Approximation, the coefficients  $f_{\tau l}(z)$  satisfy the following system of integral equations [2]:

$$f_{\tau l}(z) = t_{\tau l} i^{l-\tau+1} \sqrt{2\pi(2l+1)} e^{ikz} + \frac{3fkDt_{\tau l}}{4\pi(ka)^3d} \sum_{\tau'l'} \int_{z_1}^{z_2} K_{\tau l \tau' l'}(z-z') f_{\tau' l'}(z') dz', \quad z \in [z_1, z_2]$$

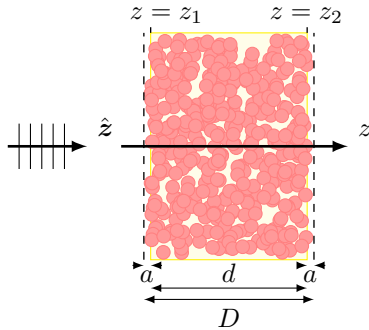


Figure 1: The geometry of the material region  $z \in [z_1 - a, z_2 + a]$ . The yellow region denotes the region of possible locations of local origins, *i.e.*, the interval  $[z_1, z_2]$ .

where the transition matrix of the particles are denoted  $t_{\tau l}$ , and the kernel  $K_{\tau l \tau' l'}(z)$  has a closed form solution for the hole correction (HC), *i.e.*, the pair correlation function  $g(r) = H(r - 2a)$ , for details see [2].

Under the assumption of hole correction (HC) and for non-magnetic spherical particles of radius  $a$  with a permittivity  $\epsilon_1$ , the low-frequency expression of the transmission coefficient is [2]

$$t(k) = 1 + \frac{3ifkD}{2} \frac{y}{1 - fy\frac{D}{a}} = 1 + ikH, \quad y = \frac{\epsilon_1 - \epsilon}{\epsilon_1 + 2\epsilon}$$

## 2 Analytic properties

In a time-domain setting, a general incident wave of fixed polarization along  $\hat{\mathbf{x}}$  impinges on the slab. The background wave velocity is  $c$  and the wavenumber is denoted  $k = \omega/c$ . We have

$$\begin{cases} \mathbf{E}_i(z_1 - a, t) = \hat{\mathbf{x}} \int_{-\infty}^{\infty} A(k) e^{-ikct} dk \\ \mathbf{E}_t(z_2 + a, t + D/c) = \hat{\mathbf{x}} \int_{-\infty}^{\infty} t(k) A(k) e^{-ikct} dk \end{cases}$$

We assume  $\mathbf{E}_i(z_1 - a, t) = 0$ ,  $t < 0$  and that  $A(k) \in L^2(\mathbb{R})$ . If we assume causality,  $\mathbf{E}_t(z_2 + a, t + D/c) = 0$ ,  $t < 0$ , Titchmarsh's theorem implies that  $A(k)$  and  $t(k)$  are analytic in the upper complex plane  $\mathbb{C}_+ = \{z \in \mathbb{C} : \text{Im } z > 0\}$ . The assumption of passive material, implies  $|t(k)| \leq 1$ , which can be analytically continued to  $|t(k)| \leq 1$  in  $\mathbb{C}_+ \cup \mathbb{R}$ .

**Sum rule with the logarithm:** Construct a function  $h_1(k)$  from the transmission coefficient  $t(k)$ .

$$h_1(k) = -i \ln \left( t(k) \prod_{n=1}^N \frac{1 - k/k_n^*}{1 - k/k_n} \right)$$

where  $k_n$ ,  $n = 1, 2, \dots, N$ , are the zeros of the transmission coefficient  $t(k)$  in  $\mathbb{C}_+$ . Note that  $\text{Im } h_1(k) = -\ln |t(k)|$ ,  $k \in \mathbb{R}$ .

The low-frequency behavior of  $h_1(k)$  is

$$h_1(k) = kH + 2k \sum_{n=1}^N \text{Im} \frac{1}{k_n} + O(k^2)$$

Consequently, the sum rule is [1]

$$-\int_0^\infty \ln |t(\lambda)| \, d\lambda = \pi^2 \left( H + 2 \sum_{n=1}^N \text{Im} \frac{1}{k_n} \right) \leq \pi^2 H$$

Let  $I(t_0)$  (length  $|I(t_0)|$ ) denote the wavelength interval defined by  $|t(\lambda)| \leq t_0 \in (0, 1)$ . Then, a crude estimate of the sum rule implies

$$|I(t_0)| \ln \frac{1}{t_0} \leq \int_{I_0} \ln \frac{1}{|t(\lambda)|} \, d\lambda \leq \int_0^\infty \ln \frac{1}{|t(\lambda)|} \, d\lambda \leq \pi^2 H$$

**Sum rule with pulse Herglotz function:** A more elaborate function is the pulse Herglotz function [1].

$$h_\Delta(z) = -\frac{1}{\pi} \int_{-\Delta}^{\Delta} \frac{1}{z-t} \, dt = \frac{1}{\pi} \ln \frac{z-\Delta}{z+\Delta}, \quad \text{Im } z > 0, \quad \Delta > 0$$

The imaginary part of  $h_\Delta(z)$  is non-negative and bounded by unity in  $\mathbb{C}_+$ . Specifically, the inner part of the circle  $|z| = \Delta$  in  $\mathbb{C}_+$  maps to  $1/2 < \text{Im } h_\Delta(z) < 1$ .

The Möbius transformation  $w(z) = i(1+z)/(1-z)$  maps the unit circle to  $\mathbb{C}_+$ . Define the function  $h_2(k)$  with asymptotes

$$h_2(k) \stackrel{\text{def}}{=} h_\Delta(w(t(k))) = \frac{k\Delta H}{\pi} + O(|k|^2), \quad k \rightarrow 0$$

The parameter  $\Delta = \Delta(t_0)$  and the threshold  $|t| = t_0 \leq 1$  is set to  $\Delta(t_0) = (1+t_0)/(1-t_0) > 0$ , and the sum rule reads [1]

$$\int_0^\infty \text{Im } h_2(\lambda) \, d\lambda = \pi\Delta H$$

This is an exact sum rule and serves as an independent check on the numerical precision in the numerical calculations.

With the wavelength interval  $I(t_0)$  defined above, the integrand is larger than  $1/2$  by construction, and we get

$$\frac{|I(t_0)|}{2} \leq \int_{I(t_0)} \text{Im } h(\lambda) \, d\lambda \leq \int_0^\infty \text{Im } h(\lambda) \, d\lambda = \pi\Delta H$$

## References

- [1] A. Bernland, A. Luger, and M. Gustafsson. Sum rules and constraints on passive systems. *J. Phys. A: Math. Theor.*, **44**(14), 145205, 2011.
- [2] G. Kristensson. Coherent scattering by a collection of randomly located obstacles — an alternative integral equation formulation. *J. Quant. Spectrosc. Radiat. Transfer*, **164**, 97–108, 2015.
- [3] A. Ludvig-Osipov, J. Lundgren, C. Ehrenborg, Y. Ivanenko, A. Ericsson, M. Gustafsson, B. L. G. Jonsson, and D. Sjöberg. Fundamental Bounds on Transmission Through Periodically Perforated Metal Screens With Experimental Validation. *IEEE Transactions on Antennas and Propagation*, **68**(2), 773–782, 2020.